

FlowAccel Server Installer

Installation Guide (Windows) - Multi-Part Download

This guide walks through the full install of FlowAccel on a Windows server, from reassembling the multi-part download to clicking through the setup wizard. The installer is self-contained: it includes its own Node.js 18 runtime, PostgreSQL 15, the IIS URL Rewrite + Application Request Routing modules, NSSM service manager, and the FlowAccel application itself.

Package	FlowAccel-Setup-1.0.exe (~394 MB, self-contained)
Distribution	5 × 90 MB 7-Zip volumes + SHA256SUMS.txt + README.txt
Bundled stack	Node.js 18, PostgreSQL 15, IIS URL Rewrite, IIS ARR, NSSM, VC++ Redist
Host OS	Windows Server / Windows 10+ with administrator rights
Prerequisite	7-Zip (<code>winget install 7zip.7zip</code>)

Run the installer as **Administrator**. The wizard will reboot services (IIS, PostgreSQL) and modify firewall rules.

STEP 1**Download the multi-part package**

From the FlowAccel login page, click **Download FlowAccel Server Installer (Windows)**. Your browser will prompt once to allow multiple downloads. Accept and let it pull every part listed in SHA256SUMS.txt:

```
FlowAccel-Setup-1.0.7z.001
FlowAccel-Setup-1.0.7z.002
FlowAccel-Setup-1.0.7z.003
FlowAccel-Setup-1.0.7z.004
FlowAccel-Setup-1.0.7z.005
SHA256SUMS.txt
README.txt
```

Move all 7 files into a single folder (for example C:\FlowAccelInstall\).

STEP 2**Install 7-Zip (if needed)**

Open an elevated PowerShell or Command Prompt and run:

```
winget install 7zip.7zip
```

Skip this step if 7-Zip is already installed at C:\Program Files\7-Zip\.

STEP 3**Extract to a single .exe**

Right-click FlowAccel-Setup-1.0.7z.001 and choose **7-Zip** → **Extract Here**. 7-Zip auto-detects parts .002 through .005 and produces FlowAccel-Setup-1.0.exe in the same folder.

Command-line alternative:

```
"C:\Program Files\7-Zip\7z.exe" x FlowAccel-Setup-1.0.7z.001
```

STEP 4**Verify integrity (optional)**

Confirm the extracted .exe matches the published hash:

```
certutil -hashfile FlowAccel-Setup-1.0.exe SHA256
```

Compare the output to the **extracted** line at the bottom of SHA256SUMS.txt. If it matches, the download is intact.

STEP 5**Launch the setup wizard**

Right-click FlowAccel-Setup-1.0.exe and choose **Run as administrator**. Click through the welcome and license screens. The wizard then collects four configuration screens before it starts installing.

STEP 6**Network settings**

The wizard pre-fills your server's primary IPv4 address. Adjust only if users will reach FlowAccel by hostname or a different NIC. Default HTTP/HTTPS ports (80 / 443) are correct for most deployments.

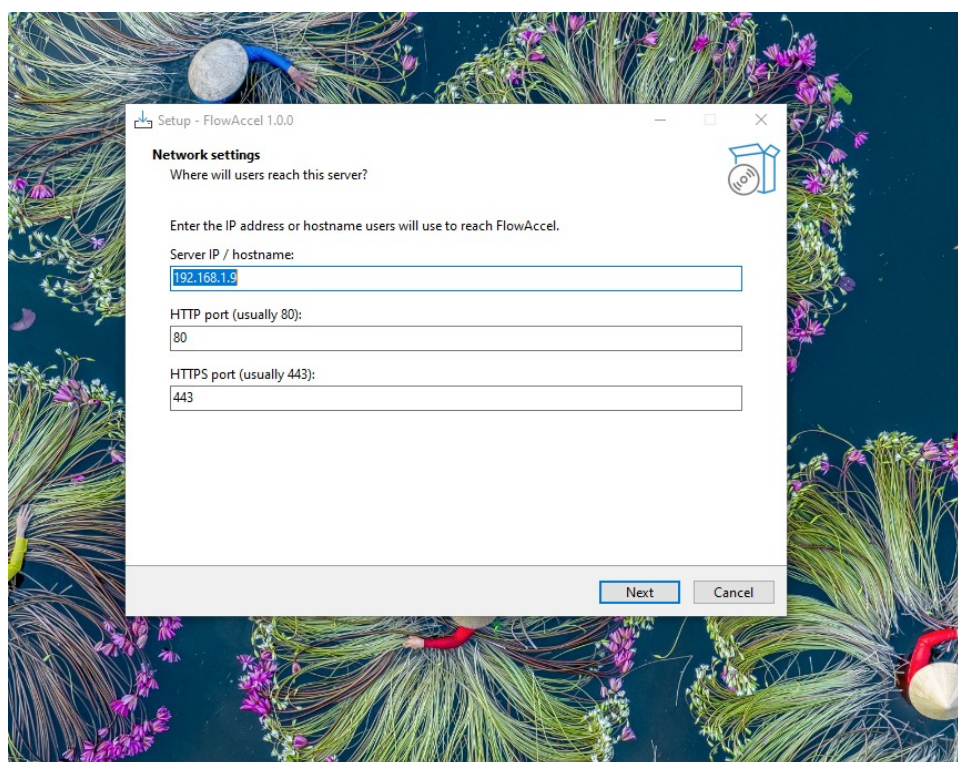


Figure 1 - Network settings: server IP and ports

STEP 7**Microsoft Sign-In (optional)**

If your workspace uses Azure AD / Entra ID single sign-on, paste the **Client ID**, **Tenant ID**, and **Client secret** from your app registration. Leave all three fields blank to install without SSO - users will sign in with email and password only.

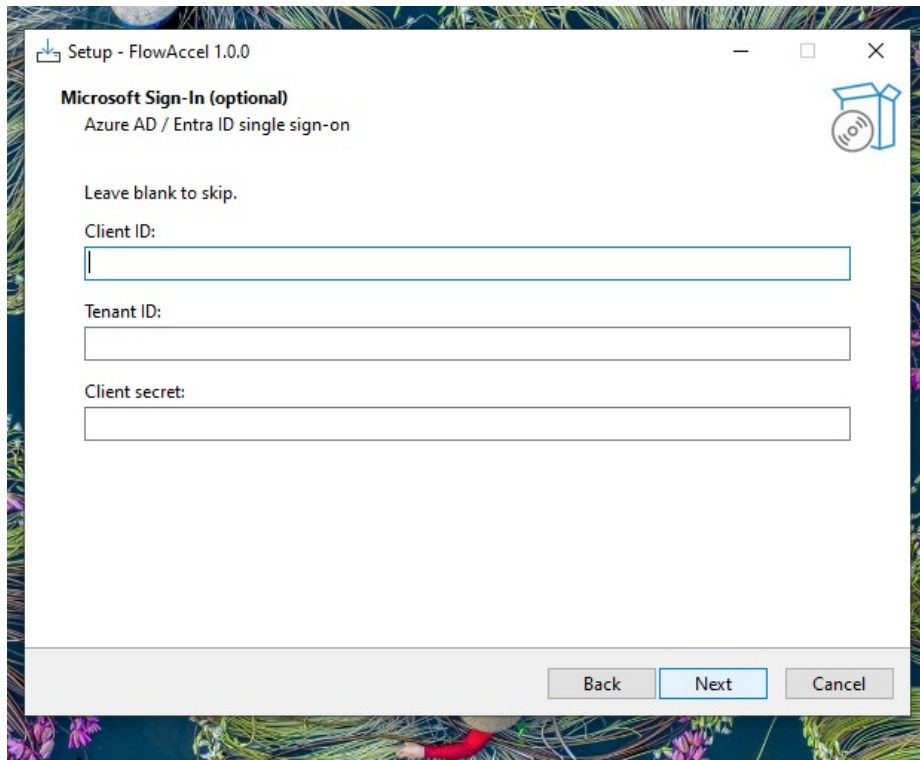


Figure 2 - Microsoft Sign-In (leave blank to skip)

STEP 8**HTTPS certificate**

Choose how the server presents its TLS certificate:

SelfSignedCA (default, recommended) - the installer generates a local Root CA and a leaf certificate. Trusted clients can be issued the Root CA automatically; renewals are handled internally.

ImportPFX - bring your own certificate from DigiCert, an internal ADCS, or another CA. Provide the full path to the .pfx file and its password.

Skip - HTTPS will not be configured. Only suitable for HTTP-only internal testing.

Add comma-separated DNS names or IP addresses in **Extra SANs** if users will reach FlowAccel through more than one hostname (e.g. flowaccel.example.com, 10.0.0.42).

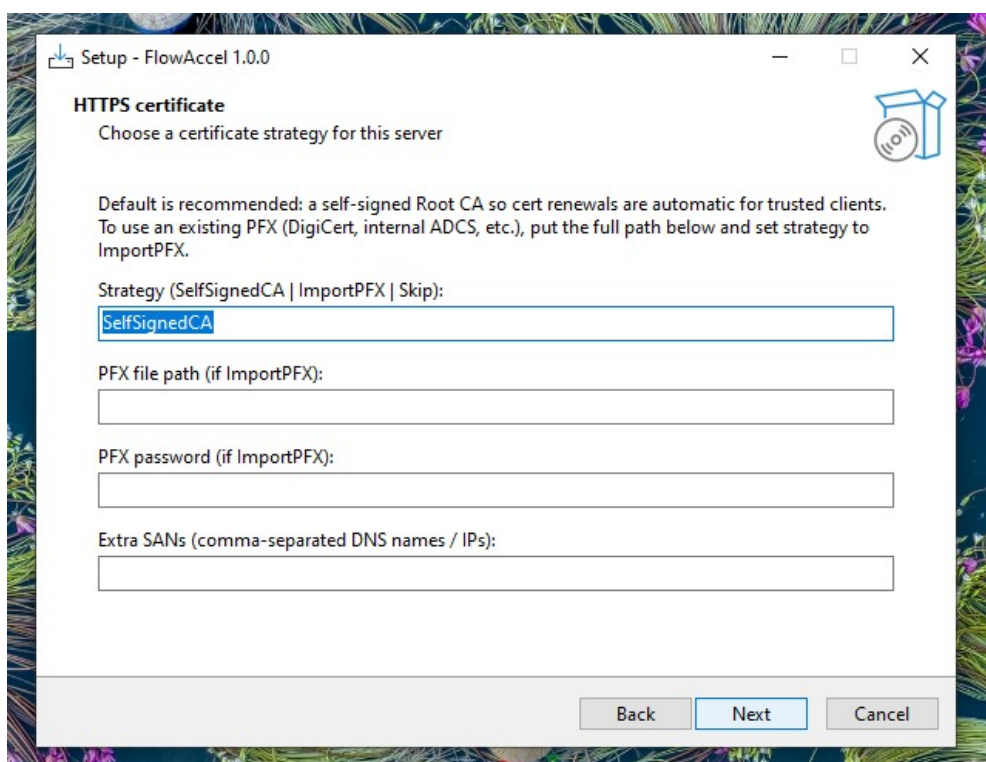


Figure 3 - HTTPS certificate strategy

STEP 9**PostgreSQL passwords**

PostgreSQL 15 is installed silently in the background. The wizard asks for two passwords used *internally only* - the database is never exposed to the network:

Postgres superuser password - minimum 12 characters. Used by the installer to create the FlowAccel database and role. Record it in your password manager; you will need it for future schema migrations.

Application DB password - auto-generated. The application uses this to connect; you typically do not need to read or change it.

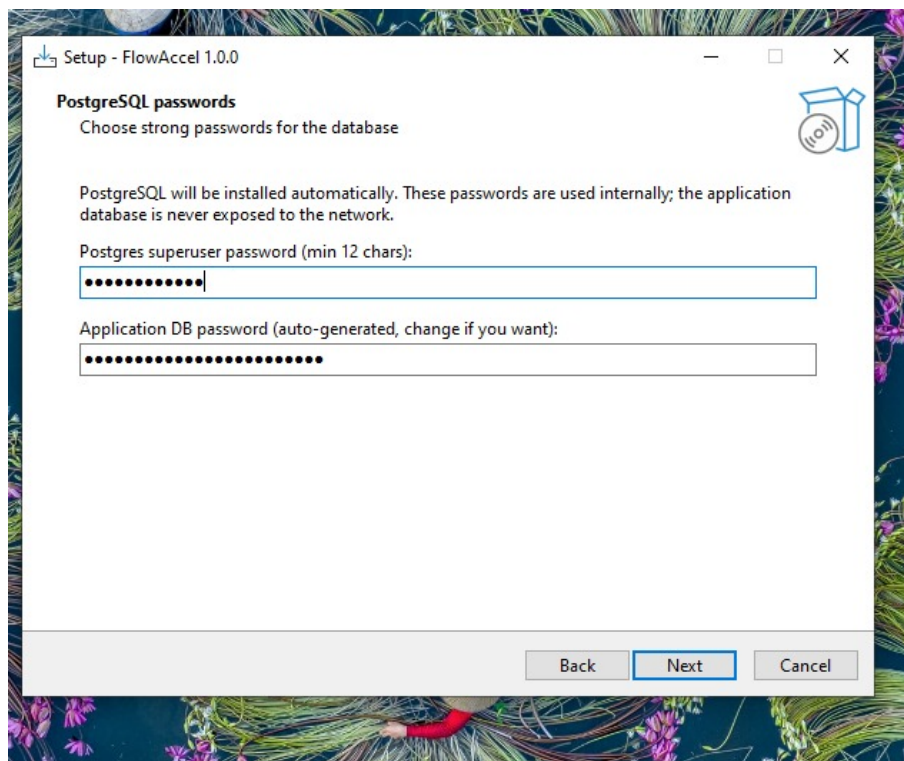


Figure 4 - PostgreSQL passwords (internal only)

STEP 10**Install runs unattended**

After the password screen the wizard moves into the installation phase. It runs the following actions in sequence:

1. Verify SHA256 of every bundled binary against SHA256SUMS.txt
2. Install Visual C++ Redistributable (silent)
3. Install Node.js 18 LTS via MSI (silent)
4. Install PostgreSQL 15 with the passwords from Step 9
5. Install IIS URL Rewrite module + Application Request Routing
6. Deploy NSSM and register FlowAccel as a Windows service
7. Generate the Root CA / leaf cert (or import your PFX)
8. Configure IIS bindings, reverse proxy rules, and firewall
9. Run post-install health checks (service status, /healthz, HTTPS)

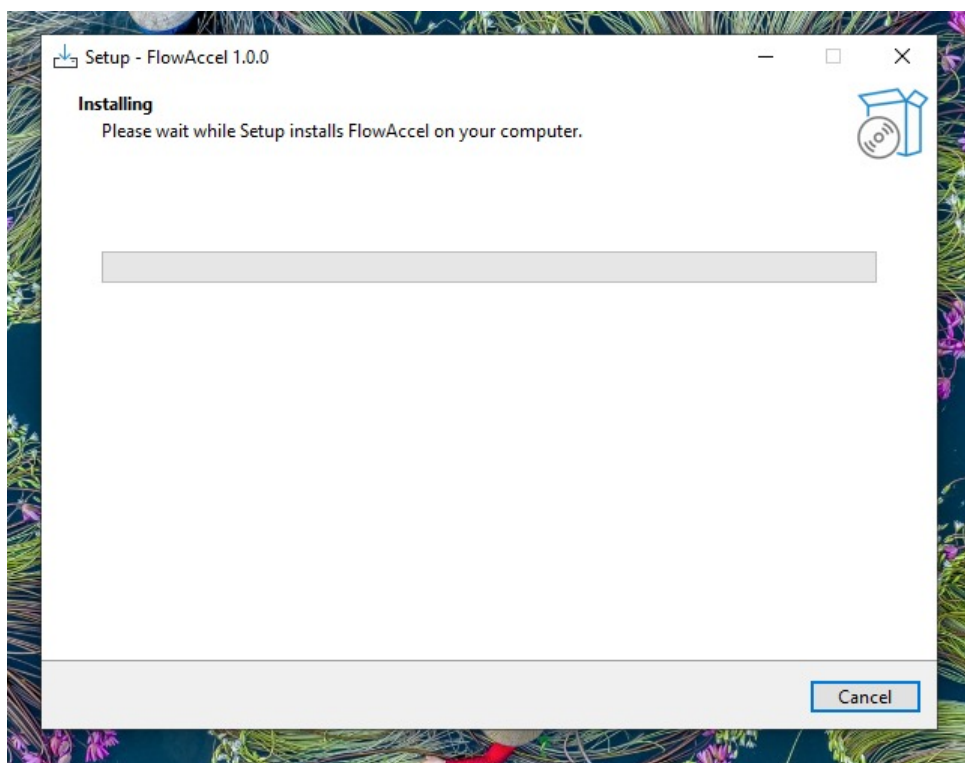


Figure 5 - Installation in progress

STEP 11**After install**

When the wizard reports success, FlowAccel is already running as a Windows service. Open a browser on the same network and navigate to:

```
https://<server-ip-or-hostname>/
```

If you used **SelfSignedCA**, your browser will warn about an untrusted issuer the first time. Distribute the Root CA from `C:\ProgramData\FlowAccel\trust-bundle\` to client machines (Group Policy or manual import into **Trusted Root Certification Authorities**) to remove the warning.

Service management

Manage the FlowAccel service from an elevated prompt:

```
sc query FlowAccel
sc stop FlowAccel
sc start FlowAccel
nssm restart FlowAccel
```

Log locations

```
C:\ProgramData\FlowAccel\logs\install.log - install transcript
C:\ProgramData\FlowAccel\logs\service.log - runtime stdout/stderr
Event Viewer → Windows Logs → Application - service crashes
```

Uninstall

Run **Apps & features** → **FlowAccel 1.0.0** → **Uninstall**. The uninstaller stops the service, removes IIS bindings, drops the FlowAccel database, and unregisters certificates. PostgreSQL and Node.js are left installed in case other apps depend on them.

Need help? Contact admin@bettroi.com.