

Software Systems

Session 3

Requirements Engineering

Y. Raghu Reddy

Software Engineering Research Center
IIIT Hyderabad, India



Why Requirements Engineering ?


A **requirement** is a statement that specifies what a system must do or qualities it must possess to satisfy stakeholder needs.

Factors that cause projects to fail

- Requirements/Planning → 30 – 40%
- Project Management/Estimation → 20 – 30%
- People & Organization → 15 - 25%
- Technical/Design → 10 - 20%
- Testing/Quality Assurance → 5- 15%
- Change Management/Organizational Adoption → 5 -15%


Sources of Requirements

Stakeholders, Existing systems/artifacts, external constraints/regulations, market research, technical & organizational sources, etc

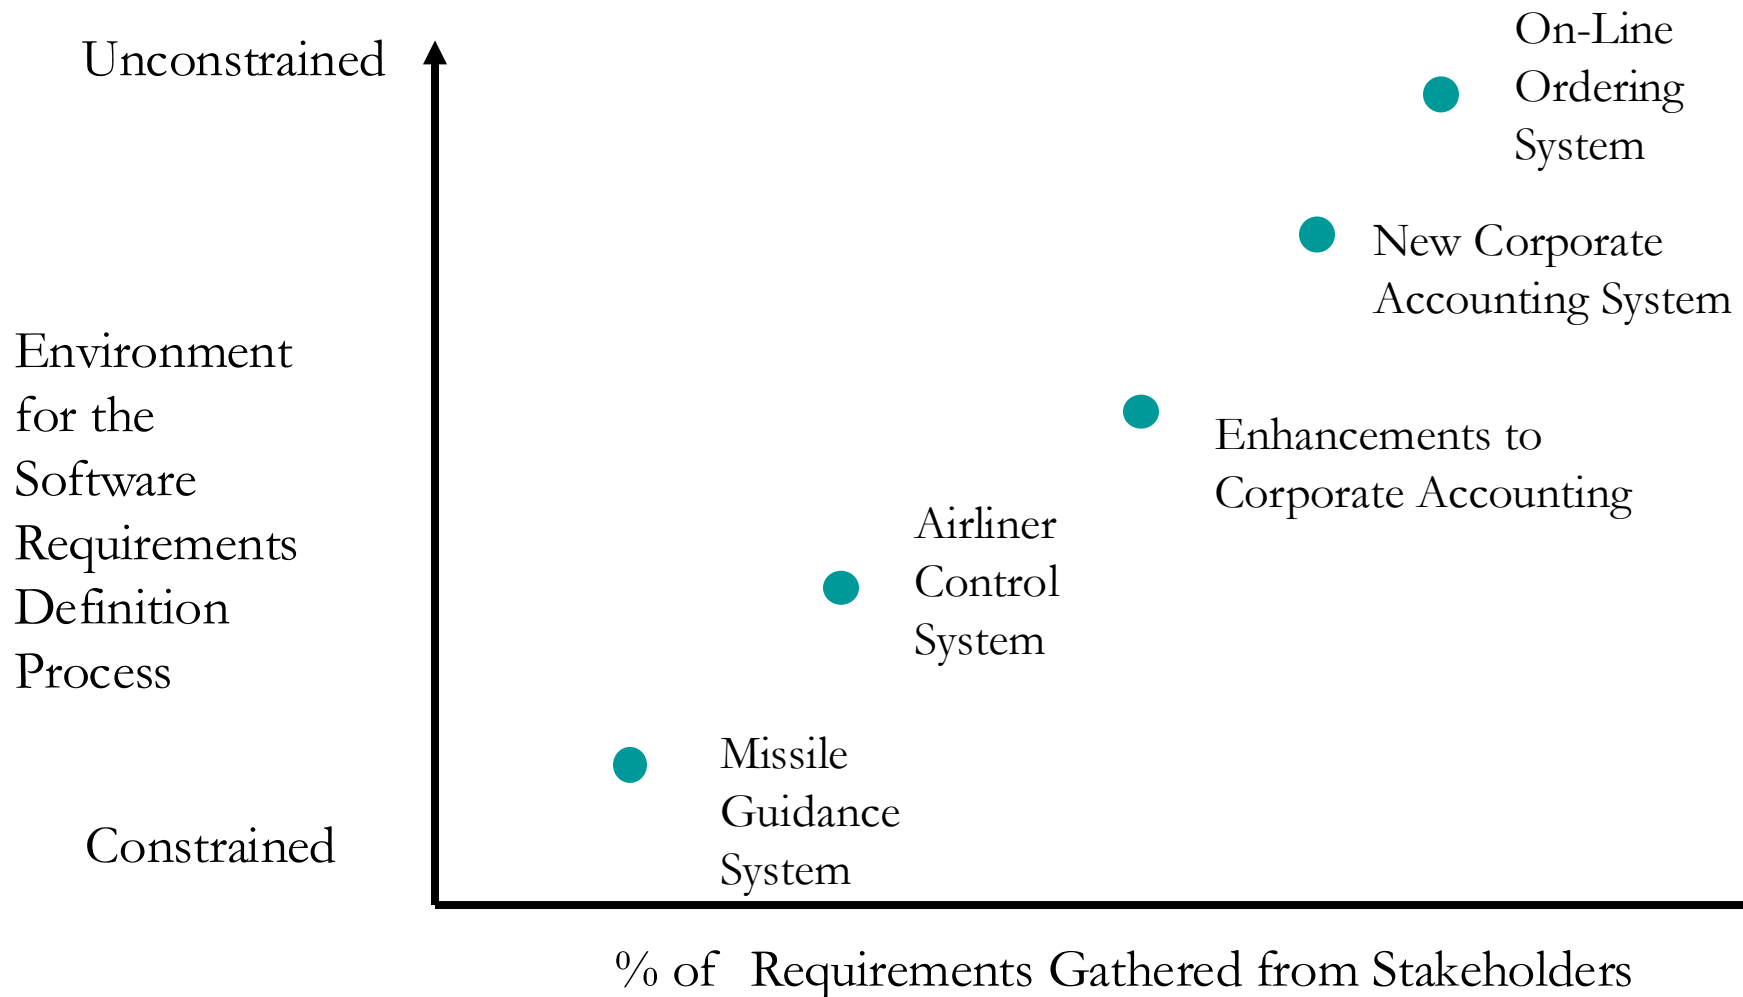


Defining the Scope

- Narrow the *scope* by defining a more precise problem
 - List all the things you might imagine the system doing
 - Exclude some of these things if too broad
 - Determine high-level goals if too narrow
- Example: A university registration system

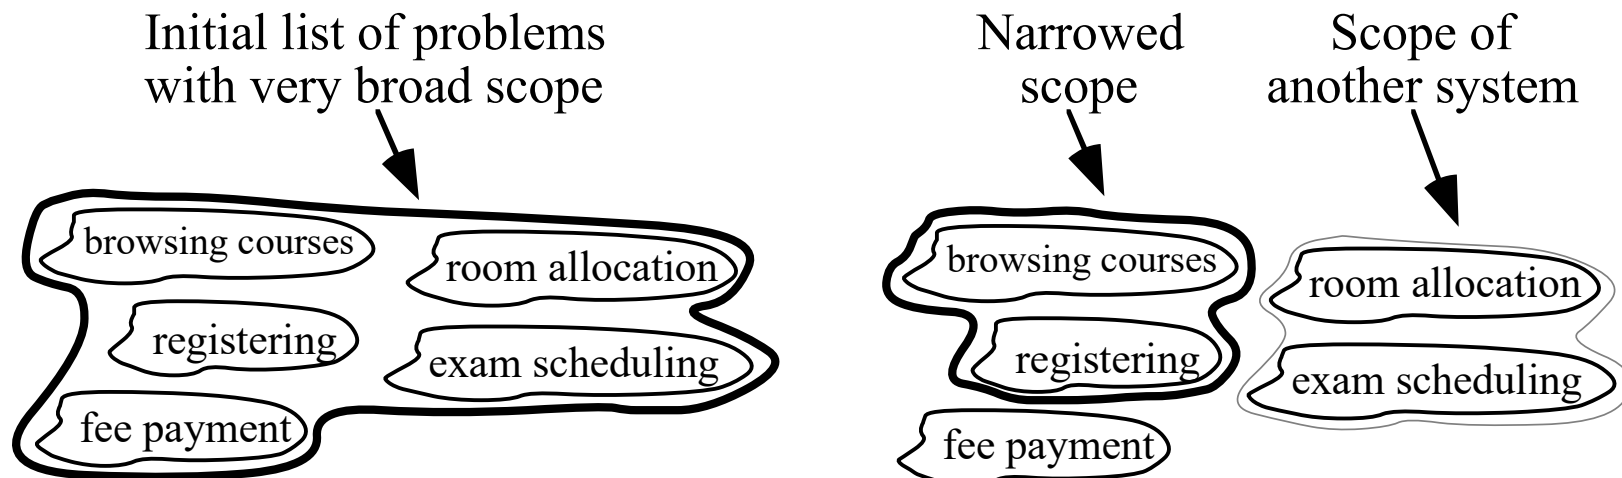

The Starting Point for Software Projects

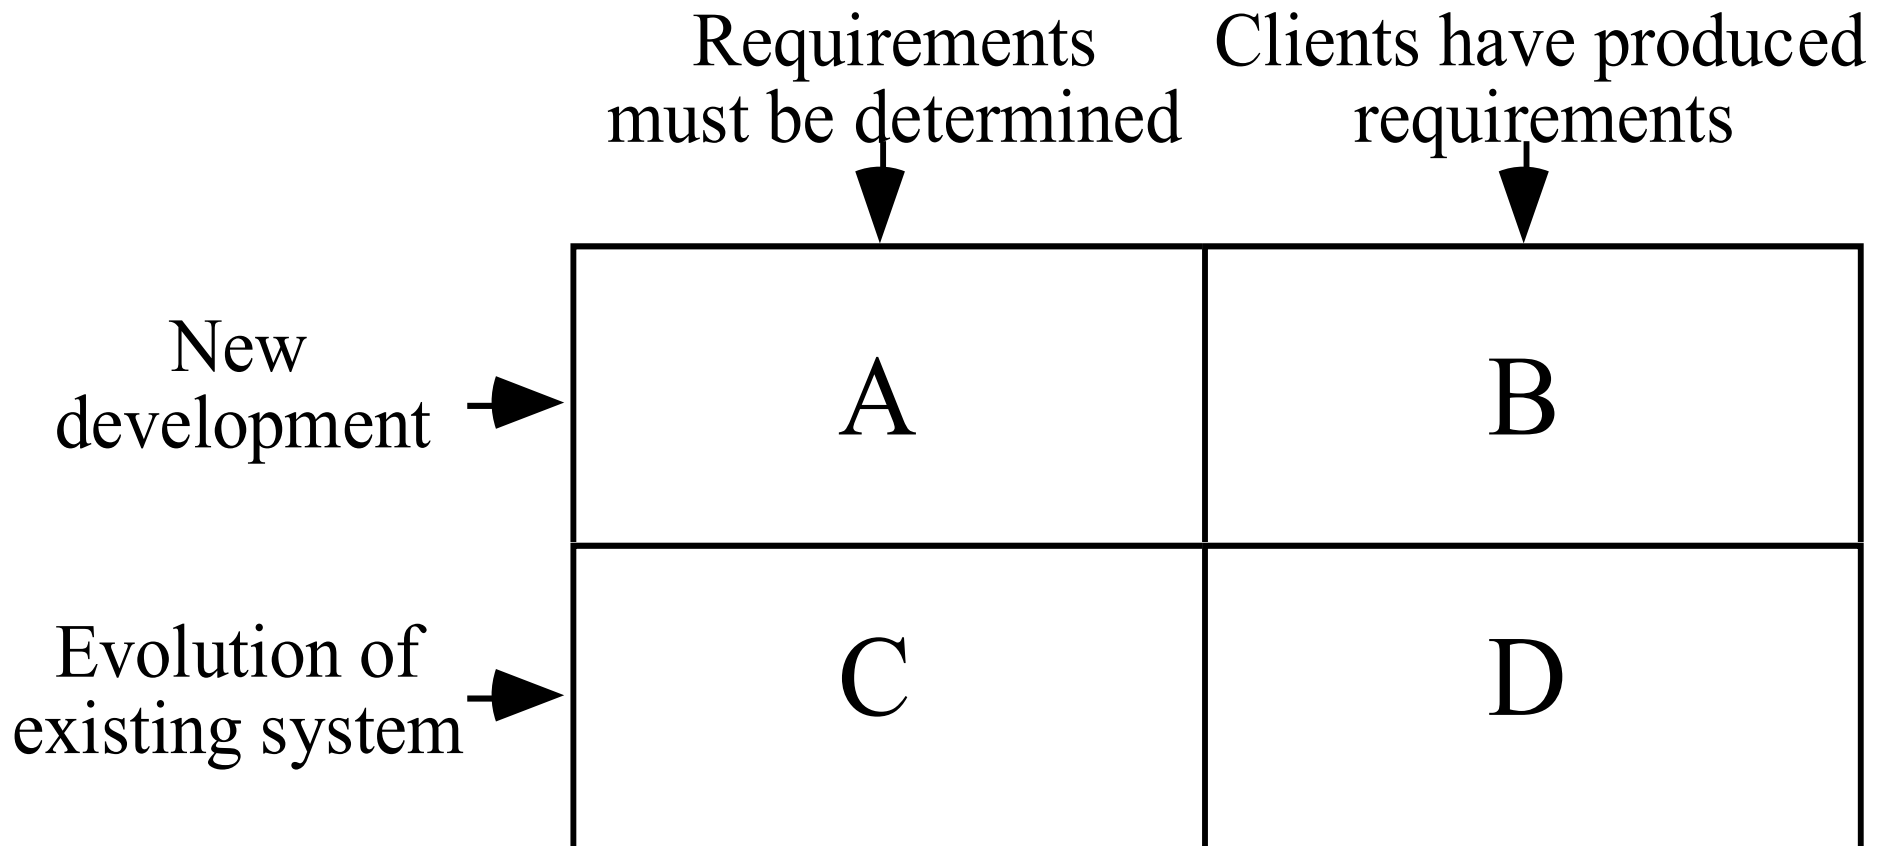

Types of requirements

- Requirements are broadly categorized into two types:
 - **Functional requirements**
 - **Non-functional requirements**

There may be other requirements from
“Domain”, ”Business”, “Transition”, etc.

Functional Requirements

Specifies behaviors/services (describe *what* the system should do)

Example: In e-commerce website, a functional requirement is

'The system shall allow users to add items to their shopping cart.'

Or

'The system shall process refunds when requested by authorized personnel.'

Clearly specifying functional requirements can help reduce **scope creep** !

Example: Functional Requirement


f1: find Books

– Input:

- a borrower's id:

– Output:

- details of the books that the borrower has currently checked out.

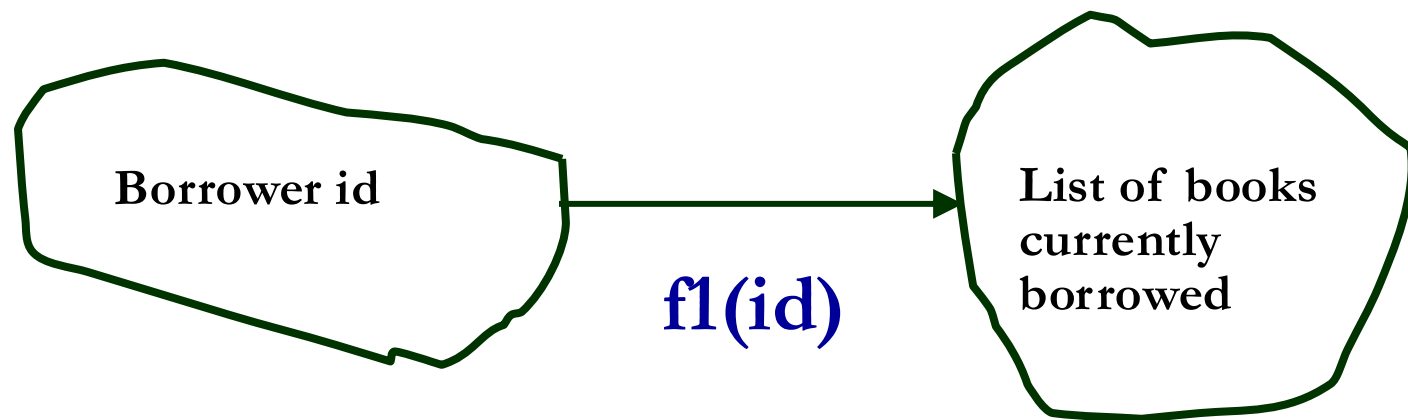

Non-Functional Requirements (NFR)

Include characteristics of the system which cannot be expressed as functions. Specifies Qualities/Constraints

- Performance, Security, Usability, etc.
- Technical constraints, Business constraints, Process constraints

Example: In e-commerce website, a non-functional requirement is


'The system shall support at least 100,000 concurrent users.'

Or,

'The website shall be available 99.99 % of the time,'

Clearly specifying non-functional requirements **can help measure** how well the system is doing what its supposed to do !

Requirements - Activities

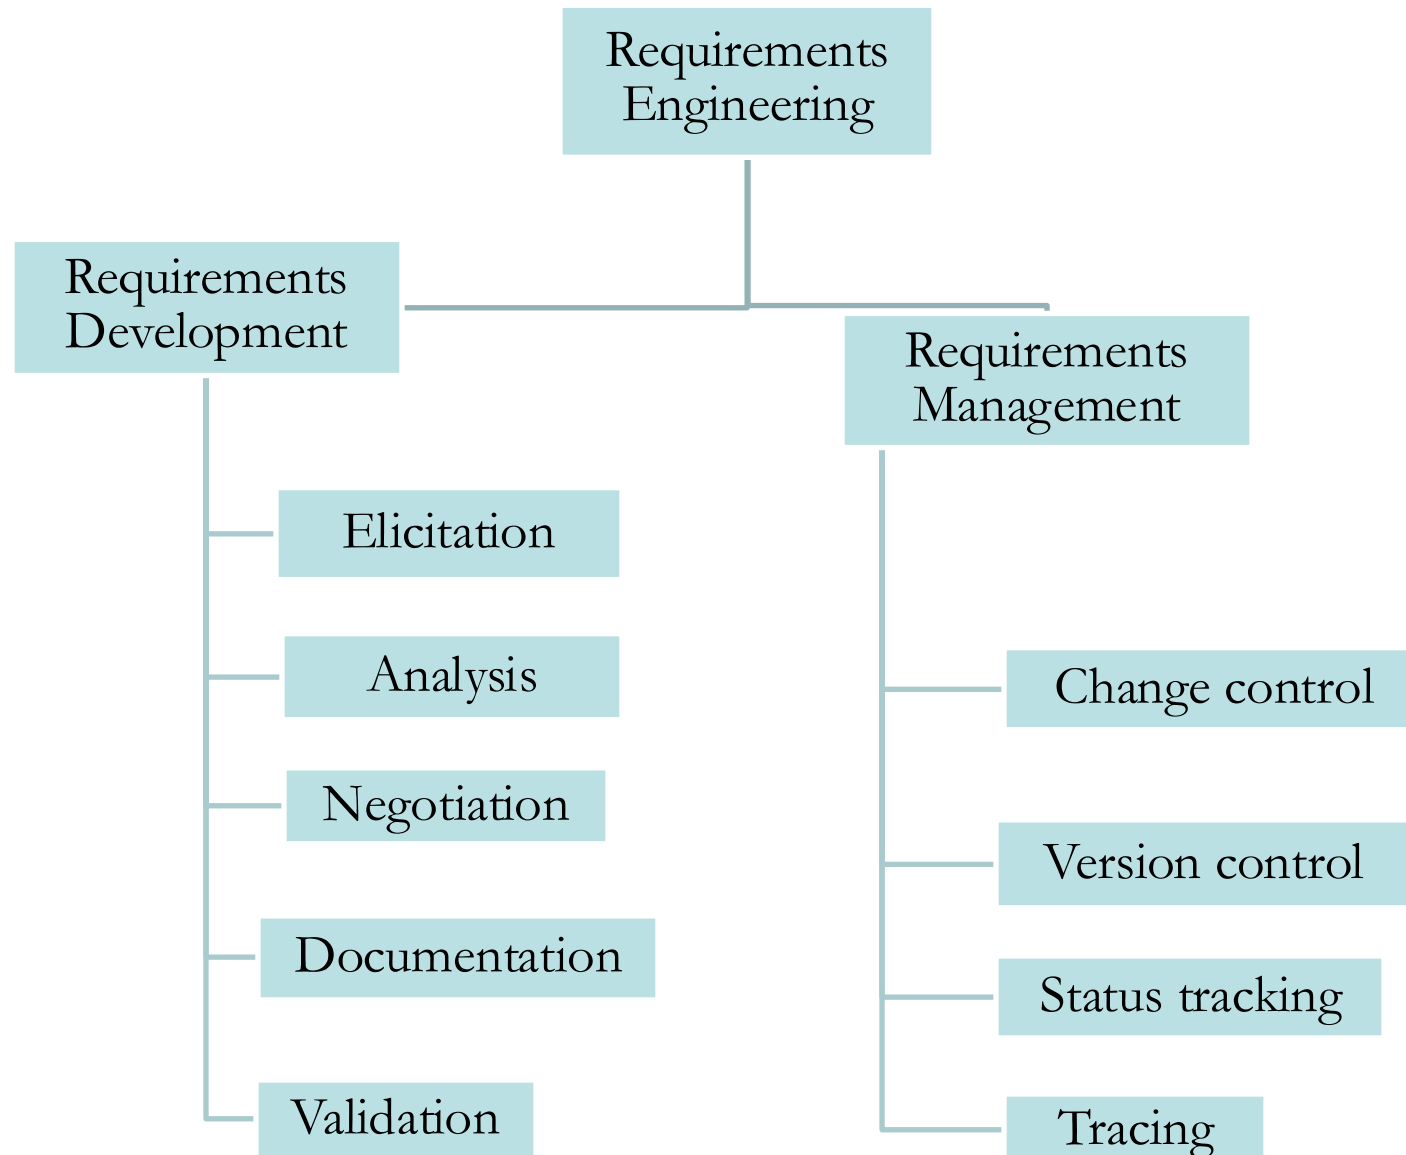

Thank you !

Requirements Gathering and Analysis

Requirements Gathering/Requirements Elicitation

- **Interviews** - structured vs. unstructured; elicitation goals, question design.
 - Ask about specific details
 - Ask about the stakeholder's vision for the future
 - Ask if they have alternative ideas
 - Ask for other sources of information
 - Ask them to draw diagrams

Example: interview product owner and lead developer to capture API requirements.


- **Observation / Contextual Inquiry** - Ethnographic methods, task analysis, capturing tacit knowledge.
 - Read documents and discuss requirements with users
 - Shadowing important potential users as they do their work - ask the user to explain everything he or she is doing
 - Session videotaping

Example: observe staff using legacy LMS to identify pain points for migration.

Gathering Requirements

- **Workshops / Joint Application Development (JAD)** - facilitated sessions, role of moderator, resolving conflicting requirements.
 - Appoint an experienced moderator
 - Arrange the attendees around a table
 - Decide on a ‘trigger question’
 - Ask each participant to write an answer and pass the paper to its neighbour

Example: cross-functional workshop to define semester grading workflow.

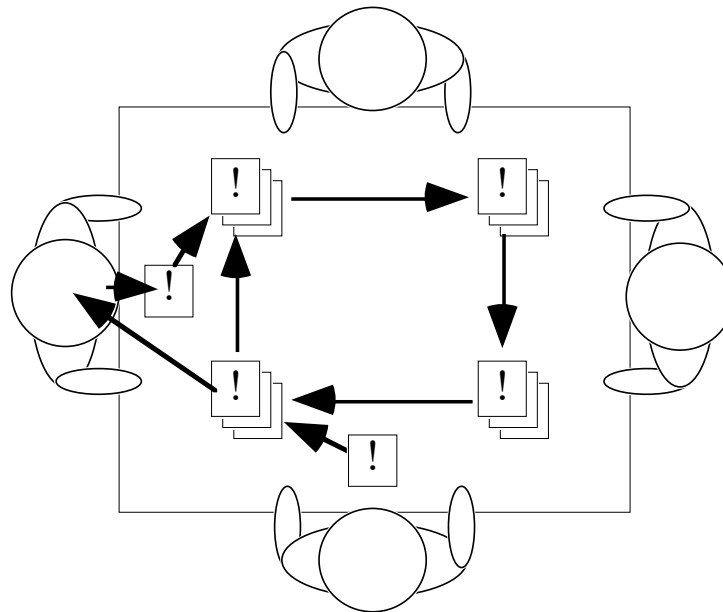

Gathering Requirements

- Prototyping
 - The simplest kind: *paper prototype*.
 - a set of pictures of the system that are shown to users in sequence to explain what would happen
 - The most common: a mock-up of the system's UI
 - Written in a rapid prototyping language
 - Does *not* normally perform any computations, access any databases or interact with any other systems
 - May prototype a particular aspect of the system

Example problems and requirements elicitation

University students miss assignment deadlines due to unclear submission workflows across LMS and email.

Contextual inquiry: shadow 5 students during one week of assignment handling to observe steps, tools used, and pain points; document task flows and exceptions.

Hospital nurses spend excessive time locating available infusion pumps, delaying patient care.

Workshops + Field observation: run a 2-hour workshop with nurses and biomedical engineers, then observe peak-shift workflows to validate device tracking requirements.

Small retailers cannot reconcile daily sales across POS and online storefronts, causing inventory mismatches.

Document analysis + Stakeholder interviews: review reconciliation reports and interview store manager + e-commerce admin to capture data fields, timing, and error cases.

Requirements Gathering Table - Example

Requirement ID	Requirement Title	Description	Priority	Type	Source / Stakeholder	Acceptance Criteria	Notes / Dependencies
R-001	User Registration	Allow users to create an account using email and password, with email verification.	H	Functional	Product Owner, Marketing	User can register, receive verification email, and activate account; error shown for duplicate email.	Depends on SMTP service; GDPR consent checkbox
R-002	User Login	Authenticate users via email and password; support "Forgot Password".	H	Functional	Product Owner	Users can log in with valid credentials; password reset email sent within 5 minutes.	Rate-limit login attempts
R-003	Create Task	Users can create tasks with title, description, due date, priority, and tags.	H	Functional	End Users	Task saved and visible in user's task list with correct fields.	Requires user session

Thank you !

Analysis of the gathered requirements

- Main purpose of requirements analysis:
 - Clearly understand the user requirements,
 - Detect inconsistencies, ambiguities, and incompleteness.
- Incompleteness and inconsistencies:
 - Resolved through further discussions with the end-users and the customers.

Inconsistent Requirement

Some part of the requirement contradicts with some other part.

Example (E-commerce site):

1. Product Availability:

1. Requirement A: Products are displayed as available even if there's only one left in stock to create a sense of urgency.
2. Requirement B: Users cannot add a product to their cart if the stock quantity is less than five.

2. Pricing Rules:

1. Requirement C: Discounted prices should be displayed with the original price crossed out and the new discounted price prominently shown.
2. Requirement D: Prices are automatically adjusted based on user behavior, with the goal of maximizing revenue

Incomplete Requirement

Some requirements have been omitted - Possibly due to oversight.

- Example (E-commerce site):
 - Implement user authentication for the e-commerce website.

Enhanced Requirement:

Precondition: User must be registered in the system via an email id and password.

"Users should be able to log in with their registered email and password. After three unsuccessful login attempts, users should be locked out of their accounts for 30 minutes. Implement password reset functionality that sends a password reset link to the user's registered email address"

Requirements Quality Control

- less rework
- fewer unnecessary features
- lower cost
- faster development
- fewer miscommunication
- reduced scope creep
- better deliverables
- minimize change control


Requirements Quality Control

- Goal: Check if the identified requirements represent all expectations about the system of various stakeholders, and do not contradict each other.
- Process: through Validation and Verification activities
- Metrics can be used

Verification & Validation Activities


- Validation
 - “Am I building the right *product*?”
 - Checking a work product against higher level work products or authorities who framed this product
 - Focus on requirement qualities that affect the product
 - Requirements are validated by stakeholders
- Verification
 - “Am I *building* the product right?”
 - Checking a work product against some standards and conditions imposed on this *type* of product and the *process* of its development
 - Focus on requirement qualities that affect the development process
 - Requirements are verified by the analysts mainly

V & V in Requirements Engineering

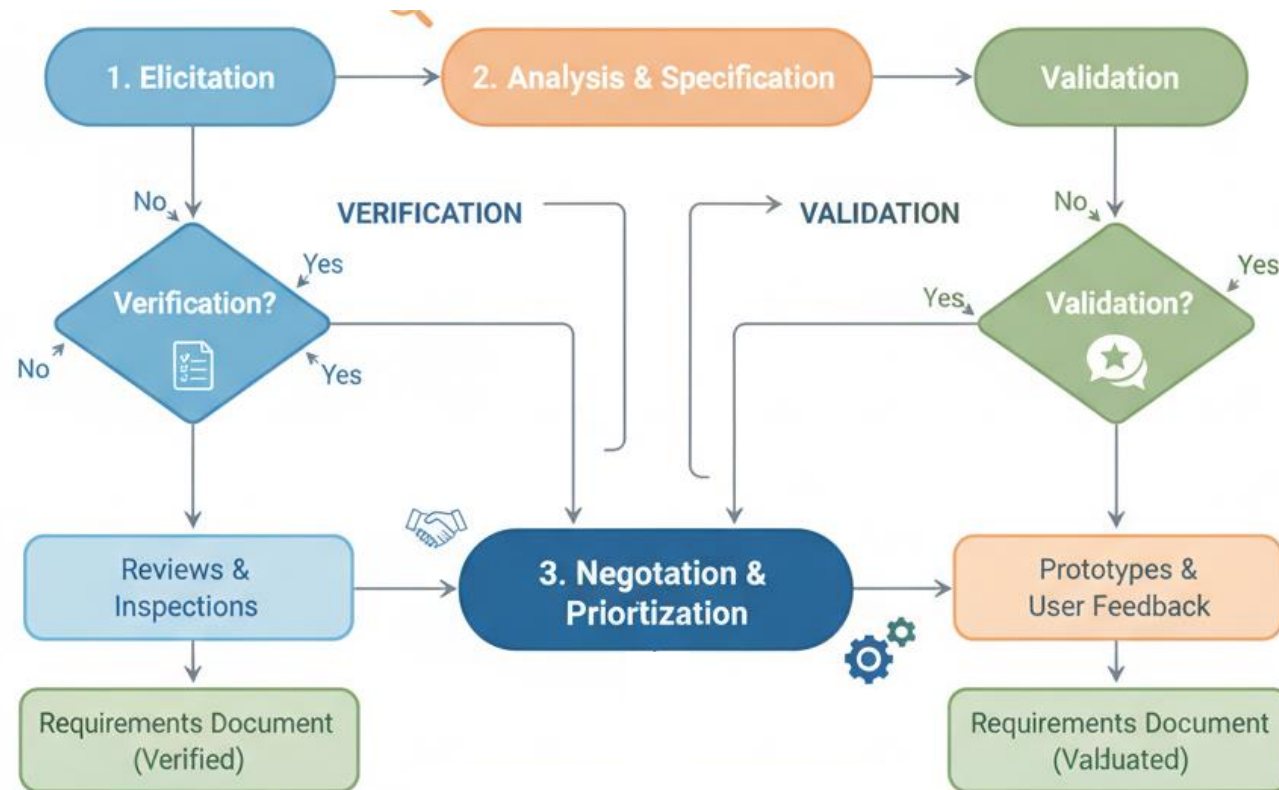

Desired Qualities in Requirements

- V&V checks the requirements for presence of defects with respect to some defined quality characteristics.

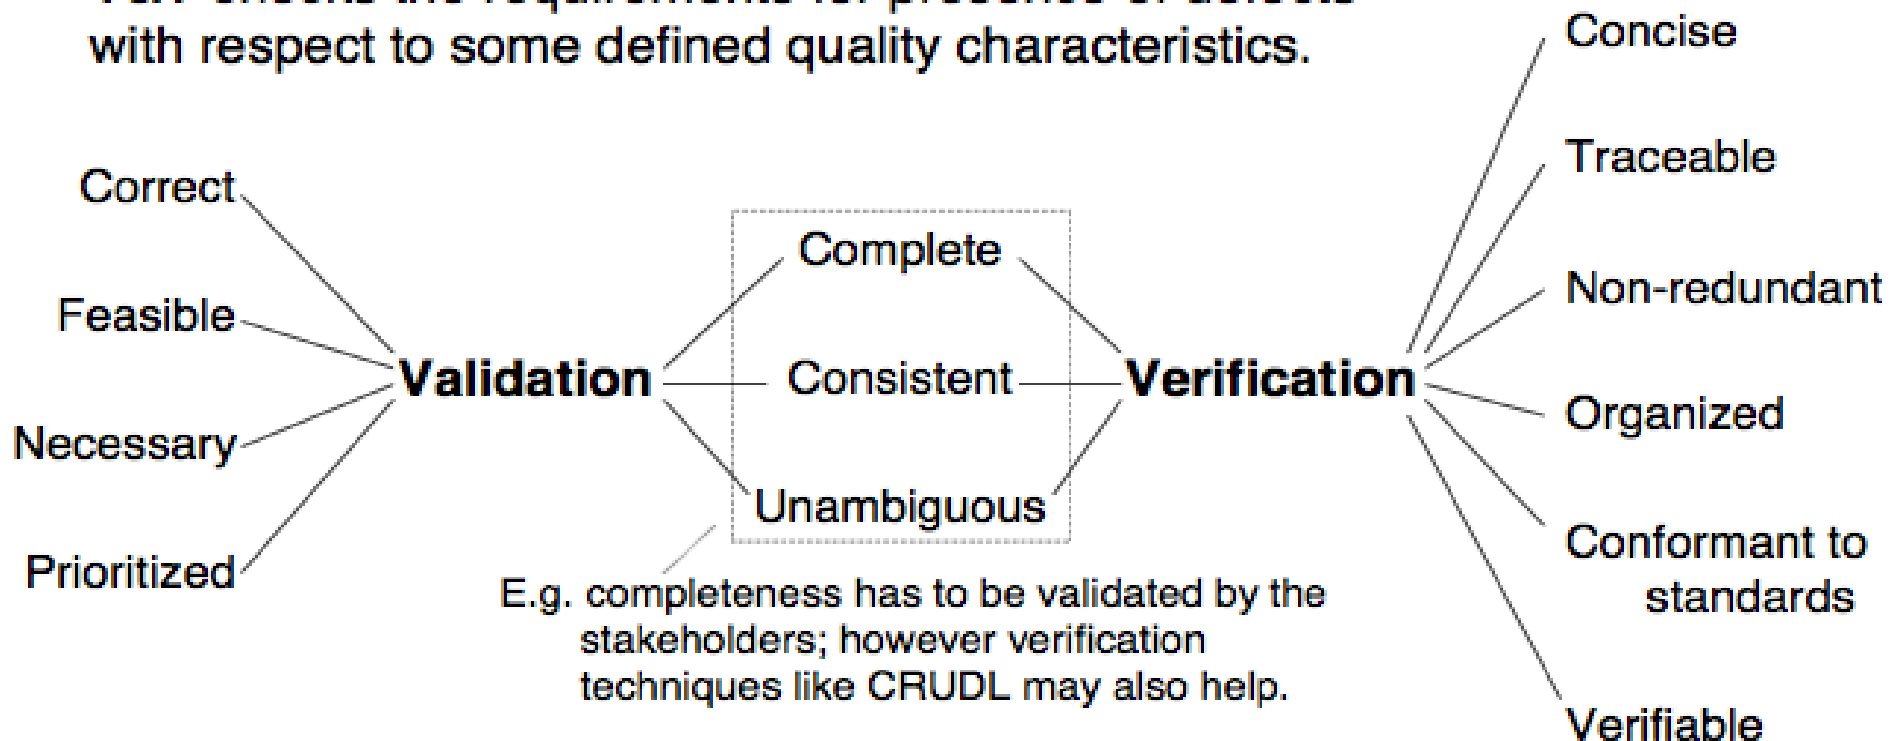

Look as a whole and at a statement level

Bad Requirements: A Simplified Example

- *A mail should be displayed within 3 seconds of clicking on mail*
- *User should be able to add a new mail server during peak hours within a small downtime*
- *Business services should not be interrupted during the peak hours*
- *User should be able to change the look and feel of how the mailbox is displayed*

Why do you think they are given as examples of bad requirements?

Quality Requirements

- Correct – only user representative can determine
- Feasible – get reality check on what can or cannot be done technically or within given cost constraints.
- Necessary – trace each requirement back to its origin
- Unambiguous – one interpretation
- Verifiable – how to you know if the requirement was implemented properly?
- Prioritized – function of value provided to the customer

Writing Example #1

“The product shall provide status messages at regular intervals not less than every 60 seconds.”

- Incomplete – What are the status messages and how are they supposed to be displayed?
- Ambiguous – What part of the product? Regular interval?
- Not verifiable

Example #1 – Rewritten spec

1. Status Messages.
 - 1.1. The Background Task Manager shall display status messages in a designated area of the user interface at intervals of 60 plus or minus 10 seconds.
 - 1.2. If background task processing is progressing normally, the percentage of the background task processing that has been completed shall be displayed.
 - 1.3. A message shall be displayed when the background task is completed.
 - 1.4. An error message shall be displayed if the background task has stalled.

Writing Example #2

“The product shall switch between displaying and hiding non-printing characters instantaneously.”

- Not Feasible – computers cannot do anything instantaneously.
- Incomplete – conditions which trigger state switch
- Ambiguous – “non-printing character”

Example #2 – Rewritten Spec

“The user shall be able to toggle between displaying and hiding all HTML markup tags in the document being edited with the activation of a specific triggering condition.”

- Note that “triggering condition” is left for design

The Specification Trap

The Landing Pilot is the Non-Landing Pilot until the 'decision altitude' call, when the Handling Non-Landing Pilot hands the handling to the Non-Handling Landing Pilot, unless the latter calls 'go-around,' in which case the Handling Non-Landing Pilot continues handling and the Non-Handling Landing Pilot continues non-handling until the next call of 'land,' or 'go-around' as appropriate. In view of recent confusions over these rules, it was deemed necessary to restate them clearly.

British Airways memorandum,
quoted in *Pilot Magazine*, December

1996

Quantifying Requirements

- The ability to identify measurable, mutually properties of similar requirements and the elicitation of corresponding values for each requirement
 - Auditability
 - Capacity
 - Configurability
 - Internationalization
 - Personalization
 - Variability
 - Correctness
 - Accuracy
 - Precision
 - Current
 - Dependability
 - Availability
 - Reliability
 - Robustness
 - Safety
 - Security
 - Survivability
 - Efficiency
 - Interoperability
 - Performance
 - Response time
 - Latency
 - Through put
 - Schedule-ability

Quantifying Requirements

examples...

The Quality Concepts
(abstract notions of
quality properties)



Measurable Quantities
(define some metrics)



**Counts taken from
Design Representations**
(realization of the metrics)

reliability



mean time
to failure?



run it and
count crashes
per hour???

complexity



information
flow between
modules?



count
procedure
calls???

usability



time taken
to learn
how to use?



minutes
taken for
some user
task???

Example Quantifications

Quality	Metric
Speed	transactions/sec response time screen refresh time
Size	Kbytes number of RAM chips
Ease of Use	training time number of help frames
Reliability	mean-time-to-failure, probability of unavailability rate of failure, availability
Robustness	time to restart after failure percentage of events causing failure
Portability	percentage of target-dependent statements number of target systems

Difficulties and Risks in Requirements analysis

- Requirements change rapidly
 - *Perform incremental development, build flexibility into the design, do regular reviews*
- Attempting to do too much
 - *Document the problem boundaries at an early stage, carefully estimate the time*
- It may be hard to reconcile conflicting sets of requirements
 - *Brainstorming, JAD sessions, competing prototypes*
- It is hard to state requirements precisely
 - *Break requirements down into simple sentences and review them carefully, look for potential ambiguity, make early prototypes*

Requirements Specification

Software Requirements Specification (SRS)

Main aim of requirements specification:

- Systematically organize the requirements arrived during requirements analysis.
- Document requirements properly.

Can be documented in

- Natural language
- Structured natural language
- Formal specifications

SRS Document

- The SRS document is known as black-box specification:
 - The system is considered as a black box whose internal details are not known.
 - Only its visible external (i.e. input/output) behavior is documented.



- SRS document concentrates on:
 - What** needs to be done
 - Carefully avoids the solution (“**how to do**”) aspects.
- SRS document serves as a contract
 - Between **development team** and the **customer**

Properties of a Good SRS Document

- Correctness
- Completeness
- Consistency
- Unambiguous / Precise
- Verifiable / Testable
- Modifiable / Maintainable
- Traceable
- Ranked for priority
- Understandable by stakeholders
- Feasible / Realistic
- Concise / Organized
- Uniform terminology and style
- Include functional and non-functional requirements
- Include acceptance criteria and success metrics
- Versioning and change history

Natural Language SRS

Field	Content
System	Online Bookstore — Customer Purchasing
Scope	Customers can browse, search, add books to cart, and checkout.
N-L1	The system shall allow customers to create an account using their email address and a password.
N-L2	Customers should be able to search for books by title, author, or ISBN and see results sorted by relevance.
N-L3	The system shall process payments via credit card and display an order confirmation.
N-L4	The system should be fast and user friendly.

Structured Natural Language SRS

Field	Content
System	Online Bookstore — Customer Purchasing
ID	R-001
Title	User Registration
Statement	The system shall allow a new customer to register using a unique email and password.
Preconditions	None
Postconditions	A customer account record is created; verification email queued.
Priority	High
Acceptance Criteria	Given a valid unused email and password meeting policy, when user submits registration, then account is created and verification email sent within 30 seconds; duplicate emails rejected with HTTP 409.
Notes	Structured fields improve clarity, testability, and traceability.

Structured Natural Language – example structure

As a [Type of USER],
[Function to Perform (some goal)]
so that [Business Value (some reason)]

Example: **As** a user, I can indicate folders not to backup
so that my backup isn't filled up with things I don't
need saved

Use templates for Specifying Correctly

- The <System_name> shall <behavior> if <conditions>, where <quality factor>.
- Upon <conditions>, the <System_name> shall <behavior> where <quality factor>.
 - Ex: The ATM shall reject withdrawal requests if the amount requested is not divisible by 20.
- The system_name shall produce <output> for use by <nodes>, for use by <nodes>, if <conditions>, using <inputs/outputs> where <quality factor>.
 - The ATM shall produce a receipt for use by bank patrons if a transaction is completed. The receipt will include a unique transaction code, amount, date, time and location.

Formal SRS

Field	Specification
System	Online Bookstore — Shopping Cart Module
Types	$\text{BOOK} = \{ \text{isbn: String, title: String, price: Real} \}$; $\text{CART} =$ sequence of BOOK
State (CartState)	cart: CART total: Real Invariant: $\text{total} = \sum_{b \in \text{cart}} b.\text{price}$
Operation: AddBook	Precondition: true Input: b: BOOK Postcondition: $\text{cart}' = \text{cart} ++ [b] \wedge \text{total}' = \text{total} + b.\text{price}$
Operation: RemoveBook	Precondition: $1 \leq \text{index} \leq$
Operation: GetTotal	Precondition: true Output: $\text{total} = \sum_{b \in \text{cart}} b.\text{price}$
Error Handling	AddBook: if $b.\text{price} < 0 \Rightarrow \text{error BAD_PRICE}$ RemoveBook: if index invalid $\Rightarrow \text{error}$ INDEX_OUT_OF_RANGE
Invariants & Constraints	$\forall b \in \text{cart}: b.\text{price} \geq 0 ;$

Formal Specification Techniques

The role of FSTs in Software Engineering

A **Formal Specification Technique** (FST) consists of a formal specification language and mechanisms for deriving consequences from statements in the language

FSTs can be used to:

- Prove that a specification is implementable
- Prove that an implementation satisfies its specification
- Prove properties of system without executing them

Types of properties that can be investigated with FSTs

- **Correctness**: establishing that a model/specification exhibits/captures desired functionality. Also establishing that a refinement is consistent with its specification
- **Safety**: establishing that model/specification does not allow undesired behavior
- **Liveness**: establishing that a model/specification will eventually do certain desired things
- **Security**: establishing that unauthorized access to sensitive data and programs are not permitted by model
- **Timeliness**: establishing that modeled behavior is consistent with timing constraints

Levels of Rigor

- **Level 0:** No Use of FSTs
- **Level 1:** Use of concepts and notation from discrete math.
- **Level 2:** Use of formalized specification languages with some supporting tools
- **Level 3:** Use of formal specification languages with supporting environments, including animators, and mechanized theorem proving and proof checking tools.

Example of Level 0 specification

Calculate the mean average of a set of employee salaries

1. Read in the List, L, of employee salaries from the Employee file
2. Sum the values in L in Total
3. Divide Total by the number of elements in L and output the result

Example of a level 1 specification

Calculate the mean average of a set of employee salaries

input empsals: list of $\mathbb{N}$ ($\mathbb{N}$ is the set of natural numbers)

output avg: R (R is the set of real numbers)

Pre-condition

$empsals \neq emptylist$

Post-condition

$$avg = \left(\sum_{i=1}^{\#(empsals)} empsals(i) \right) \text{div } \#empsals$$

Example of a level 2 specification

Calculate the mean average of a set of employee salaries

Z specification (in this case avg is formed by carrying out an integer division)

$sum: seqN \rightarrow N$
$sum (\emptyset) = 0$
$\forall l: seqN \bullet sum (l) = head(l) + sum (tail (l))$
Average
$empsals? : seqN$
$avg! : N$
$avg! = sum (empsals?) \text{ div } \#(empsals)$

Choosing appropriate levels of rigor

- If FSTs are to be used for documentation only level 1 is appropriate
- If FSTs are to be used for justifying designs of critical systems then level 3 may be preferred
- If FSTs are to be used to help gain insight into a problem and/or solution level 2 may be sufficient
- Level 0 can be used for routine (well-understood) applications

Types of FSTs

- **Presentation mode**: textual, visual,...
- **Specification approach**: model-oriented, property-oriented
- **Specification perspective**: process-oriented, state-oriented, object-oriented, ...
- **Semantic basis**: operational semantics, denotational semantics, formal logic,...
- **Analysis approach**: model checking, theorem proving, animation/simulation,...
- **Types of applicable systems**: transformational, reactive,...

Proof obligations and their discharge

Proof obligations depend on:

- the problem being tackled
- the expressive power of the formal language
- the structure of the solution

Discharge of obligations depends on:

- the analytical power of the FST
- the structure of the solution

Summary

- Requirements define system needs and qualities
- Proper gathering, analysis, and documentation are critical
- Clear requirements reduce rework and misunderstandings
 - Can be specified using natural language, structured natural language or using a formal language