

Using AI/ML to estimate original muon momenta from reconstructed tracks

Chethana Johannas

May 4, 2026


Input Files Used

- Currently using Hugo's RS57-70 ROOT file:
- `roadset57_70_R008_2111v42_tmp_noPhys.root`


Event Selection Applied

- To ensure high-quality data for training the AI/ML model, we apply a rigorous event selection process.
- Specifically, we apply the **Standard Chuck Cuts**, which are optimized for Drell-Yan (DY) event topologies.
- These cuts successfully filter out background noise, target-dump separation ambiguity, and poor-quality tracks to isolate clean dimuon pairs.

Dimuon P_x (GeV)

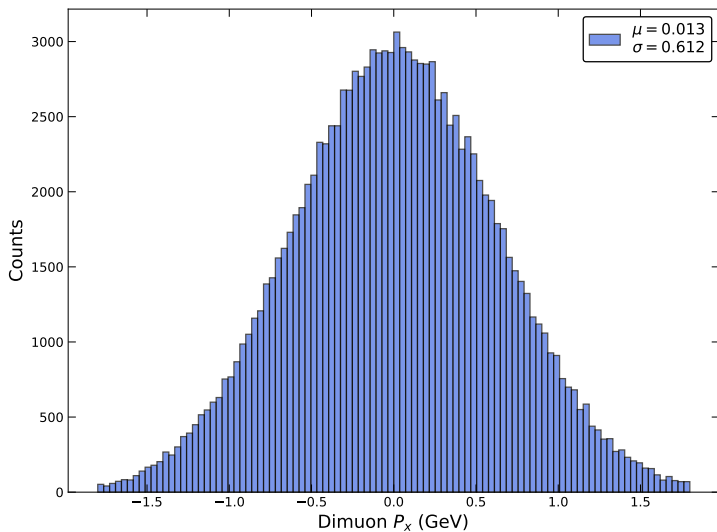

Dimuon P_y (GeV)

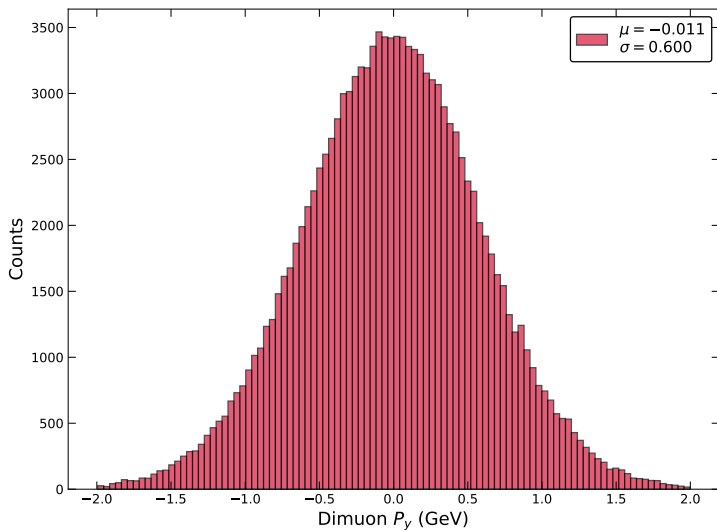

Dimuon P_z (GeV)

