

Module2 - R Markdown Document 1

Oscar S. Chavarria

10/14/2020

This is a level 1 header

R Markdown

This is a level 3 header

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

Here is a link to [GOOGLE](#)

Here is a word in **bold** and another word in **bold**.

Here is a word in *italics* and another word in *italics*.

When we compile our document we are using the `rmarkdown` package.

Here are some example R commands:

```
2+2
```

```
mean(c(1,2,3,4,5))
```

Here is an example of a non-numbered list:

- Breakfast
 - food
 - * eggs
 - * toast
 - * bacon
 - drink
 - * apple juice
- Lunch
 - taco
- Dinner
 - baked chicken
 - broccoli
 - rice

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:


```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   :  2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##  Mean   :15.4    Mean    : 42.98
```

```
## 3rd Qu.:19.0 3rd Qu.: 56.00  
## Max. :25.0 Max. :120.00
```


Including Plots

You can also embed plots, for example:

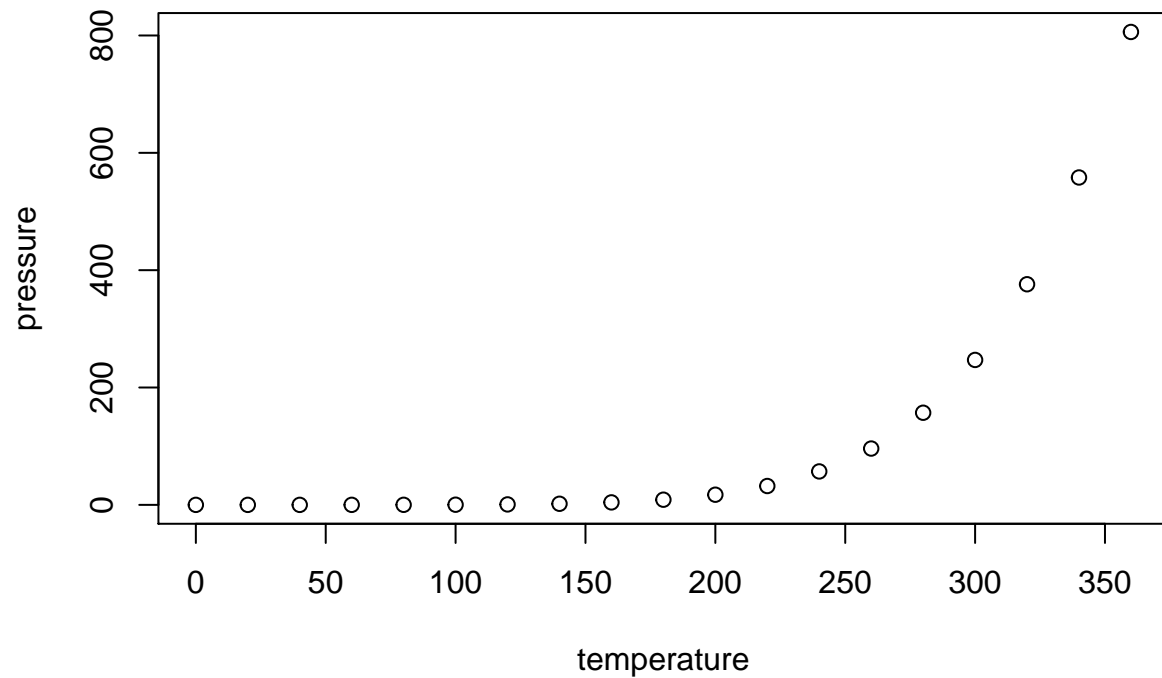

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

```
plot(pressure)
```

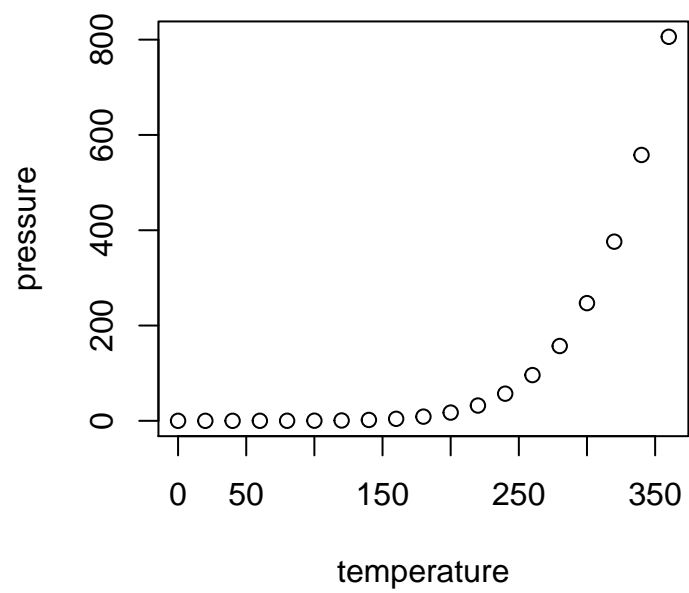

Insert Tables

```
knitr::kable(head(cars))
```

| speed | dist |
|-------|------|
| 4 | 2 |
| 4 | 10 |
| 7 | 4 |
| 7 | 22 |
| 8 | 16 |
| 9 | 10 |