Task 14

Create an S3 bucket where:

- Only /images/* is publicly readable
- All other objects remain private
- Public access is blocked at bucket level except required access

AWS S3 Bucket: Restricted Public Access (/images only)

Objective

Create an S3 bucket where:

- Only `/images/*` is publicly accessible
- All other objects remain private
- Public access is restricted at bucket level except required access

Step 1: Create Bucket

1. Go to
   Amazon S3 Console
2. Click **Create bucket**

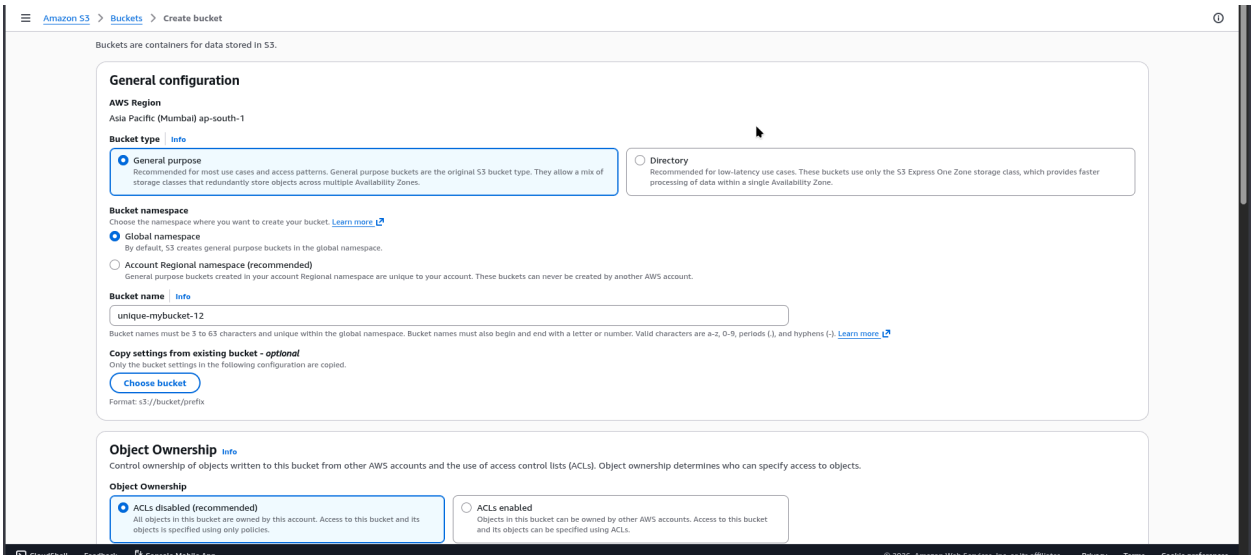
Amazon S3 > Buckets > Create bucket
Buckets are containers for data stored in S3.
General configuration
AWS Region
Asia Pacific (Mumbai) ap-south-1
Bucket type Info
General purpose
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
Directory
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.
Bucket namespace
Choose the namespace where you want to create your bucket. Learn more
Global namespace
By default, S3 creates general purpose buckets in the global namespace.
Account Regional namespace (recommended)
General purpose buckets created in your account Regional namespace are unique to your account. These buckets can never be created by another AWS account.
Bucket name Info
unique-mybucket-12
Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). Learn more
Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
Choose bucket
Format: s3://bucket/prefix
Object Ownership Info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.
Object Ownership
ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

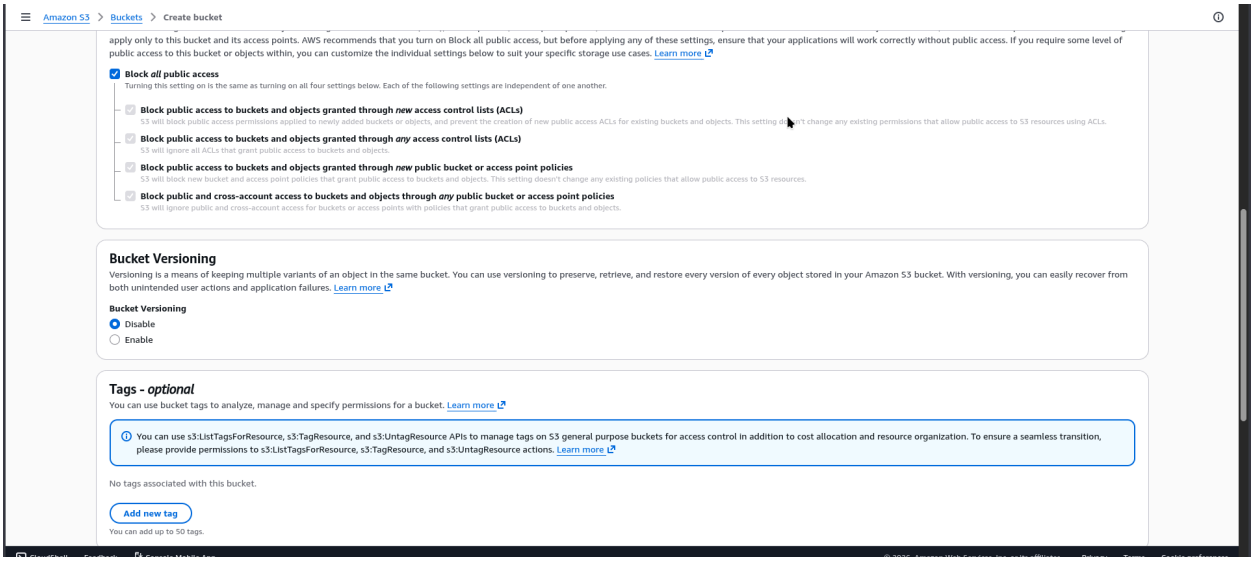
Amazon S3 > Buckets > Create bucket
apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more
Block all public access
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
Block public access to buckets and objects granted through new access control lists (ACLs)
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
Block public access to buckets and objects granted through any access control lists (ACLs)
S3 will ignore all ACLs that grant public access to buckets and objects.
Block public access to buckets and objects granted through new public bucket or access point policies
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
Block public and cross-account access to buckets and objects through any public bucket or access point policies
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.
Bucket Versioning
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more
Bucket Versioning
Disable
Enable
Tags - optional
You can use bucket tags to analyze, manage and specify permissions for a bucket. Learn more
You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. Learn more
No tags associated with this bucket.
Add new tag
You can add up to 50 tags.

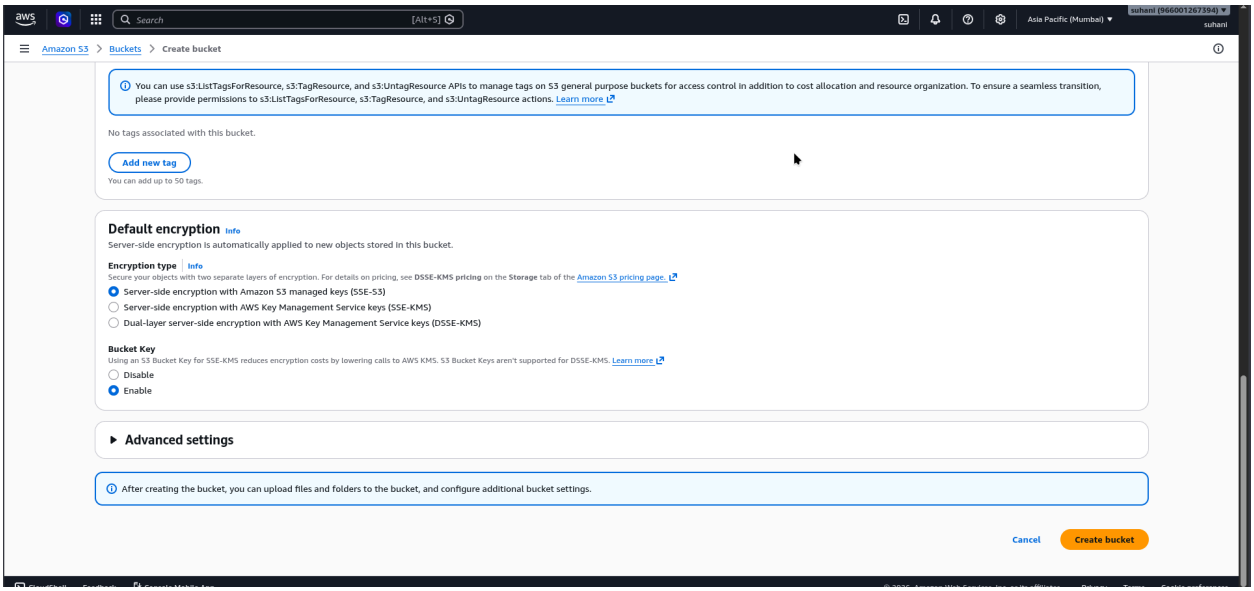

Step 3: Add Bucket Policy

Go to:

- **Permissions → Bucket Policy**

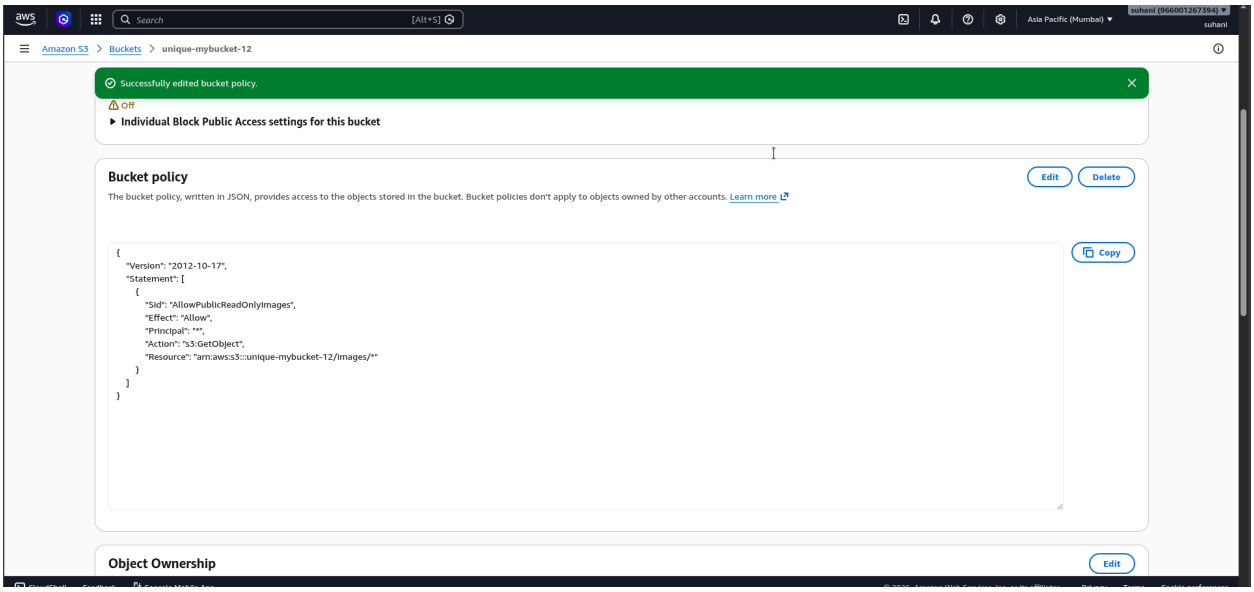

Even though block public access is ON:

- AWS allows **explicit policy exceptions**
- Only `/images/*` becomes public

- Everything else stays private