Task 18

Configure:

- Server access logging
- Logs delivered to another secure bucket
- Logs bucket must not be public

Step 1: Create Logs Bucket

- Create new bucket:

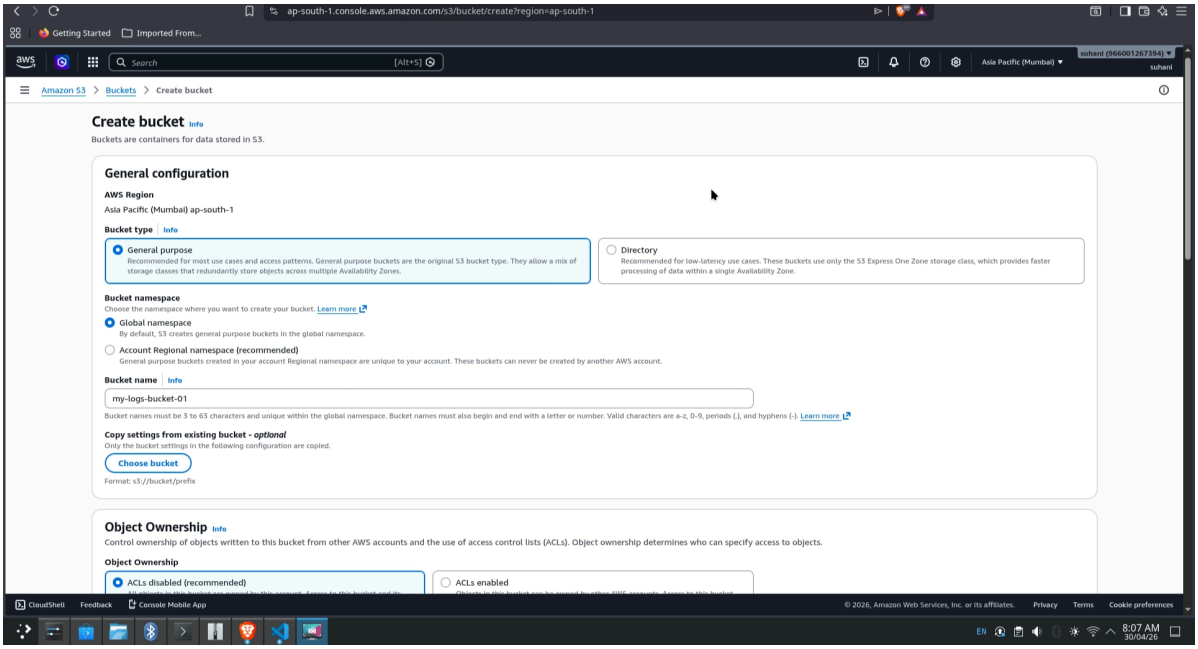

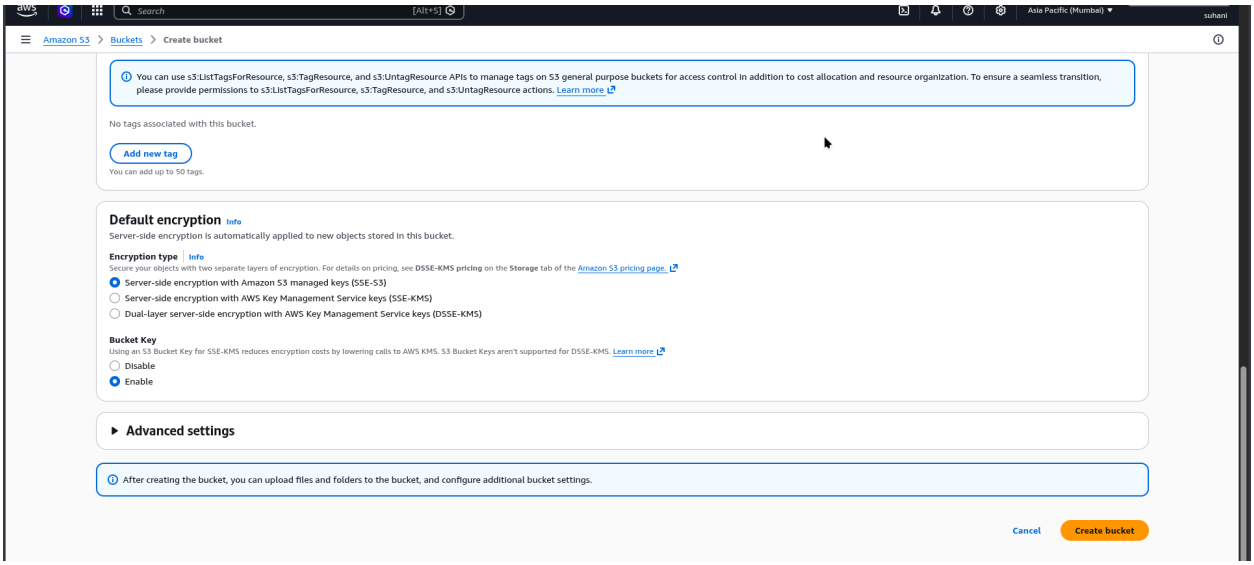

Step 2: Enable Logging

Go to:

- Main bucket → **Properties**
- Enable:
  - **Server Access Logging**

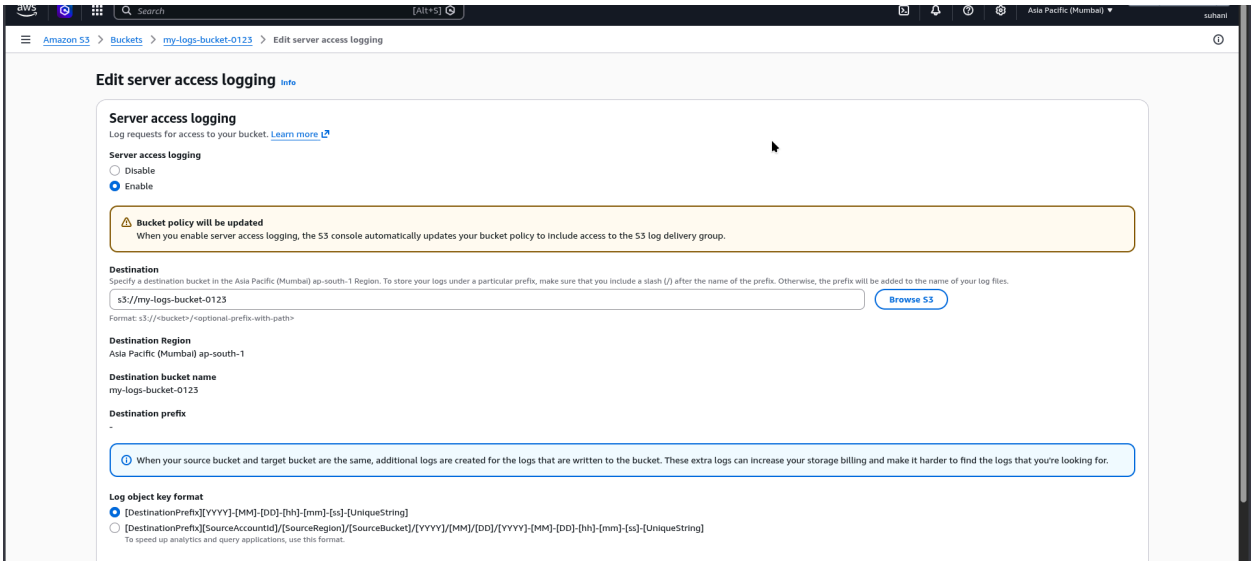

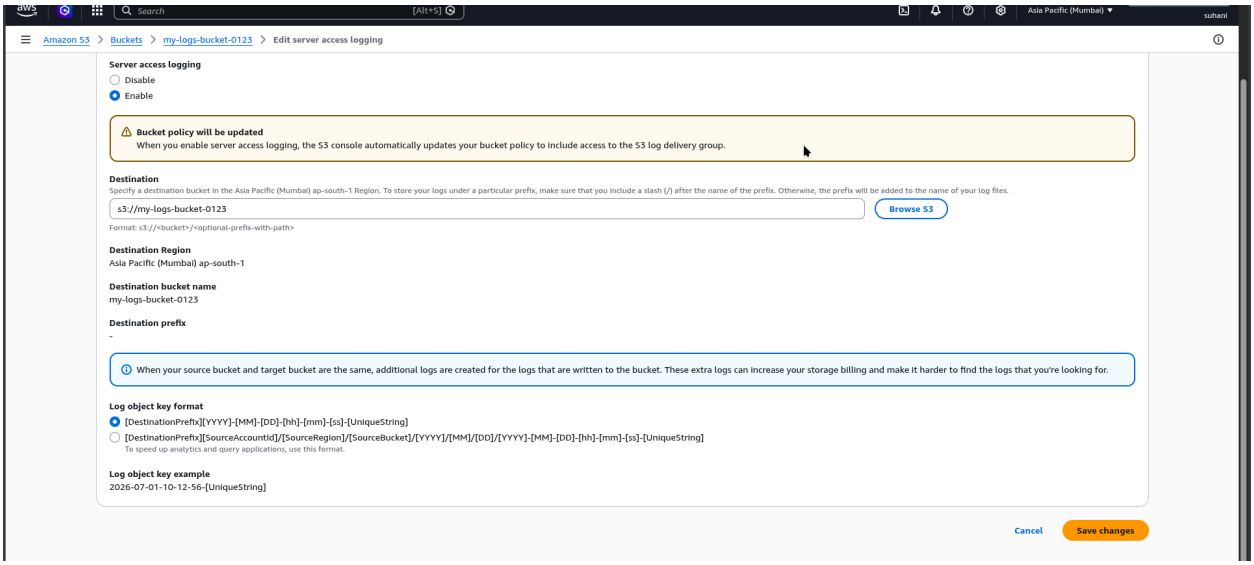
Search
[Alt+S]
Asia Pacific (Mumbai)
suhani
Amazon S3 > Buckets > my-logs-bucket-0123 > Edit server access logging
Server access logging
Disable
Enable
Bucket policy will be updated
When you enable server access logging, the S3 console automatically updates your bucket policy to include access to the S3 log delivery group.
Destination
Specify a destination bucket in the Asia Pacific (Mumbai) ap-south-1 Region. To store your logs under a particular prefix, make sure that you include a slash (/) after the name of the prefix. Otherwise, the prefix will be added to the name of your log files.
s3://my-logs-bucket-0123
Browse S3
Format: s3://<bucket>/<optional-prefix-with-path>
Destination Region
Asia Pacific (Mumbai) ap-south-1
Destination bucket name
my-logs-bucket-0123
Destination prefix
-
When your source bucket and target bucket are the same, additional logs are created for the logs that are written to the bucket. These extra logs can increase your storage billing and make it harder to find the logs that you're looking for.
Log object key format
[DestinationPrefix][YYYY]-[MM]-[DD]-[hh]-[mm]-[ss]-[UniqueString]
[DestinationPrefix][SourceAccountId]/[SourceRegion]/[SourceBucket]/[YYYY]/[MM]/[DD]/[YYYY]-[MM]-[DD]-[hh]-[mm]-[ss]-[UniqueString]
To speed up analytics and query applications, use this format.
Log object key example
2026-07-01-10-12-56-[UniqueString]
Cancel
Save changes