

Parts List			
Item	Qty	Part Number	Material
1	1	CAP PTC-CAP-01	TI-6AL-4V GRADE 5
2	1	PLUG PTC-PLUG-01	TI-6AL-4V GRADE 5
3	1	SMALLEY HHMU-38-S02	302 STAINLESS
4	1	O-RING 1.0 CS, SIZE TBC	TBC

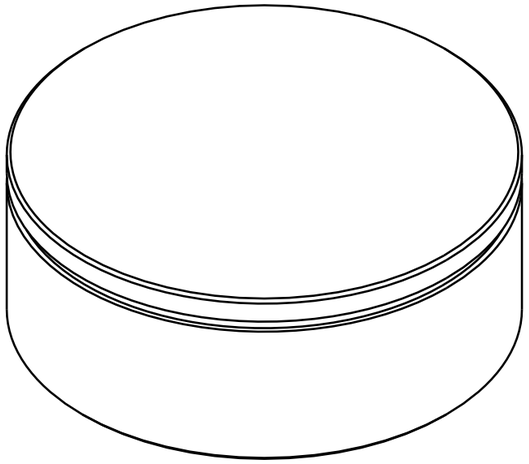


ISOMETRIC VIEW, SCALE 2:1

NOTES:
1. MATERIAL (ITEMS 1, 2): TITANIUM TI-6AL-4V GRADE 5 BAR.
2. FINISH: AS MACHINED, RA 1.6 MAX UNLESS NOTED.
   FINAL FINISH TBD.
3. UNLESS NOTED: LINEAR ±0.10, ANGLES ±1 DEG.
4. THE STEP FILES ARE THE MASTER FOR ALL GEOMETRY; THIS
   DRAWING CALLS OUT OVERALL AND CRITICAL DIMENSIONS.
5. DEBURR ALL EDGES. NO BURRS IN ANY GROOVE.
6. QUANTITY: 60 SETS.
7. ITEM 3 IS SEATED IN THE CAP GROOVE BEFORE CLOSING. THE
   PLUG RIM RAMP SPREADS IT AND IT LOCKS INTO THE PLUG
   GROOVE. THE CLOSED ASSEMBLY IS NOT MEANT TO REOPEN.
8. ITEM 4 O-RING SIZE AND MATERIAL TO BE CONFIRMED.
9. DO NOT SCALE DRAWING. DIMENSIONS IN MM.

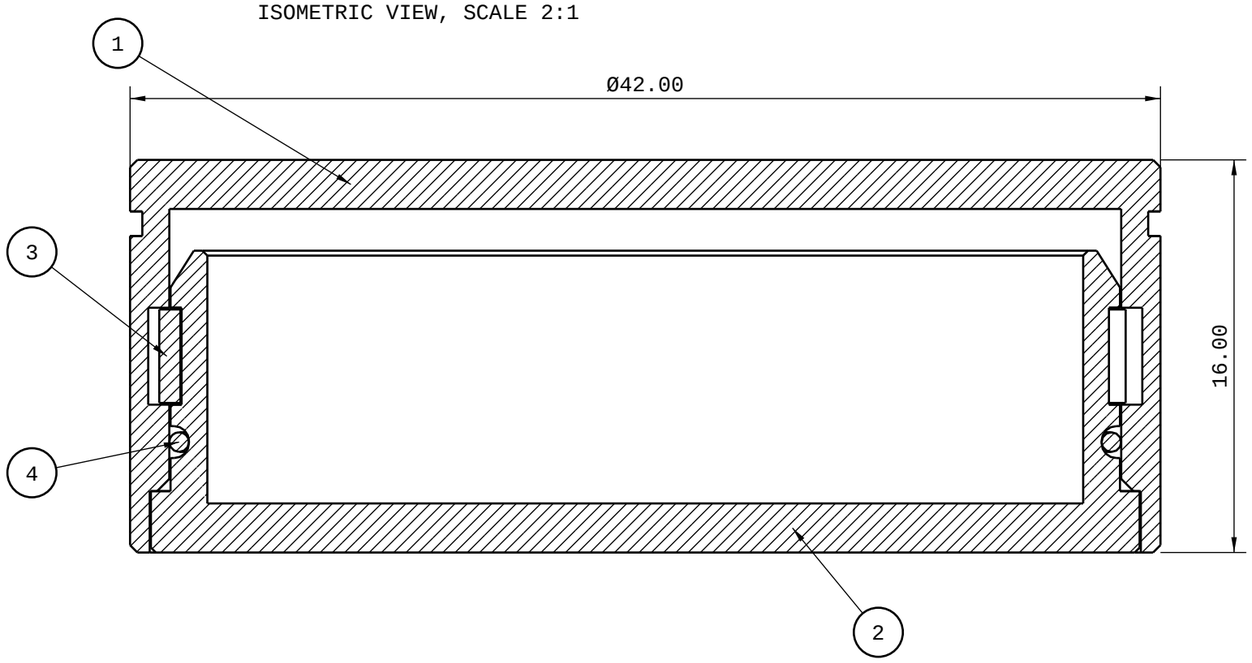


SECTION THROUGH AXIS, SCALE 4:1

DEPT. CW&T	TECHNICAL REFERENCE	CREATED BY Che-Wei Wang	APPROVED BY 11/11/26
		DOCUMENT TYPE Fabrication drawing - ASSEMBLY	DOCUMENT STATUS FOR QUOTE
CW&T		TITLE Pocket Time Capsule	DWG NO. PTC-001
		REV. A	DATE OF ISSUE 11/11/26
			SHEET 1/3

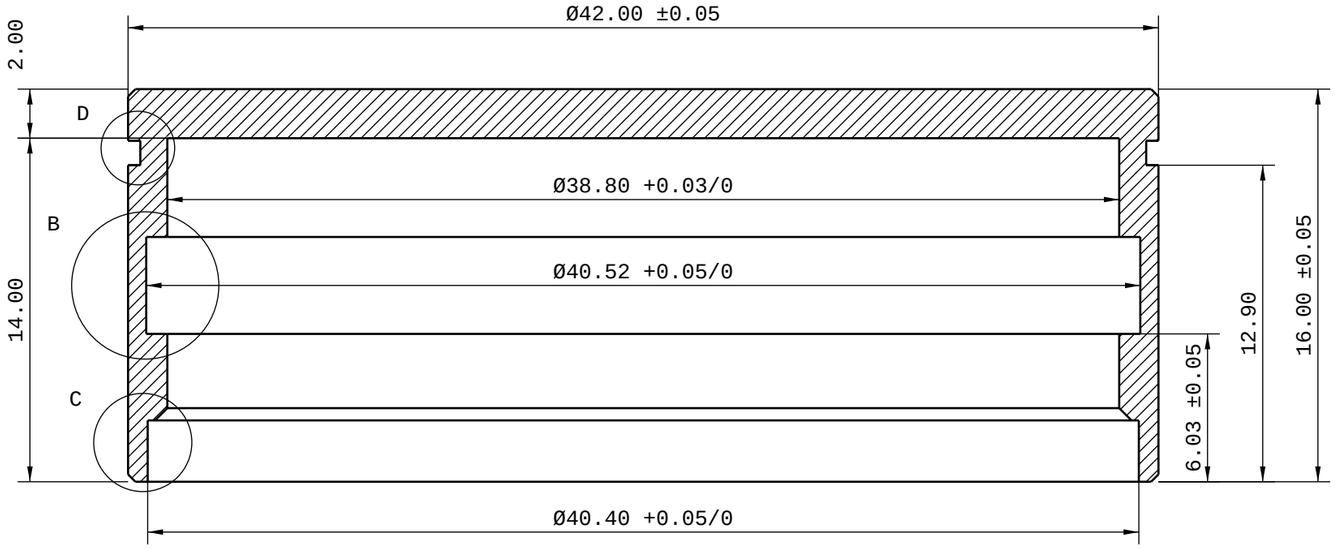


SECTION A-A, SCALE 4:1

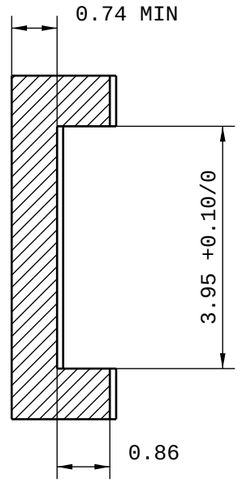


DETAIL B, SCALE 10:1

LOCK RING GROOVE
SHOULDERS SQUARE, R0.1 MAX



DETAIL C, SCALE 10:1


MOUTH. BORE LEAD-IN 0.5 x 45°
OUTER EDGES 0.3 x 45° (2x)




DETAIL D, SCALE 10:1

CUT GROOVE

CAP PTC-CAP-01. TURNED PART.
HEIGHTS ARE FROM THE OPEN END.
BORE: RA 0.8 FROM 3.0 TO 6.0 ABOVE THE OPEN END (O-RING SEAL ZONE). NO AXIAL SCRATCHES.
BORE CONCENTRIC TO OUTSIDE DIAMETER WITHIN 0.05.
LOCK RING GROOVE EDGES BROKEN 0.05 MAX.
MATES WITH PTC-PLUG-01 AND SMALLEY HHMU-38 RING.
GENERAL NOTES: SHEET 1.

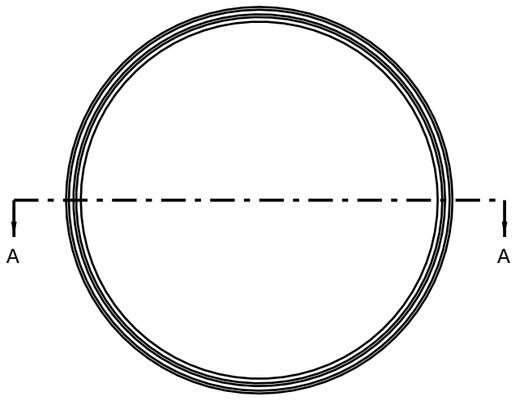


BOTTOM (OPEN END), SCALE 1.5:1

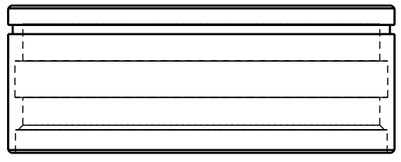


FRONT, SCALE 1.5:1

DEPT.	TECHNICAL REFERENCE	CREATED BY	APPROVED BY
CW&T		Che-Wei Wang	11/11/26
		DOCUMENT TYPE: Fabrication drawing - CAP	DOCUMENT STATUS: FOR QUOTE
CW&T		TITLE: Pocket Time Capsule	DWG NO.: PTC-001
		REV.: A	DATE OF ISSUE: 11/11/26
			SHEET: 2/3

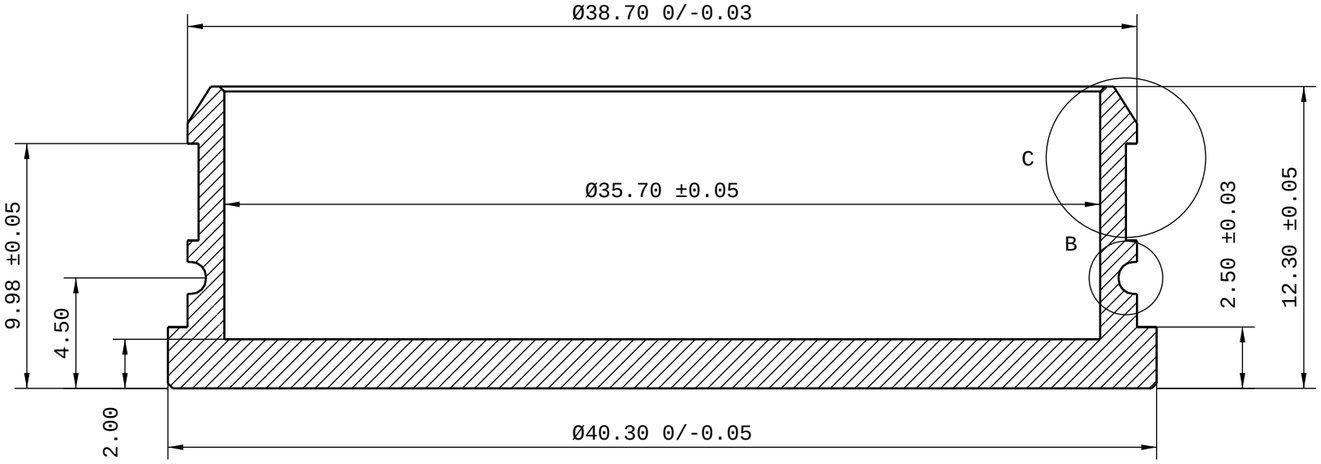


SECTION A-A, SCALE 4:1

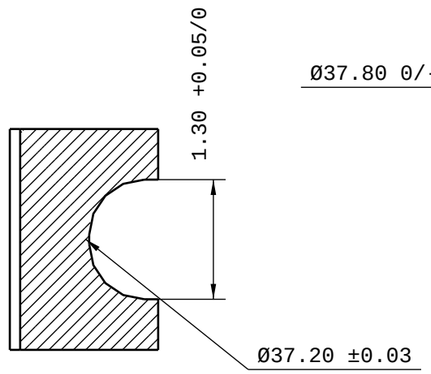

DETAIL B, SCALE 15:1


O-RING GROOVE, FLOOR DIAMETER SHOWN
BOTTOM CORNERS R0.6, RA 0.8

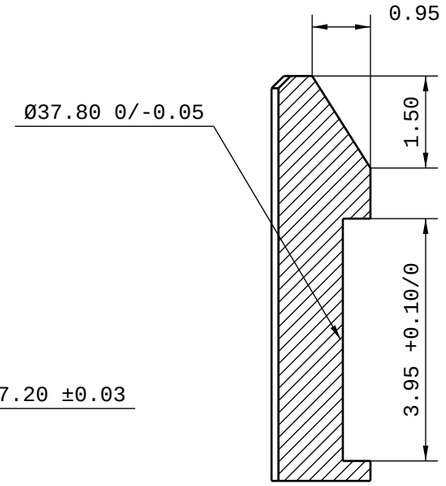


DETAIL C, SCALE 10:1

LOCK RING GROOVE (FLOOR DIAMETER SHOWN) AND RIM RAMP
SHOULDERS SQUARE, R0.1 MAX

PLUG PTC-PLUG-01. TURNED PART.
HEIGHTS ARE FROM THE FLANGE BOTTOM FACE.
FLANGE BOTTOM EDGE CHAMFER 0.2 x 45°.
INNER RIM CHAMFER 0.2 x 45°.
RIM RAMP SMOOTH, NO STEP.
BODY CONCENTRIC TO FLANGE DIAMETER WITHIN 0.05.
LOCK RING GROOVE EDGES BROKEN 0.05 MAX.
MATES WITH PTC-CAP-01 AND SMALLEY HHMU-38 RING.
GENERAL NOTES: SHEET 1.

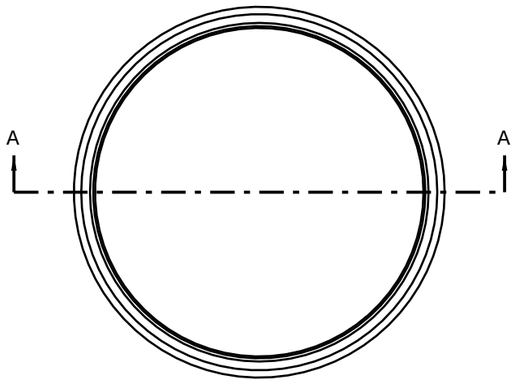

TOP (OPEN END), SCALE 1.5:1



FRONT, SCALE 1.5:1

DEPT. CW&T	TECHNICAL REFERENCE	CREATED BY Che-Wei Wang	APPROVED BY 11/11/26
		DOCUMENT TYPE Fabrication drawing - PLUG	DOCUMENT STATUS FOR QUOTE
CW&T		TITLE Pocket Time Capsule	DWG NO. PTC-001
		REV. A	DATE OF ISSUE 11/11/26 / SHEET 3/3