CMSAdmin 2.0 Documentation

Oct 16, 2026 · @Jessie

Overview

CMSAdmin 2.0 is Chelan County's staff-only admin system for everything published on `chelancounty.gov` and its portals: pages, news, press releases, events, emergency alerts, online forms, job postings, navigation menus and media. It runs at `http://cmsadmin.chelancounty.gov/` on the county's own Windows server, and every piece of content is scoped to a department or site **workspace**.

This document is built from the source in `C:\inetpub\CMSAdmin2.0` and its in-repo notes (`STATUS.md`, `TODO.md`, `.doclib/000–009`), as of the 2026-10-16 commits. The live site could not be loaded from here, so screen descriptions come from the view templates, not screenshots.

Who uses it

Role	What they manage
Administrator (`admin`)	Everything, plus users, workspaces, navigation menus and system settings
Public Information Officer (`pio`)	Content plus Articles, Press Releases and Emergency Alerts
Human Resources (`hr`)	Content plus Job Postings and applications
Author (`author`)	Pages, media, forms and events in their assigned workspaces

Technology stack

Layer	Technology
Web server	Microsoft IIS 10 with URL Rewrite (`web.config`)
App server	Confirmed: Adobe ColdFusion 2021 (older repo notes say Lucee; those are out of date)

Layer	Technology
Framework	Wheels (CFWheels) 4.1.2, MVC, flat app-side layout (no `public/` folder)
Database	Microsoft SQL Server, datasource `ChelanCountyWebsite`
Front end	Vanilla HTML/CSS/JS, no CDN; in-house JBDEditor rich-text editor
Source control	Git, branch `main` with an `origin` remote

Getting started

A working install needs IIS pointing at `C:\inetpub\CMSAdmin2.0`, a CFML engine behind it, and the `ChelanCountyWebsite` SQL Server datasource.

Set up a local copy

1. Copy `env.example` to `.env` and set `WHEELS_RELOAD_PASSWORD` (and `WHEELS_BASE_URL` if links must use a fixed host).
2. Create the `ChelanCountyWebsite` datasource in the CFML administrator.
3. Run `config/sql/schema-complete.sql` against SQL Server, then `config/sql/seeds.sql` for form departments.
4. Point the IIS site at the folder; `web.config` rewrites clean URLs to `index.cfm`. For CommandBox, `box server start` uses `server.json` and `urlrewrite.xml`.
5. After changing routes or settings, reload with `?reload=true&password=<WHEELS_RELOAD_PASSWORD>`.

Environments. `config/environment.cfm` sets *development* for `localhost`, `127.0.0.1`, `::1`, any host containing `cmsadmin`, or `?dev=true`. Every other host gets `WHEELS_ENV` or *production*.

Signing in (`/login`)

1. Enter your county email. `Sessions.cfc:checkEmail` looks it up in `cms_users` and rejects inactive accounts.
2. Choose a second step: a 6-digit email passcode (valid 15 minutes) or an authenticator-app code (TOTP).

3. First-time authenticator users pair an app at `/login/connect-authenticator`, which saves `totp_secret` to their user row.
4. On success you land on the Dashboard, or on the page you were trying to reach.

Sessions end after **30 minutes idle**. AJAX calls then get a `401` JSON reply with a `redirect` to the sign-in page.


Switching workspaces. The header's workspace selector sets which department or site you are working in; most lists, the media library and new content follow it. The choice is kept in a cookie and local storage.

Admin layout. The sidebar groups modules as: *Main* (Dashboard) · *Content Management* (Pages, Events/Calendar, Media Library, Form Builder, Documentation) · *HRM* (Human Resources) · *PIO* (Public Information, Articles & Posts) · *Administration* (Workspaces, Users & Roles, Navigation Menus, Settings). Groups you have no role for are hidden.

Architecture

Every browser request goes through IIS to the Wheels front controller (`index.cfm`), except static assets and the `/api/Files.cfc` file service, which run outside Wheels.

Every admin request passes the login filter; the Files API does not

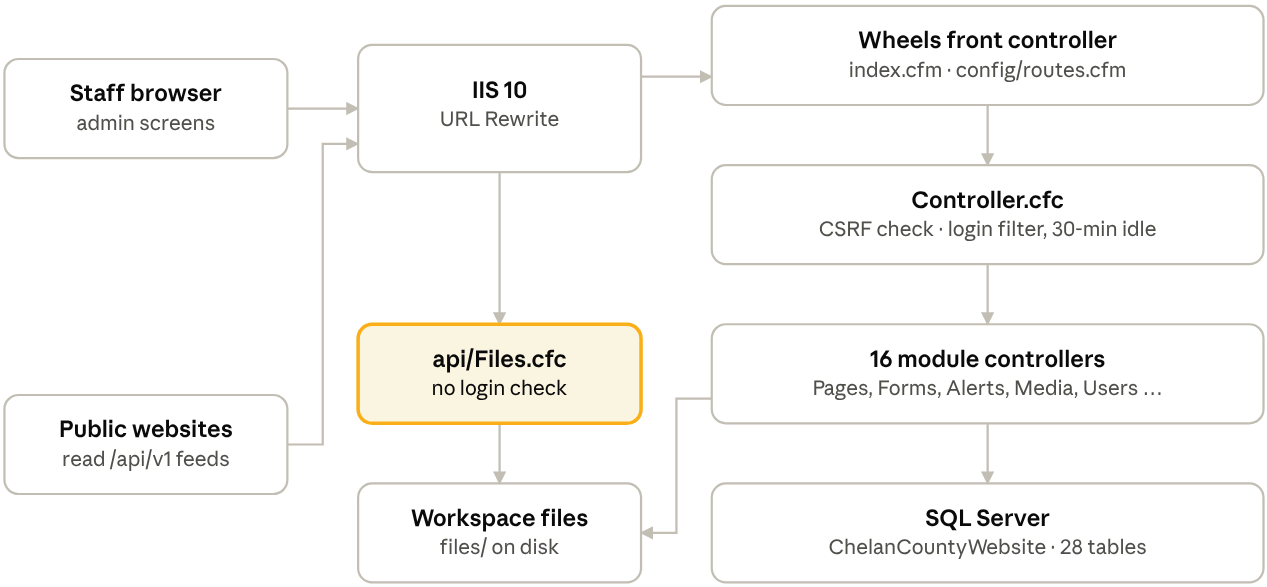

request path · IIS to Wheels to SQL Server, plus the separate Files API

Public feeds enter through the same Wheels path but are on the public-action list; `Media.cfc` also writes to the workspace folders directly.

Folder layout

Path	Holds
`Application.cfc`, `index.cfm`	App entry point and Wheels dispatcher, in the site root
`app/controllers/`	One CFC per module: `Main`, `Pages`, `Articles`, `PressReleases`, `Events`, `Alerts`, `Forms`, `Jobs`, `Navigation`, `Media`, `Users`, `Workspaces`, `Settings`, `Sessions`, `Documentation`, `Up`
`app/controllers/Controller.cfc`	Base controller: CSRF protection, `requireLogin` filter, list of public actions
`app/models/`	Thin ORM models mapped to SQL tables (`Page`, `Article`, `EmergencyAlert`, `Form*`, `User`, `Workspace` …)
`app/views/layout.cfm`	Admin shell: sidebar, header, workspace selector, alert badge, modal dialogs
`app/views/helpers.cfm`	View helpers such as `svgIcon()` and badges
`app/global/functions.cfm`	Shared helpers, including workspace seeding and role lookup
`config/routes.cfm`	All named routes, then a `wildcard()` fallback for `controller/action` URLs
`config/sql/`	SQL Server DDL per module plus `schema-complete.sql`
`api/`	Standalone File Explorer JSON service with its own `Application.cfc`
`files/<workspace>/`	Uploaded images, documents and media per workspace
`javascripts/`, `stylesheets/`	`admin.js`, `jbdeditor.js`, `form-builder.js`, `filexplorer/`, `admin-theme.css` and friends
`vendor/wheels/`, `vendor/jbdeditor/`	Wheels 4.1.2 core and the JBDEditor source
`.doclib/`	In-repo documentation series 000–009

Request rules

- Every controller extends `Controller.cfc`, whose `config()` calls `protectsFromForgery()` and the `requireLogin` filter. A child controller that defines `config()` must call `super.config()`.
- Public actions skip login: sign-in, `/up`, form `preview`/`submit`, careers pages, event `.ics` export, `/api/v1/alerts/active`, `/api/v1/articles` and `/api/v1/press-releases` plus press-release `view`.
- Write requests (`POST`) send the CSRF token as an `X-CSRF-Token` header, read from `<meta name="csrf-token">`.
- AJAX actions return a JSON envelope through `renderJsonEnvelope(success, message, data)`.
- Routes are added above `.wildcard()`; several actions have camelCase and hyphenated aliases (e.g. `/pages/how-do-i/save`, `/pages/saveHowDoIItem`, `/pages/save-how-do-i-item`).

Shared front-end API (`javascripts/admin.js`)

Function	Use
`window.adminAlert({title, message, type})`	Accessible notice dialog
`await window.adminConfirm({title, message, type, acceptText, cancelText})`	Yes/no gate; resolves `true` or `false`
`window.adminPrompt(…)`	Text-input dialog
`window.showToast(message, type)`	Brief status message
`window.openMediaPicker(mode, options)`	Opens the media picker (see File storage)

Native `alert()`, `confirm()` and `prompt()` are not used anywhere.

Feature modules

Thirteen modules sit behind the sidebar; each is one controller with its views under `app/views/<module>/`.

Module	Main URL	Who	Controller	Tables
Dashboard & notifications	`/`, `/notifications`	All	`Main.cfc`	—
Pages, Sub-pages, Folder Explorer	`/pages`, `/pages/edit?id=N`	All	`Pages.cfc`	`pages`, `page_SubPage`, `page_FolderExplorer`, `page_revisions`
How Do I? directory	`/pages/how-do-i`	All	`Pages.cfc`	`how_do_i_categories`, `how_do_i_items`
Events / Calendar	`/events`	All	`Events.cfc`	`calendar_events`, `calendar_event_categories`
Media Library	`/media`	All	`Media.cfc`	filesystem only
Form Builder & submissions	`/forms`, `/form-builder`	All	`Forms.cfc`	`forms`, `form_fields`, `form_submissions`, `form_submission_values`, `form_audit_logs`, `form_departments`
Job Postings & applications	`/jobs`, public `/careers`	HR, Admin	`Jobs.cfc`	`job_listings` / `job_postings`, `job_applications`
Articles & Posts	`/articles`	PIO, Admin	`Articles.cfc`	`articles`, `article_categories`, `article_tags`
Press Releases	`/press-releases`	PIO, Admin	`PressReleases.cfc`	`press_releases`
Emergency Alerts	`/alerts`	PIO, Admin	`Alerts.cfc`	`emergency_alerts`
Navigation Menus	`/navigation`	Admin	`Navigation.cfc`	`navigation_menus`, `navigation_menu_items`
Users & Roles	`/users`, `/users/roles`	Admin	`Users.cfc`	`cms_users`, `cms_roles`, `cms_user_workspaces`
Workspaces	`/workspaces`	Admin	`Workspaces.cfc`	`cms_workspaces`
Settings	`/settings/general`	Admin	`Settings.cfc`	`cms_settings`

Pages

- **All Pages** (`/pages`) lists pages for the active workspace with filters. *Add Page* opens a modal that creates the row immediately and offers two layouts: *Full Width* or *Right Sidebar*.
- **Page editor** (`/pages/edit?id=N`) has the JBDEditor body, SEO meta fields, and *Page Assignment*: top-level (called from URL) or attached to a main menu item.
- **Right Sidebar** pages get a sub-pages manager (`/pages/subpage/save` , `/pages/subpage/delete`).
- **Folder Explorer items** attach a server folder to a page: title, absolute server path, web path, and layout (*Full Width* or *3/9 grid*).
- **No deletes.** Pages are retired by setting them Inactive/Hidden; the delete buttons were removed on purpose.
- **Revision history** keeps every version for RCW 42.56 (Public Records Act):
  1. Opening an unversioned page saves a *version 1* baseline.
  2. Each save adds a version with an optional change note and the user's name.
  3. *Restore* first snapshots the current draft, then applies the old version as a new version.
  4. The Rollback Studio compares versions four ways: Visual Diff, Side-by-Side, Snapshot Preview and HTML.

How Do I? directory

Manages the citizen quick-links grouped by verb (Apply for, Contact, Find, File, Get, Learn About, Pay, Register for, Report, Request, Submit, View). Each item links to a CMS page, an online form or an external URL, with a live 4-column preview.

Events / Calendar

Month grid and list views, an add/edit modal with time and location presets, Zoom/Teams links, agenda-packet attachments from the media library, a category manager, and `.ics` export (`/events/ics` , public).

Form Builder

- Three panes: field palette (17+ types), canvas, and settings for the selected field or the whole form.

- `/forms/builder?template=…` loads a starter (Report a Problem, Pest Report, HRM Intake, PIO Press Inquiry, Building Permit, Satisfaction Survey); `?resume=1` reopens a draft.
- **Save** (`POST /forms/save`) writes the form and its fields in one transaction. Removed fields are soft-deleted so old submissions keep their meaning. **A new form saves as Published** because the builder sends no status — review it before sharing the link.
- The public form is `/forms/preview?slug=…` ; submissions post to `/forms/submit` .
- Spam checks: a hidden honeypot field (`_chelan_gov_verify`) and a speed trap that holds anything sent under 3 seconds after load.
- Uploads go to `files/_form-uploads/` , limited to allowed extensions and 25 MB.
- Staff review submissions and export UTF-8 CSV; the builder also generates an iframe embed, a standalone HTML file and a JSON schema.

Job Postings (HRM)

HR staff create, edit, open/close and delete postings (`/jobs`), review applications and update their status, and export applications to CSV. The public side is `/careers` , `/careers/view` and `/careers/apply` .

Articles & Posts (PIO)

News editor with categories, tags, SEO fields and a cover-image accessibility block: decorative toggle, alt text (150 recommended / 500 max) with *Suggest from Headline*, caption, long description (2,000 characters) and photo credit. A read-only feed is at `/api/v1/articles` .

Press Releases (PIO)

Create, publish/unpublish and delete releases, with a public `view` page and a feed at `/api/v1/press-releases` .

Emergency Alerts (PIO)

- Banners in three severities: **Critical** (red, e.g. Level 3 “GO NOW” evacuation), **Warning** (amber, e.g. Level 2, pass closures) and **Info** (blue, e.g. detours).
- One-click presets: wildfire Levels 1–3, winter pass closure, river flood warning, courthouse weather closure.
- Each alert has start and optional expiry times, a link, a dismissible flag and a site scope.

- The admin header shows a badge while any alert is active.
- Public sites read `GET /api/v1/alerts/active` (optional `?site_id=`). Results are cached in `application.activeAlertsCache` and cleared on every save, toggle or delete.

Navigation Menus (Admin)

Builds hierarchical menus per workspace. Items are saved, deleted and reordered by AJAX (`/navigation/items/save`, `/delete`, `/reorder`); the page picker lists the workspace's real pages.

Users & Roles (Admin)

- Staff directory with role, workspace and 2FA filters; add/edit forms with role cards and a multi-workspace picker (global, departments, sites).
- `/users/roles` shows the permission matrix; `/users/simulate?role=pio` lets an admin preview the interface as another role.
- Every user can open **My Profile** (`/users/profile`) to change details, password, notification preferences and 2FA.

Workspaces (Admin)

- 16 canonical workspaces: `global`, 11 departments (Assessor, Auditor, HRM, PIO, Community Development, Public Works, Administration, Commissioners, Sheriff, Treasurer, Clerk) and 4 sites (`chelancounty.gov`, parks, GIS, expo).
- Each record has a `code`, `type` (`global`, `dept`, `site`), unique `virtual_directory`, `folder_path`, redirect URL, department category and contact details.
- Creating a workspace also creates its folder under `files/`. Deleting is a soft delete.

Settings (Admin)

Four screens: *General* (county name, contact info, time zone, maintenance mode), *Reading & SEO* (default meta, social cards, analytics IDs, robots rules), *Media Sizes* (thumbnail sizes, upload cap) and *System Info* (engine version, JVM memory, SQL Server health, disk use).

Editor and accessibility checker

All rich text — pages, sub-pages, articles, press releases, job descriptions and documentation — uses the in-house **JBDEditor**, and pages and articles run a live WCAG 2.1 AA checker before publishing.

JBDEditor files

File	Role
`vendor/jbdeditor/src/*.js`	Source modules: `editor`, `toolbar`, `dialog`, `table`, `a11y`, `history`, `storage`, `utils`
`javascripts/jbdeditor/*.js`	Served copy of those modules
`javascripts/jbdeditor.js`	Bundled editor loaded by `layout.cfm` (cache-busted `v=1.7`)
`stylesheets/jbdeditor.css`	Editor styles (`v=1.8`)

Toolbar sets are named presets in `CustomEditor.TOOLBAR_PRESETS` (e.g. `JBD_SUBPAGE_TOOLBAR`, `JBD_ARTICLE_TOOLBAR`); all include table insert and table tools. Tables support row/column add, Tab/Shift+Tab between cells, and are never nested inside a `<p>`.

> The bundle exists in several identical copies (`jbdeditor.js` and `jaleditor.js` in three folders). A fix in one must be copied to all, then checked with `node -c javascripts/jbdeditor.js`.

Accessibility pre-flight checker

A bar above the editor shows *Compliant* or the error and warning counts; *Inspect Diagnostics* opens a drawer listing each issue with *Locate in Editor* and, where possible, a one-click *Quick Fix*.

Check group	Blocks publishing (error)	Warns
Cover image	Not decorative and no alt text	Alt text is a file name or a generic word; over 150 characters

Check group	Blocks publishing (error)	Warns
Body images	`<img>` with no `alt`; linked image with empty `alt`	Generic or file-name alt; over 150 characters
Headings	Empty heading	`<h1>` in the body (Quick Fix: make it `<h2>`); skipped levels; body starting below `<h2>`
Links	Empty link	`#` or `javascript:` targets; “click here”-style text; raw URLs as text; new-tab links without notice or `rel="noopener noreferrer"`
Tables	No `<th>` header cells	Headers without `scope`; no `<caption>` or `aria-label`
Readability	Title empty or under 5 characters	Pale inline text colours; all-caps blocks over 60 characters; 3+ empty spacer paragraphs; meta description over 160 characters

Saving with status *Published* while errors remain opens a confirm dialog: **Review in Drawer** or **Publish Anyway**. The override is allowed for emergencies.

File storage and Files API

Uploaded files live on disk under `C:\inetpub\CMSAdmin2.0\files\<workspace>\` and are served from `/files/<workspace>/…`; there is no media database table yet.

Folder rules

- Each workspace folder holds `images\` and `documents\`; staff can add subfolders inside those. Some workspaces also have `media\`, which is what `Workspaces.cfc` creates.
- `files\shared\` holds county-wide assets; `files\_form-uploads\` holds form attachments.
- Workspace folders are created by the Workspaces screen, never from the file explorer.

- Allowed uploads: images `.jpg .jpeg .png .gif .webp .svg`; documents `.pdf .docx .xlsx .pptx .txt .csv`. Executable and script types (`.exe .cfm .cfc .jsp .asp .bat .ps1`) are rejected.

Media Library screens

URL	Screen
`/media`	Grid/list browser for the active workspace, search, inspector drawer with metadata
`/media/upload`	Drag-and-drop upload
`/media/picker`	Picker shown inside other editors' modal

Using the picker from code. `window.openMediaPicker('image' | 'document', { folder, onSelect })` opens `/media/picker` in an iframe. On selection the iframe calls the named callback and also posts a message:

```
{
  "type": "CMS_MEDIA_SELECTED",
  "url": "/files/pio/images/press-briefing.jpg",
  "alt": "Commissioners meeting regarding 2027 budget",
  "title": "Press Briefing Cover Photo",
  "caption": "…",
  "credit": "…",
  "data": { "webUrl": "…", "name": "press-briefing.jpg", "size": 245100,
"extension": "jpg" }
}
```

The modal then closes and focus returns to the button that opened it.

Files API (`/api/Files.cfc`)

A standalone JSON service used by the file explorer. It has its own `api/Application.cfc`, so Wheels routing, sessions and CSRF do not apply. Call it as `/api/Files.cfc?method=<name>&path=<rel>&ws=<workspace>`.

Method	HTTP	Does
`ping`	GET	Returns server name, time, files root and limits

Method	HTTP	Does
`list`	GET	Lists a folder and the folder tree; creates the workspace's `images` / `documents` if missing
`createFolder`	POST	Makes a subfolder (name up to 64 characters)
`deleteFolder`	POST	Removes an **empty** folder only, never recursively

- Paths are forward-slash strings relative to the files root, e.g. `public-works/documents/agendas`.
- POSTs must carry the header `X-Requested-With: FileExplorer`.
- Paths with `..`, hidden segments or reserved characters are refused, and the resolved path must stay inside the files root.
- The top two levels (`<workspace>/` and `<workspace>/images|documents`) are protected from deletion.
- Errors come back as HTTP 200 with `{ "ok": false, "error": "…" }`.
- Settings are hard-coded in `api/Application.cfc` (`filesRoot`, `webBase`, `serverName` `WEB-01`); add `?reinit=1` to reload them.

Database

`config/sql/schema-complete.sql` defines 28 tables in SQL Server database `ChelanCountyWebsite`; per-module scripts in the same folder add or repair one area at a time.

Area	Tables	Notes
Access	`cms_users`, `cms_roles`, `cms_user_workspaces`, `cms_workspaces`	Users hold `role_code`, `department_code`, an `assigned_workspaces` JSON copy and TOTP columns; the junction table is unique on `(user_id, workspace_code)`
Pages	`pages` (key `ContentID`), `page_SubPage`, `page_FolderExplorer`, `page_revisions`	Revisions cascade-delete with their page; indexed by `(page_id, version_number DESC)`

Area	Tables	Notes
Navigation	`navigation_menus`, `navigation_menu_items`	Scoped by `siteid`; items have parent links and icons
Forms	`form_departments`, `forms`, `form_fields`, `form_submissions`, `form_submission_values`, `form_audit_logs`	`forms.schema_json` caches the field list; `form_key` and `slug` are unique
HR	`job_listings`, `job_applications`	The `JobPosting` model and docs say `job_postings` — check which name the live database uses
How Do I?	`how_do_i_categories`, `how_do_i_items`	Seeded with the county's verb categories
Calendar	`calendar_event_categories`, `calendar_events`	
PIO	`articles`, `article_categories`, `article_tags`, `press_releases`, `emergency_alerts`	Articles and alerts carry `siteid` / `site_id` scope
Settings	`cms_settings`	Key/value settings for the four Settings screens

Rules every query follows

1. **Soft delete.** Most tables have `deletedat`; lists filter `WHERE deletedat IS NULL`.
2. **Start with `SET ANSI_NULLS ON; SET QUOTED_IDENTIFIER ON;`** on any statement that touches a table with a filtered index. Without it, SQL Server fails with *Msg 1934*.
3. **Return new IDs through a table variable**, because `pages` has triggers: `DECLARE @Ins TABLE (newId INT); INSERT … OUTPUT INSERTED.ContentID INTO @Ins(newId) …; SELECT newId FROM @Ins;`. A bare `OUTPUT INSERTED.id` fails.
4. **Use `queryExecute()` with typed parameters**: `cf_sql_integer` for IDs, `cf_sql_varchar` with a length for short text, `cf_sql_longvarchar` for HTML, `cf_sql_timestamp`, `cf_sql_bit`.
5. **Timestamps are UTC** (`SYSUTCDATETIME()`) in `createdat` / `updatedat`.

Some controllers also add missing columns at runtime (for example `Sessions.cfc` adds `totp_secret`, `totp_connected`, `totp_connected_at` to `cms_users`), so the live schema can be ahead of the SQL files. Wheels migrations in `app/migrator/migrations/` cover only the early tables.

Development standards, known issues and roadmap

The code is close to feature-complete for its first release, but the sign-in and file service still contain development shortcuts that must be removed before the system is exposed beyond trusted staff.

Standards for every change

- No CDN links: fonts, icons (`#svgIcon(name="…", size=N)#`), CSS and JS are served locally.
- No native browser dialogs; use `adminAlert`, `adminConfirm`, `adminPrompt`, `showToast`.
- Literal `#` inside `<cfoutput>` is written `##`; keep CSS and JS in asset files.
- Encode output with `EncodeForHTML()`, `EncodeForHTMLAttribute()` or `EncodeForJavaScript()`; trim and length-limit input.
- Write for Adobe ColdFusion 2021 and avoid Lucee-only syntax, e.g. `CreateObject("java","java.io.File").init(path).mkdirs()` instead of `DirectoryCreate(path, true)`.
- Save UTF-8 templates with `<cfprocessingdirective pageencoding="utf-8">` and write symbols in JS as `\u` escapes.
- Log each task in `.doclib/002_ACTIVITY_SUMMARY_AND_CHANGELOG.md`; add a new `.doclib/0NN_…md` volume for a new subsystem and link it from `000_SERIES_INDEX.md`.

Known issues found in the code (2026-10-16)

#	Severity	Where	Issue	Fix
1	Critical	`Sessions.cfc` `verifyOtp`, `verifyAuthenticator`, `saveAuthenticator`	The code `000000` is accepted for every account, so anyone who knows a staff email can sign in.	Remove the bypass; allow it only when the environment is development **and** the host is localhost.
2	Critical	`Sessions.cfc` `sendOtp`	The real passcode is returned to the browser as `devOtp`, and no email is sent.	Send the code by email; never return it.

#	Severity	Where	Issue	Fix
3	High	`api/Files.cfc`	No sign-in or workspace check: anyone who can reach the server can list folders and create or delete empty ones. `ws` comes from the caller and `allowedIPs` is `*`.	Check the CMS session and the user's workspaces on every call, or route it through Wheels.
4	High	`Sessions.cfc` `new`, `checkEmail`	The sign-in page lists up to 8 active accounts, and a wrong email lists registered emails.	Remove the account list and the suggestions.
5	High	`config/environment.cfm`, `settings.cfm`	Any host containing `cmsadmin` runs as *development* with `showErrorInformation=true`, so the real site shows stack traces. The reload password falls back to `chelancms`.	Drop the `cmsadmin` and `?dev=true` rules; require `WHEELS_RELOAD_PASSWORD`.
6	Medium	Form Builder	New forms save as *Published* by default.	Default new forms to *Draft*.
7	Low	Schema vs. code	`job_listings` vs `job_postings`; `media\` vs `images\` folders; three copies of the editor bundle.	Pick one name each and remove the duplicates.

Roadmap (open items in `TODO.md`)

- [ ] 1.3 Store media metadata (alt text, captions, credit, owner, SHA-256 duplicate check) in `dbo.media_assets`
- [ ] 2.4 Public read-only APIs: `/api/v1/how-do-i`, `/api/v1/navigation/menu?code=main`, `/api/v1/events/upcoming`, with cache purge on save
- [ ] 3.1 Editorial workflow: Draft → In Review → Approved → Published → Archived
- [ ] 3.2 Scheduled publish and unpublish dates for pages, events, jobs and articles
- [ ] 3.3 Media “used on” list and broken-link guard before delete or rename
- [ ] 3.4 Public Records Request intake with the 5-business-day deadline tracker
- [ ] 4.1 Spanish-language content tabs
- [ ] 4.2 Ctrl+K command palette
- [ ] 4.3 Central audit log (`dbo.cms_audit_logs`) for sign-ins, role changes, deletes and uploads
- [ ] 4.4 Form email routing and citizen confirmation emails (SMTP or Microsoft Graph)