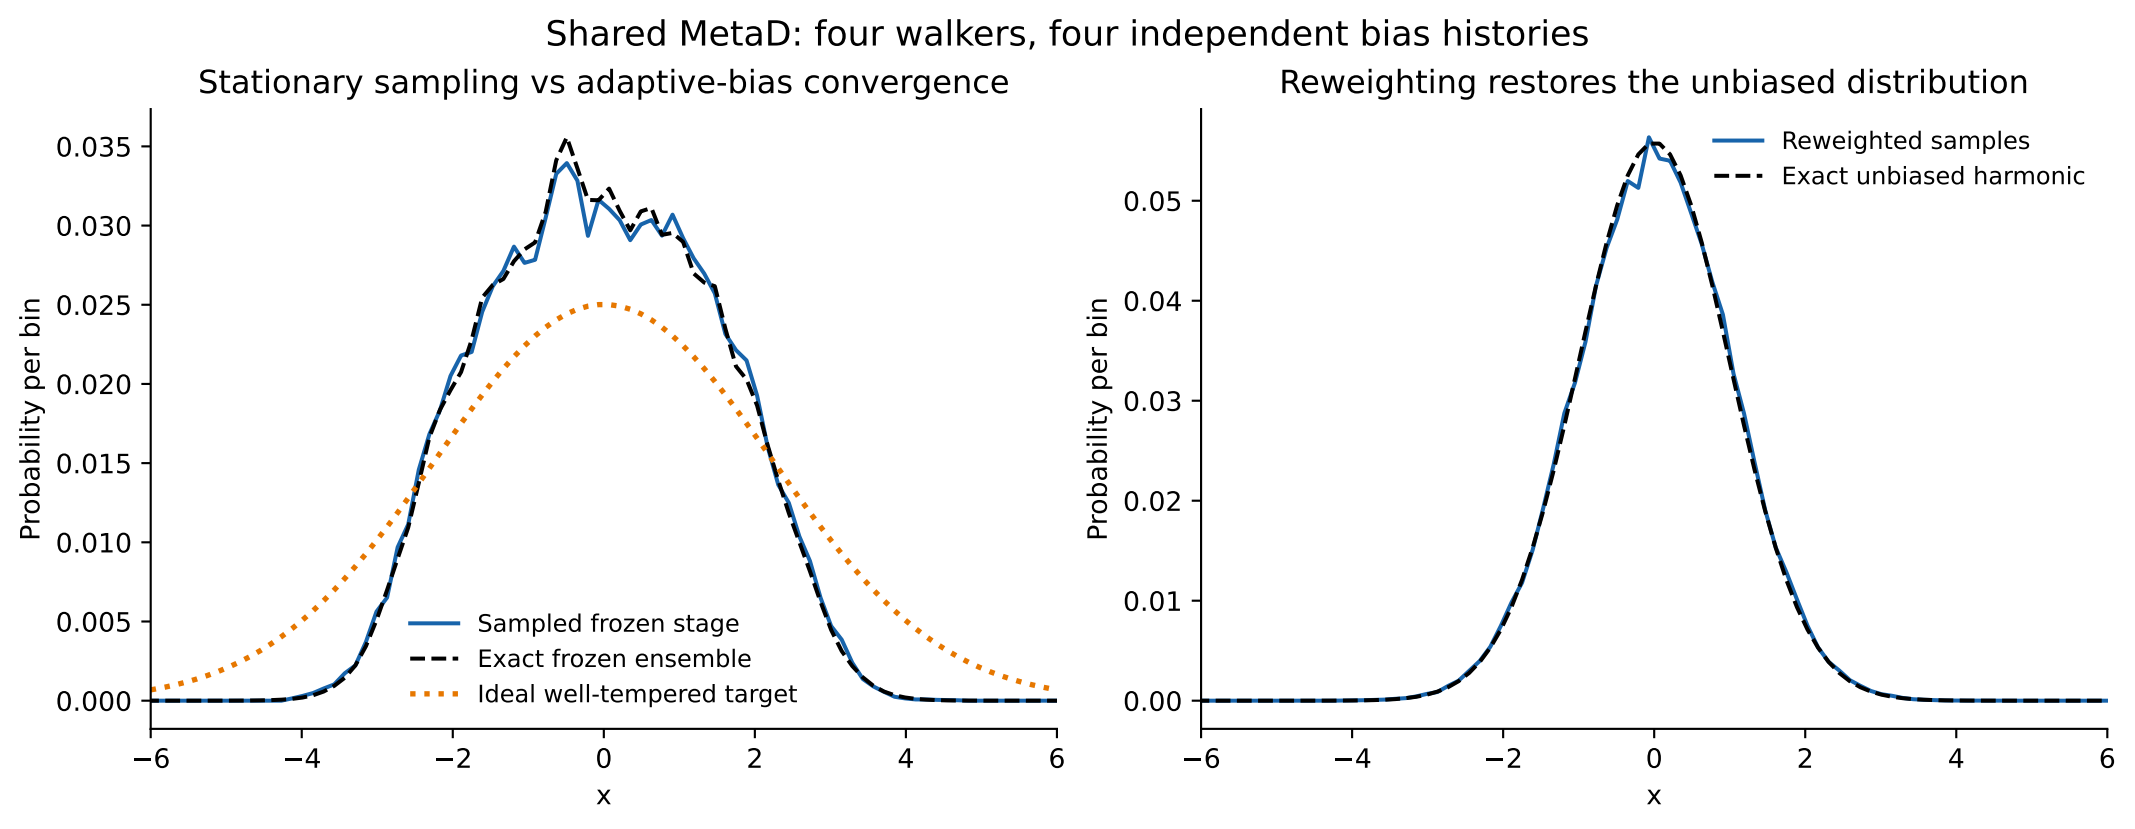
Shared MetaD: four walkers, four independent bias histories
Stationary sampling vs adaptive-bias convergence
Probability per bin
x
Sampled frozen stage
Exact frozen ensemble
Ideal well-tempered target
Reweighting restores the unbiased distribution
Reweighted samples
Exact unbiased harmonic