

# The Fourth Week Report

Lu Guorui

2018.7.22

## Contents

<b>1</b>	<b>Some Questions Remained</b>	<b>2</b>
1.1	What is Forward and Back propagation	2
1.2	How can we express the derivative of $\sigma(z)$ . . . . .	2
1.3	Some uses of numpy <sup>1</sup> . . . . .	3
1.4	What do high bias and high variance mean? . . . . .	5

---

<sup>1</sup>The source of package "pythonhighlight":<https://github.com/chenfeng123/latex-highlighting>

1.5	How does regularization prevent over-fitting? . . . . .	6
-----	---	---

# 1 Some Questions Remained

## 1.1 What is Forward and Back propagation?

In short, forward propagation is a way we used to count the value of compound functions. And back propagation is used to count the derivative of compound functions. We needn't complicate them.

## 1.2 How can we express the derivative of $\sigma(z)$ ?

By taking the derivative of  $\sigma(z)$ , we can easily get the result:  $\sigma'(z) = \sigma(z)(1 - \sigma)$ . Further, we can gain the consequence:

$$dz = \frac{\partial L}{\partial z} = \frac{\partial L}{\partial a} \cdot \frac{\partial a}{\partial z} \quad (1)$$

$$= \left(-\frac{y}{a} + \frac{1-y}{1-a}\right) \cdot a(1-a) \quad (2)$$

$$= a - y \quad (3)$$

$$dw = \frac{\partial L(w, b)}{\partial w} = \frac{\partial L}{\partial z} \cdot \frac{\partial z}{\partial w} \quad (4)$$

$$= dz \cdot x \quad (5)$$

$$= x(a - y) \quad (6)$$

$$db = \frac{\partial L}{\partial b} = \frac{\partial L}{\partial z} \cdot \frac{\partial z}{\partial b} \quad (7)$$

$$= 1 \cdot dz \quad (8)$$

$$= a - y \quad (9)$$

## 1.3 Some uses of numpy. <sup>2</sup>

1. Create a vector:

```
1 x = np.array([...])
```

2. Call some frequently-used functions

```
1 np.exp(x)
2 np.log(x)
```

---

<sup>2</sup>The source of package "pythonhighlight": <https://github.com/chenfeng123/latex-highlighting>

### 3. Get the shape of matrices

```
1 x.shape[0] # the number of rows
2 x.shape[1] # the number of column
```

### 4. Change the dimension

```
1 x.reshape((row,col))
```

### 5. Count the length of each row

```
1 x_norm = np.linalg.norm(x, axis=1, keepdims =
                             True)
```

### 6. Matrix-matrix or matrix-vector multiplication

```
1 # matrix multiplication:
2 # x1.shape = (a, m), x2.shape = (m, b)
3 np.dot(x1,x2)
4 # multiply the elements in corresponding
                           locations
5 # x1.shape = (a, m), x2.shape = (a, m)
6 np.multiply(x1, x2)
```

### 7. Gain random numbers

- Get one number

```
1 n = numpy.random.random()
```

- Get a matrix

```
1 n = numpy.random.random(size=(3, 2))
```

- Generate random numbers between 0 and 1

```
1 np.random.rand(2,3) # (2,3) show the  
                        dimension
```

- Generate the same random numbers

```
1 '''  
2 Set the same seed every time,  
3 and we can get the same random numbers  
4 '''  
5 numpy.random.seed(num)  
6 numpy.random.rand(the_length_of_the_array)
```

## 1.4 What do high bias and high variance mean?

High bias means that your model can't fit your train set well and high variance means your model

overfit the train set so that it can't fit other data well.

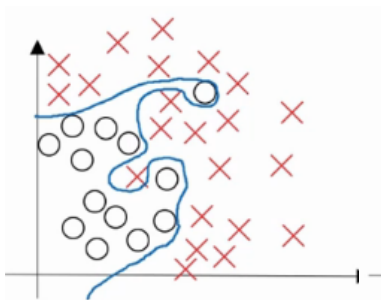


Figure 1: Overfitting




Figure 2: Underfitting

## 1.5 How does regularization prevent overfitting?