

Problem 0: Homework checklist

- ✓ I didn't talk with any one about this homework.
- ✓ Source-code are included at the end of this document.

Problem 1: Direct Methods for Tridiagonal Systems

1.

$$A = \begin{bmatrix} \alpha_1 & \beta_1 & & & \\ \beta_1 & \alpha_2 & & & \\ & \ddots & \ddots & & \\ & & \ddots & \ddots & \\ & & & \beta_{n-2} & \alpha_{n-1} & \beta_{n-1} \\ & & & & \beta_{n-1} & \alpha_n \end{bmatrix}$$

$$A_{n-1} = L_{n-1} L_{n-1}^T$$

Then matrix L_{n-1} must have the shape like

$$L_{n-1} = \begin{bmatrix} X_{11} & 0 & & & \\ X_{12} & X_{22} & & & \\ & \ddots & \ddots & & \\ & & \ddots & X_{n-2,n-2} & 0 \\ & & & X_{n-1,n-2} & X_{n-1,n-1} \end{bmatrix}$$

2.

$$\begin{aligned} A &= L_n L_n^T \\ &= \begin{bmatrix} L_{n-1} L_{n-1} & \beta_{n-1} \\ \beta_{n-1} & \alpha_n \end{bmatrix} \\ &= L_n L_n^T \\ L_n &= \begin{bmatrix} L_{n-1} & 0 \\ b & l \end{bmatrix} \\ L_n^T &= \begin{bmatrix} L_{n-1}^T & b^T \\ 0 & l \end{bmatrix} \end{aligned}$$

Then we need to figure out b and l

$$b L_{n-1}^T = \beta_{n-1} \quad (1)$$

$$\|b\|^2 + l^2 = \alpha_n^2 \quad (2)$$

Because b is a vector with only one non zero entry and L_{n-1} is a lower triangle matrix with one diagonal elements and one below diagonal. So both equation 1 and 2 can be solved in constant number of operations.

3. From part(1) and part(2), we can get,

$$\mathbf{L}_n = \begin{bmatrix} \sqrt{\delta_1} & 0 & & & & \\ \frac{\beta_1}{\sqrt{\delta_1}} & \sqrt{\delta_2} & & & & \\ & \ddots & \ddots & & & \\ & & \frac{\beta_{n-2}}{\sqrt{\delta_{n-2}}} & \sqrt{\delta_{n-1}} & 0 & \\ & & & \frac{\beta_{n-1}}{\sqrt{\delta_{n-1}}} & \sqrt{\delta_n} & \end{bmatrix}$$

where

$$\begin{aligned} \delta_1 &= \alpha_1 \\ \delta_j &= \alpha_j - \frac{\beta_{j-1}}{\delta_{j-1}}, j = 2, \dots, k, \end{aligned}$$

Pseudocode:

```
1:  $\delta_1 = \alpha_1$ 
2: for i=2:n
 $\delta_j = \alpha_j - \frac{\beta_{j-1}}{\delta_{j-1}}$ 
```

There is only one loop with size n , so the complexity is $O(n)$.

Problem 1: Sparse Matrices in Matlab

1. Code:

```
1 N=4;
2 A = sparse((N-1)*(N-1), (N-1)*(N-1));
3
4 for i=1:(N-1)*(N-1)
5     A(i,i) = -4;
6
7     col = mod(i,N-1)
8     if col==0
9         col = N-1;
10    end
11    row = ceil(i/(N-1))
12    if row-1>1
13        A(i, (row-2)*(N-1) + col) = 1; % UP
14    end
15    if row+1 <=N-1
16        A(i, (row)*(N-1) + col) = 1; % DOWN
17    end
18    if col-1>1
19        A(i, (row-1)*(N-1) + col-1) = 1; % LEFT
20    end
21    if col+1<=N-1
22        A(i, (row-1)*(N-1) + col+1) = 1; % RIGHT
23    end
24 end
```

2. Code:

```
1 N=4;
2 nz = (N-1)^2 + 4*(N-1)*(N-2);
3 I = zeros(nz,1);
4 J = zeros(nz,1);
5 V = zeros(nz,1);
```



Table 1: My caption

N	Method_1	Method2
10	0.0086	0.0004
50	0.0438	0.0022
100	0.3845	0.0060
500	513.0644	0.1364

```

6
7 index = 1;
8 for i=1:(N-1)*(N-1)
9     I(index) = i;
10    J(index) = i;
11    V(index) = -4;
12    index = index+1;
13
14    col = mod(i,N-1);
15    if col==0
16        col = N-1;
17    end
18    row = ceil(i/(N-1));
19    if row-1>=1
20        % UP
21        I(index) = i;
22        J(index) = (row-2)*(N-1) + col;
23        V(index) = 1;
24        index = index+1;
25    end
26    if row+1 <=N-1
27        % DOWN
28        I(index) = i;
29        J(index) = (row)*(N-1) + col;
30        V(index) = 1;
31        index = index+1;
32    end
33    if col-1>=1
34        % LEFT
35        I(index) = i;
36        J(index) = (row-1)*(N-1) + col-1;
37        V(index) = 1;
38        index = index+1;
39    end
40    if col+1<=N-1
41        % RIGHT
42        I(index) = i;
43        J(index) = (row-1)*(N-1) + col+1;
44        V(index) = 1;
45        index = index+1;
46    end
47 end
48
49 A = sparse(I,J,V, (N-1)*(N-1), (N-1)*(N-1));

```

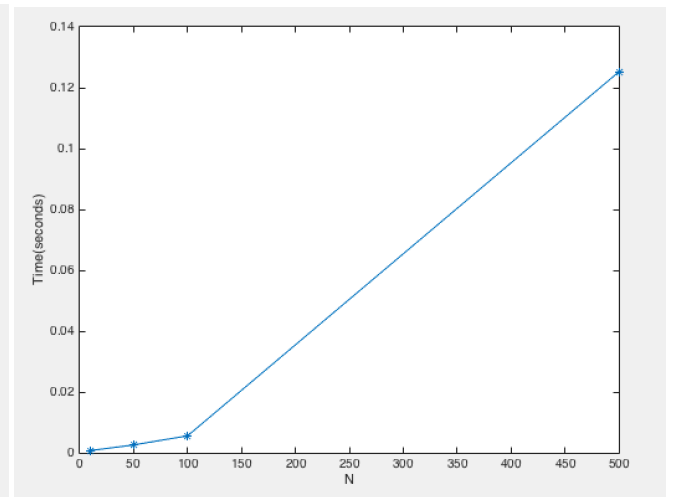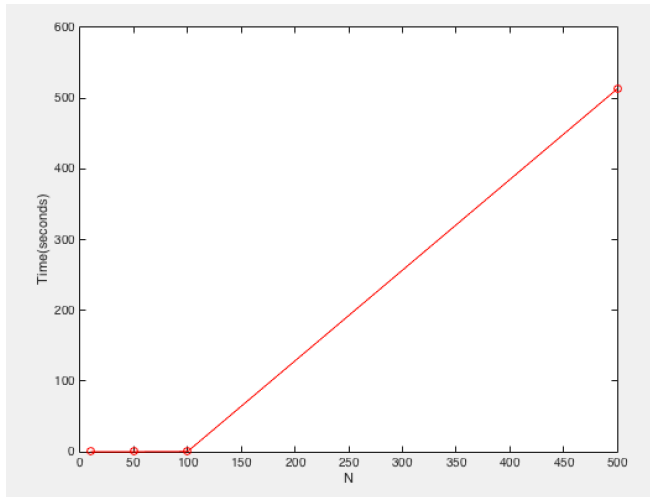

3.

4.

5. Code:

```

1 function U= jacobian(A, b)
2 [N,t] = size(b);
3 U = zeros(N,1) ;
4 size(A)
5 size(b)
6 true = A\b;
7 diff = 100;
8 iter = 0 ;
9 while diff > 1.0e-4
10     temp = U;
11     for i=1:N
12         sum = 0;
13         for j=1:N
14             if i≠j
15                 sum = sum + A(i,j)*temp(j);
16             end
17         end
18         U(i) = 1/A(i,i)*(b(i)-sum);
19     end
20     diff = norm(U- true) ;
21     iter = iter + 1 ;
22 end
23
24 end

```

Table 2: Problem2.5

N	Iteration
10	182
50	4567
100	
500	

6. The results are shown in the following tables for different right side vectors.

Table 3: $f(x, y) = 1$

N	Iteration
10	
50	
100	
500	

Table 4: $f(x, y) = -1$

N	Iteration
10	
50	
100	
500	

Table 5: $f(x, y) = -(x - 0.5)^2 - (y - 0.5)^2$

N	Iteration
10	
50	
100	
500	

Table 6: $f(x, y) = \sin(100x)\cos(100y)$

N	Iteration
10	
50	
100	
500	