

使用接口层级的方式实现对 starrocks 集群进行账号、权限、库表授权管理。

-
1. 支持权限授予、权限回收,例如: ALTER,DROP,SELECT,INSERT,EXPORT,UPDATE,DELETE,CREATE_TABLE,CREATE_VIEW,...
 2. 支持账号创建、账号回收
 3. 支持创建库
 4. 支持 Apache Ranger
-

配置文件说明:

```
StarRocks:
  service.port: 8877 接口默认端口,可修改(必填)
  service.enckey: 密钥(必填)
  service.X-StarRocks: Token标志(必填)
Ranger:
  host: http:// apache ranger地址, starrocks集成ranger权限管理的地址,(可不填,如果集群使用的是ranger鉴权,可实现同样方式往ranger添加policy)
  user: admin
  password: admin
Schema:
  lkremind:
    - 飞书群机器人,(可不填,不填运行时就不会发送信息到飞书群)
  LarkMeta: ops.feishu_user_information 员工元数据信息表,(可不填,不填就不发送信息到用户层)
  GroupUri: 加入飞书群链接,(可不填,设计场景是:用户点击"StarRocks总群"标识时,可以加入公司飞书群,这是一个入群链接)
Connects:
  - (0). 常用连接方式.
  - (1). [Web]
  - (2). [DBEaver]
  - (3). [ODBC]
  - (4). [Python] 各位连接StarRocks的方式介绍,(可不填)
  - (5). [Tableau]
  - (6). [观远]
  - (7). [MySQL Client]
log:
  line: true
  level: 0
  path: '/u/users/svccndlopsns/chengken/log'
  console: true
```

点击查看: StarRocksDict.yaml

密钥的生成说明:

为什么要加这一层? 因为作为一个接口,并不是所有的请求都会处理,只有具备 token 的请求,才进行响应,否则将拒绝响应。

这里用到加密工具: encpass2.0, 自取

假如配置密钥:

service.enckey: bigdatastarrocks service.X-StarRocks: StarRocks

生成请求密钥:

length : 16 enckey : bigdatastarrocks enc password : 7bzI5uM+N1gl6hu9laotNQ==

```
$ encpass2.0 -k bigdatastarrocks -e "StarRocks"

length      : 16
enckey      : bigdatastarrocks
enc password : 7bzI5uM+N1gl6hu9laotNQ==

$
```

那么,发起 http 请求时,需要带上 -H "X-StarRocks: 7bzI5uM+N1gl6hu9laotNQ==", 否则校验失败,报非管理员不可使用,并打回请求。

“密钥 HEAD 为空，您无权使用管理员 POST 功能!!”

1. 配置密钥选项:

```
StarRocks:      service.port: 8876      service.enckey: bigdatastarrocks      service.X-StarRocks:
StarRocks
```

2. 服务正式启动

```
$ ./StarRocksDict
```

```
/---| | ---\      /---\    \   ---| | ---  
\\-- \\ --//       (-) // \\  \\   || -- \\  
--- ) | | (- | | | - < (-) | (-) <- \\ \\  
----/ \\-- \\--||-|-| \\ \\-- \\ \\--| \\ \\-- \\
```

```
StarRocksDict v1.0.123  
md5sum #524985255f95d289a9cc7ab2946d18fe  
author @  
system @  
update @2025-05-19 14:24:45
```

```
INFO [2025-05-19T14:24:47+08:00] init.go:57 loading lark_information is success. 62759  
[GIN-debug] [WARNING] Running in "debug" mode. Switch to "release" mode in production.  
- using env: export GIN_MODE=release  
- using code: gin.SetMode(gin.ReleaseMode)
```

```
[GIN-debug] POST /setui --> StarRocksDict/SetDictOneStop.SetuDict (3 handlers)  
[GIN-debug] POST /setri --> StarRocksDict/SetDictOneStop.SetuDictRole (3 handlers)  
[GIN-debug] POST /reuser --> StarRocksDict/SetDictOneStop.SetuAddUserID (3 handlers)  
[GIN-debug] POST /addbase --> StarRocksDict/SetDictOneStop.SetAddDataBase (3 handlers)  
[GIN-debug] POST /ranger/setui --> StarRocksDict/SetRangOneStop.ApiaddPolicy (3 handlers)
```

```
[GIN-debug] Listening and serving HTTP on :8876
```

```
INFO [2025-05-19T14:24:51+08:00] Information.go:54 loading meta_information is success. [sr-adhoc]:[10803]  
INFO [2025-05-19T14:24:55+08:00] Information.go:54 loading meta_information is success. [sr-app]:[3618]  
INFO [2025-05-19T14:24:55+08:00] Information.go:54 loading meta_information is success. [sccts]:[939]  
INFO [2025-05-19T14:24:56+08:00] Information.go:54 loading meta_information is success. [sr-cdp]:[327]  
INFO [2025-05-19T14:24:56+08:00] Information.go:54 loading meta_information is success. [sr-api]:[138]  
INFO [2025-05-19T14:24:57+08:00] Information.go:54 loading meta_information is success. [sr-mal]:[437]  
INFO [2025-05-19T14:24:57+08:00] Information.go:54 loading meta_information is success. [sr-qal]:[100]  
INFO [2025-05-19T14:24:57+08:00] Information.go:54 loading meta_information is success. [sr-db]:[67]  
INFO [2025-05-19T14:24:57+08:00] Information.go:54 loading meta_information is success. [sr-ranger]:[62]
```

3. 尝试发起请求

```

-H "X-StarRocks: 7bzISuMNIg6hu9laotNQ=" \
-H "Content-Type: application/json" \
-d {
  "starrocks": "sr-qa",
  "catalog": "default_catalog",
  "user": "cnshd",
  "table": "cn_vm_item",
  "permission": "select",
  "revoke": false,
  "policyname": "id=2825859-0126"
}
{"message":{"App":"sr-qa","Catalog":"default_catalog","User":"cnshd","Table":"ALL CATALOGS","Permit":"USAGE","Demand":"授予","Comment":"","(App)":"sr-qa","Catalog":"default_catalog","User":"cnshd","Table":"cn_vm_item","Permit":"Select","State":"Fail","Demand":"","Comment":"删除表不存在"},"status":"Ok"}

```

```
'curl -X POST "http://xxx:8876/setui"
-H "X-StarRocks: 7bz15uM+N1gl6hu9laotNQ=="
-H "Content-Type: application/json"
-d ' {

"starrocks": "sr-qa",
"catalog": "default_catalog",
"user": "cnshd",
"table": "cn_wm_vm.item",
"permission": "Select",
"revoke": false,
"policyname": "id-20250519-0126"
}'
```

当密钥不正确时，则拒绝访问。

```
curl -X POST "http://<IP>:<PORT>/setui" \
-H "X-StarRocks: encpass" \
-H "Content-Type: application/json" \
-d '{
  "starrocks": "sr-qa",
  "catalog": "default_catalog",
  "user": "cnsld",
  "table": "cn_wm_vm.item",
  "permission": "Select",
  "revoke": false,
  "policyname": "id-20250519-0126"
}'
```

"密钥HEAD为空，您无权使用管理员POST功能！！"

例子:

REQUEST:

```
curl -X POST "http:///"
-H "X-StarRocks: "
-H "Content-Type: application/json"
-d "
```

DESCRIPTION: IP: 当前运行接口程序的机器 IP。PORT: 端口默认 8877, 可在配置文件 service.port 中进行修改。API: 方法, 具体有 [/ranger/setui] | [/setui] | [/reuser] | [/addbase] | [/setri]。TOKEN: 密钥, 这是一个防爆破密钥, 填在请求 header 中, 可在配置文件 service.X-StarRocks 中修改, 在配置文件中会根据 service.enckey 值进行强加密, 加解密方式在 util/enc.go 中有详解。JSON_BODY: 请求体, 如下各项功能介绍所示


功能:

1. native 权限授权、权限撤回 (/setui)
2. 账号新建与删除管理 (/reuser)
3. 数据库添加与调整配额 (/addbase)
4. 角色权限授权、权限撤回 (/setri)
5. apache ranger 权限授权、权限撤回 (/ranger/setui)


Apache Ranger http://<IP>:<PORT>/ranger/setui curl -X POST "http://<IP>:<PORT>/ranger/setui" \ -H "X-StarRocks: <TOKEN>" \ -H "Content-Type: application/json" \ -d '{ "starrocks": "sr-adhoc", "catalog": "default_catalog", "user": "scnshs", "table": "cn_wm_repl_vm.grs_fulfillment_parm, cn_wm_repl_vm.channel_mthd_txt, cn_wm_vm.item_dc, cn_wm_vm.item, cn_wm_repl_vm.grs_filtered_order", "permission": "Select", "revoke": false, "policyname": "<no>" }'

前提条件: FE 开启 ranger 接管鉴权


```
#ranger access_control = ranger
```

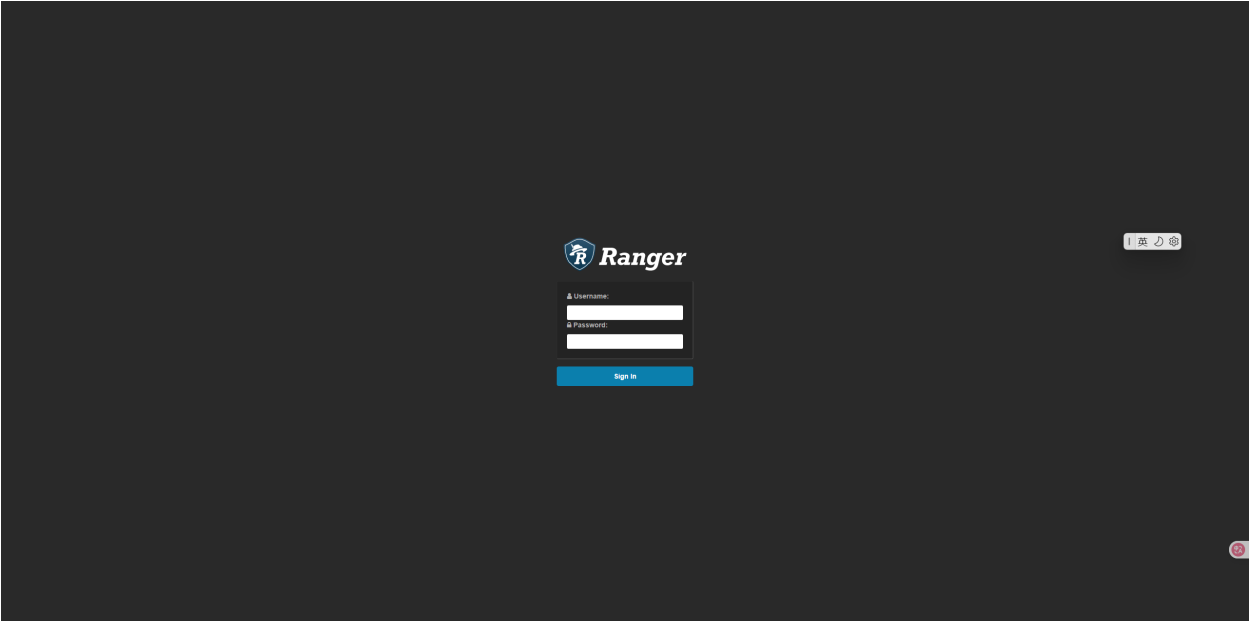

已经配置接管

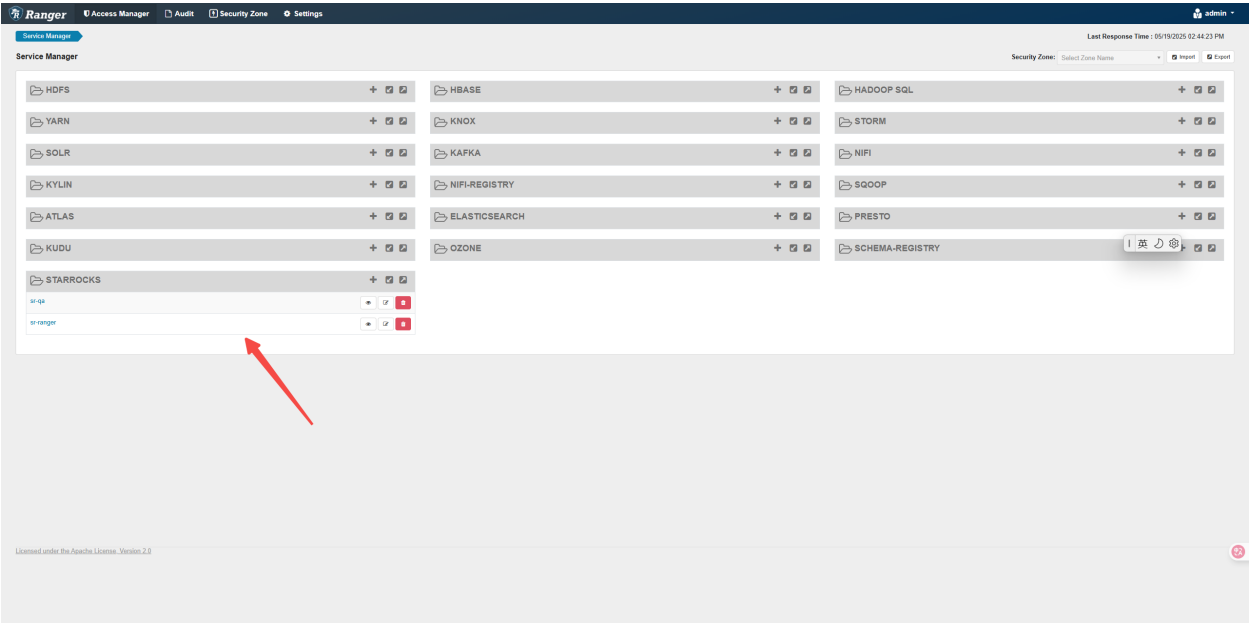

最原始的状态


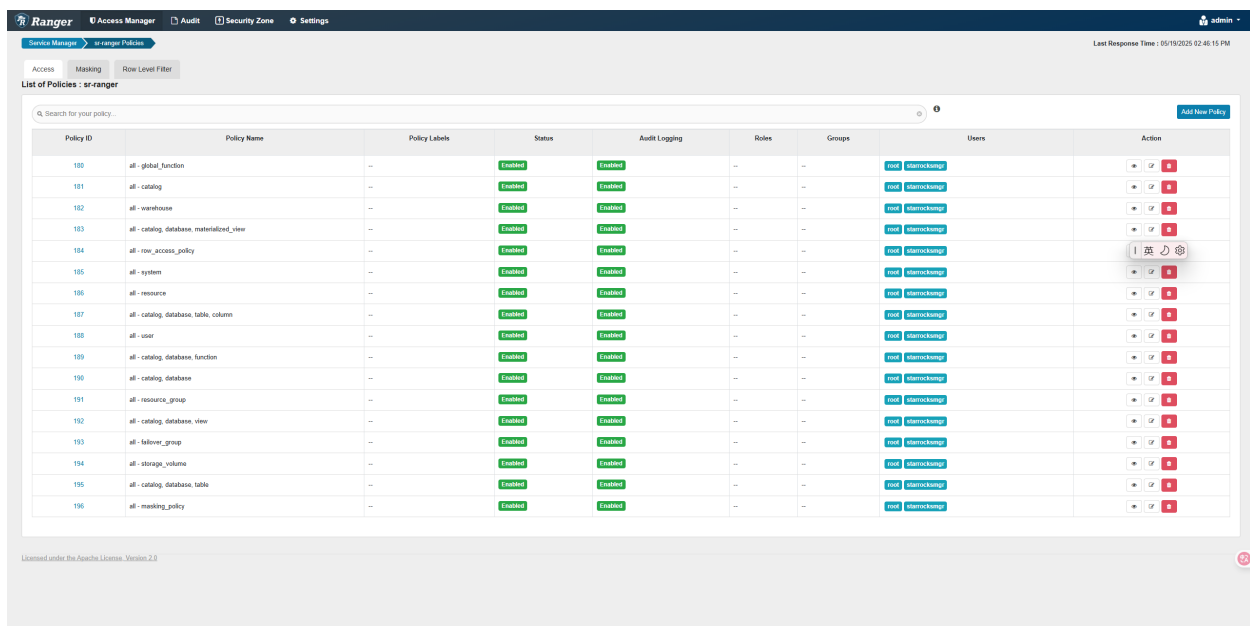


```

-H "X-StarRocks: 7bzISuM+N1g16hu9laotNQ==" \
-H "Content-Type: application/json" \
-d '{
  "starrocks": "sr-ranger",
  "catalog": "default_catalog",
  "user": "test1",
  "table": "cn_wm_vm.item,cn_wm_vm.d1,cn_wm_vm.d2",
  "permission": "Select,Alter",
  "revoke": false,
  "policyname": "id-20250519-0001"
}'
{"message": "Success GRANT sr-ranger: CATALOG=default_catalog,USER=test1,TABLE=cn_wm_vm.item,cn_wm_vm.d1,cn_wm_vm.d2,PERMISSION=Select,Alter ", "status": "Ok"}

```

ranger 界面:

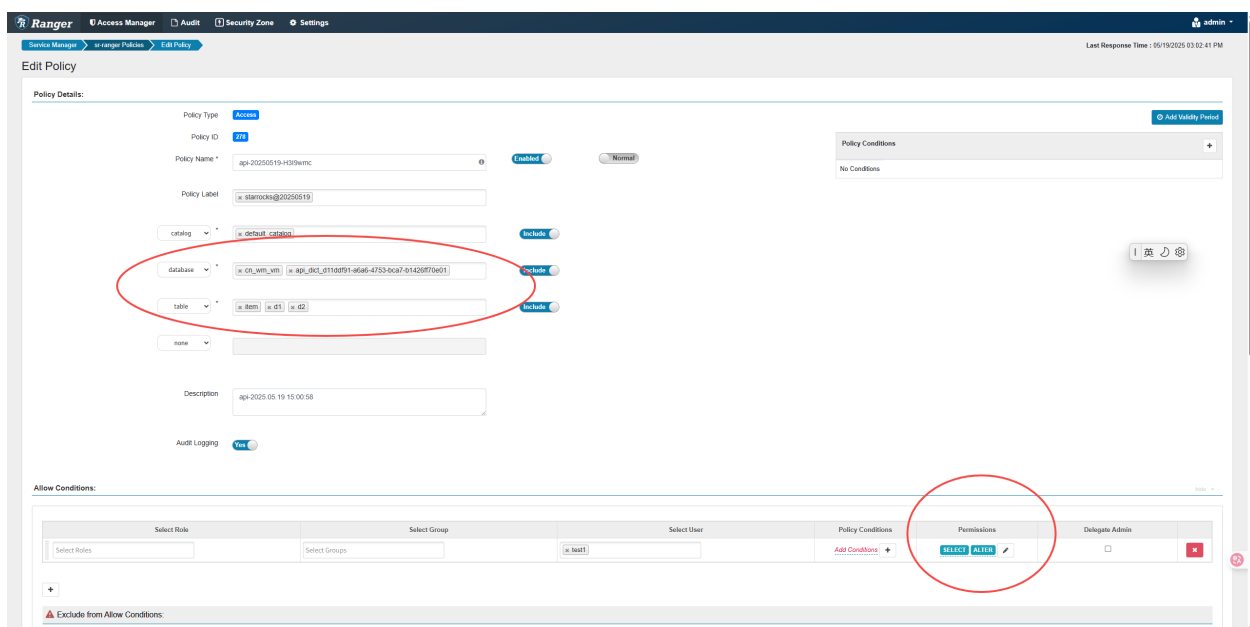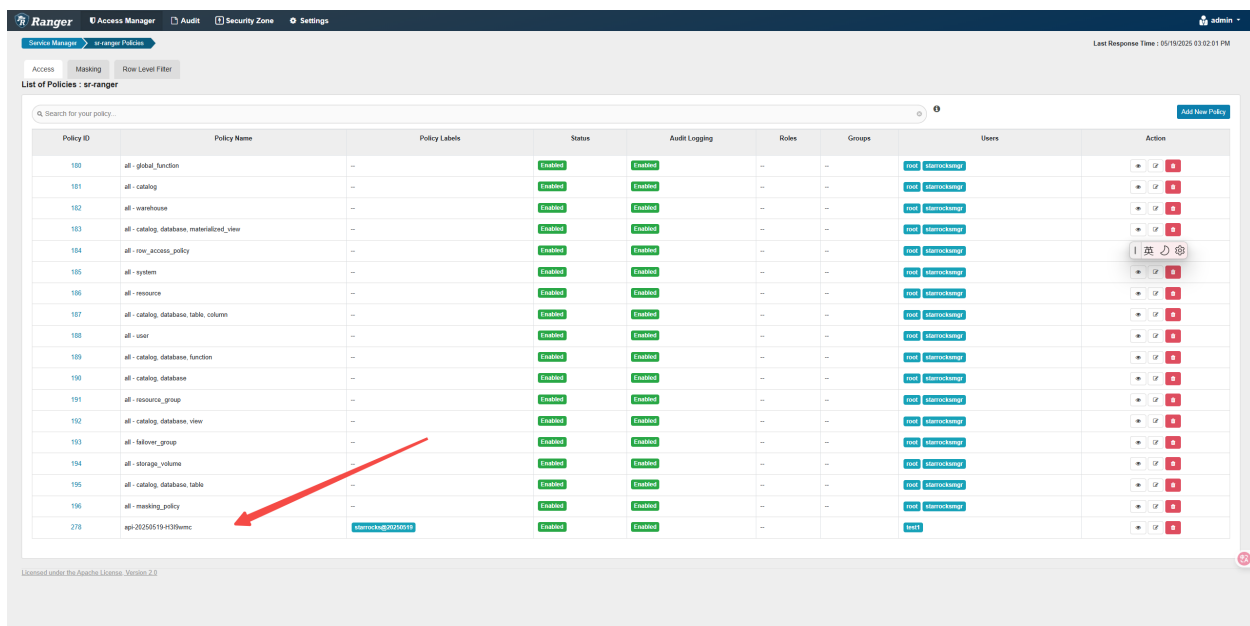

已经赋予权限。

其他：

账号增删 `http://reuser curl -X POST "http://<IP>:<PORT>/reuser" \ -H "X-StarRocks: <TOKEN>" \ -H "Content-Type: application/json" \ -d '{"starrocks": "sr-qa", "user": "scnshs1", "owner": "c010f91", "ldap": false, "option": "create", "policyname": "create-20250512-0002"}'`

{ "starrocks": "<app>", # 集群名称 "user": "<user>", # 账号 "owner": "<owner>", # 责任人, 填写责任人名称后, 该用户会收到相关的邮件, 账号密码。 "ldap": <true>|<false>, #true, 代表创建 ldap 类型账号、false, 代表创建 native 类型账号 "option": "<create>|<reset>|<drop>", #create 创建账号、reset 重置密码、drop 删除账号 "policyname": "<label>" # 标识, 可不填, 可填工单号 }

权限管理 `http://setui curl -X POST "http://<IP>:<PORT>/setui" \ -H "X-StarRocks: <TOKEN>" \ -H "Content-Type: application/json" \ -d '{"starrocks": "sr-adhoc",`

```
"catalog":"default_catalog",      "user":"scnshs",      "table":"cn_wm_repl_vm.grs_fulfillment_parm",
"permission":"Select",      "revoke":false,      "policyname":"Request-20250512-0002"
}'
```

```
{      "starrocks": "<app>",# 集群名称      "catalog": "<catalog>",#catalog 名称,[default_catalog] | [iceberg] | [
catalog name...]      "user": "<user1>,<user2>...",# 账号,支持多个账号      "table": "<schema.tablename1>,<sche
库表,支持多个库表      "permission": "<SELECT,ALTER...>",# 权限,支持多个权限      "revoke": <true>|<false>,<#true,
代表撤销权限, false, 代表赋予权限      "policyname": "<label>"# 标识, 可不填, 可填工单号 }
```

解析: 对 sr-adhoc 集群中的 scnshs,test2 这两个账号授予 default_catalog 下面 cn_wm_repl_vm.grs_fulfillment_parm, cn_wm_repl_vm.channel_mthd_txt, cn_wm_vm.item_dc, cn_wm_vm.item, cn_wm_repl_vm.grs_filtered_order 这五个表的查询权限和删除权限。

```
REQUEST:      curl -X POST "http://<IP>:<PORT>/setui"      \      -H "X-StarRocks: <token>"
\      -H "Content-Type: application/json"      \      -d '{
"starrocks": "sr-adhoc",
"catalog":"default_catalog",      "user":"scnshs",      "table":"cn_wm_repl_vm.grs_fulfillm
cn_wm_repl_vm.channel_mthd_txt, cn_wm_vm.item_dc, cn_wm_vm.item, cn_wm_repl_vm.grs_filtered_order",
"permission":"Select",      "revoke":false,      "policyname": "<no>"      }'
```

REPOSE:

```
{      "message": [      {      "App": "sr-adhoc",      "Catalog": "default_catalog",
"User": "scnshs",      "Table": "ALL CATALOGS",      "Permit": "USAGE",
"State": "Ok",      "Demand": " 授予",      "Comment": ""      },      {
"App": "sr-adhoc",      "Catalog": "default_catalog",      "User": "scnshs",
"Table": "cn_wm_repl_vm.grs_filtered_order",      "Permit": "Select",      "State":
"Ok",      "Demand": " 授      予",      "Comment": ""      },      {
"App": "sr-adhoc",      "Catalog": "default_catalog",      "User": "scnshs",
"Table": "cn_wm_vm.item_dc",      "Permit": "Select",      "State": "Ok",
"Demand": " 授      予",      "Comment": ""      },      {
"sr-adhoc",      "Catalog": "default_catalog",      "User": "scnshs",
"Table": "cn_wm_repl_vm.channel_mthd_txt",      "Permit": "Select",      "State":
"Ok",      "Demand": " 授      予",      "Comment": ""      },      {
"App": "sr-adhoc",      "Catalog": "default_catalog",      "User": "scnshs",
"Table": "cn_wm_vm.item",      "Permit": "Select",      "State": "Ok",
"Demand": " 授      予",      "Comment": ""      },      {
"sr-adhoc",      "Catalog": "default_catalog",      "User": "scnshs",
"Table": "cn_wm_repl_vm.grs_fulfillment_parm",      "Permit": "Select",      "State":
"Ok",      "Demand": " 授予",      "Comment": ""      }      ],      "status":
"Ok" }
```

LOG:

```
15836 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:31 用户授权机器
15837 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:54 Job start -> {
15838   "starrocks": "sr-adhoc",
15839   "catalog": "default_catalog",
15840   "user": "c0l0f9l",
15841   "table": "cn_wm_repl_vm.grs_fulfillment_parm, cn_wm_repl_vm.channel_mthd_txt, cn_wm_vm.item_dc, cn_wm_vm.item, cn_wm_repl_vm.grs_filtered_order",
15842   "permission": "Select",
15843   "revoke": false,
15844   "policyname": "Request-20250512-0002"
15845 }
15846 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:76 Job start connect sr.
15847 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:220 Job connect sr done.
15848 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:223 3.30
15849 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:224 Job get sr version.
15850 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Execute -> { set @policyName="Request-20250512-0002"; GRANT USAGE ON ALL CATALOGS TO USER c0l0f9l
15851 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Success -> { set @policyName="Request-20250512-0002"; GRANT USAGE ON ALL CATALOGS TO USER c0l0f9l
15852 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Execute -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_repl_vm.grs_filtered_order TO c0l0f9l
15853 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Success -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_vm.item_dc TO c0l0f9l
15854 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Success -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_repl_vm.grs_filtered_order TO c0l0f9l
15855 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Execute -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_repl_vm.channel_mthd_txt TO c0l0f9l
15856 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Success -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_vm.item_dc TO c0l0f9l
15857 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Success -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_repl_vm.channel_mthd_txt TO c0l0f9l
15858 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Execute -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_repl_vm.grs_fulfillment_parm TO c0l0f9l
15859 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Success -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_vm.item TO c0l0f9l
15860 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Success -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_vm.item TO c0l0f9l
15861 INFO [2025-05-14T13:34:35+08:00] Object.go:222 Task Success -> { set @policyName="Request-20250512-0002"; SET CATALOG default_catalog GRANT Select ON VIEW cn_wm_repl_vm.grs_fulfillment_parm TO c0l0f9l
15862 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:159 all tasks done.
15863 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:197 Job done -> {
15864   "starrocks": "sr-adhoc",
15865   "catalog": "default_catalog",
15866   "user": "c0l0f9l",
15867   "table": "cn_wm_repl_vm.grs_fulfillment_parm, cn_wm_repl_vm.channel_mthd_txt, cn_wm_vm.item_dc, cn_wm_vm.item, cn_wm_repl_vm.grs_filtered_order",
15868   "permission": "Select",
15869   "revoke": false,
15870   "policyname": "Request-20250512-0002"
15871 }
15872 INFO [2025-05-14T13:34:35+08:00] SetuAddDictPermission.go:85 Job result -> {
15873   {
15874     "App": "sr-adhoc",
15875     "Catalog": "default_catalog",
15876     "User": "c0l0f9l",
15877     "Table": "ALL CATALOGS",
15878     "Permit": "USAGE",
15879     "State": "OK",
15880     "Demand": "授予",
15881     "Comment": ""
15882   },
15883   {
15884     "App": "sr-adhoc",
15885     "Catalog": "default_catalog",
15886     "User": "c0l0f9l",
15887     "Table": "cn_wm_repl_vm.grs_filtered_order",
15888     "Permit": "Select",
15889     "State": "OK",
15890     "Demand": "授予",
15891     "Comment": ""
15892   },
15893   {
15894     "App": "sr-adhoc",
15895     "Catalog": "default_catalog",
15896     "User": "c0l0f9l",
15897     "Table": "cn_wm_repl_vm.grs_filtered_order",
15898     "Permit": "Select",
15899     "State": "OK",
15900     "Demand": "授予",
15901     "Comment": ""
15902   },
15903   {
15904     "App": "sr-adhoc",
15905     "Catalog": "default_catalog",
15906     "User": "c0l0f9l",
15907     "Table": "cn_wm_repl_vm.grs_fulfillment_parm, cn_wm_repl_vm.channel_mthd_txt, cn_wm_vm.item_dc, cn_wm_vm.item, cn_wm_repl_vm.grs_filtered_order",
15908     "Permit": "Select",
15909     "State": "OK",
15910     "Demand": "授予",
15911     "Comment": ""
15912   },
15913   {
15914     "App": "sr-adhoc",
15915     "Catalog": "default_catalog",
15916     "User": "c0l0f9l",
15917     "Table": "demo.scan_table",
15918     "Permit": "Select",
15919     "State": "OK",
15920     "Demand": "授予",
15921     "Comment": ""
15922   },
15923   {
15924     "App": "sr-adhoc",
15925     "Catalog": "default_catalog",
15926     "User": "c0l0f9l",
15927     "Table": "cn_wm_vm.item",
15928     "Permit": "Select",
15929     "State": "OK",
15930     "Demand": "授予",
15931     "Comment": ""
15932   }
15933 }
```



StarRocks

StarRocks

机器人

消息

云文档



Hello! chengken li 😊

您申请的StarRocks的库表权限流程已经结束。

如有其他疑问或需要帮助可加入 [StarRocks总群](#) 提问

单号: Request-20250512-0002

集群: sr-adhoc

目录: default_catalog

用户:

库表:

01. (Ok)(Select) cn_wm_repl_vm.grs_filtered_order

02. (Ok)(Select) cn_wm_vm.item_dc

03. (Ok)(Select) cn_wm_repl_vm.channel_mthd_txt

04. (Ok)(Select) cn_wm_repl_vm.grs_fulfillment_parm

05. (Ok)(Select) demo.scan_table

06. (Ok)(Select) cn_wm_vm.item

技术文档

如配置了飞书应用机器人,scnshs 用户亦会收到机器人发送的消息,如下:

程序依赖配置表:-- db.starrocks_information_connections definition CREATE TABLE starrocks_information_conne

```
(  app varchar(100) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci NOT NULL COMMENT
'集群名称 (英文)',  nickname varchar(100) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci
DEFAULT NULL COMMENT '别名',  alias varchar(100) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci
DEFAULT NULL COMMENT '集群别名',  feip varchar(200) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci
NOT NULL COMMENT '集群连接地址 (必填)F5,VIP,CLB,FE',  user varchar(200) CHARACTER SET
utf8mb4 COLLATE utf8mb4_0900_ai_ci NOT NULL COMMENT '集群登录账号 (必填) 建议是管理员角色的
账号',  password varchar(500) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci NOT
NULL COMMENT '集群登录密码 (必填)',  feport int NOT NULL DEFAULT '9030' COMMENT '集群登录
端口, 默认 9030',  address varchar(500) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci
DEFAULT NULL COMMENT 'MANAGER 地址, 如果填了 MANAGER 地址, 那么将触发定时检查 LICENSE 是否过
期 (企业级)',  expire int DEFAULT '30' COMMENT 'LICENSE 是否过期 (企业级) 过期提醒倒计时, 单
位 day',  status int NOT NULL DEFAULT '0' COMMENT 'LICENSE 是否过期 (企业级) 开关,0 off, 1
on',  fe_log_path varchar(500) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci DEFAULT
NULL COMMENT 'FE 日志目录',  be_log_path varchar(500) CHARACTER SET utf8mb4 COLLATE
utf8mb4_0900_ai_ci DEFAULT NULL COMMENT 'BE 日志目录',  be_meta_log varchar(200) DEFAULT
NULL,  java_udf_path varchar(500) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci
DEFAULT NULL COMMENT 'BE 日志目录',  manager_access_key varchar(500) CHARACTER SET utf8mb4
COLLATE utf8mb4_0900_ai_ci DEFAULT NULL COMMENT 'manager 开发者的 access key',  manager_secret_key
varchar(500) CHARACTER SET utf8mb4 COLLATE utf8mb4_0900_ai_ci DEFAULT NULL COMMENT 'manager
开发者的 secret key',  updated_at timestamp NULL DEFAULT CURRENT_TIMESTAMP ON UPDATE
CURRENT_TIMESTAMP COMMENT '更新时间' ) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_0900_ai_ci
COMMENT='StarRocks 登录配置, manager 地址, (定期检查 license 过期日期)';
```

```
INSERT INTO db.starrocks_information_connections (app, nickname, alias, feip, user,
password, feport, address, expire, status, fe_log_path, be_log_path, be_meta_log, java_udf_path,
manager_access_key, manager_secret_key, updated_at) VALUES('sr-ranger', 'StarRocks(Tencent
Cloud) SR-RangerQa', NULL, 'FE 连接地址', 'root', '密码', 9030, 'http://xxx:19321', 30, 1,
NULL, NULL, NULL, NULL, NULL, NULL, NULL, '2025-04-23 18:00:05');
```
