Nexus header-interface candidate 01 | UNFINISHED

Dimensions in mm. Native-text / analytic study only. Do not fabricate or assemble from this candidate.

Main board: actual routed cutouts and B.Cu lands (top-view coordinates)

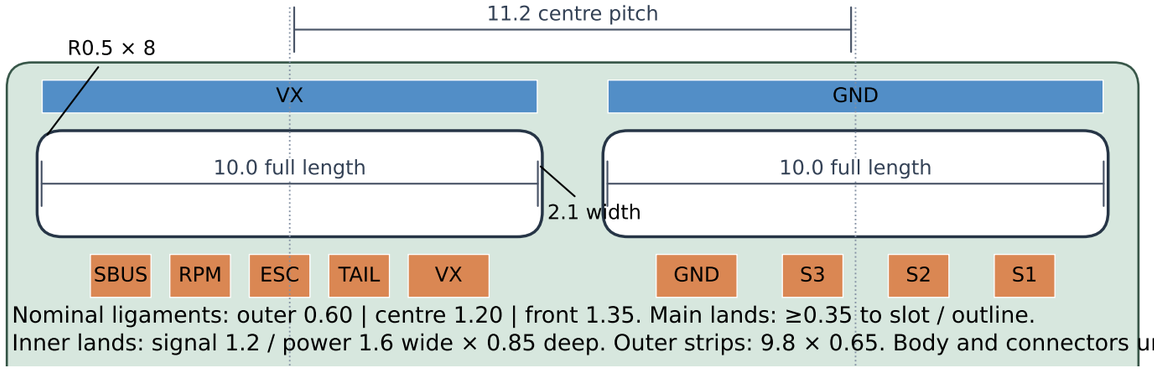

Nominal ligaments: outer 0.60 | centre 1.20 | front 1.35. Main lands: ≥0.35 to slot / outline.
Inner lands: signal 1.2 / power 1.6 wide × 0.85 deep. Outer strips: 9.8 × 0.65. Body and connectors unchanged.

Child board: true tab / relief contour

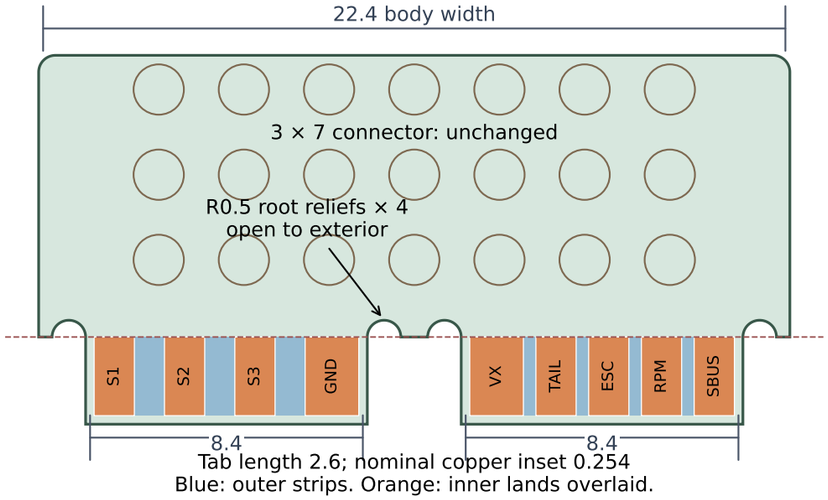

Tab length 2.6; nominal copper inset 0.254
Blue: outer strips. Orange: inner lands overlaid.

Nominal section through slot centre

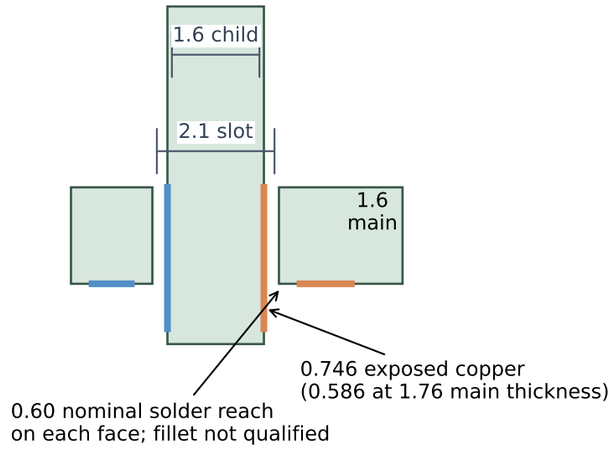

FIT SCREEN (rigid, centred, perpendicular)
Nominal total play: x 1.466 / y 0.500.
Adverse sizes: x 0.710 / y 0.140 at R0.5.
Add illustrative 0.40 pitch mismatch: x budget 0.310.
At R0.60: remaining total x budget only 0.162.
Loose endpoint: x 1.990 / y 0.860. Fixture required.
These assumed tolerances are not process acceptance.

QUALIFICATION GATES
Flat seating lands: 0.40 / 0.80 / 0.40 nominal.
Illustrative ±0.10 finished copper alignment retains
≥1.10 signal / ≥1.50 power x-overlap; verify every net.
Reduced exposed copper / strip area needs current & load tests.
No laminate rating, load limit, native DRC or 3D fit approval.
Local rerouting + refill + native ERC/parity still required.