


A. Diagnostic at a checkpoint

Fix model only within each comparison.

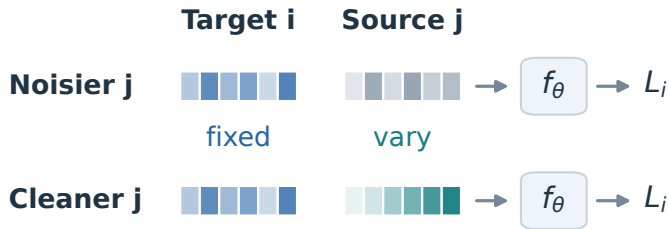

Hold target noise and other inputs fixed.

$$D_{j \rightarrow i} = L_i(\text{noisier } j) - L_i(\text{cleaner } j)$$

Positive D: cleaner j helps denoise i.


Across noise levels and contexts.

REPEATED THROUGHOUT TRAINING



B. Joint schedule + model learning

Illustrative schedules; not measured

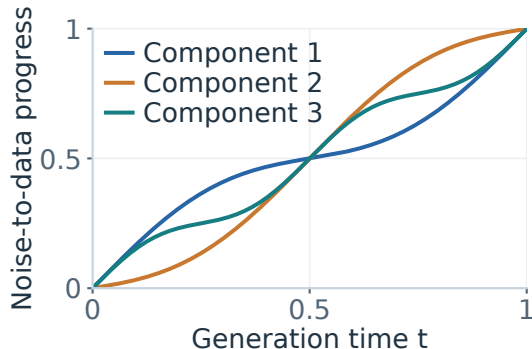

Denoising order and dependencies co-evolve with the transformer.