


A. Controlled recovery

Same target noise, other inputs, and network

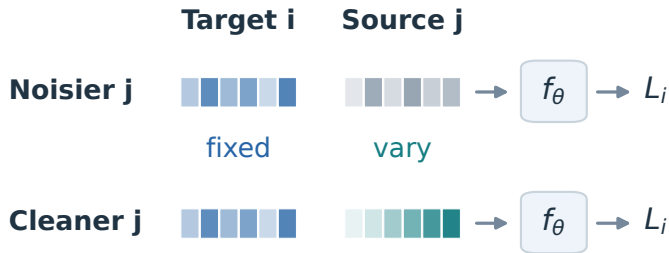


$$D_{j \rightarrow i} = L_i(\text{noisier } j) - L_i(\text{cleaner } j)$$

Positive D: cleaner j helps recover i.

Repeat over noise levels and contexts.

B. Coordinate denoising

Illustrative; not measured

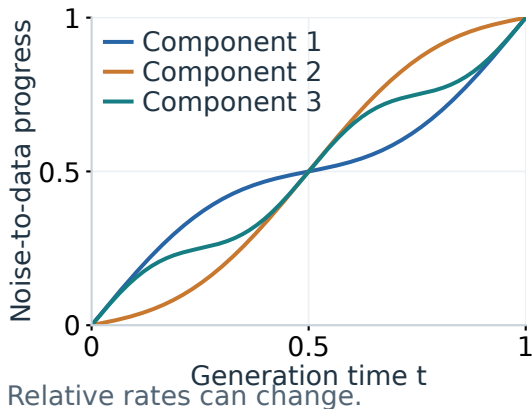

Scheduling tradeoff

Advancing j can help recover i, but j then has less context for its own recovery.