


D1 · case_000003 · Decode-only Q16

NVIDIA H800 · TP8 / DCP2 · manually selected
Trace-off graph p50: CW 170.3 μs | FA3-native 211.8 μs | vLLM A2A 231.5 μs

Q all-gather Attention History combine Receive Final combine


Critical-wave · rank 0 · 132 CTAs

Trace span 98.7 μs

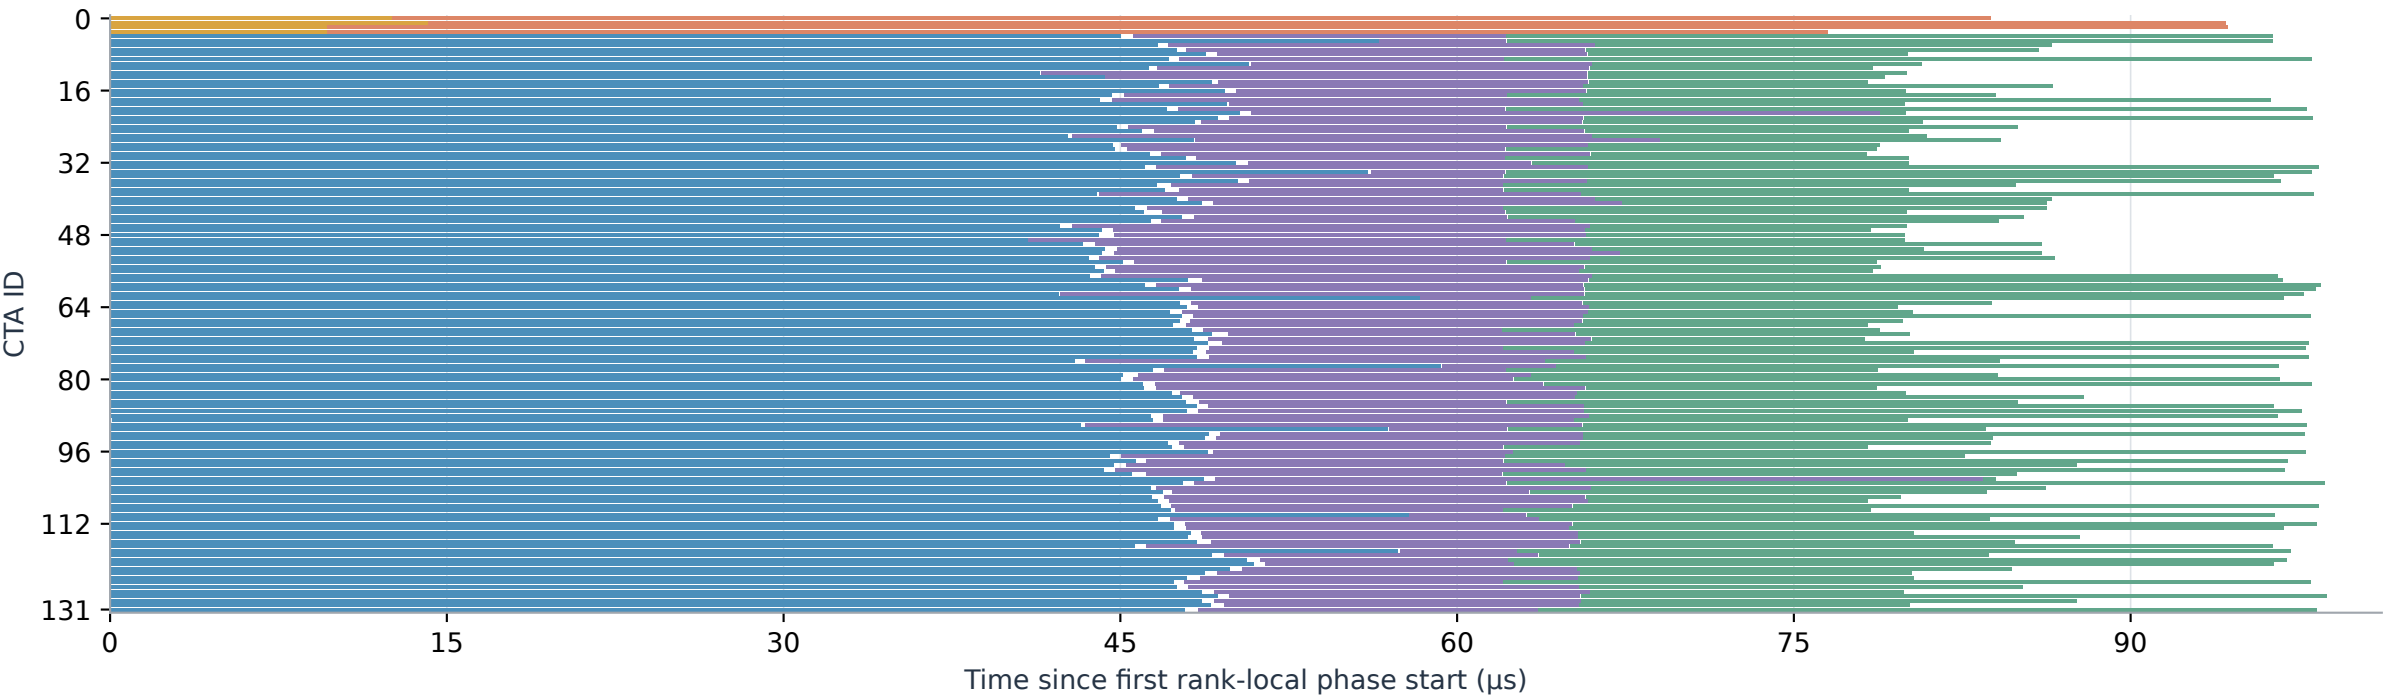


FA3-native / FIFO · rank 0 · 132 CTAs

Trace span 97.3 μs

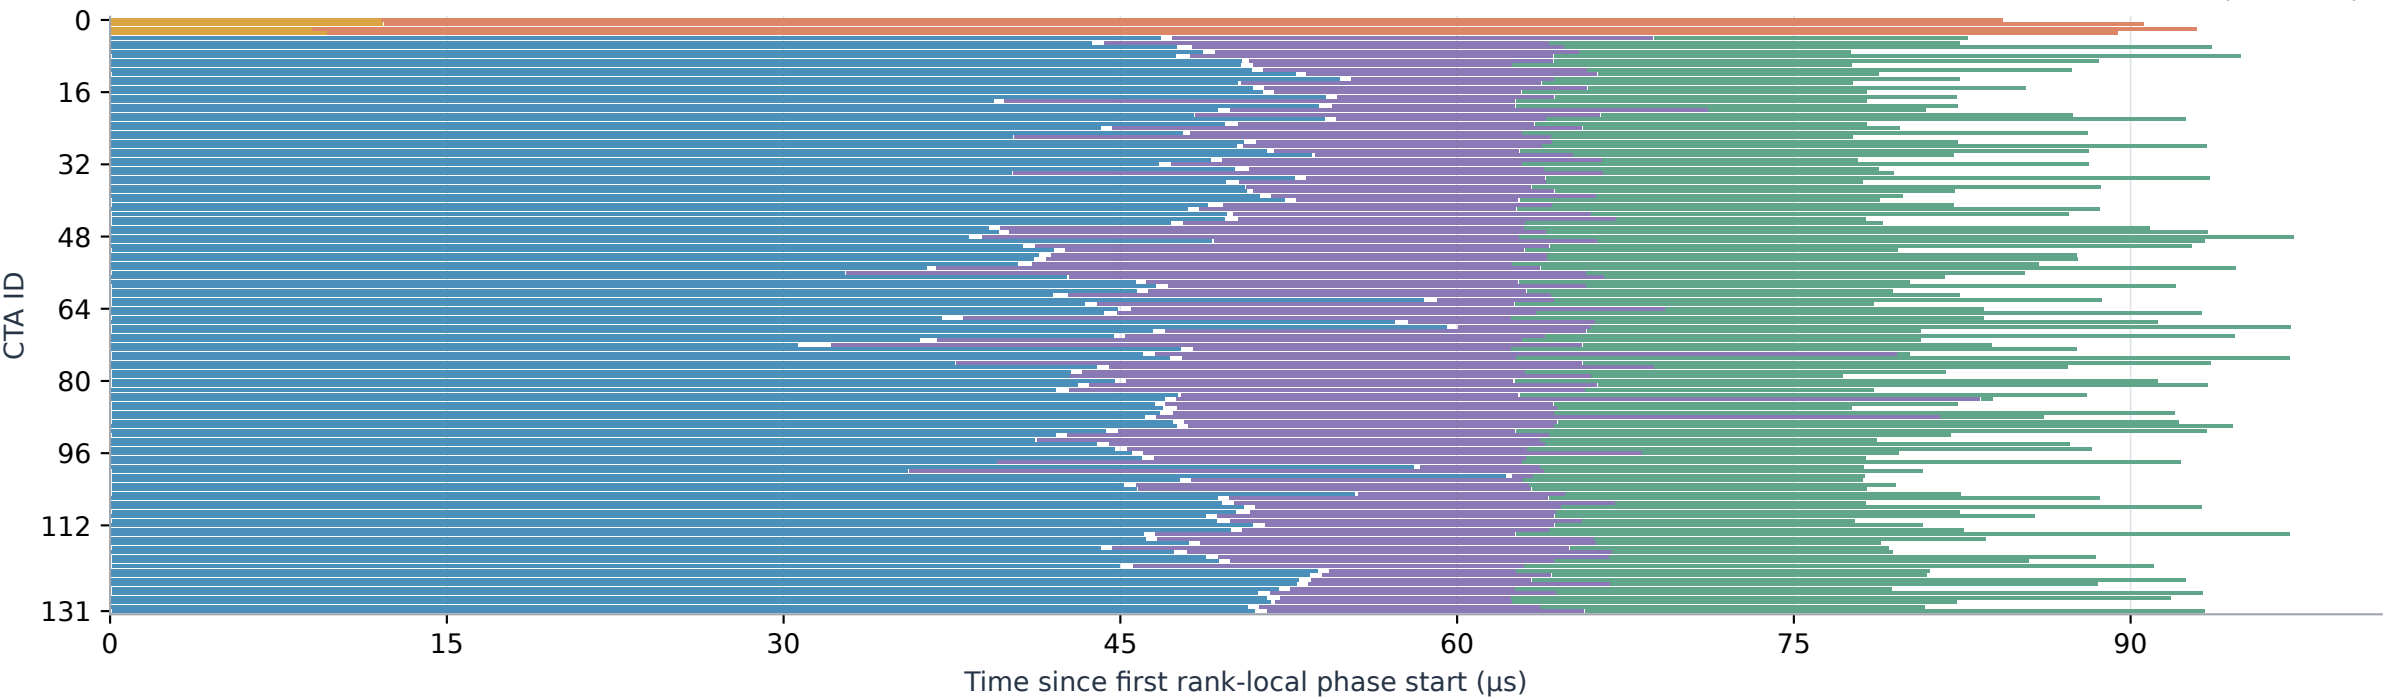

Local vLLM A2A · diagnostic rank 3

Stages 326.0 μs / measured end-to-end 361.0 μs

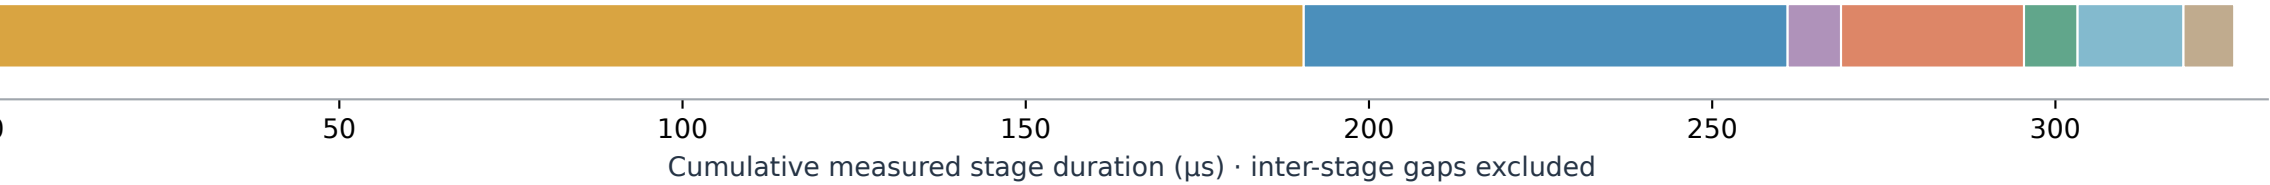

Q all-gather / reorder · 190.5 μs All-to-all · 26.7 μs Chunk attention · 15.4 μs
History attention · 70.5 μs Unpack / combine · 7.8 μs State merge · 7.4 μs
Pack · 7.8 μs

CTA plots preserve recorded phase starts and gaps; each method has its own time origin. Phase intervals include waits/synchronization.

A2A strip concatenates distinct stage durations; it is not a timestamped timeline. Diagnostic timings are separate from trace-off graph p50.