

VICTORIA UNIVERSITY OF WELLINGTON

*Te Whare Wānanga o te Ūpoko o te Ika a Māui*



School of Engineering and Computer Science

*Te Kura Mātai Pūkaha, Pūrorohiko*

PO Box 600  
Wellington  
New Zealand

Tel: +64 4 463 5341  
Fax: +64 4 463 5045  
Internet: [office@ecs.vuw.ac.nz](mailto:office@ecs.vuw.ac.nz)

## **Comprehensive Quality-Aware Automated Semantic Web Service Composition**

Chen Wang

Supervisors: Dr. Hui Ma and Dr. Aaron Chen

August 24, 2017

Submitted in partial fulfilment of the requirements for  
PhD.

### **Abstract**

Automated web service composition is an NP-hard problem and it has been raising much attention in the research community due to the computational challenge and real-world applicability. The focus of our studies on service composition is to find an effective and efficient approach to comprehensive quality-aware semantic web service composition, which aims to optimise semantic matchmaking quality and Quality of service (QoS) simultaneously. This focused problem is mainly solved using EC techniques and not fully explored before in the following considerations: (1) developing EC-based hybrid approaches that could explicitly support a comprehensive quality model that jointly optimises QoS and semantic matchmaking quality, (2) developing multi-objective approaches for optimising the quality criteria that involved in the comprehensive quality model, (3) developing EC-based hybrid composition techniques for dynamic service composition while handling various changes of composition environment, and (4) developing approaches for semantic web service composition, particularly, considering precondition and effects.



# Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
1.1	Problem Statement . . . . .	1
1.2	Motivations . . . . .	3
1.3	Research Goals . . . . .	7
1.4	Published Papers . . . . .	11
1.5	Organization of Proposal . . . . .	11
<b>2</b>	<b>Literature Review</b>	<b>13</b>
2.1	Background . . . . .	13
2.1.1	Web Service . . . . .	13
2.1.2	Web Service Composition . . . . .	15
2.1.3	Evolutionary Computation Techniques Overview . . . . .	20
2.2	Related Work . . . . .	21
2.2.1	Single-Objective Web Service Composition Approaches . . . . .	21
2.2.2	Multi-objective, and Many-objective Composition Approaches . . . . .	25
2.2.3	Dynamic Web Service Composition Approaches . . . . .	27
2.2.4	Semantic Web Service Composition Approaches . . . . .	29
2.2.5	Summary and Limitations . . . . .	30
<b>3</b>	<b>Preliminary Work</b>	<b>31</b>
3.1	Problem Formalisation . . . . .	31
3.2	PSO-based Approach . . . . .	33
3.2.1	An Overview of our PSO-based Approach . . . . .	33
3.2.2	The Algorithms for our PSO-based Approach . . . . .	34
3.3	Experiment Study for PSO-based Approach . . . . .	35
3.3.1	GP-based vs. PSO-based approach . . . . .	35
3.3.2	Comprehensive Quality Model vs. QoS Model . . . . .	36
3.3.3	Further Discussion . . . . .	36
3.4	Summary for PSO-based Approach . . . . .	38
3.5	GP-based Approach . . . . .	38
3.5.1	Tree-like Representation . . . . .	38
3.5.2	GP-Based Algorithm . . . . .	39
3.6	Experiment Study for GP-based Approach . . . . .	42
3.6.1	Comparison against a previous GP-based approach . . . . .	42
3.6.2	Further Discussion . . . . .	43
3.7	Summary for GP-based Approach . . . . .	44
3.8	Conclusion . . . . .	44

<b>4</b>	<b>Proposed Contributions and Project Plan</b>	<b>45</b>
4.1	Proposed Contributions . . . . .	45
4.2	Overview of Project Plan . . . . .	46
4.3	Project Timeline . . . . .	46
4.4	Thesis Outline . . . . .	46
4.5	Resources Required . . . . .	48
4.5.1	Computing Resources . . . . .	48
4.5.2	Library Resources . . . . .	48
4.5.3	Conference Travel Grants . . . . .	48

# Figures

2.1	Functional Properties of a Web Service. . . . .	14
2.2	Web service composition lifecycle [65]. . . . .	16
2.3	An example of traveling agency service. . . . .	17
2.4	An example for demonstrating semantic matchmaking quality. . . . .	18
2.5	Sequence construct and calculation of its QoS [114]. . . . .	20
2.6	Parallel construct and calculation of its QoS [114]. . . . .	20
2.7	Choice construct and calculation of its QoS [114]. . . . .	20
2.8	Loop construct and calculation of its QoS [114]. . . . .	20
3.1	An overview of our PSO-based approach to comprehensive quality-aware automated semantic web service composition. . . . .	33
3.2	An example for the comparison of the best solutions obtained based on the QoS model and on the comprehensive quality model for Task 3. . . . .	37
3.3	Example of a tree-like representation . . . . .	39
3.4	Example of a DAG used for transferring it into tree-like representation . . . .	40
3.5	Examples of two mutations on terminal and functional nodes . . . . .	41
3.6	Example of best solutions using the two GP-based approaches . . . . .	43



# Chapter 1

## Introduction

### 1.1 Problem Statement

*Service-oriented computing* (SOC) is a novel computing paradigm that employs services as fundamental elements to achieve the agile development of cost-efficient and integrable enterprise applications in heterogeneous environments [73, 74]. One of the primary purposes of SOC is to overcome conflicts due to diverse platforms and programming languages to make integrable and seamless communication among those existing or newly built independent services. *Service Oriented Architecture* (SOA) could abstractly realize service-oriented paradigm of computing. This accomplishment has been contributing to reuse of software components, from the concept of functions to units and from units to services during the evolution of development in SOA [10, 70]. One of the most typical implementation of SOA is *web service*, which is designated as “modular, self-describing, self-contained applications that are available on the Internet” [19]. Several standards play a significant role in registering, enquiring and grounding web services across the web, such as UDDI [18], WSDL [48] and SOAP [31]. *Web service composition* aims to loosely couple a set of web services to provide a value-added composite service that accommodates complex functional and non-functional requirements of service users.

Two most notable challenges for web service composition are ensuring interoperability of services and achieving Quality of Service (QoS) optimization [31]. *Interoperability* of web services presents challenges in syntactic and semantic dimensions. On the one hand, the syntactic dimension is covered by the XML-based technologies [112], such as *WSDL* and *SOAP*. In this dimension, most services are composed together merely based on the matching of input-output parameters. On the other hand, the semantic dimension enables a better collaboration through ontology-based semantics [69], in which many standards have been established, such as OWL-S [62], Web Service Modeling Ontology (WSMO) [49], SAWSDL [45], and Semantic Web Services Ontology (SWSO) [77]. This dimension brings around some other underlying functionality of services (i.e., precondition and postcondition) that could effect the execution of web services and their composition. The interoperability challenge gives birth to *Semantic web services composition*, as a different technique from traditional service composition methods (i.e., only syntactic dimension is presented in web services). The interoperability of services is presented as a semantic matchmaking relationship between provided information (i.e one service output) and required information (i.e., another service input), which do not often perfectly match with each other based on their semantic descriptions. Therefore, the quality of matchmaking becomes an aspect of the quality concern for users, which also raise researchers’ interests. Another challenge is related to QoS optimization, where QoS represents non-functional attributes of service composition (e.g, cost, time, reliability and availability). Often, a global search method is employed to minimize the cost

and maximize the reliability of composite services. This challenge gives birth to *QoS-aware service composition* that aims to find composition solutions with optimized QoS. Furthermore, QoS-aware service composition problem is facilitated by *Service Level Agreement (SLA)* [85], i.e., binding constraints on QoS. This results in the *SLA-aware web service composition*, e.g., constraints on cost, execution time, availability and reliability are separately specified with both lower and upper bounds.

Apart from the two notable challenges discussed above, the environment of service composition is changing in the real world, rather than *static*. For example, QoS values of services being composed of are fluctuating over time. Services chosen at the planning stage may not available to be invoked at the runtime, it may due to imprecise interface description [40] or hardware failures [35]. New services can also be registered in the service repository from time to time. Existing techniques for *static web service composition* can not support such a changing environment. Therefore, *dynamic web service composition* become a very demanding research field with a growing interest and a practical value. Particularly, some mechanisms are required to automatically detect the changes or recover from the faults [16]. Additionally, in the context of semantic web service composition, semantics of web services can make the problem of dynamic web service composition more complicated due to the changes in the ontology.

Different service composition approaches [22, 25, 36, 50, 60, 79, 84, 114, 99] have been proposed to cope with those composition challenges discussed above and they can be classified into two main categories: *semi-automated web service composition* and *fully automated web service composition*. The first category of composition approach requires human beings to manually create abstract service workflows. Generally, researchers assume a pre-defined abstract workflow is given and provided. The optimization problem in this approach turns to selecting concrete services with the best possible quality to each abstract service slot in a given workflow. Due to a tremendous growth in industries and enterprise applications, the number of web services has increased dramatically and unprecedentedly. The process of designing abstract workflows manually is fraught with difficulties in effectively and efficiently solving composition problems, such as QoS-aware service composition problem. Therefore, full automation of composition process is introduced in web service composition for less human intervention, less time consumption, and high productivity [81]. The differences in fully automated approach is that an abstract workflow is not provided, but generated while service are being selected.

Generating composition plans automatically in discovering and selecting suitable web services is an NP-hard problem [65], which means the near-optimized composition solution is not likely to be found in a reasonable computation time. *Artificial Intelligence (AI) planning-based approaches*, *Evolutionary Computation (EC) techniques* and hybrid techniques have been introduced. AI planning is utilized to solve the automated web service composition problems as a plan making process, from initial states to a set of actions to desired goal states-composite web services, where services are considered as actions triggered by one state (i.e., inputs) and resulted in another state (i.e., outputs). In the second approach, heuristics have been employed to generate near-optimal solutions using a variety of EC techniques have been used in this context, e.g., Genetic Algorithms (GA), Genetic Programming (GP) and Particle Swarm Optimization (PSO). EC-based techniques have been effectively developed to solve the *QoS-aware web service composition* problem. Many representations have been carefully investigated in QoS-aware web service composition problems, since they could significantly affect the performance of fully automated service composition approaches. In the third approach, a hybrid of AI planning-based approaches and EC-based approaches [22, 60] have been proposed to ensure the correctness in constructing workflows and to optimize the quality of composition solutions (e.g., QoS) at the same time. From the literature,



hybrid approaches generally outperform EC-based methods in finding optimal solutions in the domain of automated QoS-aware web service composition. It becomes a very promising direction to investigate. As summarized here, a few previously addressed challenges for fully automated service compositions lies in jointly optimizing QoS and semantic match-making quality, dealing with multi-objective optimization, handling environment changes in dynamic service composition, and composing semantic web services. Those challenges are addressed with key limitations in Section 1.2.

The overall goal of this thesis is to propose effect and efficient approaches to comprehensive-quality aware automated web service composition. This comprehensive quality aims to jointly optimize semantic matchmaking quality and QoS. Meanwhile, this new approach also tackles several service composition problems, such as multi-objective optimization, dynamic web service composition and semantic web service composition based on preconditions and postconditions.

## 1.2 Motivations

The motivations of this proposed research lies in the requirements from five key aspects that simultaneously account for. 1. *Various techniques of hybridization*. 2. *Hybridization of quality of semantic matchmaking and quality of service*. 3. *Muti-objective optimization*. 4. *Dynamic semantic service composition*. 5. *Service composition based on preconditions and effects*. Herein these requirements are explicitly discussed below.

### Various Techniques of Hybridization

Various techniques have been utilized to solve service composition problems, such as AI planning, local searching and EC-based techniques [30, 75, 79, 99]. AI planning is a prominent technique for handling web service composition problems while always ensuring the correctness of the solution (i.e., all the inputs of involved services are satisfied) [99]. Local search is a exhaustive search technique for solving optimization problems. In local search, solutions keep moving to the neighbor solutions, driven by some local maximization criterion until near-optimal solution found [75]. However, this technique has the shortage of being trapped in local optimal. On the other hand, EC-based techniques are outstanding at solving combinatorial optimization problems for finding the globally optimized solutions in large searching spaces. To take the benefits from various techniques, various techniques of hybridization allows escaping local optima easily and improving the rate of convergence rate [83].

Traditionally, various techniques are employed to handle service composition problem independently in existing works. Many researchers investigated AI planning techniques for service composition problems using classical planning algorithm, where inputs, outputs, preconditions and effects are well defined along with the actions (i.e, services) [61, 76]. On the one hand, AI planning ensures both the correctness of functionality and satisfactory of constrains, but it is always considered to be less efficient and less scalable, incapable of solving complicated optimization problems [75]. On the other hand, some researchers combined AI planning and local search to handle optimization problems, e.g., a combination of Graphplan [9] and Dijkstras algorithm is proposed by [30] to achieve a correct solution with optimized QoS. Yet, many EC techniques have been utilized to handle service composition problems, since their promise are shown in handling combinatorial optimization problems in a huge searching space. This problems usually have mathematical models utilized for solving them. A few researchers also combine both local search and EC-based techniques for efficiently finding composition solution with optimized QoS [75]. From the techniques

discussed above, they are problem-specific for either optimizing QoS or number of services. In this thesis, more complicated and realistic service composition problems are addressed. To cope with this composition problems featured in all the motivations discussed below (i.e. comprehensive quality-aware service composition, multi-objective optimization, dynamic service composition, and composing semantic web services based on preconditions and postconditions), EC-based methods are motivated to be proposed in the problems. For example, one heuristic in a EC-based technique is initially utilized for a purpose of global search. Meanwhile, another heuristic is additionally designed for a purpose of a local search, which determining neighborhood of composition solutions. This hybrid methods may lead to more effective performance comparing those using only one individual technique.

### Comprehensive Quality of Semantic Web Service Composition

Web service compositions are optimized by the well known non-functional attributes (i.e., QoS), when services are composed together based on outputs provided by one service and inputs required by another service. In the domain of semantic web services, often, the provided information (i.e., outputs) does not perfectly match the required information (i.e., inputs) according to their semantic descriptions [52]. The quality of the matches (i.e., quality of semantic matchmaking) are one part of the goal for achieving service compositions [50]. Therefore, a comprehensive quality is proposed for simultaneously considering both QoS and semantic matchmaking quality regarding a combinatorial optimization problem. This problem particularly handles an insufficiency of only QoS optimization. One motivated example from a practical perspective is explained here: many different service compositions can meet a user request but differ significantly in terms of QoS and semantic matchmaking quality. For example, in the classical travel planning context, some component service must be employed to obtain a travel map. Suppose that two services can be considered for this purpose. One service  $S$  can provide a street map at a price of 6.72. The other service  $S'$  can provide a tourist map at a price of 16.87. Because in our context a tourist map is more desirable than a street map,  $S'$  clearly enjoys better semantic matchmaking quality than  $S$  but will have negative impact on the QoS of the service composition (i.e., the price is much higher). One can easily imagine that similar challenges frequently occur when looking for service compositions. Hence, a good balance between QoS and semantic matchmaking quality is called for.

Existing works on service composition focus mainly on addressing only one quality aspect discussed above. For the semantic matchmaking quality, it is mainly addressed in works that focus on the discovery of atomic services, i.e., one-to-one matching of user requirements to a single service. Some works [6, 11, 64] on semantic service composition utilize semantic descriptions of web services (e.g., description logic) to ensure the interoperability of web services, but the goal of the composition is often to minimize the number of services or the size of a graph representation for a web service composition. These approaches do not guarantee an optimized QoS of service compositions. On the other hand, huge efforts have been devoted to studying QoS-aware web service composition [20, 25, 36, 60, 79, 114]. Some of these works do consider different semantic matchmaking types (e.g., Exact and Plugin matches [72]) when they compose services, but do not recognize the importance of semantic matchmaking quality regarding different matchmaking types. However, it is not sufficient to only consider one quality aspect for optimizing service composition. Only very few works address both semantic matchmaking quality and QoS for web service composition problems. To the best of our knowledge, [29, 50, 78] reported about first attempts that consider both aspects together, but they are only semi-automated approaches. For these reasons, there is a need to device an comprehensive quality for jointly optimizing the two

quality aspects. Apart from that, new fully automated approaches need to be proposed to handle this optimization problem and explicitly support the comprehensive quality.

### **Multi-Objective Composition Optimization**

Existing approaches for handling web service composition problems fall into two groups, depending on the different goals of optimization for either a single objective or multiple objectives. In single-objective service compositions, one composition solution is always returned by a composition task, where the preferences of each quality component within the single objective (e.g., a weighted sum of different quality criteria) is known by users. However, users do not always have clear preferences when many quality criteria are presented. Therefore, multi-objective optimization is a natural requirement from users to provide a set of trade-off solutions that concern about the conflicting and independent quality criteria. For example, premium users do not care cost as much as price-sensitive users do, so premium users may prefer a composition solution with lowest execution time with no limit on the budget, rather than one with a relatively lower execution time without exceeding a budget. Therefore, multi-objective service composition approaches are motivated to be proposed for generating a set of solutions for two reasons: first, the preferences of different quality is not clear and hard to determine in advance; second, single-objective optimization using weighted sum method can not reach solutions in the non-convex regions [42].

Existing research on the automated web service composition mainly concentrates on single objective problems for QoS-aware web service compositions. For example, there is only one solution promoted by a unified QoS ranking score to the users. However, to our best knowledge, existing works on multi-objective service composition [57, 94, 107, 108] are only approached by semi-automated methods to handle the conflicting QoS attributes independently, where the workflow structure is assumed to be pre-existing. However, simultaneously constructing workflows and selecting proper services for optimizing multi-objectives is a very challenge work to complete. On the other hand, some constraints on SLA are also employed to some of these approaches to reach the solutions with a desirable level. These constraints raised the complexity of absolute Preto priority relation [34]. From above discussion, there is a lack of fully automated approaches to multi-objective web service composition problems for QoS-aware web service composition abiding by constraints on SLA. Moreover, the insufficiency of handling only non-functional attributes (i.e., QoS) has given rise to adding semantic matchmaking quality into simultaneous consideration for this multi-objective problem.

### **Dynamic Semantic Web Service Composition**

In a dynamic environment, QoS of atomic services in a service repository is fluctuating over time. Static service composition solution is no longer enough, and requisite actions must be taken if the original composition solution changes in QoS or is not be executable due to any service involved goes offline. Apart from that, newly registered services could also could alter the composition plan as it could significantly contribute to the overall QoS or quality of semantic matchmaking. Therefore, dynamic web service composition is proposed to effectively and efficiently update composition solutions when they are not presented as optimal and/or executable solutions [54].

Most approaches work on effective and efficient methods for service re-selection for each services employed, which do not allow the changes of service composition structure. Apart from that, the cost of initial planning is ignored and separated from the adaption of dynamic environment. Some techniques [4, 7, 44] endeavoured to update outdated or incorrect com-

positions, and they allow for dynamic adaptation of the solutions based on implementation of variability constructs at the language level. For example, a composition language extending a typical WS-BPEL [4] is proposed for supporting the dynamic adaption using ECA (Event Condition Action) rules, which is utilized for guiding the operations for self-reconfiguration. This approach is difficult to manage, and error-prone. Based on and by extending the previous approaches, variability model based approaches [3] are proposed to support the adaption of service composition solutions. Meanwhile, some non-EC based existing work [66, 86, 95, 109] focus on developing efficient methods for service re-selection, which is utilized for replacing services once the negatively contributed services are detected. On the other hand, EC-based techniques can overcome the two limitations. That is, the changes of composition structure is allowed and the cost of initial planning is not ignored and separated from re-planning. Because a proper amount of individuals stored could be used for retrieving an alternative composition solution in the case of failure. This is a save of computation cost for re-planning. Second, the stored individuals could be further evolved on a concrete service or composition structure. However, existing EC-based approaches to web service composition have only been studying in static scenarios, rather than dynamic ones. Although some works [30, 57] points out that their approaches fit the dynamic problems due to the natural features of ACO algorithm (i.e., a continuous optimization process), there is no definition or discussion about dynamic service composition problems in their papers. Therefore, there is a lack of research in the area of EC-based dynamic service composition. Given above discussion, it is very advisable to study the effectiveness of EC approaches in a dynamic composition context.

### **Automated Web Service Composition Based on Preconditions and Effects**

Apart from considering the satisfactory inputs and production of outputs, since inputs and outputs are not everything required for service execution. Some conditional constraints also determine the executability of services. These conditional constraints lead to more complex service composition constructs (i.e., choice and loop) when services are composed together. For example, in the scenario of an online book shopping system [99], services are composed to provide an operation for book shopping. Users expect purchasing outcome (e.g. receipt) returned if books and customer details (e.g. title, author, customer id) are given. In this case, the users may have specific constraints. If the customer has enough money to pay for the book in full amount, then they would like to do so. Otherwise, the customer would like to pay by installments. Therefore, the constraints on their current account balance needs to be handled during the execution of the service composition.

Most of the existing approaches to automated web service composition are approached through services represented by only inputs and outputs. However, the underlying functional knowledge base of services (i.e., in the form of preconditions and effects) is not covered [71]. On the one hand, a few approaches [6, 12] have been explored to achieve compositions that consider precondition and effects using AI planning, since AI planning ensures both the correctness of functionality and satisfactory of constrains. Meanwhile, exhaustive methods are utilized with AI planning for tackling optimization problems. These methods suffer hugely in terms of efficiency, scalability, and computation cost. On the other hand, EC techniques (i.e., heuristic methods) are considered to be more flexible and more efficient. Given the benefits of both AI planning and EC-based techniques, they are motivated to be collectively explored for automated web service composition based on preconditions and effects.

### 1.3 Research Goals

The overall goal of this thesis is to *develop new and effective EC-based hybrid approaches for comprehensive quality-aware automated semantic web service composition*. More specifically, the focus will be on: (1) developing EC-based approaches that could explicitly support a comprehensive quality model that jointly optimizes QoS and semantic matchmaking quality, (2) developing multi-objective approaches for optimizing the quality criteria that involved in the comprehensive quality model, (3) developing EC-based hybrid composition techniques for dynamic service composition while handling various changes of composition environment, and (4) developing approaches for semantic web service composition, particularly, considering precondition and effects. This research aim to develop EC-based approaches for effectively handling the several service composition problems discussed above. The research goal described above can be achieved by completing the following set of objectives:

1. **Develop EC-based approaches to comprehensive quality-aware automated web service composition that simultaneously optimizes both QoS and semantic matchmaking quality.** Particularly, we extend existing works on QoS-aware service composition by considering jointly optimizing the both quality aspects, which is proposed as a comprehensive quality model. Meanwhile, representations of the composition solutions are the key aspect of the approaches, and they must maintain all the required information for the evaluation. Therefore, we will investigate the following sub-objectives to handle this objective.
  - (a) *To propose a comprehensive quality model that addresses QoS and semantic matchmaking quality simultaneously with a desirable balance on both sides.* We aim to establish a quality model with a simple calculation and good performance for the evaluation of our proposed comprehensive quality. Meanwhile, to enable a better evaluation on our approaches, it must support most of existing benchmark datasets, e.g., Web Service Challenge 2009 (WSC09)[43] and OWLS-TC [47].
  - (b) *To propose direct and indirect solution representations for comprehensive quality-aware web service composition.* Graph-based and tree-based representations are widely used for directly representing service composition solutions. Graph-based representations are capable of presenting all the semantic matchmaking relationships as edges, but hardly supporting some composition constructs (e.g. loop and choice). Tree-based representations could be more ideal for practical use, since they can present all composition constructs as inner nodes of trees. However, they could hardly maintain all the edge-related relationships supported by graphs. To take advantage of the graph-based and tree-based representations, we aim to propose a tree-like representation representation. In particular, any isomorphic copy in the traditional tree-based representations is removed and labeled with a special symbol  $q$ , and insert an edge to the root of the copy. Meanwhile, particular genetic operators are developed without breaking the functionality of symbol  $q$ . The *indirect representations* do not present the final service composition solutions, they must be decoded to executable service composition. Previous studies have shown their good performances in searching optimal solution for QoS-aware web service composition [24, 25]. However, the decoding process could increase the computation time. Apart from that, the indirect representation potentially increases the searching space, due to the changes of the indirect representation may result in the same solutions as discussed in the work [25]. To overcome these disadvantages, it is advisable to propose more efficient indirect representations.

- (c) *To propose EC-based hybrid methods to effectively and efficiently handle the problem for comprehensive quality-aware automated web service composition.* The reasons of utilizing hybrid techniques are briefly discussed in the first motivation, and they aim to efficiently and effectively handle service composition problems. Herein, memetic approaches are developed for supporting both the proposed indirect and indirect representations. In particular, new and effective genetic operators are to be developed for EC-based algorithms, and local search are also to be developed for avoiding being trapped by the local optimal, where proper designed structures are studied for neighboring solutions. Apart from that, these approaches must explicitly support the comprehensive quality model, and AI planning techniques are further introduced into the memetic approaches to provide fast convergence of fitness value.

**2. Develop multi-objective approaches to fully automated comprehensive quality-aware semantic service composition.** In practice, many quality criteria proposed in our comprehensive quality model are often conflicting in natural. Existing works [17, 103, 108, 57, 111, 117] mainly concentrated on semi-automated QoS-aware web service composition. Therefore, researches need to be carried out not only for better understanding of inherent trade-offs among different objectives (e.g., quality of semantic matchmaking and QoS are naturally considered as two conflicting objectives), but also for developing fully automated approaches by utilizing cutting-edge multi-objective optimization algorithms (e.g, NSGA-II [28], SPEA2 [120] and MOEA/D [116]). These algorithms are needed for finding a Pareto front of evolved solutions that comprehensively cover users' requirements. Meanwhile, different representations may not perform equally well, so a study on improving the effectiveness of different representations along with different Evolutionary Multi-Objective Optimization (EMO) techniques also arouses researchers' interest. Apart from that, SLA consideration needs to be taken into account. It is also necessary to consider customized matchmaking levels to bring the flexibility for meeting different requirements from segmented users (e.g., platinum users, gold users and normal users). The development of this approach can be divided into the following three sub-objectives:

- (a) *To develop a EMO-based approaches for multi-objective fully automated semantic web service composition.* Herein we will propose novel representations and useful modifications of multi-objective EC algorithms (for example, NSGA-II [28], SPEA2 [120] and MOEA/D [116]) simultaneously to improve the effectiveness and efficiency of our service composition approaches. This sub-objective is also established for in-depth investigation of each quality criteria based on our proposed comprehensive quality model in Objective 1. In particular, both quality of semantic matchmaking and QoS must be optimized independently, since they may represent conflicting interests. It would be interesting to examine different trade-offs among the service composition solutions with respect to the different quality criterion. Apart from that, fully automated approaches are also developed to overcome the limitation of existing works (i.e., semi-automated approaches), where abstract workflows are given .
- (b) *To develop EMO-based hybrid approaches for multi-objective fully automated semantic web service composition.* Once we achieve the sub-objective 2a, the effectiveness and efficiency are the next focus. The EC-based approaches should be extended by introducing some local search. In particular, we aim to design an effective mechanism to decide how often, how long, which solutions we use the local search for targeting their neighboring solutions. For example, an exhaustive

search is designed and to target the neighborhood of the best the individual of each current population, and it is performed with a highest possibility with respect to its fitness values.

- (c) *To develop EMO-based hybrid approaches for multi-objective fully automated semantic web service composition subject to constraints on SLA and customized matchmaking level.* In real world, satisfaction on given SLA constraints is required in addition to optimizing QoS. Therefore, this sub-objective consider some additional constraints on QoS (i.e., multilevel constraints with lower and upper bound for different individual QoS criterion [108]). Meanwhile, to satisfy the customized different semantic matchmaking levels (e.g., exact matchmaking level and less strict matchmaking level), these methods are also required to cope with the constraints on the different accepted matchmaking level. We aim to propose a vector of both QoS and semantic matchmaking constrains, which is represented as a vector of lower and upper bounds for each quality criterion. The vector is utilized in the fitness function for penalizing the individuals that breach the constrains.

3. **Develop EC-based techniques to support dynamic semantic web service composition effectively.** Objectives 1 and 2 are proposed assuming the environment of service composition is static. In our context, composition environment refers to the registered services in the service repository, non-functional attributes advertised by service providers, and the ontology utilized for describing the resources of web services. On the one hand, existing EC-based approaches are only executed once to generate an initial composition plan from a given composition task, some factors could significantly impact the execution of the plan. For example, QoS values of component services are fluctuating over time, service chosen at the planning stage may not available to be invoked at the runtime, or newly registered service may need to be considered for reconstructing a better plan. On the other hand, existing non-EC based approaches [68, 86, 95, 109] work on effective and efficient methods for service re-selection for repairing each service employed. Technically, their approaches do not allow changes in service composition structure. Also, the cost of initializing a composition plan is ignored and separated from their approaches. To overcome the two limitations above, three studies are conducted as three sub-objectives as follows:

- (a) *To develop EC-based techniques to re-optimize solution candidates for changes in QoS and Ontology.* Traditionally, initial population is created with solution candidates that are further evolved for searching optimal solutions. During the evolutionary computation process, most of service candidates are discarded except the best service candidate identified. Those discarded solution candidates may be promising, since some of them could turn to be alternative best due to the changes in services or the ontology. Therefore, instead of discarding the solution candidates, we aim to propose an effective EC-based approach to re-optimize these maintained candidates for further use since these candidates preserve both diversity and elitism. This diversity and elitism motivate us to continue the evolutionary process without wasting the computation time utilized in stage of initial composition plan.
- (b) *To develop EC-based hybrid techniques to re-optimize solution candidates for changes in QoS and Ontology.* Once the EC-based techniques to re-optimize solution candidates for changes in QoS and ontology are achieved, it should be further studied in developing more effective approach to handle this problem. We aim to propose

an adaptive and hybrid approach to this dynamic problem. On the one hand, the adaptive refers to assign a higher priority to a group of services with changes and a lower priority to a group of services without changes, respectively. This priority is utilized in service selection for building up new individual (i.e., service composition solutions), and must be adaptively handled with a proper decreasing rate with respect to each service for the first group. On the other hand, the hybrid refers to a memetic approach that combines EC-based approach and a local search, where the local search is developed to accelerate the convergency and decrease the number of evaluation times. In this subjective, we aim to achieve more effective performance compared to the EC-based approaches in Objective 3a.

- (c) *To develop EC-based hybrid techniques for handling service failure and new service registration using updated candidates in the population.* Apart from the changes in the QoS and the ontology of services, occasionally, existing service may fail and/or new service may be registered. For the case of new service registrations, efficient methods need to be proposed to update the plan with new services in timely manner. When new services are registered in the service repository, we discard a portion of the current population, and then replenish population based on updated services repository. For the case of service failure, efficient approaches need to be proposed to either efficiently mutate the solutions candidates on un-invokable atomic services, or its parent composition components, or effectively re-generate whole solutions using invokable services in the service repository.

**4. Develop EC-based approaches for semantic web service compositions based on preconditions and effects (Optional).** We plan to extend most service composition approaches (i.e., satisfactory on inputs and outputs) to include preconditions and effects. These conditional constrains also necessitates the study of various of composition constructs for automated semantic web service composition, e.g., loop and choice. Therefore, three sub-objectives have been proposed as our targets as follow.

- (a) *To develop EC-based techniques for semantic web service composition based on preconditions and effects.* In this objective, inputs and outputs are not everything for the execution of web services, our composition problem is re-modeled by considering not only inputs and outputs, but also preconditions and effects. In particular, we need to establish a general matchmaking mechanism of satisfaction on preconditions and effects. Based on the mechanism, sequence and parallel composition constructs are automatically constructed for considering preconditions and effects. Meanwhile, we aim to develop EC-based approaches to effectively handle this problem. In particular, we will propose new representations to cope with preconditions and effects.
- (b) *To develop EC-based hybrid techniques for semantic web service composition based on preconditions and effects.* Once the EC-based techniques to semantic web service composition based on preconditions and effects are proposed. More effective techniques shall be developed. In particular, we aim to create a memetic approach that utilize a EC-based approach and a local search for avoiding trapped by local optimal. This memetic approach is expect to benefit in an accelerated convergency rate and a decreasing the number of evaluation times.
- (c) *To develop EC-based techniques for semantic web service composition based on preconditions and effects for supporting loops and choice.* We initially extend the matchmaking mechanism of satisfaction on preconditions and effects to support loops and choice composition constructs. To extensively cope with these two constructs,



new and effective representations must be studied since the old representation only consider sequence and parallel constructs. Apart from that, EC-based approaches will be developed to effectively solve this problem.

## 1.4 Published Papers

During the initial stage of this research, the preliminary work was carried out on establishing the comprehensive quality model. Afterwards, some studies on the direct and indirect representations are completed for one part of Objective 1, but the earlier works focus on static web service composition using single-objective optimization technique. The following are the publications made from the preliminary studies:

- WANG, C., MA, H., CHEN, A., AND HARTMANN, S. "Comprehensive Quality-Aware Automated Semantic Web Service Composition". *AI 2017: Advances in Artificial Intelligence: 30th Australasian Joint Conference*. 2017, pp. 195-207.
- WANG, C., Ma, H., CHEN, A., AND HARTMANN, S.: "GP-Based Approach to Comprehensive quality-aware automated semantic web service composition". In: SEAL2017: International Conference on Simulated Evolution and Learning (To appear)

## 1.5 Organization of Proposal

The remainder of the proposal is organized as follows: Chapter 2 provides a fundamental definition of the web service composition problem and performs a literature review covering a range of works in this field; Chapter 3 discusses the preliminary work explores direct and indirect representations for comprehensive quality-aware semantic web service composition using a hybridization of AI planning techniques and EC-based techniques; Chapter 4 presents a plan detailing this project's intended contributions, a project timeline, and a thesis outline.



## Chapter 2

# Literature Review

In this chapter, we first introduce the background knowledge of web service composition in Section 2.1, i.e., properties of web service and web service composition, and service discover mechanisms. Second, EC techniques are also briefly introduced in Subsection 2.1.3. Followed that Section 2.2 reviews the single-objective service composition for both EC and non-EC based approaches in Subsection 2.2.1. Subsection 2.2.2 reviews existing works in multi-objective approaches and many-objective approaches. Dynamic web service composition is covered in Subsection 2.2.3. Subsection 2.2.4 discussed semantic service composition based on preconditions and postconditions. Lastly, Subsection 2.2.5 summarizes some key reviews and limitations in the literature review.

## 2.1 Background

### 2.1.1 Web Service

Web services are self-describing modules offering functionalities over the internet. The idea of web services is to allow customers to use them without prior specific knowledge. The functionalities of web services are often specified by their functional attributes, which satisfy users' functional requirements and provide mechanisms to allow users to search desired service. Web services are classified into two groups based on their functionalities: *information-providing services* and *world-altering services* [63]. The first type of services expect some data returned by giving inputs or nothing. For example, a service for air velocity transducer reads the wind speed and return the velocity at the time. This service does not require any inputs. On the other side, a service for city weather requires given city name to return the weather information for that specific city. Information-providing services do not produce any side effect to the world. The functionalities of these services are only inputs and outputs. The second type of services not only provide data information but also alters the status of the world by producing side effects. For example, a PayPal service will cause a deduction in the balance of users' bank account. *In this proposal, we mainly focus the first type of services for first three objective. Later on, an extensive study is optionally carried for the second type of services*

As demonstrated above, the functional attributes determine what service really does, while the non-functional attributes often refers to some quality criteria, which is considered for ranking services [2]. In realistic scenarios, the non-functional are also important. For example, users may not prefer a service with higher cost with the same functionality provided by another one. Herein we will demonstrate both the functional and non-functional properties as follow:

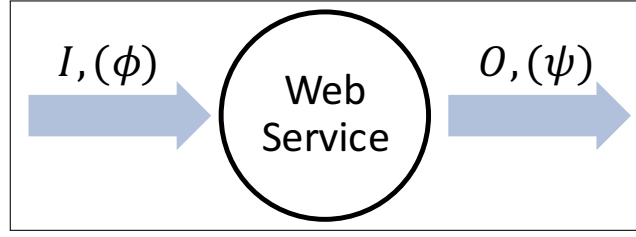


Figure 2.1: Functional Properties of a Web Service.

### Functional Properties of Web services

The operational characteristics of web services are related to the functional properties, which demonstrate the behaviors of web services, i.e, how services are successfully invoked and what information are returned after execution. In other words, a set of inputs  $I$  is required by a service and a set of output  $O$  is returned by a service. For semantic web services, ontology reasoner is employed to reason about the properties (i.e., inputs and outputs) of web services, where a knowledge base is created to better enable the interoperability of the functional properties. Sometimes, the preconditions  $\phi$  must be hold in the knowledge base before service execution, and they must remain consistent before passing the input  $I$ . Side effects are also created as post-conditions  $\psi$  along with outputs  $O$ . All functional properties of web services are demonstrated in Fig. 2.1.

### Nonfunctional Properties of Web services

Apart from the functional properties of web services discussed above, the non-functional properties of web services play an important part in composing services and are often referred to QoS. For example, customers prefer lowest execution cost with highest response time and reliability. According to [115], four most often considered QoS parameters are as follows:

- *Response time* ( $T$ ) measures the expected delay in seconds between the moment when a request is sent and the moment when the results are received.
- *Cost* ( $C$ ) is the amount of money that a service requester has to pay for executing the web service
- *Reliability* ( $R$ ) is the probability that a request is correctly responded within the maximum expected time frame.
- *Availability* ( $A$ ) is the probability that a web service is accessible.

### Web Service Discovery

To generate service compositions, web service must provide mechanisms for discovery required services. Therefore, service discovery becomes a fundamental technique to be considered in all service composition approaches. [1] discussed three mechanisms of semantic web service discovery: classification-based approach, functionality-based approach and hybrid approach. Those service discovery techniques are further demonstrated below.

The first service discovery technique makes use of the classes provided by service semantic annotation in WSMO-Lite language. Therefore, service requesters can use class names to express a goal offering a straightforward discovery from a set of classes. However, classes

without clear meaning definition could lead to the issue of incomprehensibility of web service discovery. For example, several classes may be declared in either different terms for the describing the same content or same terms for describing different content.

The second service discovery technique does not take classes into account, but considers functional properties of web service to include pre-conditions and post-conditions. In particular, a desired functionality description is defined. A discovery algorithm must be developed to handle a matching for different input, output, precondition and postcondition with associated concepts and relations in the provided domain knowledge base. The key idea of the matchmaking is to check whether services accept all the desired inputs provided by users and whether the desired outputs are delivered by services. In addition, this discovery technique also checks for the satisfiability of implications that actual precondition and actual postcondition must imply the desired precondition and desired postcondition respectively. The strength of the second is that it potentially meets the demands of all the comprehensible discovery, while the weakness is a lack of efficiency and scalability.

The third service discovery technique is based on a hybridization of classification and functionality-based discovery. Classification hierarchy is proposed to achieve automatic semantic reasoning in hierarchical functionality. For example, a functionality class is associated with super classes and sub classes for more general functionality class and more specific functionality class respectively. However, to make a consistency of classification hierarchy, the inputs, outputs, precondition and postcondition of a functionality class must satisfy the conditions that contains all the inputs, outputs, precondition and postcondition of all the classes it is subsumed by. The advantage of this approach is to achieve better performance combining strengths of the previous two pure classifications based and functionality based approaches. While the classification hierarchy needs to be kept consistent when a new web service is published or updated.

As discussed above, the first and third approach is considered either less effective or demands to build up a consistent ontology for classes and their functional attributes. That is not the focus of our research. *In the proposal, we use the second service discovery technique for meeting the comprehensible discovery. That is, different types of ontology reasoning are utilized to approach the matchmaking as a fundamental part of service composition algorithm.*

### 2.1.2 Web Service Composition

Since an atomic web service could not satisfy or fully satisfy users' complex functional requirements, web service composition is approached by composing web services together to meet the required demand. Manual service composition is very time-consuming and less productive. Therefore, many approaches have been developed to achieve semi-automated or fully automated service composition. The semi-automated service composition is inspired by the business process that required prior knowledge to build up abstract workflows. These workflows consist of abstract services, each of which is defined by input-output pairs. The details of these steps are further discussed in Subsection 2.1.2. On the other hand, when we are composing services, the interoperability of services is very important in both semi-automated and fully automated web service composition. In particular, several problems are simultaneously taken into account. That is I/O matchmaking (i.e., a mechanism for ensuring the interoperability), discovery relevant services to the optimizing the quality of service composition, e.g., overall QoS. Consequently, the following concerns are required to consider in generating composition solution.

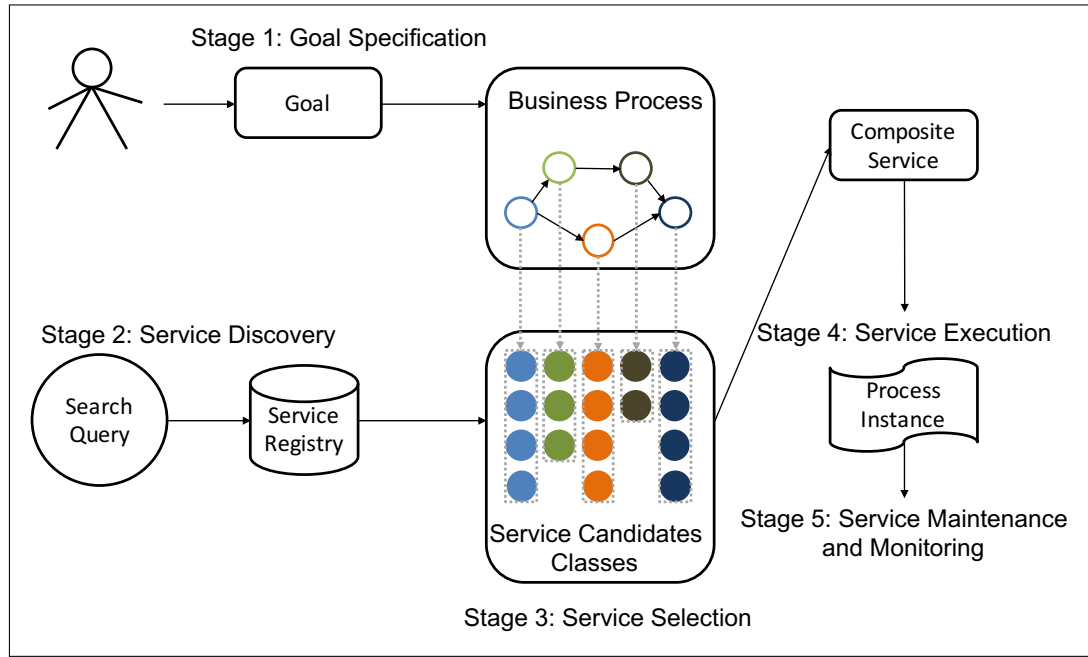


Figure 2.2: Web service composition lifecycle [65].

### Web Service Composition Lifecycle

Typical steps in a workflow-based automated Web service composition solution are shown in Fig. 2.2. The detail of the service lifecycle is discussed as follows:

1. *Goal specification*: The first step in service composition is to collect users' requirements for composition goal that comprises of the functional (i.e., correct data flow ) and non-functional side (i.e., QoS). This step is achieved by building up an abstract workflow including a series of tasks with clearly defined functionality. Those tasks could be completed by selecting proper concrete services to reach desired QoS.
2. *Service discovery*: Once the goal is clearly specified, concrete web services are to be selected for each task regarding its functional requirement. Often, more than one concrete web service is likely to be found to match one service discovery task. However, those matched web services are always different in QoS.
3. *Service selection*: At this stage, many techniques have been studied to select web services to best match each task for the satisfying functional requirement of each task and overall business process. Therefore, a plan of service composition is created ahead of execution.
4. *Service execution*: the process instance is monitored for any changes or services failures during service execution. In this stage, some actions are to be taken for adapting the changes.

The web service lifecycle discussed above is a typical *semi-automated approach*. There is a distinction between semi-automated and fully automated approaches. On the one hand, during the goal specification stage of semi-automated approach, the abstract workflow is already provided. An abstract workflow is not provided at the stage of goal specification for *fully automated service composition*. Often, fully automated service composition rely on some algorithms (e.g., Graphplan algorithm [9]) to achieve service composition. Service workflow

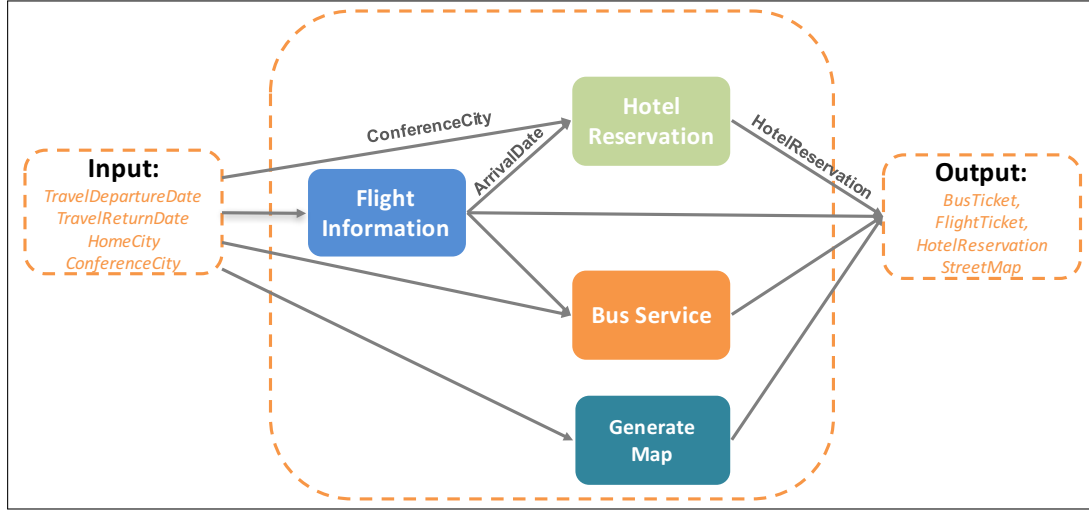


Figure 2.3: An example of traveling agency service.

is gradually built up along with service discovery and service selection. In our thesis, I concentrate on developing methods for fully automated service composition, where service discovery and service selection are considered as interrelated tasks that are interleaved with the composition algorithm.

### An Example of web service composition

Fig. 2.3 shows a popular web service composition example from travel domain. In this scenario, the agency provides customers a serial of services to satisfy their complex requirements. These services include booking flights, accommodation, bus and map generation. In Fig. 2.3, the task inputs (i.e., *TravelDepartureDate*, *TravelReturnDate*, *HomeCity* and *ConferenceCity*) are gathered from customers, and task outputs (i.e., *BusTicket*, *FlightTicket*, *HotelReservation* and *StreepMap*) are expected to be returned. Apart from that, the inputs of all the component services must be satisfied. In this service composition example, we begin by executing the *FlightBooking Service* and *GenerateMap Service*, the *FilightInforma-tion* service books the flights and determines the *arrivalDate*. Then, we use the arrival date together with the other given data, we can book the hotel and bus, and generate Map for conference city. Together, these four services produce all required outputs for customers.

### Functional Properties of Web Service Composition

From the example demonstrated above, two characteristics are indicated for the functional attributes of web service composition. One is that all the inputs of component services must be matched by given task inputs or produced outputs, so that service composition can be successfully executed. Another is that users' required inputs must be a subset of all the outputs of component web services, so that a service composition goal is completed.

In the first characteristics, often, the given task inputs or produced outputs often do not perfectly match the required services' inputs. For example, one component service from previous service composition example is pick up for further demonstrating its semantic matchmaking quality regarding its required inputs. The *generateMap* service requires inputs *MappedLocation* and producing output *StreetMap*. Given that *instance – of(ConferenceCity, City)*, *instance – of(MappedLocation, Location)* and *City  $\sqsubseteq$  Location*. We can see that *ConferenceCity* is less preferable. Therefore, Semantic matchmaking quality



Figure 2.4: An example for demonstrating semantic matchmaking quality.

between ConferenceCity and MappedLocation is relatively lower.

Description logic (DL) makes it possible to measure the quality of semantic matchmaking. Substantial work [6, 50, 51, 53, 82] utilizes Description logic (DL) reasoning between input and output parameters of web services for matchmaking, where different matchmaking types are considered for matchmaking, and they usually result in *different matchmaking quality*. Therefore, exploring an effective mechanism for measuring the quality of semantic matchmaking in service composition is one of crucial tasks in our thesis.

Firstly, we demonstrate different *Matchmaking Types* discussed above here. Given two concepts  $a, b$  in ontology  $\mathcal{O}$ , four commonly used matchmaking types are often used to describe the level of a match between outputs and inputs [72]:

- *exact* returned, if  $a$  and  $b$  are equivalent ( $a \equiv b$ ),
- *plugin* returned, if  $a$  is a sub-concept of  $b$  ( $a \sqsubseteq b$ ),
- *subsume* returned, if  $a$  is a super-concept of  $b$  ( $a \sqsupseteq b$ ),
- *fail* returned, if none of previous matchmaking types is returned.

Secondly, to our best knowledge, three methods [51, 78, 87] are utilized for measuring the quality of semantic matchmaking in the domain of service composition.

The first method measures the quality of matchmaking regarding the different matchmaking types. In [51], the quality of semantic matchmaking is measured by the two quality criterion, matchmaking types and common description rate. They additionally consider *interaction* matchmaking type ( $a \sqcap b$ ), i.e., if the intersection of  $a$  and  $b$  is satisfiable. In their work, a causal link  $sl_{i,j} \doteq \langle S_i, Sim_T(Out_{s_i}, In_{s_j}), S_j \rangle$  is created between an input and an output. In particular, both *exact* match and *plugin* match are presented as robust causal links, while both *subsume* match and *intersection* match are presented as valid casual links. However, valid casual links are not specific enough to be utilized as the input of another web service. Thus the output requires Extra Description, denoted as  $In_{s_x} \setminus Out_{s_y}$ , to enable proper service composition using Eq. 2.1. As a result, *subsume* and *intersection* are transferred to be *exact* and *plugin* respectively to formulate a robust link. Therefore, common description rate,  $q_{cd}(sl_{i,j})$  is calculated based on Extra Description and Least common subsume, denoted as  $lcs(In_{s_x}, Out_{s_y})$ , using Eq. 2.1..

$$In_{s_x} \setminus Out_{s_y} \doteq \min_{\leq_d} \{B | B \sqcap Out_{s_y} \equiv In_{s_x}\}, \text{ since } Out_{s_y} \sqsupseteq In_{s_x} \quad (2.1)$$

$$q_{cd}(sl_{i,j}) = \frac{lcs(In_{s_x}, Out_{s_y})}{In_{s_x} \setminus Out_{s_y} + lcs(In_{s_x}, Out_{s_y})} \quad (2.2)$$

The second method for measuring the quality of semantic matchmaking adopt a similarity measurement from information retrieval. In [78], the similarity is calculated by the



average value of  $F\_Measure(S_i.out_k, S_j.in_k)$ .  $F\_Measure(S_i.out_k, S_j.in_k)$  measures the similarity of two matched output  $S_i.out_k$  and input  $S_j.in_k$ , and it is calculated based precision and recall between these two parameters.

The third method for measuring the quality of semantic matchmaking is discussed in [87] using semantic similarity. For concepts  $a, b$  in  $\mathcal{O}$ , semantic similarity, denoted as  $sim(a, b)$ , is calculated based on an edge counting method in a taxonomy like WorldNet or Ontology using Eq. (2.3) [87]. This method has the advantages of simple calculation and good performance. In Eq. (2.3),  $N_a$ ,  $N_b$  and  $N_c$  measure the distances from concept  $a$ , concept  $b$ , and the closest common ancestor  $c$  of  $a$  and  $b$  to the top concept of the ontology  $\mathcal{O}$ , respectively.  $L$  is the shortest distance between the two concepts,  $a$  and  $b$ , while  $D$  is the depth of ontology tree. Also,  $\lambda$  equals 1 for neighborhood concepts or 0 for concepts from same hierarchy.

$$sim(a, b) = \frac{2N_c \cdot e^{-\lambda L/D}}{N_a + N_b} \quad (2.3)$$

For our purposes,  $\lambda$  can be set to 0 as we do not measure the similarities of neighborhood concepts, the matching type not considered in this paper.

*In this paper we are only interested in robust compositions, where only exact and plugin matches are considered, and we suggest to consider the semantic similarity of concepts when comparing different plugin matches.* As argued in [50] *plugin* matches are less preferable than *exact* matches due to the overheads associated with data processing

## Nonfunctional Properties of Web Service Composition

The nonfunctional properties of web service composition is determined by all the QoS of involved concrete web services in the solution. The aggregation value of QoS attributes for web services composition varies with respect to different constructs, which reflects how services associated with each other in a service composition [115].

- *Sequence construct*: service composition executes each atomic service associated with a sequence construct in a definite sequence order. The aggregation time ( $T$ ) and execution cost ( $C$ ) is as the sum of time and cost of web services involved respectively. The overall availability and reliability in a sequence construct are calculated by multiplying their corresponding availability and reliability of each web service in probability theory. This construct is shown in Fig. 2.5.
- *Parallel construct*: web services in a parallel construct are executed concurrently. The QoS aggregation execution cost, availability and reliability are the same as these in sequence construct while the Total time ( $T$ ) is determined by the most time-consuming path in the composite flow of the solution. This construct is presented in Fig. 2.6.
- *Choice construct*: Only one service path is executed in a choice construct depending on the satisfaction of the conditions on each path. In Fig. 2.7, assuming the choice construct has  $n$  branches,  $p_1, \dots, p_n$  with  $\sum_{k=1}^d p_k = 1$  denote the probabilities of the different branches of the choice construct. For example, The aggregated total cost  $C$  is the multiplication of the cost of each branching service and the  $p$  possibility of the branch.
- *Loop construct*: web services in a loop construct are executed repeatedly until a certain condition is satisfied. In Fig. 2.8, assuming the average number of iterations is  $\ell$ , and  $t$ ,  $c$ ,  $r$ , and  $a$  are corresponding aggregated value of a composite service. Therefore, For a loop construct, aggregated response time ( $T$ ) and execution cost ( $C$ ) are  $p_n \cdot t$  and  $p_n \cdot c$

respectively while aggregated availability  $A$  and reliability  $R$  are the  $\ell^{th}$  power of the value of one iteration, i.e.,  $A = a^\ell$  and  $R = r^\ell$ .

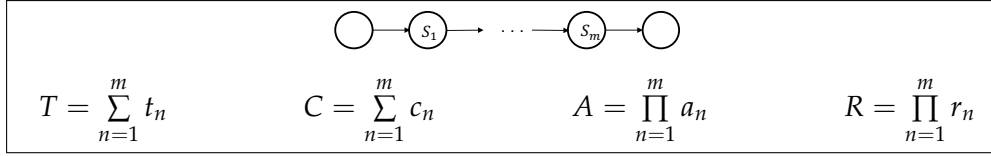


Figure 2.5: Sequence construct and calculation of its QoS [114].

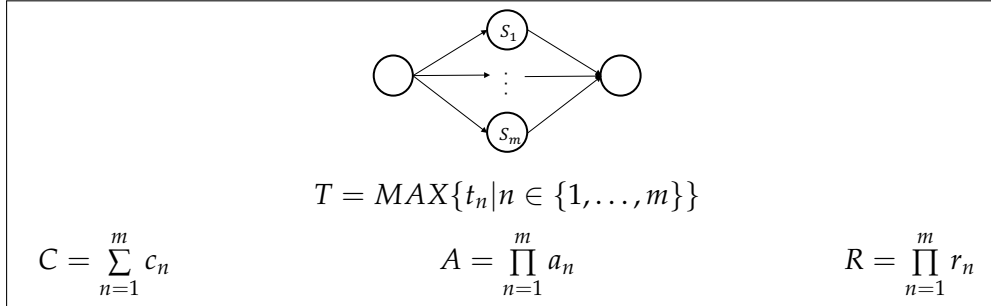


Figure 2.6: Parallel construct and calculation of its QoS [114].

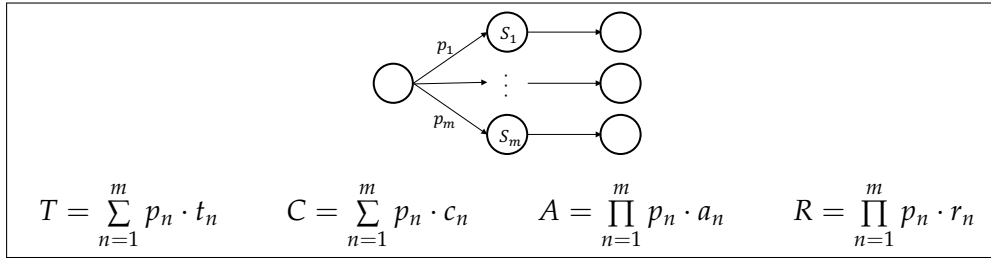


Figure 2.7: Choice construct and calculation of its QoS [114].

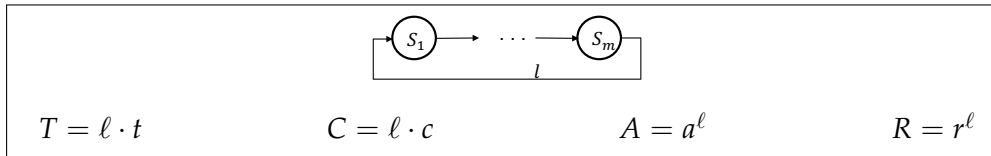


Figure 2.8: Loop construct and calculation of its QoS [114].

### 2.1.3 Evolutionary Computation Techniques Overview

Evolution Computing (EC) techniques are founded based on the principles of Darwin natural selection. The nature evolution and selection of individual in a population are automated simulated in EC. In particular, a population of individuals is initialised for directly or indirectly presenting the solutions. Those individual candidates are evolved and evaluated using a fitness function to evaluate the degree of how good (or bad) of each individual. Therefore, it is possible to reach solution with near-optimal fitness. EC have been shown its promise in solving combinatorial optimisation problems [5]. This is due to its flexibility in encoding the problems for the representation and its good performance in many scenarios. In particular, To manage the constraints in the problems, five main methods have been proposed deal with the constraints: coding, penalty functions, repair algorithm, indirect methods of representation and multi-objective optimisation [32]. In the context of

service composition. Many EC techniques have been approached for handling optimisation problems for web service composition, such as Genetic Algorithms (GA) [102], Genetic Programming (GP) [46], Particle Swarm Optimisation (PSO) [41], and Clonal Selection Algorithm [27]. These techniques are briefly introduced here.

GP is considered as a particular application of GA with a set of different encoded genes. In particular, the representation of GA is commonly represented as a linear structure. However, In GP, each individual is commonly represented as a tree structure. the tree structure has a terminal set and a function set, where variables, constants and functions are consisted of respectively. Also, the tree structure is considered be efficiently evaluated recursively. Three genetic operators consisting of reproduction, crossover, and mutation are involved in to generate next generation for both GA and GP. Reproduction operator retains the elite individual without any changes. Crossover operator replaces one node of one individual with another node of another individual. Mutation operator replaces a randomly selected node in an individual. The whole evaluation process won't stop unless an optimised solution found or a pre-defined number of generation reached.

PSO is one of swarm intelligence (SI) that based on the behaviour of decentralised, self organised system. PSO algorithm is initialised by a group of random particles, which direct or indirect present the solutions. Those particles explores for the optimisation position, which is approached by repeating the process of transferring particles position according to both their own best-known position and global best position.

Artificial immune system (AIS) has been studied for performing machine learning, pattern recognition and solving optimisation problems. Clonal Selection Algorithm (CSA) is one of AIS for handling optimisation problems, and the principle of utilising Clonal Selection Algorithm lie in the features of immune memory, affinity maturation. In particular, the antigen is considered as a fitness function instead of the explicit antigen population, and a proportion of antibody, rather than the best affinity antibody, are chosen to proliferation. Further more, speed and accuracy of the immune response grow higher and higher after each infection even confronting cross-reactive response. Apart from that, hypermutation and receptor editing contribute to avoiding local optimisation and selecting optimised solution respectively.

## **2.2 Related Work**

### **2.2.1 Single-Objective Web Service Composition Approaches**

In this section, approaches to QoS-aware web service composition will be discussed in two distinct groups: EC-based approaches, which mainly rely on the EC techniques to reach the optimal solutions, and Non-EC based methods, which do not utilise any bio-inspired methods. However, most of these approaches employ a single-objective fitness function for optimising a united QoS score as a simple Additive Weighting (SAW) technique [38].

#### **EC-based Composition Approaches**

EC-based web service composition mainly relies on evolutionary computation algorithms for searching optimal solutions. These algorithms are inspired by the behaviour of human, animals or even T-cells. To use different EC algorithms, proper representations need to be designed. These representations directly or indirectly represent the service composition solutions. Herein we mainly discuss some promising research works on QoS-aware web service composition using Genetic Algorithm (GA), Genetic Programming (GP), Particle Swarm Optimisation (PSO), and Clonal Selection Algorithm (CSA).

**Genetic Algorithm.** GA is a very reliable and powerful technique for solving combinatorial optimisation problems [91]. It has been applied to solve optimisation problems for QoS-aware web service composition [98]. [15] developed a GA-based approach for semi-automated QoS-aware service composition, where an abstract workflow is given. In their work, GA methods are compared to linear integer programming. The experimental finding reveals GA method is preferred when the size of service candidates are increasing. [92] proposed a hybrid approach utilising GA and local search. In particular, a local optimiser is developed and only recalled in the initial population for improving QoS value. This local search contributes to a better overall performance compared with GA-methods without local search. In [50], a semi-automated service composition approach is developed in their paper for optimising the quality of semantic matchmaking and some quality criteria of QoS. In particular, the quality of matchmaking problem is transferred to measure the quality of semantic links, which is proposed by two quality aspects: matchmaking type and degree of similarity.

**Genetic Programming.** Tree-based representations could be more ideal for practical use, since they can present all composition constructs as inner nodes of trees. GP technique is utilised for handling tree-based representations. [84] relies on GP utilising a context-free grammar for population initialisation, and uses a fitness function to penalise invalid individuals throughout evolutionary process. This method is considered to be less efficient as it represents a low rate of fitness convergence. To overcome the disadvantages of [84], [114] proposes a GP-based approach employing the standard GP to bypass the low rate of convergence and premature convergence. The idea of this paper is to increase the mutation rate while encountering low diversity in the population and adopt a higher crossover probability while trapped in local optimisation. During the evolutionary process, the elitism strategy is adopted, in which the best individual produced is reproduced to next generation directly without crossover and mutation. [60] proposes a hybrid approach combining GP and a greedy algorithm. In particular, a set of DAGs that represent valid solutions are initialised by a random greedy search and transferred into trees using the graph unfolding technique. In each individual, terminal nodes are considered as task inputs, root node as outputs, and all the inner nodes as atomic web services. During the reproduction process, a randomly selected node on one individual is replaced with a new subtree generated by a greedy search to perform mutation while same atomic inner nodes in two random chosen individuals are swapped to perform crossover. However, [22] proposes a different transformation algorithm to present composition constructs as the functional nodes of trees. On the whole, all these GP-based approaches [60, 84, 22, 114] consistently ignore the semantic matchmaking quality, and their representations do not preserve semantic matchmaking information and composition constructs simultaneously.

**Graph-Based Genetic Programming.** A graph-evolutionary approach is introduced in [20] with graph-based genetic operators, which is utilised to evolve graph-based representation. Although graph-based representations are capable of presenting all the matchmaking relationships as edges, they hardly present some composition constructs (e.g. loop and choice). Another paper [23] investigated Directed Acyclic Graph with branches using GraphEvol approach [20] to find near-optimal QoS solution in web service composition comparing with GP approach in [21]. The experiment results reveal a significant improvement in execution time while slightly tradeoff in the fitness value. However, the service composition problem for handling branches is not generally formulated, i.e, only works for one choice construct. If more one nested choice constructs, their approach does not work any more.

**Particle Swarm Optimisation.** PSO is considered to a simple and effective approach for solving combinatorial optimisation problems with few parameters settings [58]. The

paper [58] proposed an environmental-aware PSO approach for QoS-aware web service composition. In particular, an improved discrete PSO algorithm is developed for adapt the changes of composition environment (i.e., services) when a same service composition request is called more than one time. The paper [56] proposed a hybrid Genetic Particle Swarm Optimisation Algorithm (GPSA). In their work, GA is employed with only crossover operator to produce new individuals with  $n_1$  iterations while PSO is only utilised for local searching (i.e.,  $C_2$  parameter is set to 0 in the standard velocity updating functional) with  $n_2$  iterations. This approach achieves a good balance of global and local optimisation through a mechanism based on two thresholds, which determine the values of  $n_1$  and  $n_2$ . However, [56, 58] handles semi-automated service composition problems. On the other hand, [25] proposes a PSO-based fully automated approach to generate a composition graph from a queue. The idea is to translate the particle location into a service queue as an indirect representation of composition graph, so finding the best fitness of the composite graph is to discover the optimised location of the particle in the search space. [25] proposes a PSO-based fully automated approach to generate a composition graph from an indirect representation, i.e., a service queue. This service queue is mapped to particles' locations. so finding the best fitness of the composite graph is to discover the optimised location of the particle in the search space. In particular, the dimension of the particle is set up as the same number as relevant web services, and the index of services is mapped to the location vectors in a particle and put services in a queue in ascending order, from which a graph is decoded using a forward GraphPlan Algorithm.

**Clonal Selection Algorithm.** The paper [106] introduces a novel web service composition approach using an immune algorithm for global optimisation considering optimum time under a constraint on cost. As a given abstract graph could be broken into several single pipelines, the optimisation problem is transferred into getting the optimum executing plan for the single pipelines. In pipelines, each involved task could be slotted with several alternative web services with QoS values labelled to their edges so that a weighted multi-stage graph is established for further longest path selection. In the immune algorithm, the service composition problem is encoded using a binary string as an antibody for evaluating the affinity value regarding the antigen ( fitness function ), and the antibody with low concentration will be selected in a high probability of crossover and mutation for new antibody generation. However, the efficiency of creating the weighted multistage graph would be considered to be less efficient. The paper [78] introduced an immune-inspired web service composition approach combining an enhancing planning graph (EPG) and a clonal selection algorithm to solve optimisation problem considering both semantic link quality and QoS. The EPG model is characterised with action and Layer involved in multiple stages, where each action represents clustered web service, and each layer represents input or output parameters grouped in concepts. During the clonal selection process, the antigen is represented as a fitness function, and the antibody is represented as a binary alphabet to encode EPG. The remaining steps are standard computation procedure for CLONALG consisting of generating clones from selected antibody, affinity maturation process and replacing low-affinity antibody and re-select antibody to continue all the whole procedure. At last, the approach is proved to reach an optimal solution or a near-optimal solution in the experiments under trip and social event attendance planning domains.

## AI Based Approaches

AI Planning techniques have been widely employed for service composition [61, 76]. The main idea of these techniques considers services as actions that are defined with functional properties ( i.e., inputs, outputs, preconditions and postconditions) to generate validate ser-

vice compositions using classic planning algorithms.

Various AI planning approaches [30, 37, 80, 96, 99] have been presented to solve semantic web service composition problems using the Graphplan [9] algorithm. [99] employs the Graphplan to secure the correctness of overall functionality, which enables atomic web services to be concretely selected and accurately matched for achieving desired functionality. In particular, conditional branch structure is also correctly handled. The pitfalls of this approach are procuring only linear sequences of actions, and it is hard to deal with QoS optimisation. In paper [30], service-dependent QoS is modelled and considered for QoS-aware web service composition. This dependent QoS model is formed in three cases: a default QoS attribute, a partially dependent QoS attribute, and a completely dependent QoS attribute, and they are used for the dependency checking base on a backwards Graph building with a breadth-first strategy. However, computation of service dependencies is very intensive for initialization and updating. Some approaches [51, 90] rely some frameworks supported by particular agent programming languages (e.g., Golog [90] and SHOP2 [89]) to composite web services. In [90], a service composition framework supported by Golog. Golog is used to present the generic procedure, and situation calculus and first order language (FOL) are used to describe the properties of services and users' preferences. Therefore, Golog can effectively perform a constant search to reach a terminating situation as a service composition solution.

As summarised here, given the desired solutions generated to meet users' complex requirements, AI planning techniques are considered to be less efficient, and not capable of dealing with optimisation solutions for service composition (e.g., generate either optimal QoS or number of services ) independently. In addition, they may suffer scalability issues when large repositories are given.

## Other Approaches

The non-EC based approaches do not rely on bio-inspired approaches. They target the optimised service composition solutions by some other methods. For example, integer programming, exhaustive search, local search and so on.

**Integer Linear Programming (ILP).** ILP methods are utilised for achieving web service composition. Generally, an ILP model is created with three inputs provided: a set of decision variables, an objective function and a set of constraints. On the other hand, the outputs are maximised/minimise objective function and values of decision variables. Therefore, ILP is flexible in taking QoS into account, handling constraints for QoS and optimising the objective function for QoS-aware service composition problem. [33] define a zero-one IP model for web service composition based on an abstract service workflow, where services may be different in QoS, but classified into the same classes. [110] formulated web service composition problem based on the model introduced in [33]. Apart from that, compared with the previous work, they simultaneously take both QoS and constraints on QoS into account. However, on the one hand, due to the increase in the number of decision variables, ILP may lead to exponentially increase the complexity and cost in computation [55]. The resulted huge delay is not allowed in the real world scenarios. In addition, if non-linear function is utilised, the scalability is a big problem.

**Dynamic Programming Approach.** Dynamic programming is an effective method for solving problems, where many repetitions of their break-down subproblems and optimal substructures are presented. In [37], an efficient pruning approach is developed including a forward filtering algorithm for searching task related service candidates, a modified dynamic programming approach for dealing a subproblem of service composition (i.e., a problem on satisfactory of each concept pool of each graph layer ), and a backward-search

method for searching optimal composition results. This paper [104] forges a problem to solve large-scale service composition efficiently with QoS guarantee, where a dynamic programming algorithm named QDA is developed to for ensuring the optimisation of the composition problem. The problem is optimised by optimising every subproblem based consideration of web service composition with fewest services involved in. In particularly, best-known QoS are recorded and updated for all added web services, and service parameters by the maximum of the path using the traceback depth- first search to derive an execution plan. However, the global best QoS could be never reached since a trade-off in the efficiency of QoS guarantee in solutions.

**ER Model-Based Approach (ILP).** Most of the small and medium business rely on ER database to process information and data. [105] employs ER model to construct domain ontology and semantic web services. It potentially benefits large groups of organisations. With regard to the ontology construction, it realises the transformation from ER to OWL-DL, which has maximum expressiveness while retaining computational completeness and decidability. Also, it constructs semantic web service described by OWL-S from ER. Therefore, the semantic web service composition problem is transferred to reason composite service based on a link path between entities in the ER model corresponding to the classes. However, other constructs such as loop and switch constructs can not be effectively expressed in their approach, which demands many further research.

## 2.2.2 Multi-objective, and Many-objective Composition Approaches

Maximising or minimising a single objective function is a most commonly used way to handle optimising problems in automated web service composition. That is a Simple Additive Weighting (SAW) [38] technique, which presents a utility function for all the individual quality criteria as a whole. This technique optimises and ranks each web service composition using a single value for each solution. However, the limitation of this technique lies in not handling the conflicting quality criteria. Those conflicting quality criteria are always presented trade-offs. To overcome this limitation, a set of objectives corresponding to different independent quality criteria are optimised independently. Consequently, a set of promising solutions that present many quality criteria trade-offs are returned.

### Multi-objective approaches

Many multi-objective techniques [57, 117, 111, 108, 103, 17] have been investigated to extensively study QoS-aware web service composition problems. A set of optimised solutions is ranked based on a set of independent objectives, i.e., different QoS attributes. In particular, solutions are compared according to their relationship for domination. Especially, figuring out solutions are clearly dominating the others. For example, given two service composition solutions that are compared based on execution cost  $c$  and execution time  $t$ , solution one,  $wsc_1(c = 10, t = 1)$  and solution two,  $wsc_2(c = 13, t = 1)$ . In our context,  $wsc_1$  dominate  $wsc_2$  as  $wsc_1$  has the same execution time and a lower execution cost. If given  $wsc_3(c = 10, t = 2)$ ,  $wsc_2$  is a *non-dominant* solution in the relation to  $wsc_3$  because of its longer execution time and cheaper execution cost. Therefore, If those non-dominant solutions are globally produced among both the dominant and non-dominant solutions, i.e., they do not dominate themselves. These solutions are called a *Pareto front*, which provide a set of non-dominant solutions for users to choose.

**Multi-objective techniques with GA** Many approaches to multi-objective Web service employs GA [57], but other EC algorithms are also considered. For GA, [57] employs a service composition model, called MCOOP (i.e., multi-constraint and multi-objective optimal

path) as web service composition solution for only a sequence service composition considered in the paper. In this model, different paths are selected from a service composition graph that includes  $N$  service group. In each group, services present same functionality with different QoS. Apart from that, GPDSS is proposed to generate the outputs of Pareto optimal composition paths. In particular, two points crossover and mutation are applied to speed up the astringency of this algorithm. The work [94] investigates a semi-automated approach to SLA-aware web service composition problem. Each linear representation proposed here presents three service composition solutions designed for three group users' categories. The individuals are randomly initialised, evaluated and optimised with objectives from all the possible combinations of throughput, latency, cost and user category. In this work, two multi-objective genetic algorithms: E-MOGA and Extreme-E are developed. E-MOGA is proposed to search a set of solutions that equally distributed in the searching space by the means of fitness function, where the production of domination value, Manhattan distance to the worst point and sparsity (i.e, Manhattan distance to the closest neighbour individual) is assigned to the feasible individual as fitness value, and SLA violation /domination value is assigned to the infeasible solutions. On the other hand, Extrem-E provide extreme solutions by employing fitness functional, where weights use a term  $1/\exp(p-1)$ , where  $p$  is the number of objectives and is assigned to the  $p^{th}$  objective.

**Multi-objective techniques with PSO** The work [108] combines genetic operators and particle swarm optimisation algorithm together to tackle the multi-objective SLA-aware web service composition problems. The method proposed in the paper is considered to be more effective in considering different scare of cases. It is called as HMDPSO, i.e., hybrid multi-objective discrete particle swarm optimisation. In particular, the updates of particle's velocity and position are achieved by the crossover operator, where both velocity and position of new individual are updated in accordance with positions of  $pbest$ ,  $gbest$ , and current velocity. On the other hand, mutation strategy is introduced to increase the diversity of particle and is performed on the  $gbest$  particle if the proposed swarm diversity indicator is below some value. For the evaluation, the fitness values of individuals are assigned in the same way as the E-MOGA method in [94].

**Multi-objective techniques with ACO** Generally, ACO simulates foraging behaviours of a group of ants for optimising the traversed foraging path, where the strength of pheromones is taken account for. The work [117] turns the service composition problem into path selection problem for the given abstract workflow with different service candidate set. It employs a different strategy of "divide and conquer" for decomposing a given workflow. That is, two or more abstract execution paths are decomposed from the workflow and have no overlapped abstract services. This decomposing strategy results in a much smaller length of the execution paths compared to those in the works [113]. Also, a new ACO algorithm is proposed to handle the multi-objective QoS-aware service composition problem. In particular, the phenomenon is presented as a  $k$ -tuple for  $k$  objectives, rather than a single value. Apart from that, a different phenomenon updating rule is proposed by considering an employment of a proposed utility function as a global criterion. The paper [97] introduces non-functional attributes of web services to include trust degree according to the execution log. Also, a novel adaptive ant colony optimisation algorithm is proposed to overcome the slow convergence presented from the traditional ant colony optimisation algorithm. In particular, the pheromone strength coefficient is adjusted dynamically to control both the updating and evaporation of pheromone. The experiment results are analysed in an alternative way. That is, the total Pareto solutions are combined from different compared ACO algorithms, then the accurate rate of each algorithm is calculated based on the compared Pareto solutions identified in the total Pareto solutions. The results also show more Pareto solutions found compared to the traditional ACO methods. However, the experiment is only conducted for



the evaluation of a small case study, where only a simple abstract workflow is studied.

### **Many-objective approaches**

Herein, more than three objectives in Multi-objective problems (MOPs) are often considered as many-objective problems. Ishibuchi et al. [39] present an analysis of the multi-objective algorithm for handling optimisation problems with more than 3 objectives. However, they address that the searching ability is deteriorating while the number of objectives is increasing, since the non-dominated solution is very large, which make it harder to move solutions towards the Pareto Front.

The work [26] employs NSGA-II to deal with five different quality criteria (i.e., runtime, price, reputation, availability and reliability) for semi-automated web service composition problem. To examine the techniques to decrease the deterioration, two preference relations proposed by [8] are applied to NSGA-II: Maximum Ranking (MR) and Average Ranking methods (AR). In particular, MR is the best of all the ranking scores from all the objectives, and AR is a sum of all the ranking scores from all the objectives. Therefore, three algorithms (NSGA-II, NSGA-II with MR and NSGA-II with AR) are evaluated for studying the five different performance metrics ( i.e., hypervolume [118], Generational Distance [93], Spread and Coverage [119], and pseudo Pareto front (i.e, a combination of all non-dominated solutions)), where An empirical evaluation is performed on. The experiment shows NSGA-II with AR outperforms others in both GD and Spread (i.e., more balanced solutions). However, a certain region of Pareto Front is generated by NSGA-II, rather than a wider distribution for the solutions. NSGA-II with MR performs intermediately compared to the other two algorithms. On the whole, this work, for the first time, takes two preference relations into account for solving many-objective service composition problem, and contribute to finding better solutions with many performance metrics.

### **User Preferences-based Multi-and Many-objective Approaches**

Most of the multi-objective service composition assumes that the user preferences are not known in advance. However, often, a vague preference is provided by users at least, and preferred solutions are roughly specified by them. These vague preferences should be taken into decision making and could guide us in searching the most interesting areas on the Pareto front in a more effective and efficient way. In [13], they proposed two effective and efficient methods for finding the most relevant parts of Pareto solutions according to users' preferences. In particular, vague trade-offs between different objectives are taken into account when users have some rough thoughts about trade-offs. The first method is based on a guided multi-objective evolutionary algorithm in [14], and the second one is approached by a new biased crowding operator. In the first method, the dominance is specified for the maximally acceptable trade-offs of each pair of objectives, and the space of objectives is appropriately transferred into two auxiliary objectives. The second method works on finding a biased distribution on the Pareto solutions. The idea of this method is to introduce a biased crowding distance, which controls the expansion of solutions according to their location projected on a defined hyper plane, i.e., users' specified direction vector. The experiment conducted shows that two methods achieve an effective and efficient way of finding relevant Pareto solutions for users.

### **2.2.3 Dynamic Web Service Composition Approaches**

All the previously discussed approaches can be classified into one group that assumes the composition environment is static. The rest approaches can be classified into another group

that does not make that closed world assumption. Instead, a real world scenario is taken into account. For example, nonfunctional properties of web services may fluctuate over time or services are failed/ newly registered. A few researcher works on the second group to cope with the dynamic composition environment. To address this problem [68], a suitable mechanism for effectively and efficiently handle this problem raise a significant challenge for the practical value.

### **Dynamic Web Service Composition Approaches For Changes in QoS**

Service selection is one of the crucial steps when we compose services. In the context of static web service composition, we always selection services based on the QoS advertised by service providers. However, QoS is fluctuating over the time. Herein the execution instances of a service for the run time indicate the dynamic and real QoS of a service. This dynamic QoS is formally modelled as uncertain QoS model. Based on this model, some studied [101] has been addressed recently. In [101], the QoS model describes the probabilities of different dominating relationships in the instances of all services within the same class. To efficient provide a relatively small set of services for selection that is based on the uncertain QoS model, the data structure of R-tree is introduced for spatial query on multidimensional data (i.e., many dimension of QoS attributes) since it can significantly reduce the searching space. This space index technique is one of the key contributions in this paper for efficiently store and retrieve services for service selection.

Reinforcement learning (RL) is one technique of machine learning for solving sequential decision-making problems to maximise some long-term rewards. RL is utilised to deal with how actions are taken in an uncertain environment. In our context, this uncertain environment is related to QoS. In [67], two approaches are proposed based on multi-objective service composition in uncertain and dynamic environment (MORL) combining the advantages in multi-objective optimisation and reinforcement techniques. In particular, we service composition is modelled based on Partially Observable Markov Decision Process (POMDP), and the solutions to services composition are considered to be a set of decision policies, each of which is considered as a procedure of service selection (i.e., a single workflow). Two approaches are introduced in this paper to learn the optimal selection policy.

### **Dynamic Web Service Composition Approaches For Service Failure**

Traditionally, re-selection of failed service is one of widely used approach to re-ensure the desired execution web service composition. The idea of this traditional approach restores many alternative service candidates for each component service involved in the composition solution. If component service confronts failure, the alternatives are used for the replacement. A framework, WS-Replication is introduced in [86], which mainly address service failure using the idea of the traditional method. [109] further introduce a more complicated model that address attributes of not only QoS but also transactionality for more reliable replacement. However, those approaches [86, 109] have a huge cost in computation due to the re-selection mechanisms [68]. To overcome the disadvantage of traditional resection approach, [68] proposes a QoS-aware performance prediction for self-healing web service composition system. This system consists of three main phases: monitoring, diagnosis and repair. The monitoring phase is to detect degradation, diagnosis is to identify the source of degradation, and repair is to reselect desired services. To minimising the number of re-selection in the phase of repair, decision tree learning is used to the prediction of the performance based on the QoS. This technique outperforms other classification techniques (i.e., back propagation neural network, support vector machine probabilistic neural network, and

group method of data handling and regression tree) by accuracy in [66]. Those works mainly focus on services failure, and they do not recognise the importance of QoS changes of service in the repository. [95] proposes a method to cluster services that are back up for service failure. This method determines a set of backup services based on their functional properties for service repairing. By employing functional properties, services and their combinable services are identified. The fragmented clusters are formed based on the subsume relationship among their associated combinable services. Also, to merge these fragmented clusters, unified clusters are created by adding virtual services that subsume the fragmented clusters. Therefore, a set of backup services is provided in both the clusters that the failure services involved in and their sub-clusters, from which we could select suitable service.

#### 2.2.4 Semantic Web Service Composition Approaches

Sophisticated real-world applications demand complex requirements in developing service composition. Apart from consideration of both the functional and nonfunctional properties of web services, more complex chaining strategies of semantic services are necessarily arranged to satisfy dependency constraints in the real world. To cope with these complicated requirements, preconditions and postconditions are semantically described using logic formula to enable the complex service composition. any standards have been established for supporting the chaining ability of semantic web services, such as OWL-S. OWL-S accommodates varieties of structural constructs for service composition, namely: Sequence, Unordered, Choice, If-Then-Else, Iterate, Repeat-While, Repeat-Until, Split and "Split + Join" [99]. For example, "Split+Join" calls for the process consisting of the parallel execution of a collection of process components with barrier synchronisation. That is, "Split+Join" doesn't completes until all of its components processes have been completed. Additionally, "Split" and "Split+Join" can be applied for partial synchronisation [99].

Most of the existing service composition approaches do not fully consider services registered in the repository are associated with preconditions and postconditions. Therefore, it is hard to generate service composition solutions with branch structure in a fully automated way. On the one hand, a large number of approaches [] only consider inputs and outputs while composing services, the importance of preconditions and postconditions are ignored since it specifies preconditions that need to be satisfied and postconditions that result from service execution, which causes the effect on the next services. On the other hand, some approaches consider preconditions and postconditions using classic AI planning methods. The limitation of these approaches lies in the linear sequences of actions.

A generalised semantic web service composition is introduced in [6], preconditions and postconditions are effectively presented in a conditional directed acyclic graph where conditional nodes created with two outgoing edges representing the satisfied and the unsatisfied case at the run time. They filter the solutions based on the trust rate using Centrality Measure of Social Networks to find web service trusted by the customers. Therefore, a semantic web service composition engine is implemented for automated generated conditional composition and OWL-S description used for execution phrase, which minimises the query execution time by pre-processing and incremental updates to new service added or modified. The main limitation of this work is that the loops structure are not considered in their web service representation, and they leave optimisation problems aside.

This paper [100] addresses a critical problem by considering services with preconditions and postconditions. In a real world scenario, this problem can significantly affect service composition solutions. In their paper, an extensive Graphplan technique is proposed to support the representation of the problem with execution effects. In particular, a two-level directed graph, called planning graph (PG) is utilised and comprises of two kinds of nodes

(proposition and action ones) and three kinds of edges (precondition-edges, add-edges, and delete-edges). The proposition and action level is alternated between each other in the PG. By utilising this presentation, the branch structure is supported in the service composition solution when some uncertain effects are produced by some services.

### 2.2.5 Summary and Limitations

An overview of recent related research on web service composition is presented in this chapter. The first related research discussed is **single-objective web service composition approaches**, which mainly works on generating composition solutions with optimal QoS or number of services based on the objective functions. EC-based approaches have been widely used for solving the above problems. On the other hand, non-EC based approaches, such as AI planning approaches, Integer Linear Programming, Dynamic Programming Approaches are employed in web service composition, but they may suffer scalability due to the increase in complexity of the problem or leave aside optimisation problem. The key limitation of single-objective web service composition approaches is that the importance of semantic matchmaking quality is ignored, which should be simultaneously taken into account with QoS. To cover this necessity, new representations and quality model must be proposed with effective and efficient service composition methods.

The second related research area discussed is **multi-objective, and many-objective composition approaches**, in which different independent quality criteria of QoS are separately optimised and a set of solutions is produced. These solutions present different tradeoffs among different quality criteria of QoS. Multi-objective composition approaches optimise two or three independently quality criteria, while many-objective composition approaches optimise more than three independently quality criteria. One limitation of multi-objective or many objectives approaches is one conflicting quality criteria (i.e., quality of semantic matchmaking) is not considered. Apart from that, constraints on SLA and quality of semantic matchmaking also raise the interest of researchers. Therefore, it is very interesting and challenging to simultaneously to take these interesting problems into account.

**Dynamic web service composition approaches** are discussed in the third related research area, where a closed world assumption is dropped. In particular, the composition environment is changing over time, which gives birth to two problems discussed previously: one is related to the changes in QoS in a repository, and another is to the changes in the availability of services in a repository. Existing dynamic web service composition mainly work on service selection using non-EC techniques. These techniques aim to adjust the changes in the solutions, such as re-selection of changed services. In these existing works, the cost of initial planning is consistently ignored and separated from the adaption of a dynamic environment. Apart from that, some interesting problem are not taken into account, such as the changes of ontology that is utilised to describe the functional properties of services, and new service may register in the services repository.

The last related research area focuses on **semantic Web service composition approaches**, which explore a more complex and realistic service composition. Most of existing semantic webs service composition is merely based on the inputs and outputs of services, Beside these functional properties, precondition and postconditions are occasionally considered when they compose services. However, The support for preconditions and postconditions is not fully investigated in existing works since they potentially bring various of composition constructs into consideration. Achieving semantic service composition consider all these composition constructs is a big challenge and motivates further research in this area.

## Chapter 3

# Preliminary Work

This chapter exhibits the two initial works for comprehensive quality-aware semantic web service composition approach, which combines a hybridization of various techniques for optimising the quality of semantic matchmaking and quality of service. In particular, One direct representation and another indirect representation are proposed in two preliminary works using a PSO-based approach and a GP-based approach respectively. Apart from that, composition solutions are represented in a DAG or a tree-like representation, respectively, in the two approaches. These two works are discussed in the following sections.

### 3.1 Problem Formalisation

We consider a *semantic web service* (*service*, for short) as a tuple  $S = (I_S, O_S, QoS_S)$  where  $I_S$  is a set of service inputs that are consumed by  $S$ ,  $O_S$  is a set of service outputs that are produced by  $S$ , and  $QoS_S = \{t_S, c_S, r_S, a_S\}$  is a set of non-functional attributes of  $S$ . The inputs in  $I_S$  and outputs in  $O_S$  are parameters modelled through concepts in a domain-specific ontology  $\mathcal{O}$ . The attributes  $t_S, c_S, r_S, a_S$  refer to the response time, cost, reliability, and availability of service  $S$ , respectively. These four QoS attributes are most commonly used [115].

A *service repository*  $\mathcal{SR}$  is a finite collection of services supported by a common ontology  $\mathcal{O}$ . A *service request* (also called *composition task*) over  $\mathcal{SR}$  is a tuple  $T = (I_T, O_T)$  where  $I_T$  is a set of task inputs, and  $O_T$  is a set of task outputs. The inputs in  $I_T$  and outputs in  $O_T$  are parameters described by concepts in the ontology  $\mathcal{O}$ .

*Matchmaking types* are often used to describe the level of a match between outputs and inputs [72]: For concepts  $a, b$  in  $\mathcal{O}$  the *matchmaking* returns *exact* if  $a$  and  $b$  are equivalent ( $a \equiv b$ ), *plugin* if  $a$  is a sub-concept of  $b$  ( $a \sqsubseteq b$ ), *subsume* if  $a$  is a super-concept of  $b$  ( $a \sqsupseteq b$ ), and *fail* if none of previous matchmaking types is returned. In this paper we are only interested in robust compositions where only *exact* and *plugin* matches are considered, see [50]. As argued in [50] *plugin* matches are less preferable than *exact* matches due to the overheads associated with data processing. We suggest to consider the semantic similarity of concepts when comparing different *plugin* matches.

*Robust causal link* [52] is a link between two matched services  $S$  and  $S'$ , noted as  $S \rightarrow S'$ , if an output  $a$  ( $a \in O_S$ ) of  $S$  serves as the input  $b$  ( $b \in O_{S'}$ ) of  $S'$  satisfying either  $a \equiv b$  or  $a \sqsubseteq b$ . For concepts  $a, b$  in  $\mathcal{O}$  the *semantic similarity*  $sim(a, b)$  is calculated based on the edge counting method in a taxonomy like WorldNet or Ontology [87]. This method has the advantages of simple calculation and good performance [87]. Therefore, the *matchmaking*

*type* and *semantic similarity* of a robust causal link can be defined as follow:

$$type_{link} = \begin{cases} 1 & \text{if } a \equiv b \text{ (exact match)} \\ p & \text{if } a \sqsubseteq b \text{ (plugin match)} \end{cases}, \quad sim_{link} = sim(a, b) = \frac{2N_c}{N_a + N_b} \quad (3.1)$$

with a suitable parameter  $p, 0 < p < 1$ , and with  $N_a, N_b$  and  $N_c$ , which measure the distances from concept  $a$ , concept  $b$ , and the closest common ancestor  $c$  of  $a$  and  $b$  to the top concept of the ontology  $\mathcal{O}$ , respectively. However, if more than one pair of matched output and input exist from service  $S$  to service  $S'$ ,  $type_e$  and  $sim_e$  will take on their average values.

The *semantic matchmaking quality* of the service composition can be obtained by aggregating over all robust causal links as follow:

$$MT = \prod_{j=1}^m type_{link_j}, \quad SIM = \frac{1}{m} \sum_{j=1}^m sim_{link_j} \quad (3.2)$$

We consider two special atomic services  $Start = (\emptyset, I_T, \emptyset)$  and  $End = (O_T, \emptyset, \emptyset)$  to account for the input and output requirements given by the composition task  $T$ , and add them to  $\mathcal{SR}$ .

We use formal expressions as in [59] to represent service compositions. We use the constructors  $\bullet$ ,  $\parallel$ ,  $+$  and  $*$  to denote sequential composition, parallel composition, choice, and iteration, respectively. The set of *composite service expressions* is the smallest collection  $\mathcal{SC}$  that contains all atomic services and that is closed under sequential composition, parallel composition, choice, and iteration. That is, whenever  $C_0, C_1, \dots, C_d$  are in  $\mathcal{SC}$  then  $\bullet(C_1, \dots, C_d)$ ,  $\parallel(C_1, \dots, C_d)$ ,  $+(C_1, \dots, C_d)$ , and  $*C_0$  are in  $\mathcal{SC}$ , too. Let  $C$  be a composite service expression. If  $C$  denotes an atomic service  $S$  then its QoS is given by  $QoS_S$ . Otherwise the QoS for  $C$  can be obtained inductively as summarized in Table 3.1. Herein,  $p_1, \dots, p_d$  with  $\sum_{k=1}^d p_k = 1$  denote the probabilities of the different options of the choice  $+$ , while  $\ell$  denotes the average number of iterations.

Table 3.1: QoS calculation for a composite service expression  $C$

$C =$	$r_C =$	$a_C =$	$c_C =$	$t_C =$
$\bullet(C_1, \dots, C_d)$	$\prod_{k=1}^d r_{C_k}$	$\prod_{k=1}^d a_{C_k}$	$\sum_{k=1}^d c_{C_k}$	$\sum_{k=1}^d t_{C_k}$
$\parallel(C_1, \dots, C_d)$	$\prod_{k=1}^d r_{C_k}$	$\prod_{k=1}^d a_{C_k}$	$\sum_{k=1}^d c_{C_k}$	$MAX\{t_{C_k}   k \in \{1, \dots, d\}\}$
$+(C_1, \dots, C_d)$	$\prod_{k=1}^d p_k \cdot r_{C_k}$	$\prod_{k=1}^d p_k \cdot a_{C_k}$	$\sum_{k=1}^d p_k \cdot c_{C_k}$	$\sum_{k=1}^d p_k \cdot t_{C_k}$
$*C_0$	$r_{C_0}^\ell$	$a_{C_0}^\ell$	$\ell \cdot c_{C_0}$	$\ell \cdot t_{C_0}$

When multiple quality criteria are involved in decision making, the fitness of a solution can be defined as a weighted sum of all individual criteria using Eq. (3.3), assuming the preference of each quality criterion is provided by users.

$$Fitness = w_1 \hat{MT} + w_2 \hat{SIM} + w_3 \hat{A} + w_4 \hat{R} + w_5(1 - \hat{T}) + w_6(1 - \hat{C}) \quad (3.3)$$

with  $\sum_{k=1}^6 w_k = 1$ . We call this objective function the *comprehensive quality model* for service composition. The weights can be adjusted according to users' preferences.  $\hat{MT}$ ,  $\hat{SIM}$ ,  $\hat{A}$ ,  $\hat{R}$ ,  $\hat{T}$ , and  $\hat{C}$  are normalised values calculated within the range from 0 to 1 using Eq. (3.4). To simplify the presentation we also use the notation  $(Q_1, Q_2, Q_3, Q_4, Q_5, Q_6) = (MT, SIM, A, R, T, C)$ .

$Q_1$  and  $Q_2$  have minimum value 0 and maximum value 1. The minimum and maximum value of  $Q_3$ ,  $Q_4$ ,  $Q_5$ , and  $Q_6$  are calculated across all task-related candidates in the service repository  $\mathcal{SR}$  using the greedy search in [60, 22].

$$\hat{Q}_k = \begin{cases} \frac{Q_k - Q_{k,min}}{Q_{k,max} - Q_{k,min}} & \text{if } k = 1, \dots, 4 \text{ and } Q_{k,max} - Q_{k,min} \neq 0, \\ \frac{Q_{k,max} - Q_k}{Q_{k,max} - Q_{k,min}} & \text{if } k = 5, 6 \text{ and } Q_{k,max} - Q_{k,min} \neq 0, \\ 1 & \text{otherwise.} \end{cases} \quad (3.4)$$

To find best possible solution for a given composition task  $T$ , our goal is to maximise the objective function in Eq. (3.3).

## 3.2 PSO-based Approach

### 3.2.1 An Overview of our PSO-based Approach

As PSO has shown promise in solving combinatorial optimisation problems, we propose a PSO-based approach to comprehensive quality-aware automated semantic web service composition. Fig. 3.1 shows an overview of our approach consisting of four steps:



Figure 3.1: An overview of our PSO-based approach to comprehensive quality-aware automated semantic web service composition.

Step 1: The composition process is triggered by a composition task, which is clearly defined in Section 3.1.

Step 2: The composition task is used to discover all task-related service candidates using a greedy search algorithm adopted from [60], which contributes to a shrunken service repository. This greedy search algorithm keeps adding outputs of the invoked services as available outputs (initialised with  $I_T$ ), and these available outputs are used to discover task-related services from a service repository and updated with the outputs of these discovered services. This operation is repeated until no service is satisfied by the available outputs. During the greedy search, an ontology-based cache (*cache*) is initialised, which stores the concept similarities of matched inputs and outputs of task-related candidates. This *cache* is also used to discover services by checking whether *null* is returned by given two output-related and input-related concepts.

Step 3 and Step 4: These two steps follow the standard PSO steps [88] except for some differences in particles mapping and decoding processes. In particular, these two differences

are related to sorting a created service queue using service-to-index mapping for a particle's position vectors and evaluating the fitness of a particle after decoding this service queue into a *WG* respectively. Those differences are further addressed in Algorithms 1 and 2 in Section 3.2.2.

### 3.2.2 The Algorithms for our PSO-based Approach

The overall algorithm investigated here is made up of a PSO-based web service composition technique (Algorithm 1) and a *WG* creating technique from a service queue (Algorithm 2). In Algorithm 1, the steps 4, 5, 6 and 7 are different from those of standard PSO: In step 4, the size of task-related service candidates generated by a greedy search determines the size of each particle's position. Each service candidate in a created service candidates queue is mapped to an index of a particles position vectors, where each vector has a weight value between 0.0 and 1.0. In step 5, service candidates in the queue are sorted according to their corresponding weight values in descending order. In step 6, this sorted queue is used as one of the inputs of the forward decoding Algorithm 2 to create a *WG*. In step 7, the fitness value of the created *WG* is the fitness value of the particle calculated by the comprehensive model discussed in Section 3.1.

---

ALGORITHM 1. Steps of PSO-based service composition technique [25].

---

```

1: Randomly initialise each particle in the swarm;
2: while max. iterations not met do
3:   foreach particle in the swarm do
4:     Create a service candidates queue and map service candidates to a particle's
       position vectors;
5:     Sort the service queue by position vectors' weights;
6:     Use Algorithm 2 to create a WG from the service queue;
7:     Calculate the WG fitness value;
8:     if fitness value better than pBest then
9:       | Assign current fitness as new pBest;
10:    else
11:      | Keep previous pBest;
12:   Assign best particle's pBest value to gBest, if better than gBest;
13:   Calculate the velocity of each particle;
14:   Update the position of each particle;
```

---

Algorithm 2 is a forward graph building algorithm extended from [9]. This algorithm takes one input, a sorted service queue from step 5 of Algorithm 1. Note that different service queues may lead to different *WGs*. In addition,  $I_T$ ,  $O_T$  and *cache* are also taken as the inputs. Firstly, *Start* and *End* are added to  $V$  of *WG* as an initialisation, and *OutputSet* is also created with  $I_T$ . The following steps are repeated until  $O_T$  can be satisfied by *Outputset* or the service queue is *null*. If all the inputs  $I_S$  of the first popped  $S$  from *queue* can be satisfied by provided outputs from *OutputSet*, this  $S$  is added to  $V$  and its outputs are added to *OutputSet*, and  $S$  is removed from *queue*. Otherwise, the second popped  $S$  from *queue* is considered for these operations. Meanwhile,  $e$  is created with  $type_e$  and  $sim_e$  if  $S$  is added, and calculated using information provided from *cache*. This forward graph building technique could lead to more services and edges connected to the *WG*, these redundancies should be removed before *WG* is returned.



---

ALGORITHM 2. Create a WG from a sorted service queue.

---

**Input** :  $I_T, O_T, queue, cache$   
**Output**: WG

- 1:  $WG = (V, E);$
- 2:  $V \leftarrow \{Start, End\};$
- 3:  $OutputSet \leftarrow \{I_T\};$
- 4: **while**  $O_T$  not satisfied by  $OutputSet$  **do**
- 5:     **foreach**  $S$  in  $queue$  **do**
- 6:         **if**  $I_S$  satisfied by  $OutputSet$  **then**
- 7:             insert  $S$  into  $V$ ;
- 8:             adjoin  $O_S$  to  $OutputSet$ ;
- 9:              $queue.remove\ S$ ;
- 10:              $e \leftarrow \text{calculate } type_e, sim_e \text{ using } cache$ ;
- 11:             insert  $e$  into  $E$ ;
- 12: remove *dangling nodes* and *edges* from WG;
- 13: **return** WG;

---

### 3.3 Experiment Study for PSO-based Approach

In this section, we employ a quantitative evaluation approach with a benchmark dataset used in [60, 22], which is an augmented version of Web Service Challenge 2009 (WSC09) including QoS attributes. Two objectives of this evaluation are to: (1) evaluate the effectiveness of our PSO-based approach, see comparison test in Section 3.3.1. (2) evaluate the effectiveness of our proposed comprehensive quality model to achieve a desirable balance on semantic matchmaking quality and QoS, see comparison test in Section 3.3.2.

The parameters for the PSO are chosen from the settings from [88], In particular, PSO population size is 30 with 100 generations. We run 30 times independently for each dataset. We configure the weights of fitness function to properly balance semantic matchmaking quality and QoS. Therefore,  $w_1$  and  $w_2$  are set equally to 0.25, and  $w_3, w_4, w_5, w_6$  are all set to 0.125. The  $p$  of  $type_e$  is set to 0.75 (*plugin match*) according to [50]. In general, weight settings and parameter  $p$  are decided according to users' preferences.

#### 3.3.1 GP-based vs. PSO-based approach

To evaluate the effectiveness of our proposed PSO-based approach, we compare our PSO-based method with one recent GP-based approach [60] using our proposed comprehensive quality model. We extend this GP-based approach by measuring the semantic matchmaking quality between parent nodes and children nodes. To make a fair comparison, we use the same number of evaluations (3000 times) for these two approach. We set the parameters of that GP-based approach as 30 individuals and 100 generations, which is considered to be proper settings referring to [21].

The first column of Table 3.2 shows five tasks from WSC09. The second and third column of Table 3.2 show the original service repository size and the shrunk service repository size after the greedy search respectively regarding the five tasks. This greedy search helps reducing the original repository size significantly, which contributes to a reduced searching space. The fourth and fifth column of Table 3.2 show the mean fitness values of 30 independent runs accomplished by two methods. We employ independent-samples T tests to test the significant differences in mean fitness value. The results show that the PSO-based

Table 3.2: Mean fitness values for comparing GP-based approach

WSC09	Original $\mathcal{SR}$	Shrunken $\mathcal{SR}$	PSO-based approach	GP-based approach
Task 1	572	80	$0.5592 \pm 0.0128 \uparrow$	$0.5207 \pm 0.0208$
Task 2	4129	140	$0.4701 \pm 0.0011 \uparrow$	$0.4597 \pm 0.0029$
Task 3	8138	153	$0.5504 \pm 0.0128$	$0.5679 \pm 0.0234 \uparrow$
Task 4	8301	330	$0.4690 \pm 0.0017 \uparrow$	$0.4317 \pm 0.0097$
Task 5	15211	237	$0.4694 \pm 0.0008 \uparrow$	$0.2452 \pm 0.0369$

approach outperforms the existing GP-based approach in most cases except Task 3. Note that all  $p$ -values are consistently smaller than 0.01. Using our PSO-based approach, small changes to sorted queues (particles in PSO) could lead to big changes to the composition solutions. This enables the PSO-based approach to escape from local optima more easily than the GP-based approach.

### 3.3.2 Comprehensive Quality Model vs. QoS Model

Recently, a QoS Model,  $Fitness = w_1\hat{A} + w_2\hat{R} + w_3(1 - \hat{T}) + w_4(1 - \hat{C})$ , where  $\sum_{i=1}^4 w_i = 1$ , is widely used for QoS-aware web service composition [60, 25, 20]. To show the effectiveness of our proposed comprehensive quality model, we compare the best solutions found by this QoS model and our comprehensive model using our PSO-based approach. We record and compare the mean values of both  $SM$  ( $SM = 0.5\hat{M}T + 0.5S\hat{M}$ ) and  $QoS$  ( $QoS = 0.25\hat{A} + 0.25\hat{R} + 0.25(1 - \hat{T}) + 0.25(1 - \hat{C})$ ) of best solutions over 30 independent runs. To make the comparison informative, all these recorded values have been normalised from 0 to 1, and compared using independent-samples T tests, see Table 3.3. Note that  $p$ -values are consistently smaller than 0.001 in the results indicating significant differences in performance.

In Table 3.3, the mean values of  $QoS$  using QoS model are significantly higher than those using comprehensive quality model for Tasks 2, 3, 4 and 5. However, the mean value of  $SM$  using the comprehensive quality model are significantly higher than those using the QoS model, while a slight trade-off in  $QoS$  are observed in all tasks. In addition, our comprehensive model achieves a consistently higher comprehensive quality in terms of a combination of  $SM$  and  $QoS$ , which is significantly better in Tasks 1, 2, 3 and 4.

### 3.3.3 Further Discussion

To analyse the effectiveness of achieving a good comprehensive quality at the expense of slightly reduced QoS, we demonstrate two best solutions produced using Task 3 as an example. Fig. 3.2 (1) and (2) show two weighted DAGs,  $WG_1$  and  $WG_2$ , which have been obtained as the best service compositions solutions based on the QoS model and on the comprehensive quality model, respectively. Both  $WG$ s have exactly the same service workflow structure, but some service vertices and edges denoted in red are different. To better understand these differences, we list the overall semantic matchmaking quality  $SM$ , overall  $QoS$  and semantic matchmaking quality  $sm_{e_n}$  associated to these different edges in  $WG_1$  and  $WG_2$ . (Note:  $sm_{e_n} = 0.5type_{e_n} + 0.5sim_{e_n}$ ), where  $\Delta Q$  reveals the gain (positive  $\Delta Q$ ) or a loss (negative  $\Delta Q$ ) of the listed qualities for our comprehensive quality model. Therefore, we achieve a comprehensive quality gain (+0.1433), a result of a gain in semantic matchmaking quality (+0.1467) and a loss in  $QoS$  (-0.0034). To understand the improvement of semantic matchmaking quality from these numbers, we pick up  $e_4$  that is associated with the smallest  $\Delta Q$ . The  $e_4$  of  $WG_1$  and  $WG_2$  has two different source nodes, *Ser1640238160*

Table 3.3: Mean values of *SM*, *QoS* and sum of *SM* and *QoS* for *QoS* model and comprehensive quality model using PSO-based approach

WSC09		QoS Model	Comprehensive Quality Model
Task1	<i>SM</i>	$0.5373 \pm 0.0267$	$0.5580 \pm 0.0094 \uparrow$
	<i>QoS</i>	$0.5574 \pm 0.0156$	$0.5604 \pm 0.0164$
	<i>SM + QoS</i>	$1.0947 \pm 0.0423$	$1.1184 \pm 0.0258 \uparrow$
Task2	<i>SM</i>	$0.4549 \pm 0.0033$	$0.4630 \pm 0.0042 \uparrow$
	<i>QoS</i>	$0.4800 \pm 0.0012 \uparrow$	$0.4772 \pm 0.0025$
	<i>SM + QoS</i>	$0.9349 \pm 0.0045$	$0.9402 \pm 0.0067 \uparrow$
Task3	<i>SM</i>	$0.5538 \pm 0.0082$	$0.6093 \pm 0.0054 \uparrow$
	<i>QoS</i>	$0.4940 \pm 0.0013 \uparrow$	$0.4913 \pm 0.0009$
	<i>SM + QoS</i>	$1.0478 \pm 0.0095$	$1.1006 \pm 0.0063 \uparrow$
Task4	<i>SM</i>	$0.4398 \pm 0.0037$	$0.4604 \pm 0.0000 \uparrow$
	<i>QoS</i>	$0.4845 \pm 0.0010 \uparrow$	$0.4734 \pm 0.0044$
	<i>SM + QoS</i>	$0.9243 \pm 0.0047$	$0.9338 \pm 0.0044 \uparrow$
Task5	<i>SM</i>	$0.4580 \pm 0.0065$	$0.4639 \pm 0.0013 \uparrow$
	<i>QoS</i>	$0.4764 \pm 0.0005 \uparrow$	$0.4750 \pm 0.0007$
	<i>SM + QoS</i>	$0.9344 \pm 0.0070$	$0.9389 \pm 0.0020$

and *Ser947554374*, and two the same *End* nodes. *Ser1640238160* and *Ser947554374* are services with output parameters *Inst582785907* and *Inst795998200* corresponds to two concepts *Con2037585750* and *Con103314376* respectively in the given ontology shown in Fig. 3.2 (4). As *Inst658772240* is a required parameter of *End*, and related to concept *Con2113572083*, *Inst795998200* is closer to the required output *Inst658772240* than *Inst582785907*. Therefore, *Ser947554374* is selected with a better semantic matchmaking quality compared to *Ser1640238160*.

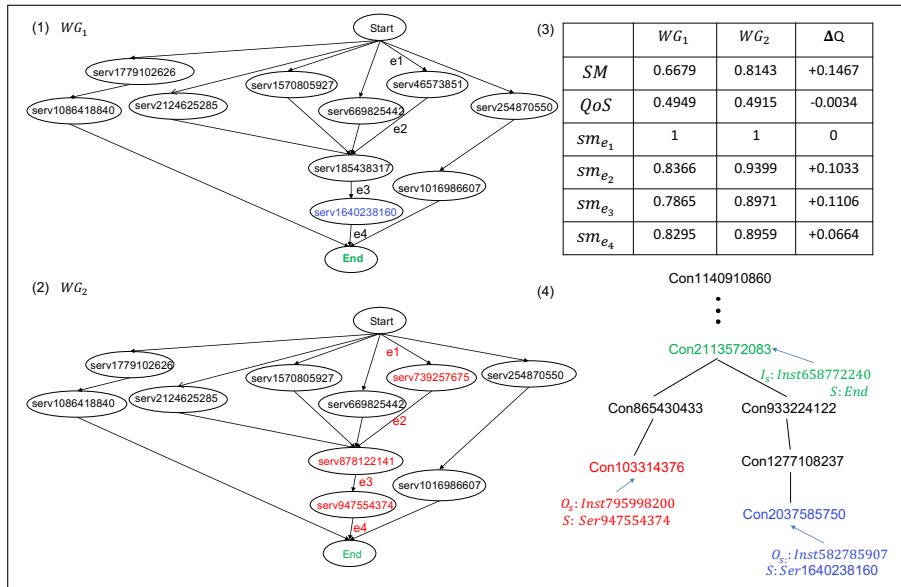


Figure 3.2: An example for the comparison of the best solutions obtained based on the *QoS* model and on the comprehensive quality model for Task 3.

### 3.4 Summary for PSO-based Approach

In PSO-based approach, we propose an effective PSO-based approach to comprehensive quality-aware semantic web service composition, which also has shown promise in achieving a better comprehensive quality in terms of a combination of semantic matchmaking quality and QoS compared to existing works.

### 3.5 GP-based Approach

In this section, we first introduce the tree-like representation that will be used in our approach, and then discuss the differences to the most widely used tree-based representations for GP-based service composition in the literature [36, 22, 114]. Finally, we present our GP-based approach with newly designed genetic operation methods.

#### 3.5.1 Tree-like Representation

Let  $\mathcal{G} = (V, E)$  be a DAG representation of a service composition. Let  $S$  be a service in  $\mathcal{G}$ , and let  $S_1, \dots, S_d$  be its successors in  $\mathcal{G}$ . We define the composite service expression relative to  $S$  as follows:

$$C_S = \begin{cases} \bullet(S, \parallel (C_{S_1}, \dots, C_{S_d})), & \text{if } d \geq 2, \\ \bullet(S, C_{S_1}), & \text{if } d = 1, \\ S, & \text{if } d = 0, \end{cases} \quad (3.5)$$

which can be evaluated inductively starting with  $Start$  which has no incoming edges in  $\mathcal{G}$ . The resulting expression  $C_{Start}$  is a composite service expression that is equivalent to  $\mathcal{G}$ .

**Example 1.** Consider the composition task  $T = (\{a, b, e\}, \{i\})$ . Fig. 3.3 shows an example of a composition solution. It involves four atomic services  $S_1 = (\{a, b\}, \{c, d, j\}, QoS_{S_1})$ ,  $S_2 = (\{c\}, \{f, g\}, QoS_{S_2})$ ,  $S_3 = (\{d\}, \{h\}, QoS_{S_3})$ , and  $S_4 = (\{f, g, h\}, \{i\}, QoS_{S_4})$ . The two special services  $Start = (\emptyset, \{a, b, e\}, \emptyset)$  and  $End = (\{i\}, \emptyset, \emptyset)$  are defined by the given composition task  $T$ . The corresponding service composition expression is:

$$C_{Start} = \bullet(Start, \bullet(S_1, \parallel (\bullet(S_2, \bullet(S_4, End)), \bullet(S_3, \bullet(S_4, End))))).$$

Formal expressions can be visualized by expressions trees. For a composite service expression  $C$  let  $\mathcal{T}$  denote the corresponding expression tree. Every leaf node in  $\mathcal{T}$  is labelled by the corresponding atomic service, while every internal node in  $\mathcal{T}$  is labelled by the corresponding composition constructor. For the sake of brevity we only consider  $\bullet$  and  $\parallel$  here, but our approach can easily be extended to  $+$  and  $*$ , too. If a subtree of  $\mathcal{T}$  (except for  $End$ ) has an isomorphic copy in  $\mathcal{T}$  then we remove it, label its root with a special symbol  $q$ , and insert an edge to the root of the copy. As a result we obtain a tree-like representation of a service composition. An example is shown in Fig. 3.3.

Fig. 3.3 shows for every atomic service  $S$  its sets of (least required) inputs  $\mathcal{I}_S$  and outputs  $\mathcal{O}_S$ . Moreover, the set of available inputs  $\mathcal{PI}_S$  is shown which is just the union of the input sets of all (direct and indirect) predecessors of  $S$  in the DAG. This can be easily generalized to composite service expressions. For a parallel composition  $C = \parallel (C_1, \dots, C_d)$  we define  $\mathcal{I}_C = \cup_{k=1}^d \mathcal{I}_{C_k}$ , and  $\mathcal{O}_C = \cup_{k=1}^d \mathcal{O}_{C_k}$ , and  $\mathcal{PI}_C = \cup_{k=1}^d \mathcal{PI}_{C_k}$ . For a sequential composition  $C = \bullet(S, C')$  we define  $\mathcal{I}_C = \mathcal{I}_S \cup (\mathcal{I}_{C'} - \mathcal{O}_S)$ , and  $\mathcal{O}_C = \mathcal{O}_S \cup \mathcal{O}_{C'}$ , and  $\mathcal{PI}_C = \mathcal{PI}_S$ .

**Example 2.** Consider the sequential composition  $C_4 = \bullet(S_4, End)$  which is shown in the rightmost position in Fig. 3.3. We obtain  $\mathcal{I}_{C_4} = \{f, g, h\}$  which represents the (least required) inputs for this composition, and  $\mathcal{O}_{C_4} = \{i\}$  which represents the outputs produced by this composition, and



Figure 3.3: Example of a tree-like representation

$\mathcal{PI}_{C_4} = \{a, b, e, c, d, j, f, g, h\}$  which represents the union of the input sets of all (direct or indirect) predecessors of  $S_4$  in the DAG (i.e.,  $S_1$ ,  $S_2$  and  $S_3$ ).

Our representation supports composition constructs that are available in commonly used composition languages, such as BPEL4WS or OWL-S. Note that our representation is different from the most widely used tree-based representations in [36, 22, 114]. These differences are as follows.

1. *Start* and *End* are included in  $\mathcal{T}$ , as they are related to measuring the semantic match-making qualities regarding  $I_T$  and  $O_T$ .
2.  $\mathcal{I}_C$ ,  $\mathcal{O}_C$ ,  $\mathcal{PI}_C$ ,  $\mathcal{QoS}_C$  are attributes, defined as a tuple  $(\mathcal{I}_C, \mathcal{O}_C, \mathcal{PI}_C, \mathcal{QoS}_C)$  for any  $C_S$  in  $\mathcal{T}$ . These attributes must be updated after population initialisation and genetic operations described in Sect. 3.5.2.
3.  $\mathcal{T}$  preserves all the semantic matchmaking information, which can be easily used for computing robust casual links.

To compute semantic matchmaking quality, we need to retrieve all the robust causal links on  $\mathcal{T}$ . This is performed by retrieving robust causal links for every sequential composition  $C = \bullet(S, C')$ . For example, in Fig 3.3, two robust causal links ( $link_2 : S_1 \rightarrow S_2$  and  $link_3 : S_1 \rightarrow S_3$ ) are retrieved from  $C_1 = \bullet(S_1, C_{||})$ , because outputs  $O_{S_1} = \{c, d, j\}$  match inputs  $I_{C_{||}} = \{c, h, d, f, g\}$ .

### 3.5.2 GP-Based Algorithm

Now we present our GP-based approach for service composition, see Algorithm 3. To begin with the algorithm, we generate the initial population  $P_0$ , which is then evaluated using our comprehensive quality model. The iterative part of the algorithm comprises lines 3 to 7,

which will be repeated until the maximum number of generations is reached or the best solution is found. During each iteration, we use tournament selection to select individuals, on which crossover and/or mutation are performed to evolve the population. These steps correspond to the standard GP steps [46] except for some particularities that will be discussed below.

---

ALGORITHM 3. GP-based algorithm for service composition.

---

**Input** :  $T, \mathcal{SR}, \mathcal{O}$

**Output**: an optimal composition solution

- 1: Initialise population  $P_0$  (using a 3-step method);
  - 2: Evaluate each individual in population  $P_0$  (using our comprehensive quality model);
  - 3: **while** *max.populations or max.fitness not yet met* **do**
  - 4:     Select the fittest individuals for evolution;
  - 5:     Apply crossover and mutation to the selected individuals;
  - 6:     Evaluate each new individual;
  - 7:     Replace the individuals with the smallest fitness in the population by the new individuals;
  - 8: Find the individual with the highest fitness in the final population;
- 

**Population initialisation.** The initial population is created by generating a set of service compositions in form of DAGs, and then transforming them into their tree-like representations (*the individuals*). The initialisation is performed as follows:

STEP 1. Greedy search is performed to randomly generate a set of DAGs, each representing a (valid) service composition for the given composition task  $T$ . For this, a simple forward graph building algorithm is applied starting with the node *Start* and the inputs  $I_T$  of the composition task  $T$ . Details of this algorithm can be found in [60]. An example of a generated DAG is shown in Fig. 3.4 with seven robust casual links marked on.

STEP 2. The DAGs can be simplified by removing some redundant edges and service nodes. While this step is not compulsory, it can help to notably reduce the size of the DAG and, consequently, the corresponding tree-like representation.

STEP 3. We transform each DAG into its tree-like representation using an algorithm modified from [22] to satisfy the particular requirements of our proposed approach. For example, Fig. 3.3 shows an example of a tree-like individual corresponding to the DAG shown in Fig. 3.4.

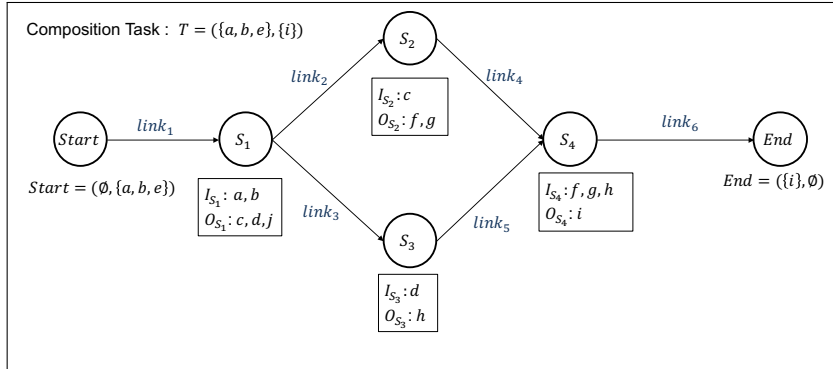


Figure 3.4: Example of a DAG used for transferring it into tree-like representation

**Crossover and Mutation.** During the evolutionary process, the correctness of the representation is maintained by crossover and mutation.

A crossover operation exchanges a subtree of a selected individual (its attributes noted as  $C_1(\mathcal{I}_{C_1}, \mathcal{O}_{C_1}, \mathcal{PI}_{C_1}, QoS_{C_1})$ ) with the subtree of another selected individual (its attributes noted as  $C_2(\mathcal{I}_{C_2}, \mathcal{O}_{C_2}, \mathcal{PI}_{C_2}, QoS_{C_2})$ ) if they represent the same functionality (i.e.  $\mathcal{I}_{C_1} = \mathcal{I}_{C_2}$  and  $\mathcal{O}_{C_1} = \mathcal{O}_{C_2}$ ). That is, at the root nodes of both subtrees, we have identical inputs and identical outputs. A crossover operation is performed in two cases: crossover on two functional nodes or on two terminal nodes. We never exchange a functional node with an terminal node, since the two associated subtrees cannot be equivalent in this case. For example, *End* must appear in the subtree associated with any functional node, but not for any selected terminal node (atomic services).

A mutation operation replaces a subtree of the selected individual (its attributes noted as  $C_1(\mathcal{I}_{C_1}, \mathcal{O}_{C_1}, \mathcal{PI}_{C_1}, QoS_{C_1})$ ) with a newly generated subtree satisfying the least required functionality. To do this, a subtree  $C_1$  must be selected from the selected individual, and a new composition task  $T = (\{\mathcal{PI}_{C_1}\}, \{\mathcal{O}_{C_1} \cap \mathcal{O}_T\})$  or  $T' = (\{\mathcal{PI}_{C_1}\}, \{\mathcal{O}_{C_1}\})$  is used to generate a tree in the same way as the 3-step method performed during the population initialisation. We utilise the available inputs and least required outputs for mutation, because it potentially bring more possibilities in generating more varieties of subtrees. The mutation is performed in two cases: mutation on a functional node with  $T$  or on a service node with  $T'$ , two examples shown in Fig 3.5 (a) and (b). In Fig 3.5 (a), a functional node  $C_{||}$  is selected for mutation, the whole subtree is replaced with the generated subtree excluding its head (i.e., *Start* and its parent node  $\bullet$ ). In Fig 3.5 (b), a atomic service  $S_1$  is selected for mutation, the branch of the selected node (i.e.,  $S_1$  and its parent node  $\bullet$ ) is replaced with the generated subtree excluding both its head (i.e., *Start* and its parent node  $\bullet$ ) and its tail (i.e., *End*).

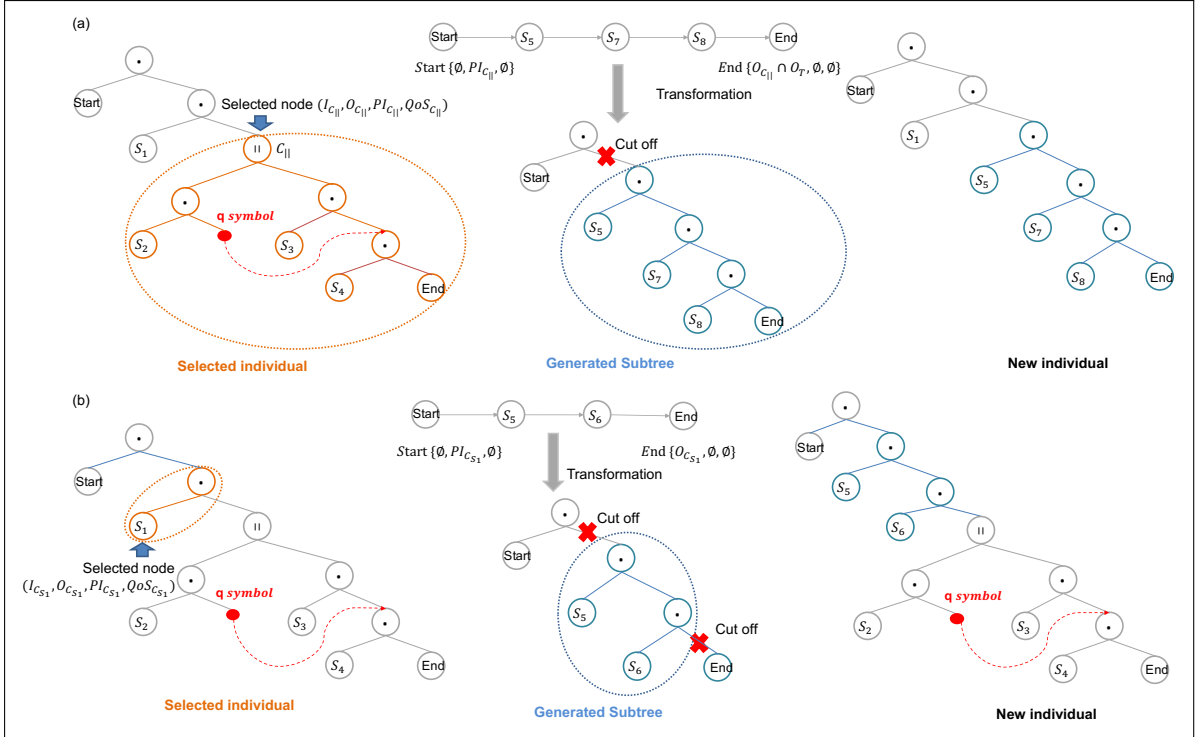


Figure 3.5: Examples of two mutations on terminal and functional nodes

Note: The set of available nodes considered for crossover and mutation do not include *Start* and *End*, and their parent nodes, because these nodes remain the same for all individuals. In addition, the nodes selected for crossover and mutation must not break the functionality of  $q$  symbols. For example, in Fig. 3.3, both sequential composition  $C_2$  and  $C_3$

are not considered for crossover and mutation as they break the edge of  $q$  symbol, but the parallel composition  $C_{\parallel}$  can be considered for genetic operations, as it may bring a new fully functional  $q$  symbol or a subtree without  $q$  symbol involved. The pointed subtree  $C_4$  could also be selected for genetic operations.

### 3.6 Experiment Study for GP-based Approach

We have conducted experiments to evaluate our proposed approach. For our experiments we have used the benchmark datasets originating from OWLS-TC [47], which have been extended with real-world QoS attributes and five composition tasks [60]. To explore the effectiveness and efficiency of our proposed GP-based approach, we compare it against one recent GP-based approach [60]. For that we have extended the later approach by our proposed comprehensive quality model, so that semantic matchmaking quality can be computed based on the parent-child relationship in the underlying tree representations.

To assure a fair comparison we have used exactly the same parameter settings as in [60]. In particular, the GP population size has been set to 200, the number of generations to 30, the reproduction rate to 0.1, the crossover rate to 0.8, and the mutation rate to 0.1. We have run every experiment with 30 independent repetitions. Without considering any users' true service composition preferences, the weights in fitness function in Eq. (3.3) have been configured simply to balance semantic matchmaking quality and QoS. Particularly,  $w_1$  and  $w_2$  are both set to 0.25, while  $w_3$ ,  $w_4$ ,  $w_5$ , and  $w_6$  are all set to 0.125. The parameter  $p$  of  $type_{link}$  is set to 0.75 (*plugin match*) in accordance with the recommendation in [50].

Our experiments indicate that our method can work consistently well under valid weight settings and parameter  $p$  to be decided by users' preferences in practice.

#### 3.6.1 Comparison against a previous GP-based approach

Table 3.4 shows the fitness values obtained by the two GP-based approaches. To compare the results, an independent-samples T-test over 30 runs has been conducted. The results show that our GP-based approach outperforms the previous GP-based approach [60] in finding more optimized composition solutions for Tasks 3 and 4. (Note: the P-values are lower than 0.0001). For Tasks 1, 2 and 5, both approaches achieve the same fitness. Therefore, the overall effectiveness of our proposed approach is considered to be better.

Table 3.4: Mean fitness values for our approach in comparison to [60]  
(Note: the higher the fitness the better)

Task	Our GP-based approach	Ma et al. approach [60]
OWL-S TC1	$0.923793 \pm 0.000000$	$0.923793 \pm 0.000000$
OWL-S TC2	$0.933026 \pm 0.000000$	$0.933026 \pm 0.000000$
OWL-S TC3	$0.870251 \pm 0.000000 \uparrow$	$0.832306 \pm 0.008241$
OWL-S TC4	$0.798137 \pm 0.007412 \uparrow$	$0.760146 \pm 0.005044$
OWL-S TC5	$0.832998 \pm 0.000000$	$0.832998 \pm 0.000000$

Table 3.5 shows the execution times observed for the two GP-based approaches. Again an independent-samples T-test over 30 runs has been conducted. For Tasks 1 and 2 both approaches need about the same time, while for Tasks 3, 4, and 5 our approach needs slightly more time. (Note: the P-values are lower than 0.0001). However, even in the worst case it exceeds [60] by no more than 1 second, which is acceptable for most real-world scenarios. Hence, in terms of efficiency our approach is comparable to [60].



Table 3.5: Mean execution time (in ms) for our approach in comparison to [60]  
(Note: the shorter the time the better)

Task	Our GP-based approach	Ma et al. approach [60]
OWL-S TC1	7396.366667 $\pm$ 772.408168	7310.866667 $\pm$ 952.701775
OWL-S TC2	2956.133333 $\pm$ 761.350965	3036.966667 $\pm$ 777.121101
OWL-S TC3	1057.266667 $\pm$ 174.405183	763.800000 $\pm$ 221.241232 $\downarrow$
OWL-S TC4	4479.466667 $\pm$ 519.767172	3068.800000 $\pm$ 472.013106 $\downarrow$
OWL-S TC5	6276.533333 $\pm$ 1075.102328	5030.200000 $\pm$ 991.863812 $\downarrow$

The experiments confirm that there is a trade-off between fitness and execution time in GP-based service composition. It can be argued that our proposed approach achieves a better balance as the computed solutions observe a significantly higher fitness while there is a moderate increase in execution time compared to [60].

### 3.6.2 Further Discussion

For Tasks 3 and 4, the optimized composition solutions obtained by the two approaches are shown in Fig. 3.6(a) and Fig. 3.6(b), respectively. The functional and nonfunctional descriptions of all services involved in these solutions are listed in Fig. 3.6(c).



Figure 3.6: Example of best solutions using the two GP-based approaches

For Task 3 the composition task is  $T_3 = (\{\text{academic-item-number}\}, \{\text{book}, \text{maxprice}\})$ . The

best composition solutions obtained by the two approaches are different, see Fig. 3.6. Both solutions have the same semantic matchmaking quality as the matchmaking type of all links is *exact* match. However, both solutions differ in their QoS. This is due to the different services that are involved:  $S_2$  versus  $S_3$ . The QoS of  $S_2$  is much better than that of  $S_3$ . Consequently, the best composition solution obtained by our approach has higher fitness according to our quality model. It is interesting to observe that the best composition solution obtained by our approach for Task 3 can be evolved from the best composition solution in [60] just by a single mutation on  $S_3$  using available inputs.

For Task 4 the composition task is  $T_4 = (\{academic-item-number\}, \{maxprice, book - type, recommendedpriceindollar\})$ . The best solutions obtained by the two approaches are also different, see Fig. 3.6. Note that solution generated by our approach is composed of four atomic services ( $S_4$ ,  $S_5$ ,  $S_6$  and  $S_2$ ) while the solution generated by approach [60] is composed of five atomic services ( $S_4$ ,  $S_5$ ,  $S_6$ ,  $S_1$  and  $S_2$ ). Both solutions have the same semantic matchmaking quality as the matchmaking type of all links is *exact* match. However, the overall QoS of our approach is better. This is due to the additional  $S_1$  in their approach, which has a significant negative impact on QoS.

We observe from above examples that our approach is able to produce better solutions because our proposed representation keeps available inputs and least required outputs of each node on the tree which unlocks more opportunities for mutation and crossover rather than restricting them to the previously used inputs and outputs only.

### 3.7 Summary for GP-based Approach

In this work, we introduce a novel GP-based approach to comprehensive quality-aware semantic web service composition. In particular, a tree-like representation is proposed to directly cope with the evaluation of semantic matchmaking quality. Meanwhile, crossover and mutation methods are proposed to maintain the correctness of individuals. The experiment shows that our proposed approach could effectively produce better solutions in both semantic matchmaking quality and QoS than the existing approach.

### 3.8 Conclusion

In the preliminary work, we propose and formalize a novel and effective comprehensive quality model for simultaneously optimise QoS and quality of semantic matchmaking. Apart from that, two novel and effective EC-based methods are proposed for comprehensive quality-aware semantic web service composition. In particular, indirect and direct representations are designed for studying their effectiveness and efficiency along with the EC-based methods. Overall experiment studies show both two methods reach good performances comparing to existing works. Also, it indicates that indirect representation utilised in PSO-based approach outperforms direct representation GP-based approach for finding more effective solutions. This finding will guide us to work on a more effective indirect presentation along with PSO-based memetic method.

## Chapter 4

# Proposed Contributions and Project Plan

### 4.1 Proposed Contributions

In the previous chapter, some preliminary work has been done to investigate the performances of direct representation and indirect representation on the proposed PSO-based approach and GP-based approach respectively. We have shown that those two approaches outperform some recent existing EC-based approaches using our proposed comprehensive quality evaluation model. To carry a further research on the remaining subjective for objective one and the rest three objectives outlined in the proposal, we present the proposed contribution and project plan to guide the research direction for the thesis in this chapter.

1. This thesis will develop a new fully automated semantic web service composition approach for simultaneously optimising the quality of semantic matchmaking and QoS. We expect that more effective and efficient methods for handling novel combinatorial optimisation problem for semantic web service composition, which is done by relying on effective representations, a comprehensive quality model and a motivated EC-based method with local search or AI planning techniques.
2. This thesis will extend on previous multi-objective web service composition approach to effectively and efficiently explore the Pareto front of comprehensive quality-aware service composition. Apart from that, conditional constraints in SLA and customised matchmaking level is expected to handle conditional constraints on each independent objectives in comprehensive quality mode. Simultaneously taking all these necessary requirements is not considered in any past research.
3. This thesis will develop an effective and efficient EC-based hybrid approach for dynamic web service composition problem. This approach is expected to better handle composition environment changes. In particular, the changes of QoS, Ontology and service repository (i.e., service failure and new service registration). These changes are not fully studied in the past and solved using motivated EC-based approaches.
4. This thesis will develop EC-based hybrid approaches to a more complex and realistic semantic web service composition based on not only inputs and outputs, but preconditions and postconditions. We expected a general mechanism is developed for supporting all the service composition constructs. Those occasionally considered precondition and postconditions are not fully studied for supporting all the composition constructs and not employed in a fully automated approach either.

Table 4.1: The milestones of PhD project plan.

Phase	Description	Duration (months)
1	Reviewing literature, developing initial EC-based composition approach, and writing the proposal	9 (Complete)
2	Develop hybrid approaches to comprehensive quality-aware automated web service composition	6 (In progress)
3	Develop multi-objective approaches to optimise the comprehensive quality for fully automated service composition	7
4	Develop hybrid techniques to support dynamic semantic web service composition effectively	8
5	Develop hybrid approaches for semantic web service compositions based on preconditions and effects	3
6	Writing the thesis	6

## 4.2 Overview of Project Plan

Six milestones for PhD project are defined in the initial research plan shown in Table 4.1. The first phase of this plan has been completed, which comprising of literature view, two initial works on comprehensive quality-aware semantic web service composition and a research proposal writing. The second phase is related to the first objective of this proposal and is currently in progress, which is covered in Chapter 3 of the proposal. The remaining phases are expected to be completed as planned.

## 4.3 Project Timeline

Table 4.2 provide an estimated timeline comprising of the minor goals and milestones, which is expected to serve as a guide and be completed through the PhD project.

## 4.4 Thesis Outline

The following is an outline of the PhD thesis, in which Chapter 6 may be replaced by Chapter 7 since it is an optimal objective.

- *Chapter 1: Introduction*  
This chapter covers a problem statement, motivations, research goals, contributions, and organisation of the thesis.
- *Chapter 2: Literature Review*  
This chapter initially provides some fundamental concepts for demonstrating the background of service composition. followed, a comprehensive understanding and analysing of existing work on the web service composition. In particular, four research directions for web service composition are investigated: single-objective approach, multi-objective approach, dynamic service composition and semantic web service composition. However, the techniques are mainly focused on EC-based approaches
- *Chapter 3: A Hybrid Approach to comprehensive Quality-Aware Web Service Composition*  
This chapter will introduce new and effective hybrid approaches that combine EC-based techniques and other searching methods. These approaches are developed to

Table 4.2: Project timeline for the remaining 24 months.

Phase	Task	Time in Months											
		2	4	6	8	10	12	14	16	18	20	22	24
n/a	Updating the literature review	x	x	x	x	x	x	x	x	x	x	x	x
2	Developing indirect representation utilise in a hyper-heuristics methods	x	x										
3	Investigating unconstrained MO optimisation for semantic quality-aware service composition			x	x								
3	Improving performance of MO approach by integrating other techniques				x								
3	Extending MO approach to handle constraints on SLA and semantic matchmaking level					x	x						
4	Develop EC-based hybrid approach to handle changes in QoS and Ontology						x	x					
4	Develop EC-based hybrid approach to handle service failure and new service registration							x	x				
5	Develop EC-based hybrid approach to handle preconditions and effects.								x	x			
6	Writing the first thesis draft										x	x	
6	Editing the final draft											x	x

effective and efficient handle comprehensive quality-aware service composition problems. Apart from that, the performance of different direct/indirect representations is also investigated here.

- *Chapter 4: Develop Multi-Objective Approaches to Comprehensive Quality-Aware Semantic Service Composition*

This chapter will demonstrate our multi-objective approaches, which optimises every quality criteria of comprehensive quality independently for automated semantic web service composition. Constraints on SLA and customised matchmaking levels are also considered in the multi-objective approaches.

- *Chapter 5: Develop hybrid techniques to support dynamic semantic web service composition effectively*

This chapter will discuss effective hybrid approaches for dynamic semantic web service composition. Effective and efficient EC-based hybrid methods are developed to handle service composition problems regarding the changes in QoS and Ontology and service repository (i.e., service failure new service registration). Those approaches are compared with existing dynamic service composition approaches, which do not utilise EC techniques.

- *Chapter 6: Develop hybrid approaches for semantic web service compositions based on preconditions and effects*

This chapter will discuss semantic service composition problems by utilising a proposed matchmaking mechanism of preconditions and postconditions, which fully support different composition constructs, such as loop and choice. These problems will be approached by EC-based hybrid methods focusing on improving their performance in both effectiveness and efficiency.

- *Chapter 7: Conclusions and Future Work*

This chapter concludes all the contributions made by the developed approaches in each objective. In addition, the limitations are also pointed along with the future research directions.

## **4.5 Resources Required**

### **4.5.1 Computing Resources**

This research mainly utilises an experimental approach. Due to the high computation of the experiment execution, ECS Grid computing facilities is required to complete these experiments.

### **4.5.2 Library Resources**

The related literature of this research can be found online using the resources provided by Victoria University of Wellington. Apart from that, useful textbook and lecture notes can be also found in university's library.

### **4.5.3 Conference Travel Grants**

Publications to relevant venues in this field are expected throughout this project, therefore travel grants from Victoria University of Wellington are required for key conferences.

# Bibliography

- [1] AGARWAL, S., JUNGHANS, M., FABRE, O., TOMA, I., AND LORRE, J.-P. D5. 3.1 first service discovery prototype. *Deliverable D5 3* (2009).
- [2] AGARWAL, S., LAMPARTER, S., AND STUDER, R. Making web services tradable: A policy-based approach for specifying preferences on web service properties. *Web Semantics: Science, Services and Agents on the World Wide Web* 7, 1 (2009), 11–20.
- [3] ALFÉREZ, G. H., PELECHANO, V., MAZO, R., SALINESI, C., AND DIAZ, D. Dynamic adaptation of service compositions with variability models. *Journal of Systems and Software* 91 (2014), 24–47.
- [4] ANDREWS, T., CURBERA, F., DHOLAKIA, H., GOLAND, Y., KLEIN, J., LEYMAN, F., LIU, K., ROLLER, D., SMITH, D., THATTE, S., ET AL. Business process execution language for web services, 2003.
- [5] BACK, T., HAMMEL, U., AND SCHWEFEL, H.-P. Evolutionary computation: Comments on the history and current state. *IEEE transactions on Evolutionary Computation* 1, 1 (1997), 3–17.
- [6] BANSAL, S., BANSAL, A., GUPTA, G., AND BLAKE, M. B. Generalized semantic web service composition. *Service Oriented Computing and Applications* 10, 2 (2016), 111–133.
- [7] BARESI, L., AND GUINEA, S. Self-supervising bpm processes. *IEEE Transactions on Software Engineering* 37, 2 (2011), 247–263.
- [8] BENTLEY, P. J., AND WAKEFIELD, J. P. Finding acceptable solutions in the pareto-optimal range using multiobjective genetic algorithms. *Soft computing in engineering design and manufacturing* 5 (1997), 231–240.
- [9] BLUM, A. L., AND FURST, M. L. Fast planning through planning graph analysis. *Artificial intelligence* 90, 1 (1997), 281–300.
- [10] BOOTH, D., HAAS, H., MCCABE, F., NEWCOMER, E., CHAMPION, M., FERRIS, C., AND ORCHARD, D. Web services architecture. w3c working note. *W3C Working Notes* (2004).
- [11] BOUSTIL, A., MAAMRI, R., AND SAHNOUN, Z. A semantic selection approach for composite web services using owl-dl and rules. *Service Oriented Computing and Applications* 8, 3 (2014), 221–238.
- [12] BOUSTIL, A., MAAMRI, R., AND SAHNOUN, Z. A semantic selection approach for composite web services using OWL-DL and rules. *Service Oriented Computing and Applications* 8, 3 (2014), 221–238.

- [13] BRANKE, J., AND DEB, K. Integrating user preferences into evolutionary multi-objective optimization. In *Knowledge incorporation in evolutionary computation*. Springer, 2005, pp. 461–477.
- [14] BRANKE, J., KAUSLER, T., AND SCHMECK, H. Guidance in evolutionary multi-objective optimization. *Advances in Engineering Software* 32, 6 (2001), 499–507.
- [15] CANFORA, G., DI PENTA, M., ESPOSITO, R., AND VILLANI, M. L. An approach for qos-aware service composition based on genetic algorithms. In *Proceedings of the 7th annual conference on Genetic and evolutionary computation* (2005), ACM, pp. 1069–1075.
- [16] CHAN, K., BISHOP, J., STEYN, J., BARESI, L., AND GUINEA, S. A fault taxonomy for web service composition. In *Service-oriented computing-ICSOC 2007 Workshops* (2009), Springer, pp. 363–375.
- [17] CHEN, Y., HUANG, J., AND LIN, C. Partial selection: An efficient approach for qos-aware web service composition. In *Web Services (ICWS), 2014 IEEE International Conference on* (2014), IEEE, pp. 1–8.
- [18] CURBERA, F., DUFTLER, M., KHALAF, R., NAGY, W., MUKHI, N., AND WEERAWARANA, S. Unraveling the web services web: an introduction to soap, wsdl, and uddi. *IEEE Internet computing* 6, 2 (2002), 86–93.
- [19] CURBERA, F., NAGY, W., AND WEERAWARANA, S. Web services: Why and how. In *Workshop on Object-Oriented Web Services-OOPSLA* (2001), vol. 2001.
- [20] DA SILVA, A., MA, H., AND ZHANG, M. Graphevol: A graph evolution technique for web service composition. In *Database and Expert Systems Applications*, vol. 9262. Springer International Publishing, 2015, pp. 134–142.
- [21] DA SILVA, A. S., MA, H., AND ZHANG, M. A gp approach to qos-aware web service composition including conditional constraints. In *Evolutionary Computation (CEC), 2015 IEEE Congress on* (2015), IEEE, pp. 2113–2120.
- [22] DA SILVA, A. S., MA, H., AND ZHANG, M. Genetic programming for qos-aware web service composition and selection. *Soft Computing* (2016), 1–17.
- [23] DA SILVA, A. S., MA, H., ZHANG, M., AND HARTMANN, S. Handling branched web service composition with a qos-aware graph-based method. In *International Conference on Electronic Commerce and Web Technologies* (2016), Springer, pp. 154–169.
- [24] DA SILVA, A. S., MEI, Y., MA, H., AND ZHANG, M. A memetic algorithm-based indirect approach to web service composition. In *Evolutionary Computation (CEC), 2016 IEEE Congress on* (2016), IEEE, pp. 3385–3392.
- [25] DA SILVA, A. S., MEI, Y., MA, H., AND ZHANG, M. Particle swarm optimisation with sequence-like indirect representation for web service composition. In *European Conference on Evolutionary Computation in Combinatorial Optimization* (2016), Springer, pp. 202–218.
- [26] DE CAMPOS, A., POZO, A. T., VERGILIO, S. R., AND SAVEGNAGO, T. Many-objective evolutionary algorithms in the composition of web services. In *Neural Networks (SBRN), 2010 Eleventh Brazilian Symposium on* (2010), IEEE, pp. 152–157.
- [27] DE CASTRO, L. N., AND VON ZUBEN, F. J. Learning and optimization using the clonal selection principle. *IEEE transactions on evolutionary computation* 6, 3 (2002), 239–251.



- [28] DEB, K., PRATAP, A., AGARWAL, S., AND MEYARIVAN, T. A fast and elitist multi-objective genetic algorithm: Nsga-ii. *IEEE transactions on evolutionary computation* 6, 2 (2002), 182–197.
- [29] FANJIANG, Y.-Y., AND SYU, Y. Semantic-based automatic service composition with functional and non-functional requirements in design time: A genetic algorithm approach. *Information and Software Technology* 56, 3 (2014), 352–373.
- [30] FENG, Y., NGAN, L. D., AND KANAGASABAI, R. Dynamic service composition with service-dependent qos attributes. In *Web Services (ICWS), 2013 IEEE 20th International Conference on* (2013), IEEE, pp. 10–17.
- [31] FENSEL, D., FACCA, F. M., SIMPERL, E., AND TOMA, I. *Semantic web services*. Springer Science & Business Media, 2011.
- [32] FLEMING, P. J., AND PURSHOUSE, R. C. Evolutionary algorithms in control systems engineering: a survey. *Control engineering practice* 10, 11 (2002), 1223–1241.
- [33] GAO, A., YANG, D., TANG, S., AND ZHANG, M. Web service composition using integer programming-based models. In *e-Business Engineering, 2005. ICEBE 2005. IEEE International Conference on* (2005), IEEE, pp. 603–606.
- [34] GAREY, M. R., AND JOHNSON, D. S. A guide to the theory of np-completeness. *WH Freeman, New York* 70 (1979).
- [35] GUINARD, D., TRIFA, V., SPIESS, P., DOBER, B., AND KARNOUSKOS, S. Discovery and on-demand provisioning of real-world web services. In *Web Services, 2009. ICWS 2009. IEEE International Conference on* (2009), IEEE, pp. 583–590.
- [36] GUPTA, I. K., KUMAR, J., AND RAI, P. Optimization to quality-of-service-driven web service composition using modified genetic algorithm. In *Computer, Communication and Control (IC4), 2015 International Conference on* (2015), IEEE, pp. 1–6.
- [37] HUANG, Z., JIANG, W., HU, S., AND LIU, Z. Effective pruning algorithm for qos-aware service composition. In *2009 IEEE Conference on Commerce and Enterprise Computing* (2009), IEEE, pp. 519–522.
- [38] HWANG, C.-L., AND YOON, K. Lecture notes in economics and mathematical systems. *Multiple Objective Decision Making, Methods and Applications: A State-of-the-Art Survey* 164 (1981).
- [39] ISHIBUCHI, H., TSUKAMOTO, N., AND NOJIMA, Y. Evolutionary many-objective optimization: A short review. In *IEEE congress on evolutionary computation* (2008), pp. 2419–2426.
- [40] ISHIKAWA, F., KATAFUCHI, S., WAGNER, F., FUKAZAWA, Y., AND HONIDEN, S. Bridging the gap between semantic web service composition and common implementation architectures. In *Services Computing (SCC), 2011 IEEE International Conference on* (2011), IEEE, pp. 152–159.
- [41] KENNEDY, J., AND EBERHART, R. Particle swarm optimization. In *IEEE International Conference on Neural Networks* (1995), IEEE, pp. 1942–1948.
- [42] KIM, I. Y., AND DE WECK, O. Adaptive weighted sum method for multiobjective optimization: a new method for pareto front generation. *Structural and multidisciplinary optimization* 31, 2 (2006), 105–116.

- [43] KONA, S., BANSAL, A., BLAKE, M. B., BLEUL, S., AND WEISE, T. Wsc-2009: a quality of service-oriented web services challenge. In *2009 IEEE Conference on Commerce and Enterprise Computing* (2009), IEEE, pp. 487–490.
- [44] KONING, M., SUN, C.-A., SINNEMA, M., AND AVGERIOU, P. Vxbpel: Supporting variability for web services in bpel. *Information and Software Technology* 51, 2 (2009), 258–269.
- [45] KOPECKÝ, J., VITVAR, T., BOURNEZ, C., AND FARRELL, J. Sawsdl: Semantic annotations for wsdl and xml schema. *IEEE Internet Computing* 11, 6 (2007).
- [46] KOZA, J. R. *Genetic programming: on the programming of computers by means of natural selection*, vol. 1. MIT press, 1992.
- [47] KÜSTER, U., KÖNIG-RIES, B., AND KRUG, A. Opossum-an online portal to collect and share sws descriptions. In *Semantic Computing, 2008 IEEE International Conference on* (2008), IEEE, pp. 480–481.
- [48] LAUSEN, H., AND FARRELL, J. Semantic annotations for wsdl and xml schema. *W3C recommendation, W3C* (2007), 749–758.
- [49] LAUSEN, H., POLLERES, A., AND ROMAN, D. W3c member submission-web service modeling ontology (wsmo). *W3C. Available at; URL: <http://www.w3.org/Submission/WSMO>* (2005).
- [50] LÉCUÉ, F. Optimizing qos-aware semantic web service composition. In *International Semantic Web Conference* (2009), Springer, pp. 375–391.
- [51] LÉCUÉ, F., AND DELTEIL, A. Making the difference in semantic web service composition. In *Proceedings of the National Conference on Artificial Intelligence* (2007), vol. 22, Menlo Park, CA; Cambridge, MA; London; AAAI Press; MIT Press; 1999, p. 1383.
- [52] LÉCUÉ, F., DELTEIL, A., AND LÉGER, A. Optimizing causal link based web service composition. In *ECAI* (2008), pp. 45–49.
- [53] LÉCUÉ, F., AND LÉGER, A. A formal model for semantic web service composition. In *International Semantic Web Conference* (2006), Springer, pp. 385–398.
- [54] LI, G., LIAO, L., SONG, D., AND ZHENG, Z. A fault-tolerant framework for qos-aware web service composition via case-based reasoning. *International Journal of Web and Grid Services* 10, 1 (2014), 80–99.
- [55] LI, J., YAN, Y., AND LEMIRE, D. Full solution indexing for top-k web service composition. *IEEE Transactions on Services Computing* (2016).
- [56] LIU, J., LI, J., LIU, K., AND WEI, W. A hybrid genetic and particle swarm algorithm for service composition. In *Advanced Language Processing and Web Information Technology, 2007. ALPIT 2007. Sixth International Conference on* (2007), IEEE, pp. 564–567.
- [57] LIU, S., LIU, Y., JING, N., TANG, G., AND TANG, Y. A dynamic web service selection strategy with qos global optimization based on multi-objective genetic algorithm. In *International Conference on Grid and Cooperative Computing* (2005), Springer, pp. 84–89.
- [58] LONG, J., AND GUI, W. An environment-aware particle swarm optimization algorithm for services composition. In *Computational Intelligence and Software Engineering, 2009. CiSE 2009. International Conference on* (2009), IEEE, pp. 1–4.

- [59] MA, H., SCHEWE, K.-D., THALHEIM, B., AND WANG, Q. A formal model for the interoperability of service clouds. *Service Oriented Computing and Applications* 6, 3 (2012), 189–205.
- [60] MA, H., WANG, A., AND ZHANG, M. A hybrid approach using genetic programming and greedy search for qos-aware web service composition. In *Transactions on Large-Scale Data-and Knowledge-Centered Systems XVIII*. Springer, 2015, pp. 180–205.
- [61] MARKOU, G., AND REFANIDIS, I. Non-deterministic planning methods for automated web service composition. *Artificial Intelligence Research* 5, 1 (2015), 14.
- [62] MARTIN, D., BURSTEIN, M., HOBBS, J., LASSILA, O., MCDERMOTT, D., MCILRAITH, S., NARAYANAN, S., PAOLUCCI, M., PARSIA, B., PAYNE, T., ET AL. Owl-s: Semantic markup for web services. *W3C member submission* 22 (2004), 2007–04.
- [63] MCILRAITH, S. A., SON, T. C., AND ZENG, H. Semantic web services. *IEEE intelligent systems* 16, 2 (2001), 46–53.
- [64] MIER, P. R., PEDRINACI, C., LAMA, M., AND MUCIENTES, M. An integrated semantic web service discovery and composition framework.
- [65] MOGHADDAM, M., AND DAVIS, J. G. Service selection in web service composition: A comparative review of existing approaches. In *Web Services Foundations*. Springer, 2014, pp. 321–346.
- [66] MOHANTY, R., RAVI, V., AND PATRA, M. R. Web-services classification using intelligent techniques. *Expert Systems with Applications* 37, 7 (2010), 5484–5490.
- [67] MOSTAFA, A., AND ZHANG, M. Multi-objective service composition in uncertain environments. *IEEE Transactions on Services Computing* (2015).
- [68] NASRIDINOV, A., BYUN, J.-Y., AND PARK, Y.-H. A qos-aware performance prediction for self-healing web service composition. In *Cloud and Green Computing (CGC), 2012 Second International Conference on* (2012), IEEE, pp. 799–803.
- [69] O’LEARY, D. Review: Ontologies: A silver bullet for knowledge management and electronic commerce. *The Computer Journal* 48, 4 (2005), 498–498.
- [70] OVERDICK, H. The resource-oriented architecture. In *Services, 2007 IEEE Congress on* (2007), IEEE, pp. 340–347.
- [71] PALIWAL, A. V., SHAFIQ, B., VAIDYA, J., XIONG, H., AND ADAM, N. Semantics-based automated service discovery. *IEEE Transactions on Services Computing* 5, 2 (2012), 260–275.
- [72] PAOLUCCI, M., KAWAMURA, T., PAYNE, T. R., AND SYCARA, K. Semantic matching of web services capabilities. In *International Semantic Web Conference* (2002), Springer, pp. 333–347.
- [73] PAPAZOGLU, M. P. Service-oriented computing: Concepts, characteristics and directions. In *Web Information Systems Engineering, 2003. WISE 2003. Proceedings of the Fourth International Conference on* (2003), IEEE, pp. 3–12.
- [74] PAPAZOGLU, M. T. P., dustdar, s., leymann, f.. service-oriented computing. research roadmap, 2006.

- [75] PAREJO, J. A., FERNANDEZ, P., AND CORTÉS, A. R. Qos-aware services composition using tabu search and hybrid genetic algorithms. *Actas de los Talleres de las Jornadas de Ingeniería del Software y Bases de Datos 2*, 1 (2008), 55–66.
- [76] PEER, J. Web service composition as ai planning-a survey. *University of St. Gallen* (2005).
- [77] PETRIE, C. J. *Web Service Composition*. Springer, 2016.
- [78] POP, C. B., CHIFU, V. R., SALOMIE, I., AND DINSOREANU, M. Immune-inspired method for selecting the optimal solution in web service composition. In *International Workshop on Resource Discovery* (2009), Springer, pp. 1–17.
- [79] QI, L., TANG, Y., DOU, W., AND CHEN, J. Combining local optimization and enumeration for qos-aware web service composition. In *Web Services (ICWS), 2010 IEEE International Conference on* (2010), IEEE, pp. 34–41.
- [80] RAO, J., DIMITROV, D., HOFMANN, P., AND SADEH, N. A mixed initiative approach to semantic web service discovery and composition: Sap’s guided procedures framework. In *2006 IEEE International Conference on Web Services (ICWS’06)* (2006), IEEE, pp. 401–410.
- [81] RAO, J., AND SU, X. A survey of automated web service composition methods. In *International Workshop on Semantic Web Services and Web Process Composition* (2004), Springer, pp. 43–54.
- [82] RAO, J., AND SU, X. Semantic web services and web process composition, volume 3387 of *lncs*, chapter a survey of automated web service composition methods, 2005.
- [83] RENDERS, J.-M., AND FLASSE, S. P. Hybrid methods using genetic algorithms for global optimization. *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)* 26, 2 (1996), 243–258.
- [84] RODRIGUEZ-MIER, P., MUCIENTES, M., LAMA, M., AND COUTO, M. I. Composition of web services through genetic programming. *Evolutionary Intelligence* 3, 3-4 (2010), 171–186.
- [85] SAHAI, A., MACHIRAJU, V., SAYAL, M., VAN MOORSEL, A., AND CASATI, F. Automated sla monitoring for web services. In *International Workshop on Distributed Systems: Operations and Management* (2002), Springer, pp. 28–41.
- [86] SALAS, J., PEREZ-SORROSAL, F., PATIÑO-MARTÍNEZ, M., AND JIMÉNEZ-PERIS, R. Ws-replication: a framework for highly available web services. In *Proceedings of the 15th international conference on World Wide Web* (2006), ACM, pp. 357–366.
- [87] SHET, K., ACHARYA, U. D., ET AL. A new similarity measure for taxonomy based on edge counting. *arXiv preprint arXiv:1211.4709* (2012).
- [88] SHI, Y., ET AL. Particle swarm optimization: developments, applications and resources. In *evolutionary computation, 2001. Proceedings of the 2001 Congress on* (2001), vol. 1, IEEE, pp. 81–86.
- [89] SIRIN, E., PARSIA, B., WU, D., HENDLER, J., AND NAU, D. Htn planning for web service composition using shop2. *Web Semantics: Science, Services and Agents on the World Wide Web* 1, 4 (2004), 377–396.

- [90] SOHRABI, S., PROKOSHYN, N., AND MCILRAITH, S. A. Web service composition via the customization of golog programs with user preferences. In *Conceptual Modeling: Foundations and Applications*. Springer, 2009, pp. 319–334.
- [91] SRINIVAS, M., AND PATNAIK, L. M. Genetic algorithms: A survey. *computer* 27, 6 (1994), 17–26.
- [92] TANG, M., AND AI, L. A hybrid genetic algorithm for the optimal constrained web service selection problem in web service composition. In *Evolutionary Computation (CEC), 2010 IEEE Congress on* (2010), IEEE, pp. 1–8.
- [93] VAN VELDHUIZEN, D. A., AND LAMONT, G. B. On measuring multiobjective evolutionary algorithm performance. In *Evolutionary Computation, 2000. Proceedings of the 2000 Congress on* (2000), vol. 1, IEEE, pp. 204–211.
- [94] WADA, H., SUZUKI, J., YAMANO, Y., AND OBA, K. E<sup>3</sup>: A multiobjective optimization framework for sla-aware service composition. *IEEE Transactions on Services Computing* 5, 3 (2012), 358–372.
- [95] WAGNER, F., ISHIKAWA, F., AND HONIDEN, S. Robust service compositions with functional and location diversity. *IEEE Transactions on Services Computing* 9, 2 (2016), 277–290.
- [96] WANG, A., MA, H., AND ZHANG, M. Genetic programming with greedy search for web service composition. In *International Conference on Database and Expert Systems Applications* (2013), Springer, pp. 9–17.
- [97] WANG, D., HUANG, H., AND XIE, C. A novel adaptive web service selection algorithm based on ant colony optimization for dynamic web service composition. In *Algorithms and Architectures for Parallel Processing*. Springer, 2014, pp. 391–399.
- [98] WANG, L., SHEN, J., AND YONG, J. A survey on bio-inspired algorithms for web service composition. In *Computer Supported Cooperative Work in Design (CSCWD), 2012 IEEE 16th International Conference on* (2012), IEEE, pp. 569–574.
- [99] WANG, P., DING, Z., JIANG, C., AND ZHOU, M. Automated web service composition supporting conditional branch structures. *Enterprise Information Systems* 8, 1 (2014), 121–146.
- [100] WANG, P., DING, Z., JIANG, C., ZHOU, M., AND ZHENG, Y. Automatic web service composition based on uncertainty execution effects. *IEEE Transactions on Services Computing* 9, 4 (2016), 551–565.
- [101] WEN, S., TANG, C., LI, Q., CHIU, D. K., LIU, A., AND HAN, X. Probabilistic top-k dominating services composition with uncertain qos. *Service Oriented Computing and Applications* 8, 1 (2014), 91–103.
- [102] WHITLEY, D. A genetic algorithm tutorial. *Statistics and computing* 4, 2 (1994), 65–85.
- [103] XIANG, F., HU, Y., YU, Y., AND WU, H. Qos and energy consumption aware service composition and optimal-selection based on pareto group leader algorithm in cloud manufacturing system. *Central European Journal of Operations Research* 22, 4 (2014), 663–685.

- [104] XU, B., LUO, S., YAN, Y., AND SUN, K. Towards efficiency of qos-driven semantic web service composition for large-scale service-oriented systems. *Service Oriented Computing and Applications* 6, 1 (2012), 1–13.
- [105] XU, C., LIANG, P., WANG, T., WANG, Q., AND SHEU, P. C. Semantic web services annotation and composition based on er model. In *Sensor Networks, Ubiquitous, and Trustworthy Computing (SUTC), 2010 IEEE International Conference on* (2010), IEEE, pp. 413–420.
- [106] YAN, G., JUN, N., BIN, Z., LEI, Y., QIANG, G., AND YU, D. Immune algorithm for selecting optimum services in web services composition. *Wuhan University Journal of Natural Sciences* 11, 1 (2006), 221–225.
- [107] YAO, Y., AND CHEN, H. Qos-aware service composition using nsga-ii 1. In *Proceedings of the 2nd International Conference on Interaction Sciences: Information Technology, Culture and Human* (2009), ACM, pp. 358–363.
- [108] YIN, H., ZHANG, C., ZHANG, B., GUO, Y., AND LIU, T. A hybrid multiobjective discrete particle swarm optimization algorithm for a sla-aware service composition problem. *Mathematical Problems in Engineering* 2014 (2014).
- [109] YIN, Y., ZHANG, B., AND ZHANG, X. Qos-driven transactional web service reselection for reliable execution. In *Information Science and Management Engineering (ISME), 2010 International Conference of* (2010), vol. 2, IEEE, pp. 79–82.
- [110] YOO, J. J.-W., KUMARA, S., LEE, D., AND OH, S.-C. A web service composition framework using integer programming with non-functional objectives and constraints. In *2008 10th IEEE Conference on E-Commerce Technology and the Fifth IEEE Conference on Enterprise Computing, E-Commerce and E-Services* (2008), IEEE, pp. 347–350.
- [111] YU, Q., AND BOUGUETTAYA, A. Efficient service skyline computation for composite service selection. *Knowledge and Data Engineering, IEEE Transactions on* 25, 4 (2013), 776–789.
- [112] YU, Q., LIU, X., BOUGUETTAYA, A., AND MEDJAHED, B. Deploying and managing web services: issues, solutions, and directions. *The VLDB Journal/The International Journal on Very Large Data Bases* 17, 3 (2008), 537–572.
- [113] YU, T., ZHANG, Y., AND LIN, K.-J. Efficient algorithms for web services selection with end-to-end qos constraints. *ACM Transactions on the Web (TWEB)* 1, 1 (2007), 6.
- [114] YU, Y., MA, H., AND ZHANG, M. An adaptive genetic programming approach to qos-aware web services composition. In *2013 IEEE Congress on Evolutionary Computation* (2013), IEEE, pp. 1740–1747.
- [115] ZENG, L., BENATALLAH, B., DUMAS, M., KALAGNANAM, J., AND SHENG, Q. Z. Quality driven web services composition. In *Proceedings of the 12th international conference on World Wide Web* (2003), ACM, pp. 411–421.
- [116] ZHANG, Q., AND LI, H. Moea/d: A multiobjective evolutionary algorithm based on decomposition. *IEEE Transactions on evolutionary computation* 11, 6 (2007), 712–731.
- [117] ZHANG, W., CHANG, C. K., FENG, T., AND JIANG, H.-Y. Qos-based dynamic web service composition with ant colony optimization. In *Computer Software and Applications Conference (COMPSAC), 2010 IEEE 34th Annual* (2010), IEEE, pp. 493–502.

- [118] ZITZLER, E. Evolutionary algorithms for multiobjective optimization: Methods and applications.
- [119] ZITZLER, E., DEB, K., AND THIELE, L. Comparison of multiobjective evolutionary algorithms: Empirical results. *Evolutionary computation* 8, 2 (2000), 173–195.
- [120] ZITZLER, E., LAUMANN, M., THIELE, L., ET AL. Spea2: Improving the strength pareto evolutionary algorithm, 2001.