Template Document

Academic Support Agent

February 19, 2025

[fragile]Welcome! TU Delft presentation template In LaTeX using the package Beamer

This template can be used to make a presentation in the 2022 version of the TU Delft style described here: `https://www.tudelft.nl/huisstijl/middelen/presentaties`

The icons have been converted to pdf, so they can be included crisply against a colored background:



A digital version of this presentation can be found at `https://gitlab.com/novanext/tudelft-beamer`.

Here's a QR code made by LaTeX, pointing to the same link:

https://gitlab.com/novanext/tudelft-beamer

Slides like these are straightforward to make, the following contains more fancy examples. Using all of these slide options in one presentation is probably too much for your audience...

background canvasbg=tud pink

1 Random Subset of Features


Citing If you happen to give a presentation with an older projector, you can set the aspect ratio to 4:3 using the documentclass option aspectratio=43.

To make a presentation with citations easier to follow, a footnote will show the full reference:

Rivers and sweet tea do unexpected things.[**?**]

Columns [T, onlytextwidth] .45 Short lines of text work well in a column. You can combine a text column with images, where the `\absimage` command can be used to place a picture at an exact location, over other elements.

To make sure the columns are top-aligned, and margins don't jump between pages, you can add the optional arguments `[T, onlytextwidth]` to the `\columns` environment. .45 Let's attempt to place an image on top of this square:



.74, .55.35tud-logo.pdf

Grid The command `\grid` can be used to add a grid to the slide, which makes it easier to place elements at a specific location.

The grid applies to `tikz`; `textpos` has the origin at the upper left.

(0.75, 0.5) circle (0.5ex); [anchor=south west] at (0.75, 0.5) (0.75, 0.5);

'Blocks' [onlytextwidth] 0.45 Default block

- item 1
- item 2

Alert block

1. Sugar in a stirred cup of tea gathers in the middle.
2. Rivers often take a detour through flat terrain.

0.45 Example block

width
[t]
List
styling
In
beamer,
enu-
mer-
a-
tions
and
item-
iza-
tions
can
con-
sist
of
three
lev-
els:

- One
  - Two
    - Three

1. One
   (a) Two
      i. Three

Speed up the compilation cycle

- Add to the preamble:
  `\includeonlyframes{current}`
- And to the frame you are working on:
  `[label=current]`
  (from the `beamer` documentation §4.3.3)
- Use `pdflatex` instead of `xelatex`
- Compile in draft mode.

background canvasbg=tud green

2 Working with split frames

0.4

A split `frame`for `\splitpos` = 0.4 `\paperwidth` [T] When `\splitpos` is given a positive value, the frame title to the right side, and the left side gets a colored background.

- The `textcolumn` environment can be used to add text to either one of the columns.

- The command `\bginsert` can be redefined to add something on top of the colored pane, clipped off at the edges.
- Use `\usebackgroundtemplate` to redefine the background more generally.

A split `frame`scoping... [T] To keep the footers visible, they can be made white using these commands:

- `\leftfooterwhitefalse`
- `\rightfooterwhitefalse`
- `\leftfooterwhitetrue`
- `\rightfooterwhitetrue`

The scope for all of these tweaks can be limited by `{` and `}`, or—more readable—by `\begingroup` and `\endgroup`.


-0.4

Negative `\splitpos` e.g. `-0.4\paperwidth` [T] Using a negative value for `\splitpos`, the background panes swap places.

The `tikzcolumn` environment can be used instead of `textcolumn`, to place items in one of the panes using tikzframe[0] commands. The default units are set relative to the paper size.

The `abstikz` environment does almost the same, without being restricted to the column, or influencing the

[0] see `https://tikz.dev/`

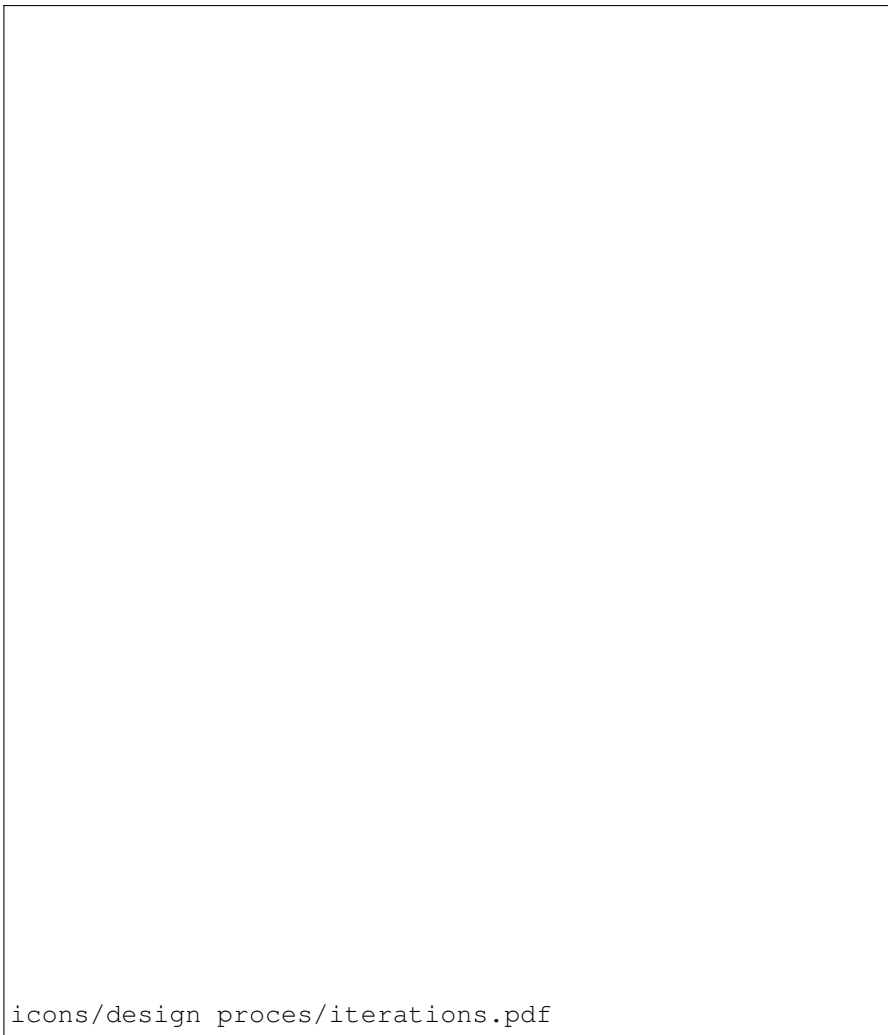

placement of another `textcolumn`. at (.8, .5)

[red, latex-] (1, 0) – ++(135:1em) node[anchor=east] (\paperwidth, 0); [red, latex-] (1, 1) – ++(-135:1em) node[anchor=east] (\paperwidth, \paperheight); [red, latex-] (0, 0) – ++(45:1em) node[anchor=west,rotate=90] origin (0, 0)—using `abstikz`;

Mass–energy equivalence [T] They say every formula you add to a presentation, will reduce your audience by 50. A simple yet effective way to mitigate this effect, is adding a compact nomenclature to the slides containing formulae.

$$E = mc_0^2$$

If you find this is taking up too much of your precious space, than you are doing something wrong, and it is not adding this little nomenclature.

-0.3

[t]Colors [T, onlytextwidth] 0.5 All colors from the TUD style guide are predefined for your convenience. You can create a table similar to the example in their powerpoint as such:

	primary		
	Huge number	100e3	
2gray!25white	**Large number**	1000	0.25
	Normal number	10	
	Small number	0.1	

- **navy**
- **topaz**
- **blue**
- **purple**
- **pink**
- **shiraz**
- **grapefruit**
- **orange**
- **yellow**
- **green**
- **teal**

0.25

- **navy**
- **topaz**
- **blue**
- **purple**
- **pink**
- **shiraz**
- **grapefruit**

- **orange**
- **yellow**
- **green**
- **teal**

3 Animations

0pt

[fragile]Animation Some commands take optional arguments in the form of `<x-y>`, where `x` is the first 'sub-frame' on which the context is shown, and `y` is the last. `x` or `y` can be replaced by +, referring to 'the next sub-frame'.

[T,onlytextwidth] .5

1. <+-> uncovered...
2. <+-> one...
3. <+-> by...
4. <+-> one.

.5 Using only:<1>1<2>2<3>3
Using onslide:<1>1<2>2<3>3
Using pause:123


For more advanced animations, see §14 of the manual:
`https://www.ctan.org/pkg/beamer`

<1>
background canvasbg=tud yellow


4 Matplotlib plots




A bar chart



A pie chart



Confidence intervals



Stream plot

background canvasbg=tud yellow

5 Full-screen graphics

widthheightabstikz [align=center, font=

flame

colors

.

[allowframebreaks,t]Bibliography