Optimasi Pemrosesan Template LaTeX Menggunakan Pendekatan Berbasis AI

Academic Support Agent

19 Pebruari 2025

Ringkasan

PENDAHULUAN
TINJAUAN PUSTAKA
[twoside,11pt]article pgm2016 amsmath algorithm [noend]algpseudocode subcaption [english]babel paralist [lowtilde]url fixltx2e listings color hyperref
auto-pst-pdf pst-all pstricks-add
[1]▷ 1 codegreenrgb0,0.6,0 codegrayrgb0.5,0.5,0.5 codepurplergb0.58,0,0.82 backcolourrgb0.95,0.95,0.92 mystyle backgroundcolor=backcolour, commentstyle=codegreen, keywordstyle=magenta, numbers-tyle=codegray, stringstyle=codepurple, basicstyle=, breakatwhitespace=false, breaklines=true, captionpos=b, keepspaces=true, numbers=left, numbersep=5pt, showspaces=false, showstringspaces=false, showtabs=false, tabsize=2 style=mystyle
University of Regina - CS 330-001 Introduction to Operating SystemsYour Name- 200XXYYZZ
1
Assignment 1
Your Nameemail@uregina.ca
200XXYYZZ
This is an example of how to cite: [**?**] proposed a new approach for inference in Bayesian networks (BNs) pear88 based on partial differentiation called *Arithmetic Circuits* darwiche00.
This template is organized as follows. In Section 1, ...

1 Example Section

A *joint probability distribution* (JPD) is function P on the Cartesian product V of the variable domains such that the following two conditions hold: $0 \leq P(v) \leq 1.0 for each configuration v \in V$; and
$\sum_{v \in V} P(v) = 1.0$
Referring to Equation 1 here.
Referring to Table 1 $(\text{sub}_t able) here$.

1.1 Example Subsection

This is how you use math items inline: $(\theta_a \star \lambda_a)$, $(\theta_{ab} \star \lambda_b)$, $(\theta_{a\bar{b}} \star \lambda_{\bar{b}})$, $(\lambda_b \star \theta_{\bar{a}b})$, $(\lambda_{\bar{b}} \star \theta_{\bar{a}\bar{b}})$, and $(\lambda_{\bar{a}} \star \theta_{\bar{a}})$.

Tabel 1: Table (a) provides the prior probability of variable A and Table (b) provides the conditional probability of B given A.

.5

Tabel 2:

A	$P(A)$
1	0.3
0	0.7

.5

Tabel 3:

A	B	$P(B\|A)$
1	1	0.1
1	0	0.9
0	1	0.8
0	0	0.2

Referring to Figure 1.

[language=python] import numpy as np from keras.models import Sequential from keras.layers.core import Dense, Dropout, Layer, Activation import time import tensorflow as tf

f = open("results.csv", "w")

INPUT$_SIZE = 10 OUTPUT_SIZE = INPUT_SIZE nb_class = 3$

batch$_size = 128 nb_epoch = 40$

np.random.seed(123)

$X_train = np.random.rand(INPUT_SIZE, nb_class) Y_train = np.random.rand(OUTPUT_SIZE, nb_class)$

$X_test = np.random.rand(INPUT_SIZE) Y_test = np.random.rand(OUTPUT_SIZE)$

for i in range(1,51):

start$_time = time.time()$

model = Sequential() model.add(Dense(INPUT$_SIZE, input_shape = (nb_class,)))model.add(Activation('linear'))mo$
$categorical_crossentropy', optimizer =' rmsprop')$


final$_time = time.time()diff_time = final_time - start_time$

f.write(str(i)+","+str(diff$_time) + ", " + "")$

f.close()

Tabel 4: Comparison of parallel and serial solutions for ACs with 50 runs each

Solution	Time average	Standard deviation
Serial	0.1610	0.0536
Parallel	0.0434	0.0082

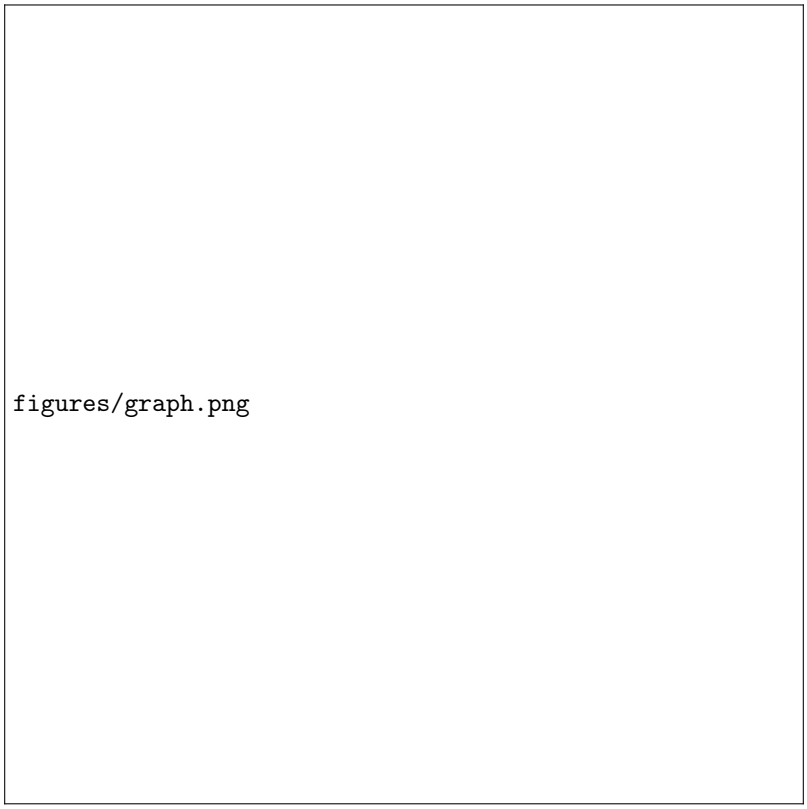

Gambar 1: Comparison between CPU and GPU implementation of AC compiling.

2 Conclusion

In nec hendrerit arcu. Pellentesque leo libero, fringilla consectetur sapien eget, placerat finibus justo. Aliquam id sapien in eros lacinia euismod. Sed consectetur eros quis dui vestibulum pulvinar. Suspendisse ligula lacus, blandit interdum convallis sit amet, vulputate eget quam. Curabitur justo nunc, efficitur vitae fringilla eget, suscipit vitae sem. Etiam ultricies, nibh dictum convallis viverra, ipsum magna vehicula nibh, eu elementum purus est ac risus. Suspendisse sollicitudin auctor urna vel aliquet. In at eros et elit mollis lacinia. Fusce auctor leo id metus porttitor, vulputate semper erat congue. Donec rutrum erat non mauris convallis, id feugiat velit facilisis. Sed interdum magna sit amet mauris elementum pellentesque.