

1、更新说明

- 添加问卷接口，详情请看 2.10

1、更新说明

2、后端接口

2.1 创建

创建用户
创建快递
创建求助
创建跑腿
创建闲置

2.2 加载

初始加载：
快递
求助
跑腿
闲置
下拉加载：
快递
跑腿
闲置
求助

2.3 上传并获取图片

2.4 接受订单

2.5 删除订单

删除前
删除后

2.6 加载个人订单

个人创建订单
个人接受订单：

2.7 获取联系方式

2.8 登陆

2.9 确认订单（即交易完成）

2.10 问卷

创建问卷
提交填写的问卷
获取问卷（用于填写）
加载问卷
上拉加载
终止问卷
删除问卷
查看问卷填写情况

2、 后端接口

2.1 创建

创建用户

请求路径: <http://172.18.32.138:8080/Create/User>

Query Params

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> code	wx.login 获取到的code	061jNdl29uaWD09c5fi2FVMdl2jNdC
<input checked="" type="checkbox"/> nickName	用户微信昵称	0o
<input checked="" type="checkbox"/> avatarUrl	用户头像url	https://wx.qlogo.cn/mmopen/vi_32/Q0j4TwGTfTKibe1KH...MmkFibaDczju4EG...
<input checked="" type="checkbox"/> gender	用户性别	1
Key	Value	Description

Body Cookies Headers (3) Test Results Status

Pretty Raw Preview JSON

```
1 {  
2   "errcode": 0,  
3   "expireTime": 60,  
4   "errmsg": null,  
5   "sessionId": "4437d70d-68e4-4be1-afda-00a56aac1d73"  
6 }
```

errcode 为 0 时说明请求正确, 不为0时, errmsg 输出 出错信息
SessionId 超时时间, 分钟

https://blog.csdn.net/qq_36303862

数据库:

openid	nickname	avatarUrl	gender	school	wechat	phoneNum	state	registe_time
001	NULL	NULL	NULL	NULL	NULL	NULL	NULL	2019-05-01 22:44:38
oXivH42Q2C6Ub-xi2vINMYkGz_dQ	0o	https://wx.qlogo.cn/mmopen/vi_32/Q0j4TwGTf...	1	NULL	NULL	NULL	0	2019-05-03 14:57:56

创建快递

请设置好 sessionId

请求路径: <http://172.18.32.138:8080/Create/Expressage>

http://172.18.32.138:8080/Create/Expressage?express_loc=明的元&arrive_time=2019/5/3 16:06&loc=至善园二号666&num=4&pay=10&remark=没啥可说的

POST http://172.18.32.138:8080/Create/Expressage?express_loc=明的元&arrive_time=2019/5/3 16:06&loc=至善园二号666&num=4&pay=10&remark=没啥可说的

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> express_loc 快递点	明的元
<input checked="" type="checkbox"/> arrive_time 到达时间	2019/5/3 16:06 → 注意请求格式
<input checked="" type="checkbox"/> loc 送达地点	至善园二号666
<input checked="" type="checkbox"/> num 数量	4
<input checked="" type="checkbox"/> pay 酬劳	10
<input checked="" type="checkbox"/> remark 备注	没啥可说的
<input checked="" type="checkbox"/> phone 手机	11111111111
<input checked="" type="checkbox"/> wechat 微信	dsfasjkhfasjdf
Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

1 创建成功, 0 创建失败

https://blog.csdn.net/qq_36303862

数据库:

pid	uid1	uid2	express_loc	arrive_time	loc	phone	wechat	num	pay	state	remark	issue_time
1	001	NULL	明的元	2019-04-29 10:11:44	至善园二号	12313123	dfafadsf	2	10	NULL	没啥可说的	2019-05-01 22:53:46
2	001	NULL	明的元	2019-04-29 10:11:44	至善园二号	12313123	dfafadsf	2	10	NULL	没啥可说的	2019-05-01 22:54:04
3	001	NULL	明的元	2019-05-03 16:06:00	至善园二号666	11111111111	dsfasjkhfasjdf	4	10	NULL	没啥可说的	2019-05-03 16:08:23
4	001	NULL	明的元	2019-05-03 16:06:00	至善园二号666	11111111111	dsfasjkhfasjdf	4	10	NULL	没啥可说的	2019-05-03 16:20:19

创建求助

请设置好 sessionId

请求路径: http://172.18.32.138:8080/Create/For_help

POST http://localhost:8080/Create/For_help?title=帮忙&content=帮我写作业&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code Co

Query Params

KEY	VALUE	DESCRIPTION
title	帮忙	
content	帮我写作业	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	

Body Cookies Headers (3) Test Results Status: 200 OK Time: 24 ms Size: 170 B

Pretty Raw Preview JSON

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

1 请求成功, 0 请求失败

https://blog.csdn.net/qq_36303862

数据库:

fid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
1	001	NULL	求助	NULL	17806753681	ljnhhlh	2019-04-29 10:11:44	19	NULL	2019-05-01 22:49:03
2	001	NULL	帮忙	NULL	17806753681	ljnhhlh	2019-04-29 10:11:44	19	NULL	2019-05-01 22:49:16
3	001	NULL	帮忙	帮我写作业	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:28:24

创建跑腿

请设置好 sessionId

请求路径: <http://172.18.32.138:8080/Create/Errand>

http://172.18.32.138:8080/Create/Errand?title=帮忙&content=帮我买饮料&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh

POST http://172.18.32.138:8080/Create/Errand?title=帮忙&content=帮我买饮料&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code Co

Query Params

KEY	VALUE	DESCRIPTION
title	帮忙	
content	帮我买饮料	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	

Body Cookies Headers (3) Test Results Status: 200 OK Time: 988 m

Pretty Raw Preview JSON

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

https://blog.csdn.net/qq_36303862

(描述, 同快递)

数据库:

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	NULL	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10

创建闲置

请设置好 sessionId

请求路径: http://172.18.32.138:8080/Create/Second_hand

POST http://172.18.32.138:8080/Create/Second_hand?object_name=自行车&content=用了两年&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh&photo_url=xxxxxx...

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code

Query Params

KEY	VALUE	DESCRIPTION
object_name	物品名称	自行车
content	用了两年	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	
photo_url	xxxxxxxxxxxx	

Body Cookies Headers (3) Test Results

Status: 200 OK Time: 19 ms Size: 170 B

或者使用promise

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

https://blog.csdn.net/qj_36363862

	sid	uid1	uid2	object_name	content	phone	wechat	ending_time	photo_url	pay	state	issue_time
▶	1	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	http://xxx	3	NULL	2019-05-01 23:04:13
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	http://xxx	4	NULL	2019-05-01 23:04:22
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	xxxxxxxxxxxx	10	NULL	2019-05-03 16:59:16
	4	001	NULL	自行车	用了两年	17806753681	ljnhhlh	2019-04-29 10:11:44	xxxxxxxxxxxx	10	NULL	2019-05-03 17:01:26

2.2加载

初始加载: 打开页面时的加载, 最多返回15条, 需要记下最后一条数据的 id, 用于下拉加载

下拉加载: 用户屏幕拉到底部时加载, 需要将最后一条数据的 id附加到请求上

初始加载:

快递

请求路径: <http://172.18.32.138:8080/Load/OnLoadExpressage>

GET
http://172.18.32.138:8080/Load/OnLoadExpressage

KEY	VALUE
Key	Value

Body
Cookies
Headers (3)
Test Results

Pretty
Raw
Preview
JSON

```

18      "loc": "至善园二号",
19      "pid": 12,
20      "remark": "none",
21      "issue_time": "2019-05-10T12:11:36.000+0000",
22      "state": 0
23    },
24    {
25      "express_loc": "明德园六号",
26      "arrive_time": "2018-05-11T03:00:00.000+0000",
27      "num": 1,
28      "pay": 5,
29      "loc": "至善园二号",
30      "pid": 11,
31      "remark": "none",
32      "issue_time": "2019-05-10T12:10:43.000+0000",
33      "state": 0
34    },
35    {
36      "express_loc": "明德园六号",
37      "arrive_time": "2018-05-11T03:00:00.000+0000",
38      "num": 1,
39      "pay": 5,
40      "loc": "至善园二号",

```

https://blog.csdn.net/qq_36303862

求助

请求路径: http://172.18.32.138:8080/Load/OnLoadFor_help

GET http://172.18.32.138:8080/Load/OnLoadFor_help

KEY	VALUE
Key	Value

body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 [
2   {
3     "fid": 4,
4     "title": "帮忙",
5     "content": "帮我写作业",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "pay": 10,
8     "state": 0,
9     "issue_time": "2019-05-10T16:30:34.000+0000"
10  }
11 ]
```

https://blog.csdn.net/qq_36303862

跑腿

请求路径: <http://172.18.32.138:8080/Load/OnLoadErrands>

GET

http://172.18.32.138:8080/Load/OnLoadErrands

KEY	VALUE
Key	Value

BodyCookiesHeaders (3)Test Results

PrettyRawPreview


JSON

```
1 [
2   {
3     "rid": 9,
4     "title": "帮忙",
5     "content": "帮我买饮料",
6     "pay": 10,
7     "ending_time": "2019-04-29T02:11:44.000+0000",
8     "state": 0,
9     "issue_time": "2019-05-11T01:39:37.000+0000"
10  },
11  {
12    "rid": 8,
13    "title": "帮忙",
14    "content": "帮我买饮料",
15    "pay": 10,
16    "ending_time": "2019-04-29T02:11:44.000+0000",
17    "state": 0,
18    "issue_time": "2019-05-11T01:39:36.000+0000"
19  },
20  {
21    "rid": 7,
22    "title": "帮忙",
23    "content": "帮我买饮料",
```

https://blog.csdn.net/qq_36303862

闲置


请求路径: http://172.18.32.138:8080/Load/OnLoadSecond_hand

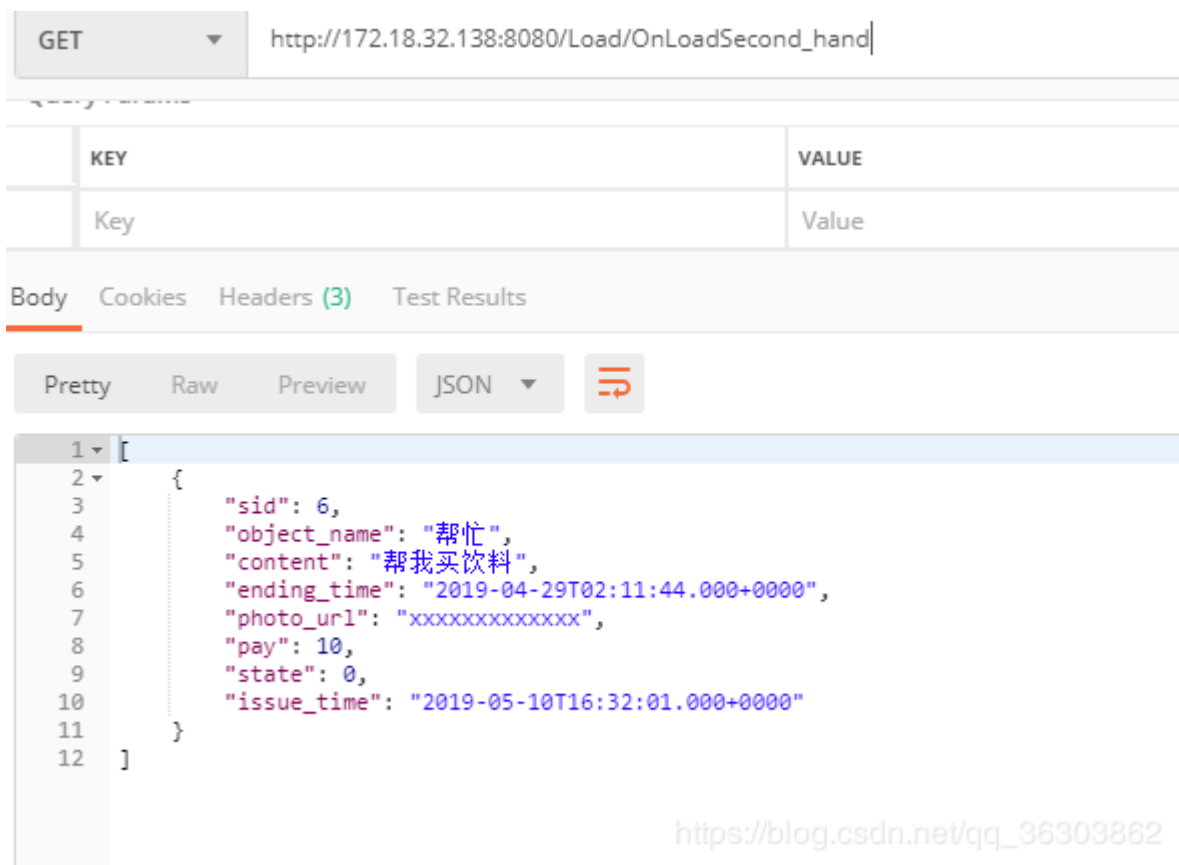

下拉加载：


快递

请求路径：<http://172.18.32.138:8080/Load/downloadExpressage>

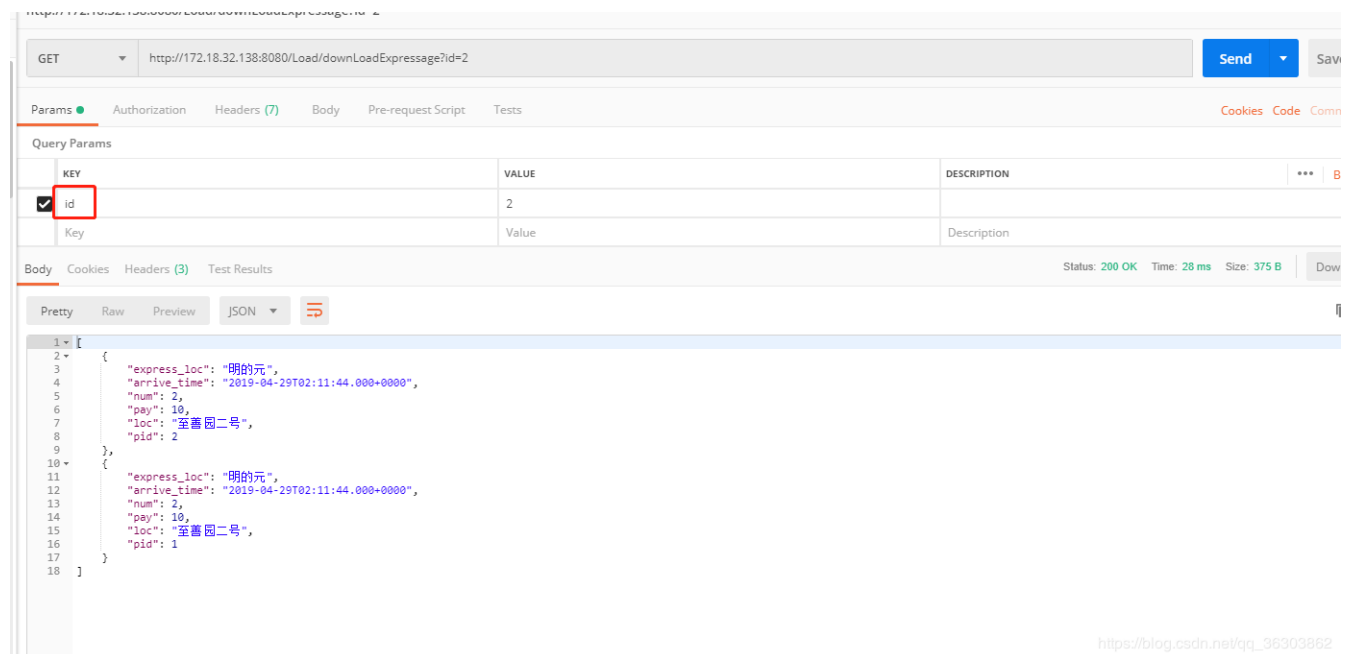

跑腿

请求路径: <http://172.18.32.138:8080/Load/downloadErrands?id=9>

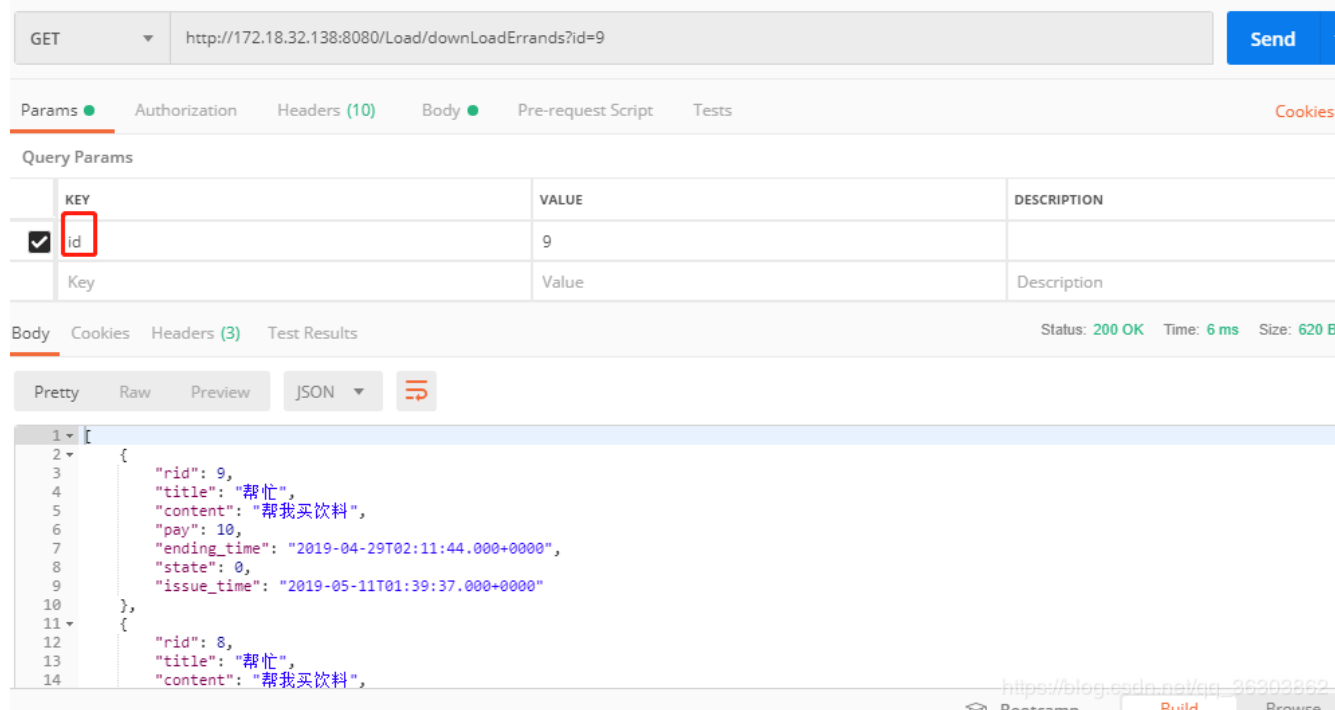


GET <http://172.18.32.138:8080/Load/downloadErrands?id=9> Send

Params Authorization Headers (10) Body Pre-request Script Tests Cookies

Query Params

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> id	9	
Key	Value	Description


Body Cookies Headers (3) Test Results Status: 200 OK Time: 6 ms Size: 620 B

Pretty Raw Preview JSON 

```
1 [
2   {
3     "rid": 9,
4     "title": "帮忙",
5     "content": "帮我买饮料",
6     "pay": 10,
7     "ending_time": "2019-04-29T02:11:44.000+0000",
8     "state": 0,
9     "issue_time": "2019-05-11T01:39:37.000+0000"
10  },
11  {
12    "rid": 8,
13    "title": "帮忙",
14    "content": "帮我买饮料",
```

闲置

请求路径: http://172.18.32.138:8080/Load/downloadSecond_hand?id=9

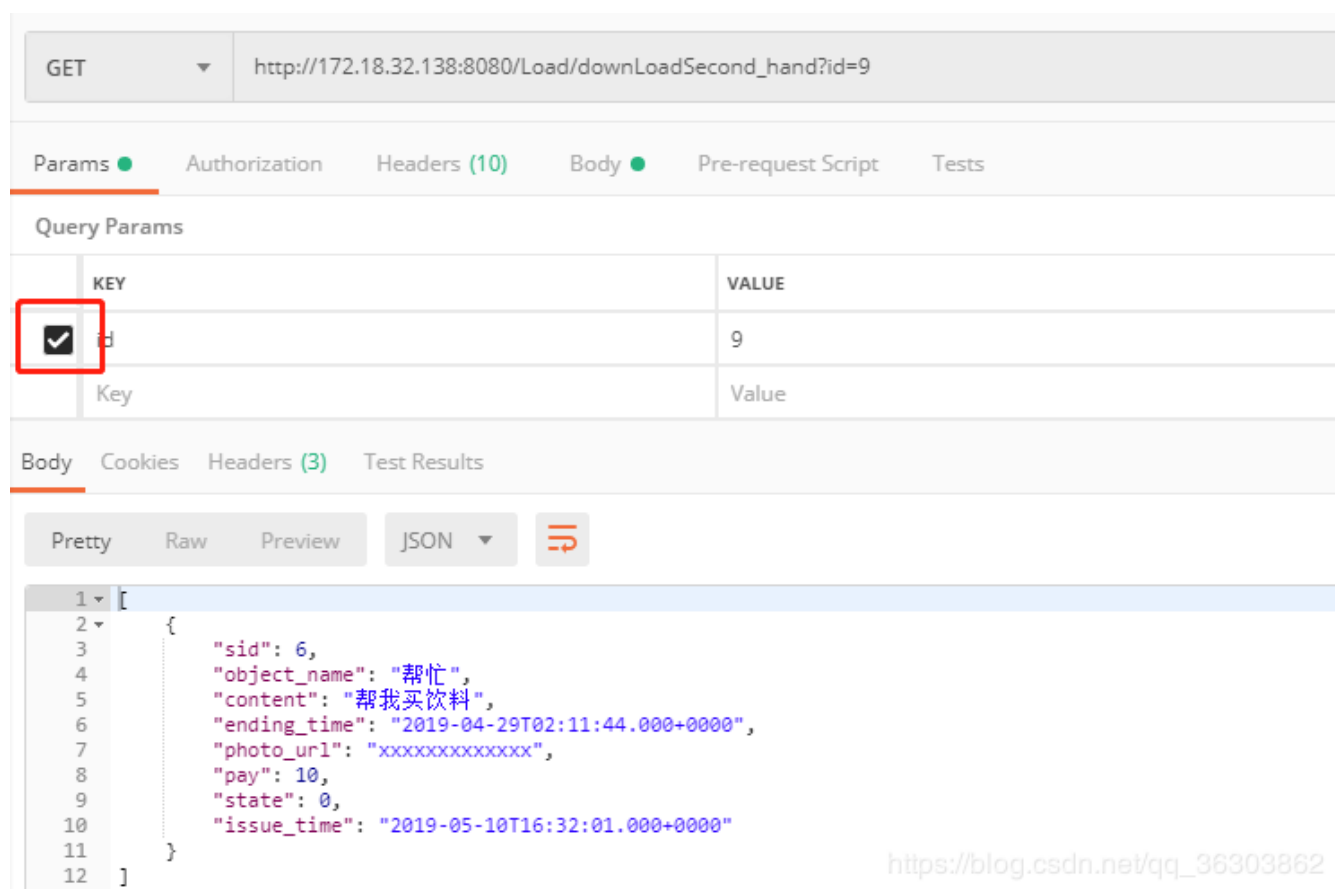


GET http://172.18.32.138:8080/Load/downloadSecond_hand?id=9

Params Authorization Headers (10) Body Pre-request Script Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> id	9
Key	Value


Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON 

```
1 [
2   {
3     "sid": 6,
4     "object_name": "帮忙",
5     "content": "帮我买饮料",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "photo_url": "xxxxxxxxxxxxxx",
8     "pay": 10,
9     "state": 0,
10    "issue_time": "2019-05-10T16:32:01.000+0000"
11  }
12 ]
```

求助

请求路径: http://172.18.32.138:8080/Load/downloadFor_help

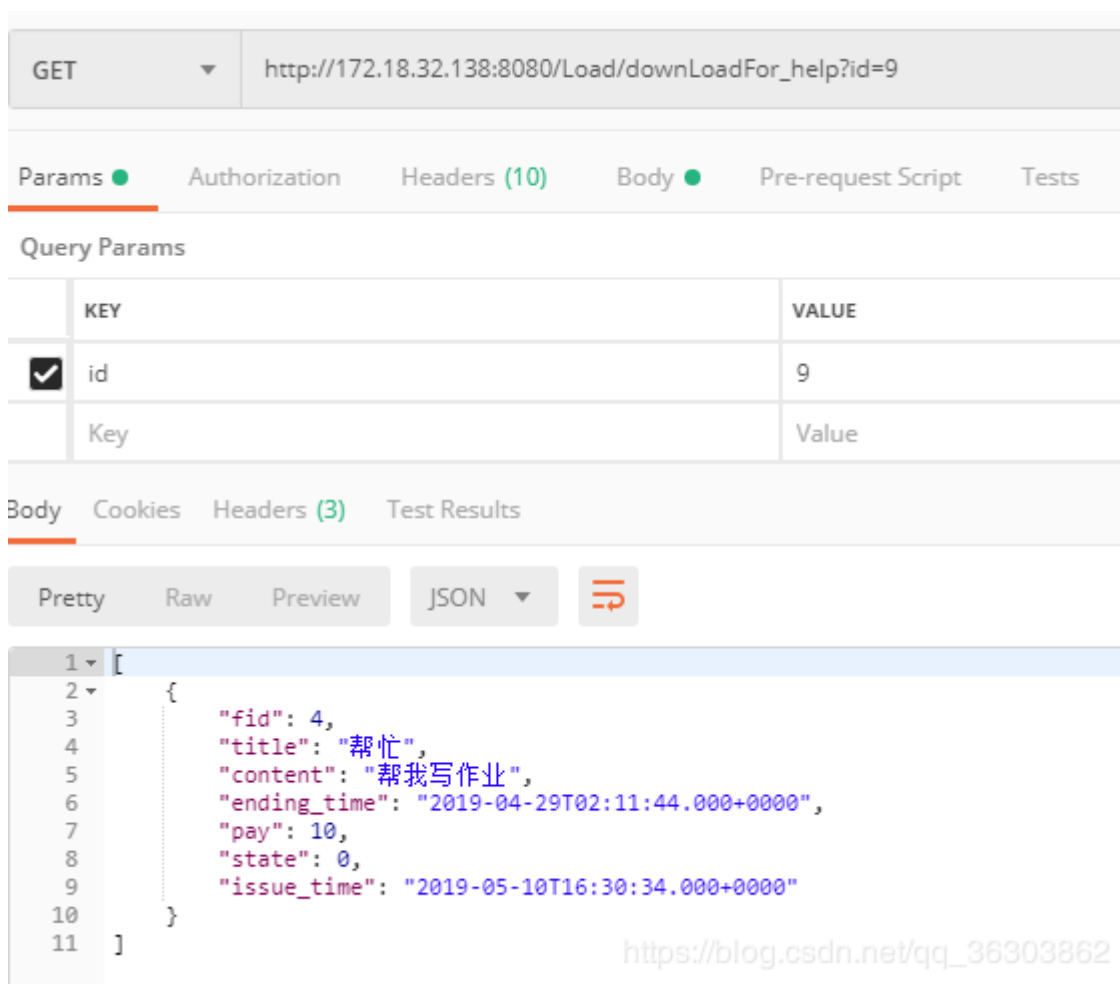


GET http://172.18.32.138:8080/Load/downloadFor_help?id=9

Params **Authorization** Headers (10) Body **Pre-request Script** Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	id	9
	Key	Value

Body **Cookies** Headers (3) Test Results

Pretty Raw Preview JSON 

```
1 [
2   {
3     "fid": 4,
4     "title": "帮忙",
5     "content": "帮我写作业",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "pay": 10,
8     "state": 0,
9     "issue_time": "2019-05-10T16:30:34.000+0000"
10  }
11 ]
```

https://blog.csdn.net/qq_36303862

2.3上传并获取图片

请求路径: <http://119.23.218.7:8080/File/Upload> (ps:这是服务端的地址, 可随时访问)

http://119.23.218.7:8080/File/Upload

POST http://119.23.218.7:8080/File/Upload Send Save

Params Authorization Headers (9) Body Pre-request Script Tests Cookies Code Comment

none form-data x-www-form-urlencoded raw binary

KEY	VALUE	CONTENT TYPE	DESCRIPTION
img	1.jpg	Auto	
Key	Value	Auto	Description

body Cookies Headers (3) Test Results Status: 200 OK Time: 207 ms Size: 229 B Download

Pretty Raw Preview JSON

```
1 {
2   "errcode": 1,
3   "imageUrl": "a58e416d-64fd-444e-854b-9d36e3ae27291.jpg",
4   "errmsg": "Upload Successfully"
5 }
```

仅为1 是成功上传 图片名称

https://blog.csdn.net/qq_36303862

请求返回的imageUrl可直接在控件上 将 src 设为“<http://119.23.218.7:8080/>”+ “imageUrl”即可

如：<image src = "{xxx}"></>

GET http://119.23.218.7:8080/a58e416d-64fd-444e-854b-9d36e3ae27291.jpg Send Save


imageUrl

Params Authorization Headers (7) Body Pre-request Script Tests Cookies Code Comment

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

body Cookies Headers (5) Test Results Status: 200 OK Time: 1893 ms Size: 379.16 KB Download




https://blog.csdn.net/qq_36303862

2.4接受订单

请设置好 sessionId

请求路径：<http://172.18.32.138:8080/Modified/AcceptIssue>

请求方式：传递订单类型和订单id

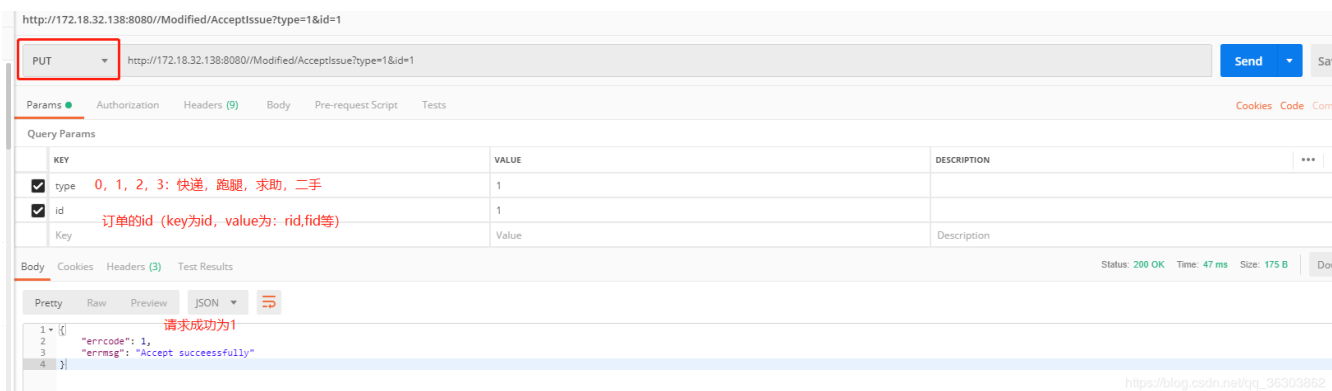

此时, uid2为接单者的openid, state 为1, 即订单已接受

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10
	4	001	NULL	跑腿	买东西	242342424323	alkfalkjfdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:30
	5	001	NULL	跑腿	买东西	242342424323	alkfalkjfdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:51
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

2.5 删除订单

请设置好 sessionId

请求路径: <http://172.18.32.138:8080/Modified/DeleteIssue>

删除前

此处的删除逻辑是改变订单的状态 (state), 而非删除数据库内对应的数据

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10
	4	001	NULL	跑腿	买东西	242342424323	alkfalkjfdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:30
	5	001	NULL	跑腿	买东西	242342424323	alkfalkjfdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:51
*	6	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	0	2019-05-11 00:31:21
	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

删除后

PUT

http://172.18.32.138:8080/Modified/DeleteIssue?type=1&id=6

Params

Authorization

Headers (9)

Body

Pre-request Script

Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> type	1
<input checked="" type="checkbox"/> id	6
Key	Value

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

```

1 {
2   "errcode": 1,
3   "errmsg": "Accept suceessfully"
4 }

```

https://blog.csdn.net/qq_36303862

rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学		12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
2	001		大山中学		12313123	dfafadsf	2019-04-29 10:11:44	3		2019-05-01 22:56:38
3	001		帮忙	帮我买饮料	17806753681	ljnhlih	2019-04-29 10:11:44	10		2019-05-03 16:55:10
4	001		跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10		2019-05-08 12:38:30
5	001		跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10		2019-05-08 12:38:51
6	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ		帮忙	帮我买饮料	17806753681	ljnhlih	2019-04-29 10:11:44	10	2	2019-05-11 00:31:21

2.6 加载个人订单

个人创建订单

请设置好sessionId

请求路径: <http://172.18.32.138:8080/Load/Creation>

GET http://172.18.32.138:8080/Load/Creation

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```

1 {
2   "errands": [
3     {
4       "rid": 6,
5       "title": "帮忙",
6       "content": "帮我买饮料",
7       "pay": 0,
8       "ending_time": null,
9       "state": 0,
10      "issue_time": null
11    }
12  ],
13  "expressages": [
14    {
15      "express_loc": null,
16      "arrive_time": null,
17      "num": 0,
18      "pay": 0,
19      "loc": "至善园二号666",
20      "pid": 13,
21      "remark": null,
22      "issue_time": null,
23      "state": 0
24    }
25  ],
26  "second_hands": [
27    {
28      "sid": 6,
29      "object_name": "帮忙",
30      "content": "帮我买饮料",
31      "ending_time": null,
32      "photo_url": null,
33      "pay": 0,
34      "issue_time": null
35    }
36  ],
37  "for_helps": [

```

https://blog.csdn.net/qq_36303862

个人接受订单:

请设置好sessionId

请求路径: <http://172.18.32.138:8080/Load/Receiving>

GET http://172.18.32.138:8080/Load/Receiving Send Save

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code Commer

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

body Cookies Headers (3) Test Results Status: 200 OK Time: 537 ms Size: 296 B Download

Pretty Raw Preview JSON

```

1 {
2   "errands": [
3     {
4       "rid": 1,
5       "title": "大山中学",
6       "content": null,
7       "pay": 0,
8       "ending_time": null,
9       "state": 1,
10      "issue_time": null
11    }
12  ],
13  "expressages": [],
14  "second_hands": [],
15  "for_helps": []
16 }

```

https://blog.csdn.net/qq_36303862

2.7 获取联系方式

请求路径: http://172.18.32.138:8080/Load/Contact_way

GET http://172.18.32.138:8080/Load/Contact_way?type=1&id=2

	KEY	VALUE
<input checked="" type="checkbox"/>	type	1
<input checked="" type="checkbox"/>	id	2
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 [
2   {
3     "phone": "12313123",
4     "wechat": "dfafadsf"
5   }
6 ]
```

https://blog.csdn.net/qq_36303862

2.8 登陆

请求路径: <http://172.18.32.138:8080/Create/Login>

用户已注册:

POST http://172.18.32.138:8080/Create/Login?code=021Q2au31tIU0R1IWNs31pD8u31Q2au5

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	code	021Q2au31tIU0R1IWNs31pD8u31Q2au5
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 {
2   "errcode": 1,
3   "expireTime": 60,
4   "errmsg": "Login in successfully",
5   "sessionId": "1419bd25-7aa4-4e45-b2c4-82c75c468990"
6 }
```

https://blog.csdn.net/qq_36303862

用户未注册

POST http://172.18.32.138:8080/Create/Login?code=081usGtF0W1olc2cVevF0YHXtF0usGth Send

Params Authorization Headers (9) Body Pre-request Script Tests Cookies Code

Query Params

	KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/>	code	081usGtF0W1olc2cVevF0YHXtF0usGth	
<input type="checkbox"/>			
	Key	Value	Description

Body Cookies Headers (3) Test Results Status: 200 OK Time: 386 ms Size: 176 B

Pretty Raw Preview JSON

```
1 {
2   "errcode": 0,
3   "errmsg": "Please First Register"
4 }
```

用户未注册

https://blog.csdn.net/qq_36303862

2.9 确认订单（即交易完成）

请设置好sessionId

请求路径: <http://172.18.32.138:8080/Modified/FinishIssue>

PUT <http://172.18.32.138:8080/Modified/FinishIssue?type=1&id=11>

Params **Authorization** Headers (9) Body Pre-request Script Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	type	快递, 跑腿, 求助, 二手: 0, 1, 2, 3
<input checked="" type="checkbox"/>	id	key: id是订单的id, 如rid, fid等
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 {  
2   "errcode": 1,  
3   "errmsg": "Finish successfully"  
4 }
```

成功为1, 失败为0, 如果失败, 则需要给用户相应的提示

https://blog.csdn.net/qq_36303862

2.10 问卷

创建问卷

请求路径: <http://172.18.32.138:8080/Create/questionair>

问卷题目统一格式:

```
{type:0,title:"",a:"",b:'',c:'',d:''}  
// type :0 单选, 1 多选, 2 填空  
//title为题目  
//a,b,c,d 为选项, 填空题则留空
```

因为数据库不区分大小写, 会将大写改成小写, 所以直接统一都使用小写

传递的数据, 可查看我提供的js文件create函数:


```
data:{
  name:name,
  description:description,
  pay:pay,
  content:content,
  content_count:content_count
}
```

//name 为问卷名称, description为问卷描述, pay为每份问卷支付费用

//content 为问卷题目数组

//content_count 用于问卷对应题目的统计, 如,a,b,c,d选了多少人, 填空题填的内容

//content_count 和 content需要做些处理, 参考我给的js

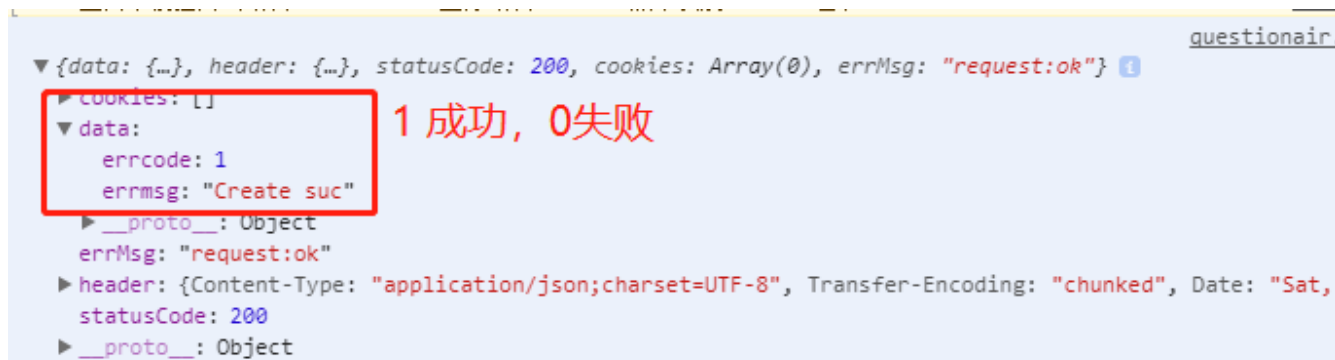

提交填写的问卷


请求路径: <http://172.18.32.138:3030/Create/fill>

```
data:{
  content_count:content_count
  id:id
}
```

//content_count 请参照我提供的js文件 fill函数

//其格式为: content_count:[{},{},{}, {}, , ,], 一个{}就是一道题目


//注意, 每条填空题, 要在末尾添加一个分割符, 如“; ”, 用于前端的后端处理,

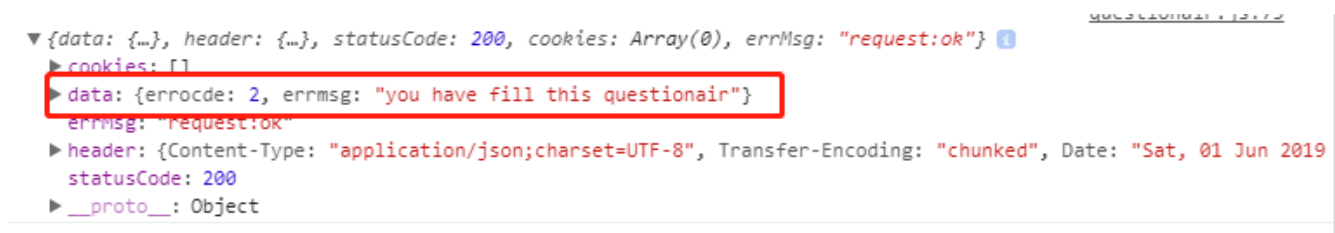


errcode : 0 填写失败, 1填写成功, 2 用户已填写过该问卷

获取问卷 (用于填写)

请求路径: <http://172.18.32.138:3030/Create/getQuestionairContent>

GET 

http://172.18.32.138:3030/Create/getQuestionairContent?id=17

Params 

Authorization


Headers (7)

Body

Pre-request Script

Tests

Query Params

	KEY	VALUE
	id	17
	Key	Value

https://blog.csdn.net/qq_36303862

```

▼ {data: Array(1), header: {...}, statusCode: 200, cookies: Array(0), errMsg: "request:ok"}
  ► cookies: []
  ▼ data: Array(1)
    ▼ 0:
      content: "[{"type":0,"title":"对饭堂的满意度","a":"不满意","b":"一般","c":"较满意","d":"满意"},{"type":1,"title":"喜欢窗口","a":"不满意","b":"一般","c":"较满意","d":"满意"},{"type":2,"title":"对饭堂的
      content_count: null
      description: "饭堂满意度"
      name: "调查问卷"
      num: 0
      qid: 17
      ► __proto__: Object
      length: 1
      nv_length: (...)
      ► __proto__: Array(0)
      errMsg: "request:ok"
      ► header: {Content-Type: "application/json;charset=UTF-8", Transfer-Encoding: "chunked", Date: "Sat, 01 Jun 2019 16:39:57 GMT"}
      statusCode: 200

```

这两个用不到，是个空值

加载问卷

请求路径: <http://172.18.32.138:3030/Create/OnLoadQuestionair>

http://172.18.32.138:3030/Create/OnLoadQuestionair

GET	▼	http://172.18.32.138:3030/Create/OnLoadQuestionair
-----	---	--

Params Authorization Headers (7) Body Pre-request Script Tests

Query Params

KEY	VALUE
Key	Value

Body Cookies Headers (3) Test Results

Pretty

Raw

Preview

JSON ▼



```
1 [
2   {
3     "qid": 18,
4     "name": "调查问卷",
5     "description": "饭堂满意度",
6     "pay": 4
7   },
8   {
9     "qid": 17,
10    "name": "调查问卷",
11    "description": "饭堂满意度",
12    "pay": 4
13  },
14  {
15    "qid": 16,
16    "name": "调查问卷",
17    "description": "饭堂满意度",
18    "pay": 4
19  },
20  {
21    "qid": 15,
22    "name": "调查问卷",
23    "description": "饭堂满意度",
24    "pay": 4
25  },
26  {
27    "qid": 14,
28    "name": "调查问卷",
29    "description": "饭堂满意度",
30    "pay": 4
31  },
32  {
33    "qid": 13,
34    "name": "调查问卷",
35    "description": "饭堂满意度",
36    "pay": 4
37  },
38 ]
```

https://blog.csdn.net/qq_36303862

上拉加载

请求路径: <http://172.18.32.138:3030/Create/downLoadQuestionair>

GET

http://172.18.32.138:3030/Create/downloadQuestionair?id=10

Params

Authorization

Headers (7)

Body

Pre-request Script

Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	id	10
	Key	Value

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

```

1  [
2    {
3      "qid": 9,
4      "name": "调查问卷",
5      "description": "饭堂满意度",
6      "pay": 0
7    },
8    {
9      "qid": 8,
10     "name": "调查问卷",
11     "description": "饭堂满意度",
12     "pay": 0
13   },
14   {
15     "qid": 7,
16     "name": "调查问卷",
17     "description": "饭堂满意度",
18     "pay": 0
19   },
20   {
21     "qid": 6,
22     "name": "调查问卷",
23     "description": "饭堂满意度",
24     "pay": 0
25   },
26   {
27     "qid": 5,
28     "name": "调查问卷",
29     "description": "饭堂满意度",
30     "pay": 0
31   },
32   {
33     "qid": 4,
34     "name": "调查问卷",
35     "description": "饭堂满意度",
36     "pay": 0

```

https://blog.csdn.net/qq_36303862

终止问卷

请求路径: <http://172.18.32.138:3030/Create/EndQuestion>

GET http://172.18.32.138:3030/Create/EndQuestion?id= 10

Params ● Authorization Headers (8) Body Pre-request Script Tests

Query Params

	KEY
<input checked="" type="checkbox"/>	id
	Key

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON ▾

```
1 {  
2   "errcode": 1,  
3   "errmsg": "End suc"  
4 }
```

0 失败, 1 成功

https://blog.csdn.net/qq_36303862

删除问卷

请求路径: <http://172.18.32.138:3030/Create/DeleteQuestionair>

GET

http://172.18.32.138:3030/Create/DeleteQuestionair?id=11

Params

Authorization

Headers (8)

Body

Pre-request Script

Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	id	11
	Key	Value

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

1

{

2

"errcode": 1,

3

"errmsg": "Delete suc"

4

}

https://blog.csdn.net/qq_36303862

查看问卷填写情况

请求路径: <http://172.18.32.138:3030/Create/viewAll>

GET

http://172.18.32.138:3030/Create/viewAll?id=16

Params

Authorization

Headers (8)

Body

Pre-request Script

Tests

Query Params

	KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/>	id	16	
	Key	Value	Description

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

1

{

2

"errcode": 1, 0 失败, 1 成功

3

"viewAllList": {

4

"name": "调查问卷",

5

"description": "饭堂满意度",

6

"content": [{"type": 0, "title": "对饭堂的满意度", "a": "\不滿意", "b": "\一般", "c": "\较滿意", "d": "\滿意"}, {"type": 1, "title": "喜欢窗口", "a": "\不滿意", "b": "\一般", "c": "\较滿意", "d": "\滿意"}],

7

"content_count": [{"a": 8, "b": 0, "c": 0, "d": 0, "fill": ""}, {"type": 0}, {"a": 0, "b": 8, "c": 0, "d": 0, "fill": ""}, {"type": 1}, {"a": 0, "b": 0, "c": 0, "d": 0, "fill": ""}, {"type": 2}],

8

"num": 8,

9

"qid": 0,

10

},

11

"errmsg": "successfully"

12

}

填写人数

选项个数

这个没用，为空值

https://blog.csdn.net/qq_36303862