

1、更新说明

1. 添加新接口

- 登陆：已注册则返回sessionId，未注册则返回注册标志码，需要将用户引导至注册页面
- 确认订单：即交易完成

1、更新说明

1. 添加新接口

2、后端接口

2.1 创建

- 创建用户
- 创建快递
- 创建求助
- 创建跑腿
- 创建闲置

2.2加载

- 初始加载：
 - 快递
 - 求助
 - 跑腿
 - 闲置
- 下拉加载：
 - 快递
 - 跑腿
 - 闲置
 - 求助

2.3上传并获取图片

2.4接受订单

2.5 删除订单

- 删除前
- 删除后

2.6 加载个人订单

- 个人创建订单
- 个人接受订单：

2.7 获取联系方式

2.8 登陆

2.9 确认订单（即交易完成）

2、 后端接口

2.1 创建

创建用户

请求路径: <http://172.18.32.138:8080/Create/User>

Query Params

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> code	wx.login 获取到的code	061jjNdl29uaWD09c5fi2FVMdl2jJNdC
<input checked="" type="checkbox"/> nickName	用户微信昵称	0o
<input checked="" type="checkbox"/> avatarUrl	用户头像url	https://wx.qlogo.cn/mmopen/vi_32/Q0j4TwGTfTKibe1KH...MmkFibaDczJu4EG...
<input checked="" type="checkbox"/> gender	用户性别	1
Key	Value	Description

Body Cookies Headers (3) Test Results Status

Pretty Raw Preview JSON

```
1 {
2   "errcode": 0,
3   "expireTime": 60,
4   "errmsg": null,
5   "sessionId": "4437d70d-68e4-4be1-afda-00a56aac1d73"
6 }
```

errcode 为 0 时说明请求正确, 不为0时, errmsg 输出 出错信息
SessionId 超时时间, 分钟

https://blog.csdn.net/qq_36303862

数据库:

openid	nickname	avatarUrl	gender	school	wechat	phoneNum	state	registe_time
001	NULL	NULL	NULL	NULL	NULL	NULL	NULL	2019-05-01 22:44:38
oXiVH42Q2C6Ub-xi2vINMYkGz_dQ	0o	https://wx.qlogo.cn/mmopen/vi_32/Q0j4TwGTf...	1	NULL	NULL	NULL	0	2019-05-03 14:57:56

创建快递

请设置好 sessionId

请求路径: <http://172.18.32.138:8080/Create/Expressage>

http://172.18.32.138:8080/Create/Expressage?express_loc=明的元&arrive_time=2019/5/3 16:06&loc=至善园二号666&num=4&pay=10&remark=没啥可说的

POST http://172.18.32.138:8080/Create/Expressage?express_loc=明的元&arrive_time=2019/5/3 16:06&loc=至善园二号666&num=4&pay=10&remark=没啥可说的

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> express_loc 快递点	明的元
<input checked="" type="checkbox"/> arrive_time 到达时间	2019/5/3 16:06 → 注意请求格式
<input checked="" type="checkbox"/> loc 送达地点	至善园二号666
<input checked="" type="checkbox"/> num 数量	4
<input checked="" type="checkbox"/> pay 酬劳	10
<input checked="" type="checkbox"/> remark 备注	没啥可说的
<input checked="" type="checkbox"/> phone 手机	11111111111
<input checked="" type="checkbox"/> wechat 微信	dsfasjkfhasjdf
Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

1 创建成功, 0 创建失败

https://blog.csdn.net/qq_36303862

数据库:

pid	uid1	uid2	express_loc	arrive_time	loc	phone	wechat	num	pay	state	remark	issue_time
1	001	NULL	明的元	2019-04-29 10:11:44	至善园二号	12313123	dfafadsf	2	10	NULL	没啥可说的	2019-05-01 22:53:46
2	001	NULL	明的元	2019-04-29 10:11:44	至善园二号	12313123	dfafadsf	2	10	NULL	没啥可说的	2019-05-01 22:54:04
3	001	NULL	明的元	2019-05-03 16:06:00	至善园二号666	11111111111	dsfasjkfhasjdf	4	10	NULL	没啥可说的	2019-05-03 16:08:23
4	001	NULL	明的元	2019-05-03 16:06:00	至善园二号666	11111111111	dsfasjkfhasjdf	4	10	NULL	没啥可说的	2019-05-03 16:20:19

创建求助

请设置好 sessionId

请求路径: http://172.18.32.138:8080/Create/For_help

POST http://localhost:8080/Create/For_help?title=帮忙&content=帮我写作业&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code Co

Query Params

KEY	VALUE	DESCRIPTION
title	帮忙	
content	帮我写作业	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	

Body Cookies Headers (3) Test Results Status: 200 OK Time: 24 ms Size: 170 B

Pretty Raw Preview JSON

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

1 请求成功, 0 请求失败

https://blog.csdn.net/qq_36303862

数据库:

fid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
1	001	NULL	求助	NULL	17806753681	ljnhhlh	2019-04-29 10:11:44	19	NULL	2019-05-01 22:49:03
2	001	NULL	帮忙	NULL	17806753681	ljnhhlh	2019-04-29 10:11:44	19	NULL	2019-05-01 22:49:16
3	001	NULL	帮忙	帮我写作业	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:28:24

创建跑腿

请设置好 sessionId

请求路径: <http://172.18.32.138:8080/Create/Errand>

http://172.18.32.138:8080/Create/Errand?title=帮忙&content=帮我买饮料&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh

POST http://172.18.32.138:8080/Create/Errand?title=帮忙&content=帮我买饮料&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code Co

Query Params

KEY	VALUE	DESCRIPTION
title	帮忙	
content	帮我买饮料	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	

Body Cookies Headers (3) Test Results Status: 200 OK Time: 988 m

Pretty Raw Preview JSON

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

https://blog.csdn.net/qq_36303862

(描述, 同快递)

数据库:

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	NULL	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10

创建闲置

请设置好 sessionId

请求路径: http://172.18.32.138:8080/Create/Second_hand

POST http://172.18.32.138:8080/Create/Second_hand?object_name=自行车&content=用了两年&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh&photo_url=xxxxxxxxxxxx

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code

Query Params

KEY	VALUE	DESCRIPTION
object_name	物品名称	自行车
content	用了两年	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	
photo_url	xxxxxxxxxxxx	

Body Cookies Headers (3) Test Results

Status: 200 OK Time: 19 ms Size: 170 B

或者使用promise

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

https://blog.csdn.net/qj_36363862

	sid	uid1	uid2	object_name	content	phone	wechat	ending_time	photo_url	pay	state	issue_time
▶	1	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	http://xxx	3	NULL	2019-05-01 23:04:13
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	http://xxx	4	NULL	2019-05-01 23:04:22
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	xxxxxxxxxxxx	10	NULL	2019-05-03 16:59:16
	4	001	NULL	自行车	用了两年	17806753681	ljnhhlh	2019-04-29 10:11:44	xxxxxxxxxxxx	10	NULL	2019-05-03 17:01:26

2.2加载

初始加载: 打开页面时的加载, 最多返回15条, 需要记下最后一条数据的 id, 用于下拉加载

下拉加载: 用户屏幕拉到底部时加载, 需要将最后一条数据的 id附加到请求上

初始加载:

快递

请求路径: <http://172.18.32.138:8080/Load/OnLoadExpressage>

GET
http://172.18.32.138:8080/Load/OnLoadExpressage

KEY	VALUE
Key	Value

Body
Cookies
Headers (3)
Test Results

Pretty
Raw
Preview
JSON

```

18      "loc": "至善园二号",
19      "pid": 12,
20      "remark": "none",
21      "issue_time": "2019-05-10T12:11:36.000+0000",
22      "state": 0
23    },
24    {
25      "express_loc": "明德园六号",
26      "arrive_time": "2018-05-11T03:00:00.000+0000",
27      "num": 1,
28      "pay": 5,
29      "loc": "至善园二号",
30      "pid": 11,
31      "remark": "none",
32      "issue_time": "2019-05-10T12:10:43.000+0000",
33      "state": 0
34    },
35    {
36      "express_loc": "明德园六号",
37      "arrive_time": "2018-05-11T03:00:00.000+0000",
38      "num": 1,
39      "pay": 5,
40      "loc": "至善园二号",

```

https://blog.csdn.net/qq_36303862

求助

请求路径: http://172.18.32.138:8080/Load/OnLoadFor_help

GET http://172.18.32.138:8080/Load/OnLoadFor_help

KEY	VALUE
Key	Value

body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 [
2   {
3     "fid": 4,
4     "title": "帮忙",
5     "content": "帮我写作业",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "pay": 10,
8     "state": 0,
9     "issue_time": "2019-05-10T16:30:34.000+0000"
10  }
11 ]
```

https://blog.csdn.net/qq_36303862

跑腿

请求路径: <http://172.18.32.138:8080/Load/OnLoadErrands>

GET

http://172.18.32.138:8080/Load/OnLoadErrands

KEY	VALUE
Key	Value

BodyCookiesHeaders (3)Test Results

PrettyRawPreview


JSON

```
1 [
2   {
3     "rid": 9,
4     "title": "帮忙",
5     "content": "帮我买饮料",
6     "pay": 10,
7     "ending_time": "2019-04-29T02:11:44.000+0000",
8     "state": 0,
9     "issue_time": "2019-05-11T01:39:37.000+0000"
10  },
11  {
12    "rid": 8,
13    "title": "帮忙",
14    "content": "帮我买饮料",
15    "pay": 10,
16    "ending_time": "2019-04-29T02:11:44.000+0000",
17    "state": 0,
18    "issue_time": "2019-05-11T01:39:36.000+0000"
19  },
20  {
21    "rid": 7,
22    "title": "帮忙",
23    "content": "帮我买饮料",
```

https://blog.csdn.net/qq_36303862

闲置


请求路径: http://172.18.32.138:8080/Load/OnLoadSecond_hand

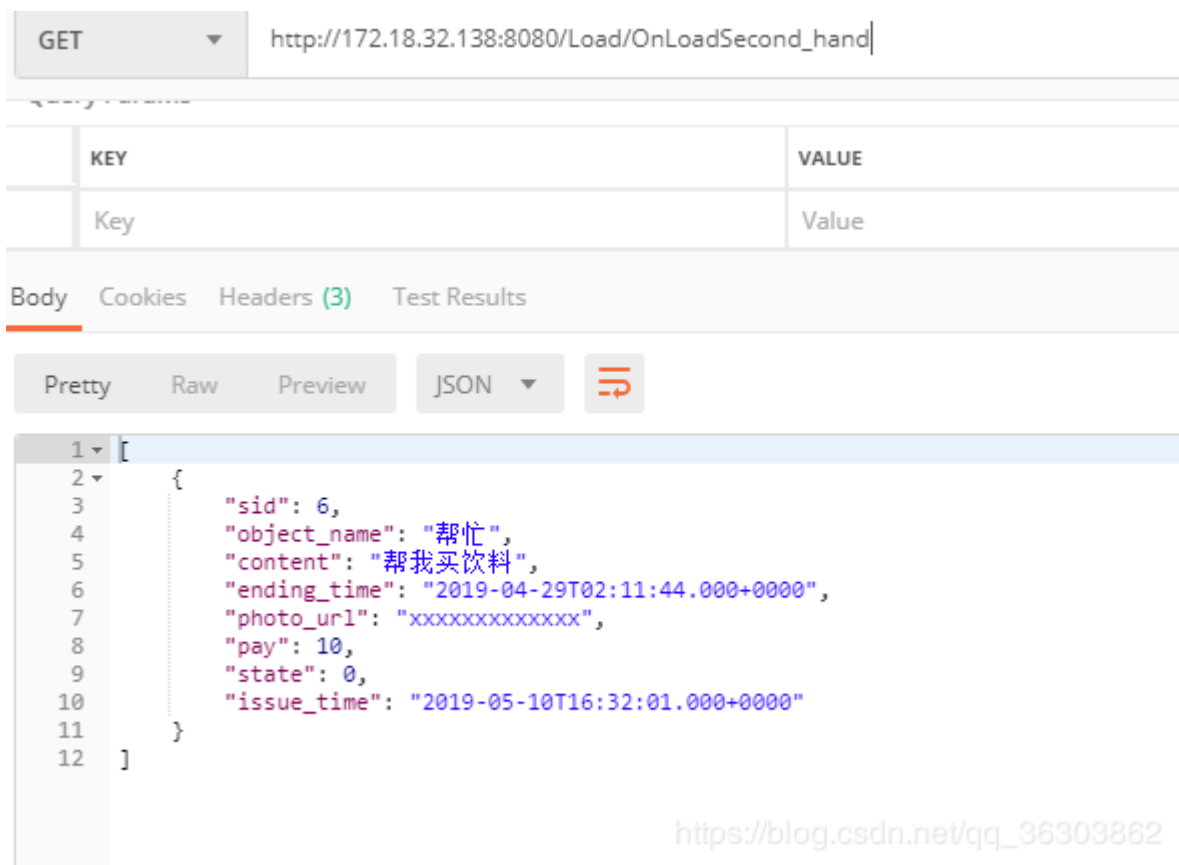

下拉加载：

快递

请求路径：<http://172.18.32.138:8080/Load/downloadExpressage>

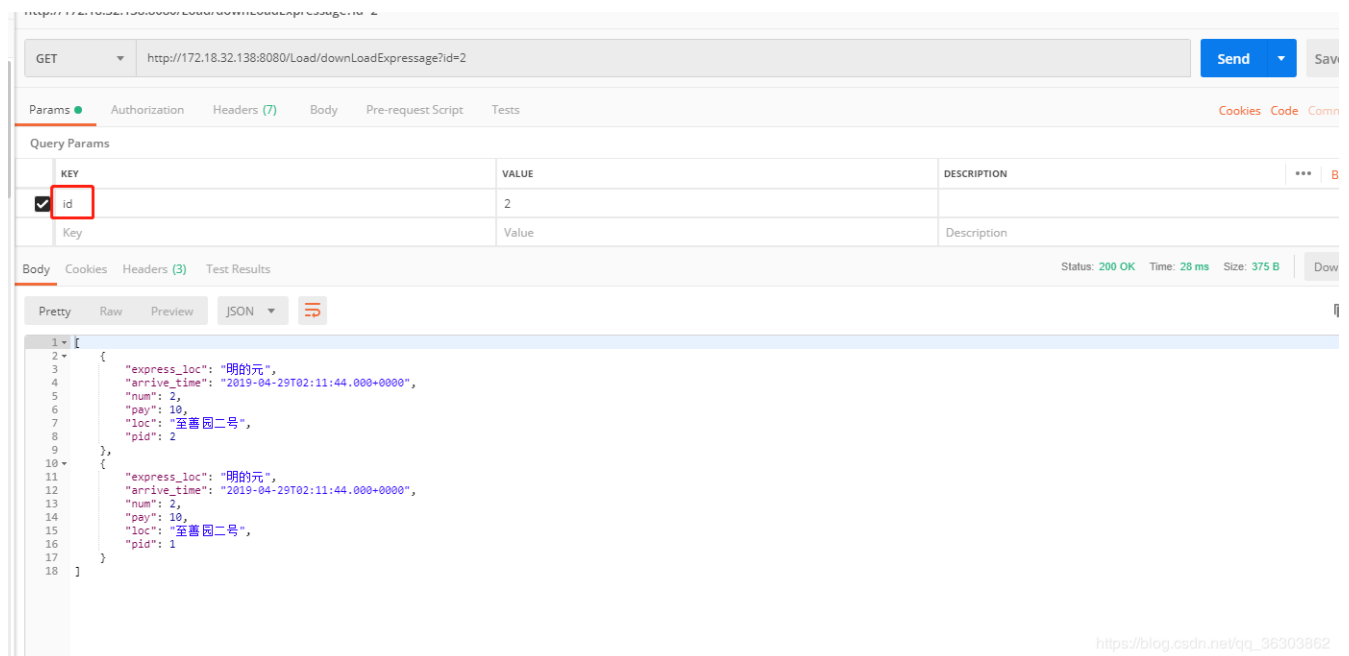

跑腿

请求路径: <http://172.18.32.138:8080/Load/downloadErrands?id=9>

GET <http://172.18.32.138:8080/Load/downloadErrands?id=9> Send

Params Authorization Headers (10) Body Pre-request Script Tests Cookies

Query Params

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> id	9	
Key	Value	Description

Body Cookies Headers (3) Test Results Status: 200 OK Time: 6 ms Size: 620 B

Pretty Raw Preview JSON

```
1 [
2   {
3     "rid": 9,
4     "title": "帮忙",
5     "content": "帮我买饮料",
6     "pay": 10,
7     "ending_time": "2019-04-29T02:11:44.000+0000",
8     "state": 0,
9     "issue_time": "2019-05-11T01:39:37.000+0000"
10  },
11  {
12    "rid": 8,
13    "title": "帮忙",
14    "content": "帮我买饮料",
```

闲置

请求路径: http://172.18.32.138:8080/Load/downloadSecond_hand?id=9

GET http://172.18.32.138:8080/Load/downloadSecond_hand?id=9

Params Authorization Headers (10) Body Pre-request Script Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> id	9
Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 [
2   {
3     "sid": 6,
4     "object_name": "帮忙",
5     "content": "帮我买饮料",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "photo_url": "xxxxxxxxxxxxxx",
8     "pay": 10,
9     "state": 0,
10    "issue_time": "2019-05-10T16:32:01.000+0000"
11  }
12 ]
```

求助

请求路径: http://172.18.32.138:8080/Load/downloadFor_help

GET http://172.18.32.138:8080/Load/downloadFor_help?id=9

Params ● Authorization Headers (10) Body ● Pre-request Script Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	id	9
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON ↺

```
1 [
2   {
3     "fid": 4,
4     "title": "帮忙",
5     "content": "帮我写作业",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "pay": 10,
8     "state": 0,
9     "issue_time": "2019-05-10T16:30:34.000+0000"
10  }
11 ]
```

https://blog.csdn.net/qq_36303862

2.3上传并获取图片

请求路径: <http://119.23.218.7:8080/File/Upload> (ps:这是服务端的地址, 可随时访问)

http://119.23.218.7:8080/File/Upload

POST http://119.23.218.7:8080/File/Upload Send Save

Params Authorization Headers (9) Body Pre-request Script Tests Cookies Code Comment

none form-data x-www-form-urlencoded raw binary

KEY	VALUE	CONTENT TYPE	DESCRIPTION
img	1.jpg	Auto	
Key	Value	Auto	Description

body Cookies Headers (3) Test Results Status: 200 OK Time: 207 ms Size: 229 B Download

Pretty Raw Preview JSON

```
1 {
2   "errcode": 1,
3   "imageUrl": "a58e416d-64fd-444e-854b-9d36e3ae27291.jpg",
4   "errmsg": "Upload Successfully"
5 }
```

https://blog.csdn.net/qq_36303862

请求返回的imageUrl可直接在控件上 将 src 设为“<http://119.23.218.7:8080/>”+ “imageUrl”即可

如：<image src = "{xxx}"></>

GET http://119.23.218.7:8080/a58e416d-64fd-444e-854b-9d36e3ae27291.jpg Send Save


imageUrl

Params Authorization Headers (7) Body Pre-request Script Tests Cookies Code Comment

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

body Cookies Headers (5) Test Results Status: 200 OK Time: 1893 ms Size: 379.16 KB Download




https://blog.csdn.net/qq_36303862

2.4接受订单

请设置好 sessionId

请求路径：<http://172.18.32.138:8080/Modified/AcceptIssue>

请求方式：传递订单类型和订单id

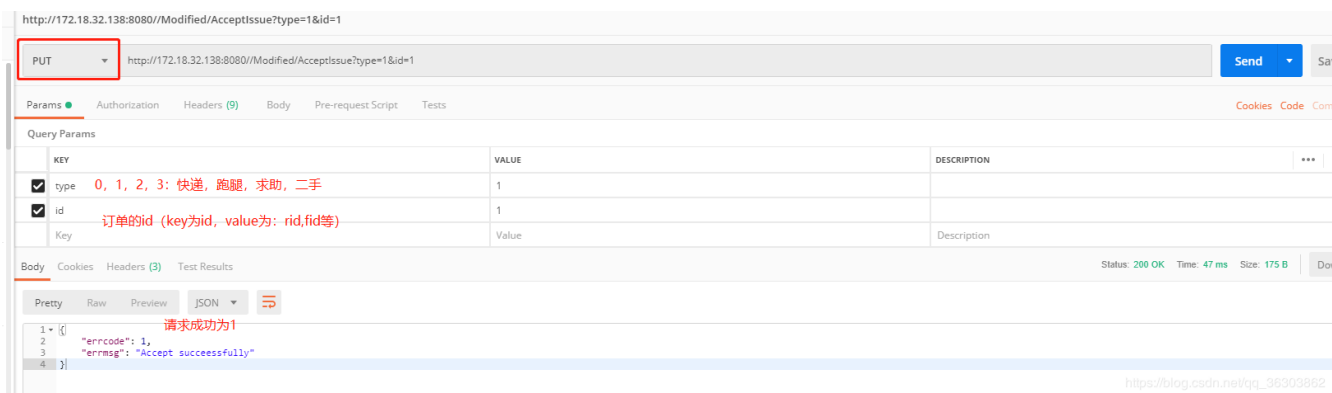

此时, uid2为接单者的openid, state 为1, 即订单已接受

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10
	4	001	NULL	跑腿	买东西	242342424323	alkfalkjfdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:30
	5	001	NULL	跑腿	买东西	242342424323	alkfalkjfdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:51
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

2.5 删除订单

请设置好 sessionId

请求路径: <http://172.18.32.138:8080/Modified/DeleteIssue>

删除前

此处的删除逻辑是改变订单的状态 (state), 而非删除数据库内对应的数据

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10
	4	001	NULL	跑腿	买东西	242342424323	alkfalkjfdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:30
	5	001	NULL	跑腿	买东西	242342424323	alkfalkjfdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:51
*	6	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	0	2019-05-11 00:31:21
	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

删除后

PUT

http://172.18.32.138:8080/Modified/DeleteIssue?type=1&id=6

Params

Authorization

Headers (9)

Body

Pre-request Script

Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> type	1
<input checked="" type="checkbox"/> id	6
Key	Value

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

```

1 {
2   "errcode": 1,
3   "errmsg": "Accept suceessfully"
4 }

```

https://blog.csdn.net/qq_36303862

rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学		12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
2	001		大山中学		12313123	dfafadsf	2019-04-29 10:11:44	3		2019-05-01 22:56:38
3	001		帮忙	帮我买饮料	17806753681	ljnhlih	2019-04-29 10:11:44	10		2019-05-03 16:55:10
4	001		跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10		2019-05-08 12:38:30
5	001		跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10		2019-05-08 12:38:51
6	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ		帮忙	帮我买饮料	17806753681	ljnhlih	2019-04-29 10:11:44	10	2	2019-05-11 00:31:21

2.6 加载个人订单

个人创建订单

请设置好sessionId

请求路径: <http://172.18.32.138:8080/Load/Creation>

GET http://172.18.32.138:8080/Load/Creation

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 {
2   "errands": [
3     {
4       "rid": 6,
5       "title": "帮忙",
6       "content": "帮我买饮料",
7       "pay": 0,
8       "ending_time": null,
9       "state": 0,
10      "issue_time": null
11    }
12  ],
13  "expressages": [
14    {
15      "express_loc": null,
16      "arrive_time": null,
17      "num": 0,
18      "pay": 0,
19      "loc": "至善园二号666",
20      "pid": 13,
21      "remark": null,
22      "issue_time": null,
23      "state": 0
24    }
25  ],
26  "second_hands": [
27    {
28      "sid": 6,
29      "object_name": "帮忙",
30      "content": "帮我买饮料",
31      "ending_time": null,
32      "photo_url": null,
33      "pay": 0,
34      "issue_time": null
35    }
36  ],
37  "for_helps": [
```

https://blog.csdn.net/qq_36303862

个人接受订单：

请设置好sessionId

请求路径：<http://172.18.32.138:8080/Load/Receiving>

GET http://172.18.32.138:8080/Load/Receiving Send Save

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code Commer

Query Params

KEY	VALUE	DESCRIPTION	...	Bulk Ed
Key	Value	Description		

body Cookies Headers (3) Test Results Status: 200 OK Time: 537 ms Size: 296 B Download

Pretty Raw Preview JSON

```
1 {
2   "errands": [
3     {
4       "rid": 1,
5       "title": "大山中学",
6       "content": null,
7       "pay": 0,
8       "ending_time": null,
9       "state": 1,
10      "issue_time": null
11    }
12  ],
13  "expressages": [],
14  "second_hands": [],
15  "for_helps": []
16 }
```

https://blog.csdn.net/qq_36303862

2.7 获取联系方式

请求路径: http://172.18.32.138:8080/Load/Contact_way

GET http://172.18.32.138:8080/Load/Contact_way?type=1&id=2

	KEY	VALUE
<input checked="" type="checkbox"/>	type	1
<input checked="" type="checkbox"/>	id	2
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 [
2   {
3     "phone": "12313123",
4     "wechat": "dfafadsf"
5   }
6 ]
```

https://blog.csdn.net/qq_36303862

2.8 登陆

请求路径: <http://172.18.32.138:8080/Create/Login>

用户已注册:

POST http://172.18.32.138:8080/Create/Login?code=021Q2au31tIU0R1IWNs31pD8u31Q2au5

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	code	021Q2au31tIU0R1IWNs31pD8u31Q2au5
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 {
2   "errcode": 1,
3   "expireTime": 60,
4   "errmsg": "Login in successfully",
5   "sessionId": "1419bd25-7aa4-4e45-b2c4-82c75c468990"
6 }
```

https://blog.csdn.net/qq_36303862

用户未注册

POST http://172.18.32.138:8080/Create/Login?code=081usGtF0W1olc2cVevF0YHXtF0usGth Send

Params Authorization Headers (9) Body Pre-request Script Tests Cookies Code

Query Params

	KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/>	code	081usGtF0W1olc2cVevF0YHXtF0usGth	
<input type="checkbox"/>			
	Key	Value	Description

Body Cookies Headers (3) Test Results Status: 200 OK Time: 386 ms Size: 176 B

Pretty Raw Preview JSON

```
1 {
2   "errcode": 0,
3   "errmsg": "Please First Register"
4 }
```

用户未注册

https://blog.csdn.net/qq_36303862

2.9 确认订单（即交易完成）

请设置好sessionId

请求路径: <http://172.18.32.138:8080/Modified/FinishIssue>

PUT http://172.18.32.138:8080/Modified/FinishIssue?type=1&id=11

Params Authorization Headers (9) Body Pre-request Script Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	type 快递, 跑腿, 求助, 二手: 0, 1, 2, 3	1
<input checked="" type="checkbox"/>	id key: id是订单的id, 如rid, fid等	11
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview

JSON



```
1 {
2   "errcode": 1,
3   "errmsg": "Finish suceessfully"
4 }
```

成功为1, 失败为0, 如果失败, 则需要给用户相应的提示

https://blog.csdn.net/qq_36303862