

1、更新说明

- 网址改为: <https://moneydog.club:3030/>
- 可在 网址 : <https://moneydog.club:3030/swagger-ui.html#/> 测试接口



- 订单状态: state: 0 创建, 1已接单, 2已完成, 6已删除
- 主要修改了返回信息, 在创建订单的时候, 需要根据返回信息, 给用户反馈“余额不足”等消息
 - errcode: 0 创建失败, 1创建成功, 2余额出错, 需要查看statecode
 - errmsg: 返回的消息, success/fail
 - statecode: -1 创建失败, 可查看 msg, 1 创建成功
 - msg: 返回的消息
- 创建订单, 返回信息增加了
- 创建问卷增加了一个参数: total_num, 用户希望收集的问卷份数。
- 扣钱实现方式:
 - 快递, 跑腿, 求助:
 - 创建时扣钱
 - 若没人接单, 用户删除订单, 则钱返回给用户
 - 完成订单时, 钱发给接单用户
 - 闲置:
 - 完成订单时, 从接单者扣钱, 发布者收钱, 若钱不够, 则无法完成订单
 - 问卷:
 - 发布问卷时, 扣取 $pay * total_num$ 个闲钱币
 - 用户填写问卷, 获得收益
 - 发单者提前终止问卷, 收回 $pay * (total_num - num)$ 个闲钱币, num为已填写份数, total_num 为最大填写数量 (创建问卷时设定)
 - 发单者删除问卷, 收回 $pay * (total_num - num)$ 个闲钱币

1、更新说明

2、后端接口

2.1 创建

创建用户

- 创建快递
- 创建求助
- 创建跑腿
- 创建闲置
- 2.2 加载
 - 初始加载：
 - 快递
 - 求助
 - 跑腿
 - 闲置
 - 下拉加载：
 - 快递
 - 跑腿
 - 闲置
 - 求助
- 2.3 上传并获取图片
- 2.4 接受订单
- 2.5 删除订单
 - 删除前
 - 删除后
- 2.6 加载个人订单
 - 个人创建订单
 - 个人接受订单：
- 2.7 获取联系方式
- 2.8 登陆
- 2.9 确认订单（即交易完成）
- 2.10 问卷
 - 创建问卷
 - 提交填写的问卷
 - 获取问卷（用于填写）
 - 加载问卷
 - 上拉加载
 - 终止问卷
 - 删除问卷
 - 查看问卷填写情况

2、 后端接口

2.1 创建

创建用户

请求路径：<https://moneydog.club:3030/Create/User>

Query Params

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> code wx.login 获取到的code	061jJNdl29uaWD09c5fi2FVMdl2jJNdC	
<input checked="" type="checkbox"/> nickName 用户微信昵称	0*	
<input checked="" type="checkbox"/> avatarUrl 用户头像url	https://wx.qlogo.cn/mmopen/vi_32/Q0j4TwGTfTKibe1KH...MmkFibaDczju4EG...	
<input checked="" type="checkbox"/> gender 用户性别	1	
Key	Value	Description

Body Cookies Headers (3) Test Results Status

Pretty Raw Preview JSON

```

1 {
2   "errcode": 0,
3   "expireTime": 60,
4   "errmsg": null,
5   "sessionId": "4437d70d-68e4-4be1-afda-00a56aac1d73"
6 }

```

errcode 为 0 时说明请求正确，不为0时，errmsg 输出 出错信息
 SessionId 超时时间，分钟

https://blog.csdn.net/qq_36303862

数据库：

openid	nickname	avatarUrl	gender	school	wechat	phoneNum	state	registe_time
001	NULL	NULL	NULL	NULL	NULL	NULL	NULL	2019-05-01 22:44:38
oXivH42Q2C6Ub-xi2vINMYkGz_dQ	0*	https://wx.qlogo.cn/mmopen/vi_32/Q0j4TwGTf...	1	NULL	NULL	NULL	0	2019-05-03 14:57:56

创建快递

请设置好 sessionId

请求路径：<https://moneydog.club:3030/Create/Expressage>

数据输入：

http://172.18.32.138:8080/Create/Expressage?express_loc=明的元&arrive_time=2019/5/3 16:06&loc=至善园二号666&num=4&pay=10&remark=没啥可说的

POST http://172.18.32.138:8080/Create/Expressage?express_loc=明的元&arrive_time=2019/5/3 16:06&loc=至善园二号666&num=4&pay=10&remark=没啥可说的

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> express_loc 快递点	明的元
<input checked="" type="checkbox"/> arrive_time 到达时间	2019/5/3 16:06
<input checked="" type="checkbox"/> loc 送达地点	至善园二号666
<input checked="" type="checkbox"/> num 数量	4
<input checked="" type="checkbox"/> pay 酬劳	10
<input checked="" type="checkbox"/> remark 备注	没啥可说的
<input checked="" type="checkbox"/> phone 手机	11111111111
<input checked="" type="checkbox"/> wechat 微信	dsfasjkfhajdf
Key	Value

https://blog.csdn.net/qq_36303862

创建成功：

```

{
  "errcode": 1,
  "errmsg": "Create Successfully!"
}

```

余额不足：

```

{
  "msg": "余额不足",
  "errcode": 2,
  "thid": "87b9fab5-9780-480e-8855-4a31e6d8ba6f",
  "errmsg": "余额错误",
  "statecode": -1
}

```

- errcode: 0 创建失败, 1 创建成功, 2 因为余额错误而创建失败, 为2时可以输出“msg”
- statecode: 只有在errcode 为 2 的时候才有, 此时可输出msg的信息
- msg: “余额不足”或用户不存在
- thid: 不用理

创建求助

请设置好 sessionId

请求路径: https://moneydog.club:3030/Create/For_help

请求数据:

POST http://localhost:3030/Create/For_help?title=帮忙&content=帮我写作业&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh Send

Params Authorization Headers (0) Body Pre-request Script Tests Cookies Code

Query Params

KEY	VALUE	DESCRIPTION
title	帮忙	
content	帮我写作业	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	

Body Cookies Headers (3) Test Results Status: 200 OK Time: 24 ms Size: 170 B

Pretty Raw Preview JSON

请求成功:

```

{
  "errcode": 1,
  "errmsg": "Create Successfully!"
}

```

数据库:

fid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
1	001	NULL	求助	NULL	17806753681	ljnhhlh	2019-04-29 10:11:44	19	NULL	2019-05-01 22:49:03
2	001	NULL	帮忙	NULL	17806753681	ljnhhlh	2019-04-29 10:11:44	19	NULL	2019-05-01 22:49:16
3	001	NULL	帮忙	帮我写作业	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:28:24

余额不足:

```

    "msg": "余额不足",
    "errcode": 2,
    "thid": "87b9fab5-9780-480e-8855-4a31e6d8ba6f",
    "errmsg": "余额错误",
    "statecode": -1
  }

```

- errcode: 0 创建失败, 1 创建成功, 2 因为余额错误而创建失败, 为2时可以输出“msg”
- statecode: 只有在errcode 为 2 的时候才有, 此时可输出msg的信息
- msg: “余额不足”或用户不存在
- thid: 不用理

创建跑腿

请设置好 sessionId

请求路径: <https://moneydog.club:3030/Create/Errand>

http://172.18.32.138:8080/Create/errand?title=帮忙&content=帮我买饮料&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh

POST http://172.18.32.138:8080/Create/Errand?title=帮忙&content=帮我买饮料&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

KEY	VALUE	DESCRIPTION
title	帮忙	
content	帮我买饮料	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	
Key	Value	Description

Body Cookies Headers (3) Test Results Status: 200 OK Time: 988 m

Pretty Raw Preview JSON

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

https://blog.csdn.net/qq_36303862

(描述, 同快递)

数据库:

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	NULL	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10
*	123456	123456	123456	123456	123456	123456	123456	123456	123456	123456	123456

创建闲置

请设置好 sessionId

请求路径: https://moneydog.club:3030/Create/Second_hand

http://172.18.32.138:8080/Create/Second_hand?object_name=自行车&content=用了两年&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh&photo_url=xxxxxxxxxxxxx

POST http://172.18.32.138:8080/Create/Second_hand?object_name=自行车&content=用了两年&ending_time=2019/04/29 10:11:44&pay=10&phone=17806753681&wechat=ljnhhlh&photo_url=xxxxxxxxxxxxx

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code

Query Params

KEY	VALUE	DESCRIPTION
object_name	物品名称	自行车
content	用了两年	
ending_time	2019/04/29 10:11:44	
pay	10	
phone	17806753681	
wechat	ljnhhlh	
photo_url	xxxxxxxxxxxxx	

Key Value Description

Body Cookies Headers (3) Test Results Status: 200 OK Time: 19 ms Size: 170 B

Pretty Raw

```

1 {
2   "msg": "Create Successfully!",
3   "state": 1
4 }

```

https://blog.csdn.net/qc_36363862

(描述同快递)

sid	uid1	uid2	object_name	content	phone	wechat	ending_time	photo_url	pay	state	issue_time
1	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	http://xxx	3	NULL	2019-05-01 23:04:13
2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	http://xxx	4	NULL	2019-05-01 23:04:22
3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	xxxxxxxxxxxxx	10	NULL	2019-05-03 16:59:16
4	001	NULL	自行车	用了两年	17806753681	ljnhhlh	2019-04-29 10:11:44	xxxxxxxxxxxxx	10	NULL	2019-05-03 17:01:26

2.2加载

初始加载：打开页面时的加载，最多返回15条，需要记下最后一条数据的 **id**，用于下拉加载

下拉加载：用户屏幕拉到底部时加载，需要将最后一条数据的 **id**附加到请求上

初始加载：

快递

请求路径：<https://moneydog.club:3030/Load/OnLoadExpressage>

GET
http://172.18.32.138:8080/Load/OnLoadExpressage

KEY	VALUE
Key	Value

Body
Cookies
Headers (3)
Test Results

Pretty
Raw
Preview
JSON

```

18      "loc": "至善园二号",
19      "pid": 12,
20      "remark": "none",
21      "issue_time": "2019-05-10T12:11:36.000+0000",
22      "state": 0
23    },
24    {
25      "express_loc": "明德园六号",
26      "arrive_time": "2018-05-11T03:00:00.000+0000",
27      "num": 1,
28      "pay": 5,
29      "loc": "至善园二号",
30      "pid": 11,
31      "remark": "none",
32      "issue_time": "2019-05-10T12:10:43.000+0000",
33      "state": 0
34    },
35    {
36      "express_loc": "明德园六号",
37      "arrive_time": "2018-05-11T03:00:00.000+0000",
38      "num": 1,
39      "pay": 5,
40      "loc": "至善园二号",

```

https://blog.csdn.net/qq_36303862

求助

请求路径: https://moneydog.club:3030/Load/OnLoadFor_help

GET http://172.18.32.138:8080/Load/OnLoadFor_help

KEY	VALUE
Key	Value

body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 [
2   {
3     "fid": 4,
4     "title": "帮忙",
5     "content": "帮我写作业",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "pay": 10,
8     "state": 0,
9     "issue_time": "2019-05-10T16:30:34.000+0000"
10  }
11 ]
```

https://blog.csdn.net/qq_36303862

跑腿

请求路径: <https://moneydog.club:3030/Load/OnLoadErrands>

GET

http://172.18.32.138:8080/Load/OnLoadErrands

KEY	VALUE
Key	Value

BodyCookiesHeaders (3)Test Results

PrettyRawPreview


JSON

```
1 [
2   {
3     "rid": 9,
4     "title": "帮忙",
5     "content": "帮我买饮料",
6     "pay": 10,
7     "ending_time": "2019-04-29T02:11:44.000+0000",
8     "state": 0,
9     "issue_time": "2019-05-11T01:39:37.000+0000"
10  },
11  {
12    "rid": 8,
13    "title": "帮忙",
14    "content": "帮我买饮料",
15    "pay": 10,
16    "ending_time": "2019-04-29T02:11:44.000+0000",
17    "state": 0,
18    "issue_time": "2019-05-11T01:39:36.000+0000"
19  },
20  {
21    "rid": 7,
22    "title": "帮忙",
23    "content": "帮我买饮料",
```

https://blog.csdn.net/qq_36303862

闲置


请求路径: https://moneydog.club:3030/Load/OnLoadSecond_hand

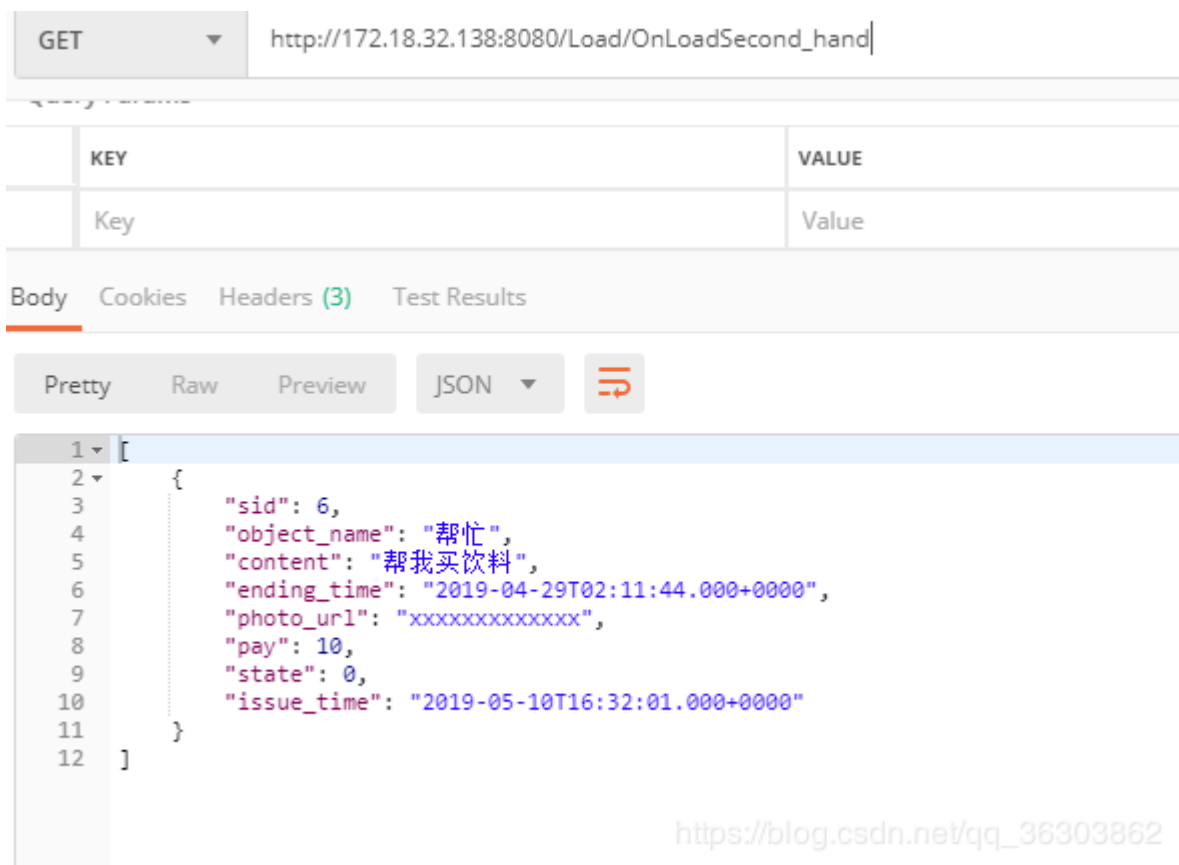

下拉加载：

快递

请求路径：<https://moneydog.club:3030/Load/downloadExpressage>

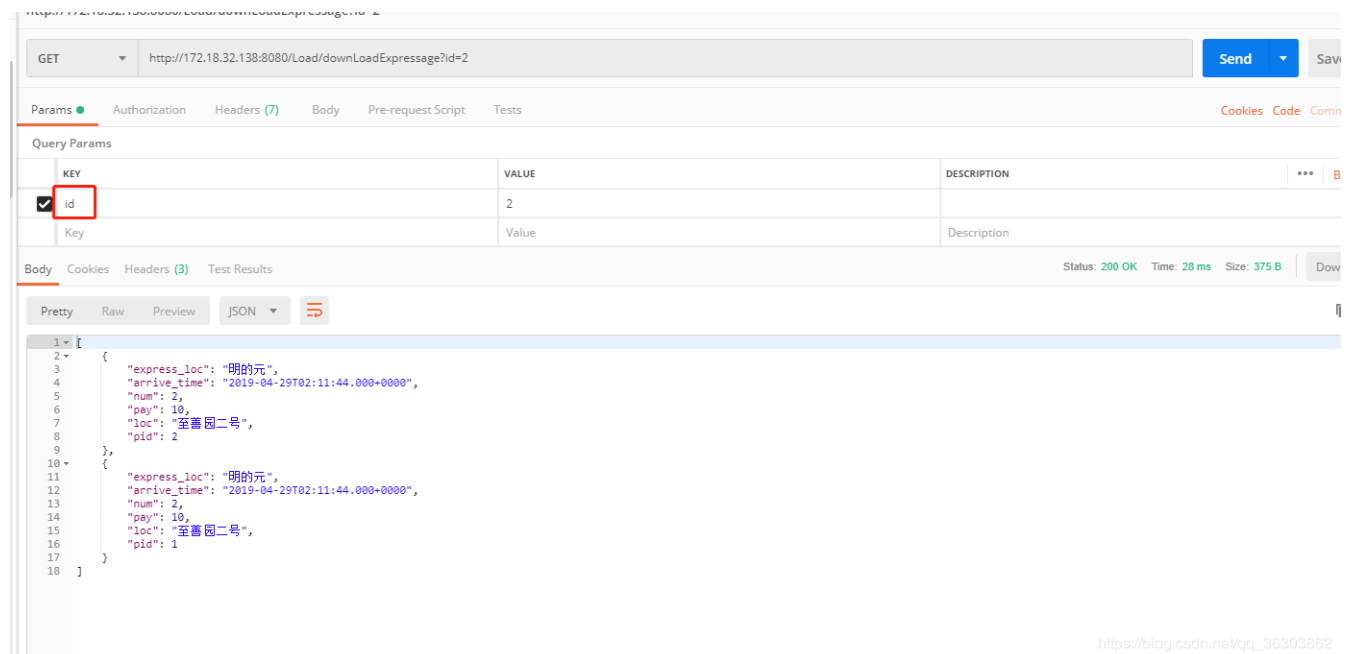

跑腿

请求路径: <https://moneydog.club:3030/Load/downloadErrands?id=9>

GET <http://172.18.32.138:8080/Load/downloadErrands?id=9> Send

Params Authorization Headers (10) Body Pre-request Script Tests Cookies

Query Params

KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/> id	9	
Key	Value	Description

Body Cookies Headers (3) Test Results Status: 200 OK Time: 6 ms Size: 620 B

Pretty Raw Preview JSON

```
1 [
2   {
3     "rid": 9,
4     "title": "帮忙",
5     "content": "帮我买饮料",
6     "pay": 10,
7     "ending_time": "2019-04-29T02:11:44.000+0000",
8     "state": 0,
9     "issue_time": "2019-05-11T01:39:37.000+0000"
10  },
11  {
12    "rid": 8,
13    "title": "帮忙",
14    "content": "帮我买饮料",
```

闲置

请求路径: https://moneydog.club:3030/Load/downloadSecond_hand?id=9

GET http://172.18.32.138:8080/Load/downloadSecond_hand?id=9

Params Authorization Headers (10) Body Pre-request Script Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> id	9
Key	Value


Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
1 [
2   {
3     "sid": 6,
4     "object_name": "帮忙",
5     "content": "帮我买饮料",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "photo_url": "xxxxxxxxxxxx",
8     "pay": 10,
9     "state": 0,
10    "issue_time": "2019-05-10T16:32:01.000+0000"
11  }
12 ]
```

求助

请求路径: https://moneydog.club:3030/Load/downloadFor_help

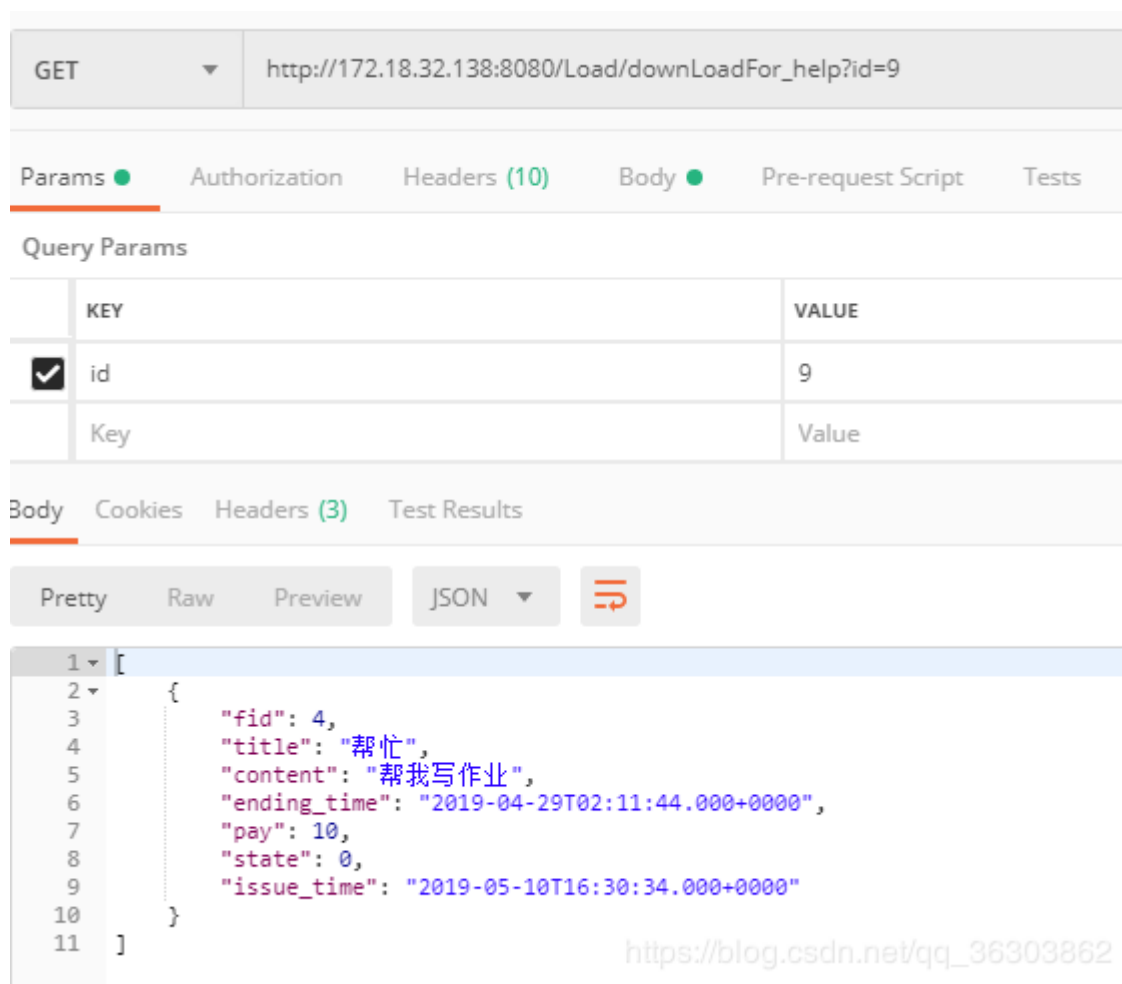

GET http://172.18.32.138:8080/Load/downloadFor_help?id=9

Params ● Authorization Headers (10) Body ● Pre-request Script Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	id	9
	Key	Value

Body Cookies Headers (3) Test Results


Pretty Raw Preview JSON ↺

```
1 [
2   {
3     "fid": 4,
4     "title": "帮忙",
5     "content": "帮我写作业",
6     "ending_time": "2019-04-29T02:11:44.000+0000",
7     "pay": 10,
8     "state": 0,
9     "issue_time": "2019-05-10T16:30:34.000+0000"
10  }
11 ]
```

https://blog.csdn.net/qq_36303862


2.3上传并获取图片

请求路径: <http://119.23.218.7:8080/File/Upload> (ps:这是服务端的地址, 可随时访问)

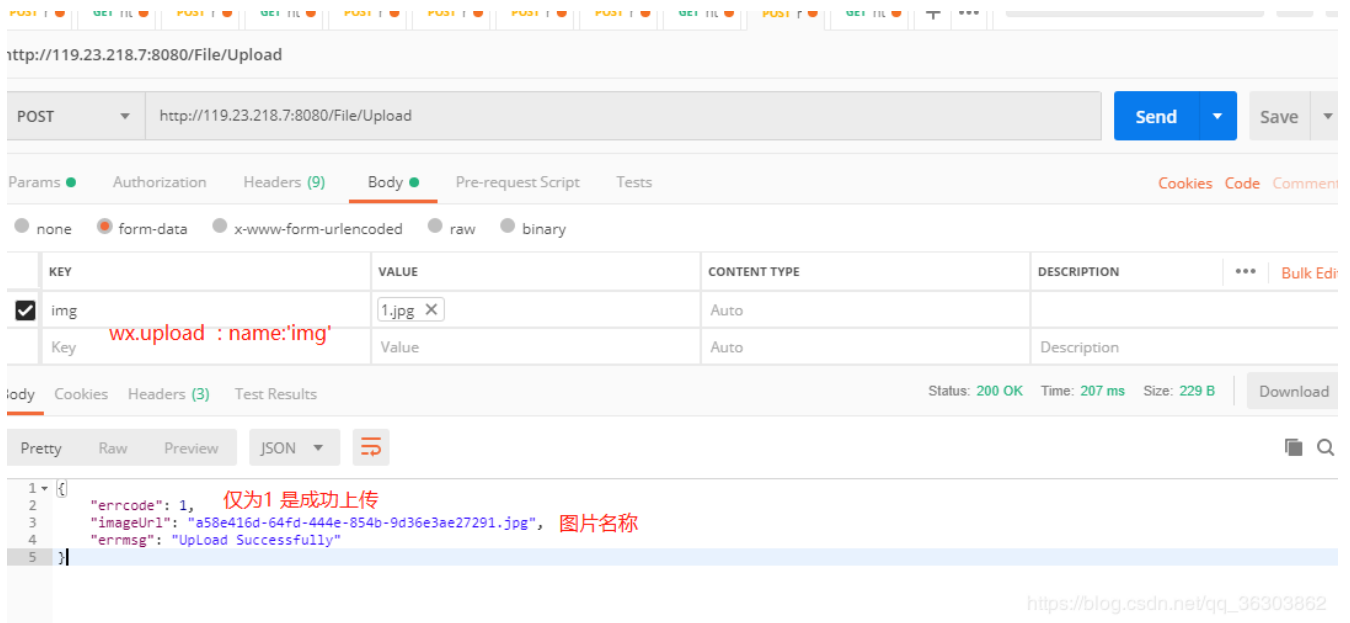

请求返回的imageUrl可直接在控件上 将 src 设为“<http://119.23.218.7:8080/>”+ “imageUrl”即可

如：<image src = "{xxx}"></>

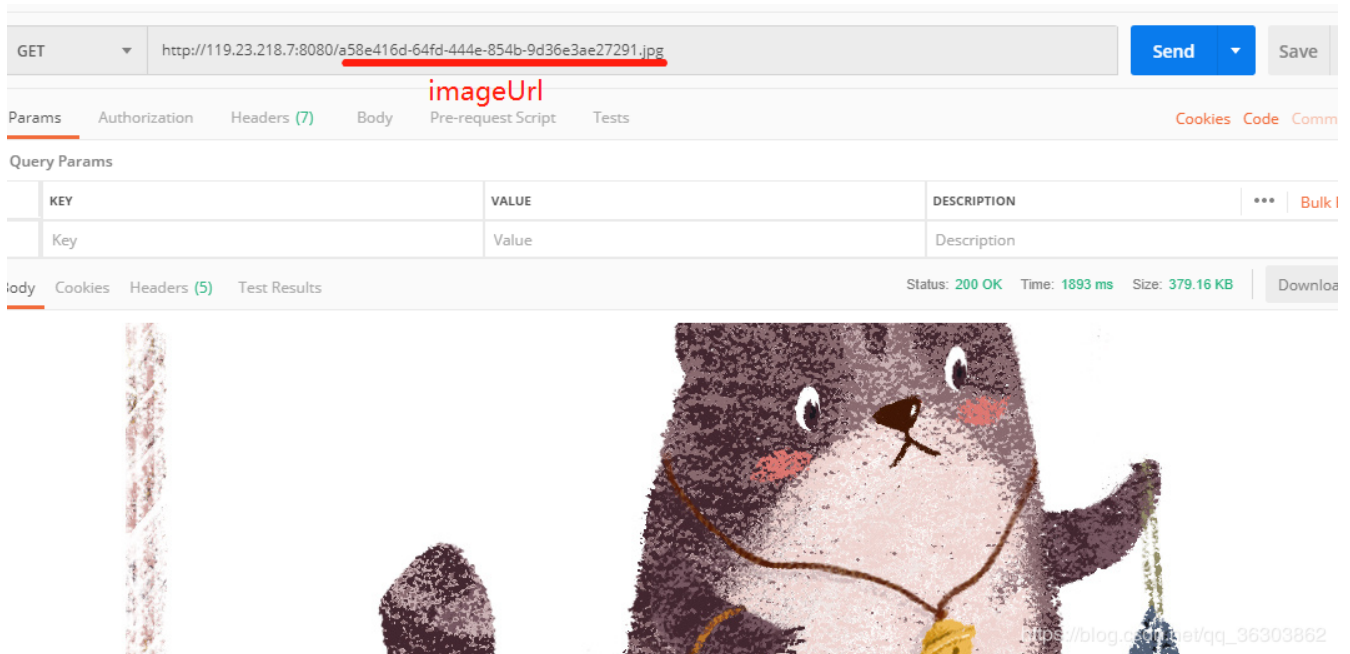


2.4接受订单

请设置好 sessionId

请求路径：<https://moneydog.club:3030/Modified/AcceptIssue>

请求方式：传递订单类型和订单id

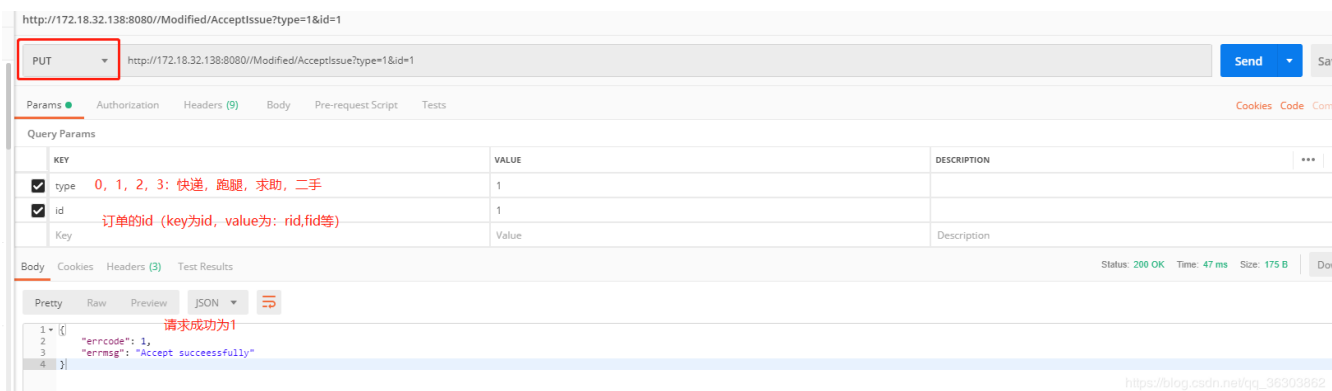

此时, uid2为接单者的openid, state 为1, 即订单已接受

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10
	4	001	NULL	跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:30
	5	001	NULL	跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:51
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

2.5 删除订单

请设置好 sessionId

请求路径: <https://moneydog.club:3030/Modified/DeleteIssue>

删除前

此处的删除逻辑是改变订单的状态 (state), 而非删除数据库内对应的数据

	rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
▶	1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
	2	001	NULL	大山中学	NULL	12313123	dfafadsf	2019-04-29 10:11:44	3	NULL	2019-05-01 22:56:38
	3	001	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	NULL	2019-05-03 16:55:10
	4	001	NULL	跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:30
	5	001	NULL	跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10	NULL	2019-05-08 12:38:51
*	6	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	NULL	帮忙	帮我买饮料	17806753681	ljnhhlh	2019-04-29 10:11:44	10	0	2019-05-11 00:31:21
	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

删除后

PUT

http://172.18.32.138:8080/Modified/DeleteIssue?type=1&id=6

Params

Authorization

Headers (9)

Body

Pre-request Script

Tests

Query Params

KEY	VALUE
<input checked="" type="checkbox"/> type	1
<input checked="" type="checkbox"/> id	6
Key	Value

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

1

{

2

"errcode": 1,

3

"errmsg": "Accept suceessfully"

4

}

https://blog.csdn.net/qq_36303862

rid	uid1	uid2	title	content	phone	wechat	ending_time	pay	state	issue_time
1	001	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ	大山中学		12313123	dfafadsf	2019-04-29 10:11:44	10	1	2019-05-01 22:56:29
2	001		大山中学		12313123	dfafadsf	2019-04-29 10:11:44	3		2019-05-01 22:56:38
3	001		帮忙	帮我买饮料	17806753681	ljnhlih	2019-04-29 10:11:44	10		2019-05-03 16:55:10
4	001		跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10		2019-05-08 12:38:30
5	001		跑腿	买东西	242342424323	alkfjalkfjdf	2019-05-03 16:06:00	10		2019-05-08 12:38:51
6	oXIVH42Q2C6Ub-xi2vINMYkGz_dQ		帮忙	帮我买饮料	17806753681	ljnhlih	2019-04-29 10:11:44	10	2	2019-05-11 00:31:21

2.6 加载个人订单

个人创建订单

请设置好sessionId

请求路径: <https://moneydog.club:3030/Load/Creation>

GET http://172.18.32.138:8080/Load/Creation

Params Authorization Headers (8) Body Pre-request Script Tests

Query Params

KEY	VALUE	DESCRIPTION
Key	Value	Description

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```

1 {
2   "errands": [
3     {
4       "rid": 6,
5       "title": "帮忙",
6       "content": "帮我买饮料",
7       "pay": 0,
8       "ending_time": null,
9       "state": 0,
10      "issue_time": null
11    }
12  ],
13  "expressages": [
14    {
15      "express_loc": null,
16      "arrive_time": null,
17      "num": 0,
18      "pay": 0,
19      "loc": "至善园二号666",
20      "pid": 13,
21      "remark": null,
22      "issue_time": null,
23      "state": 0
24    }
25  ],
26  "second_hands": [
27    {
28      "sid": 6,
29      "object_name": "帮忙",
30      "content": "帮我买饮料",
31      "ending_time": null,
32      "photo_url": null,
33      "pay": 0,
34      "issue_time": null
35    }
36  ],
37  "for_helps": [

```

https://blog.csdn.net/qq_36303862

个人接受订单：

请设置好sessionId

请求路径：<https://moneydog.club:3030/Load/Receiving>

GET http://172.18.32.138:8080/Load/Receiving Send Save

Params Authorization Headers (8) Body Pre-request Script Tests Cookies Code Commer

Query Params

KEY	VALUE	DESCRIPTION	...	Bulk Ed
Key	Value	Description		

body Cookies Headers (3) Test Results Status: 200 OK Time: 537 ms Size: 296 B Download

Pretty Raw Preview JSON

```


1 {
2   "errands": [
3     {
4       "rid": 1,
5       "title": "大山中学",
6       "content": null,
7       "pay": 0,
8       "ending_time": null,
9       "state": 1,
10      "issue_time": null
11    }
12  ],
13  "expressages": [],
14  "second_hands": [],
15  "for_helps": []
16 }

```

https://blog.csdn.net/qq_36303862

2.7 获取联系方式

请求路径: https://moneydog.club:3030/Load/Contact_way

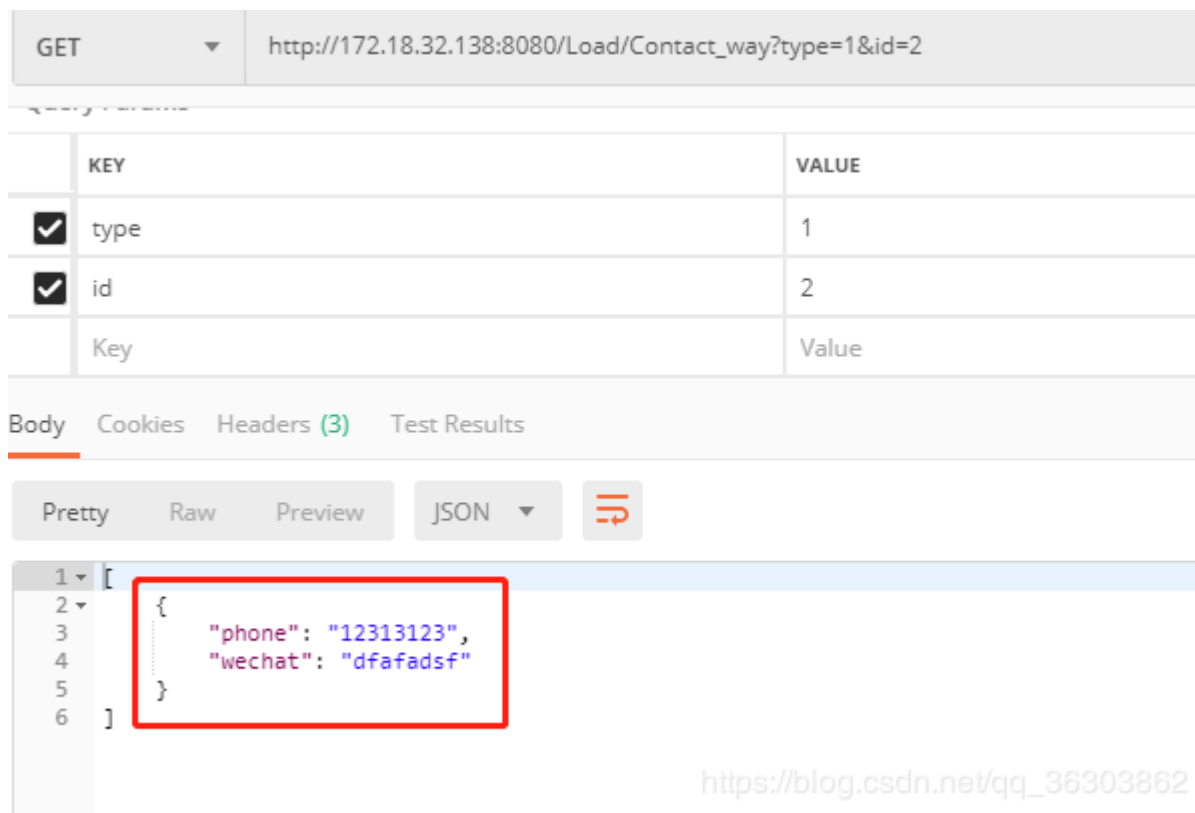

GET http://172.18.32.138:8080/Load/Contact_way?type=1&id=2

	KEY	VALUE
<input checked="" type="checkbox"/>	type	1
<input checked="" type="checkbox"/>	id	2
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```
[
  {
    "phone": "12313123",
    "wechat": "dfafadsf"
  }
]
```

https://blog.csdn.net/qq_36303862

2.8 登陆

请求路径: <https://moneydog.club:3030/Create/Login>

用户已注册:

POST

http://172.18.32.138:8080/Create/Login?code=021Q2au31tIU0R1IWNs31pD8u31Q2au5

Params

Authorization

Headers (8)

Body

Pre-request Script

Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	code	021Q2au31tIU0R1IWNs31pD8u31Q2au5
	Key	Value

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

```

1 {
2   "errcode": 1,
3   "expireTime": 60,
4   "errmsg": "Login in successfully",
5   "sessionId": "1419bd25-7aa4-4e45-b2c4-82c75c468990"
6 }

```

https://blog.csdn.net/qq_36303862

用户未注册

POST

http://172.18.32.138:8080/Create/Login?code=081usGtF0W1olc2cVevF0YHXtF0usGth

Send

Params

Authorization

Headers (9)

Body

Pre-request Script

Tests

Cookies

Code

Query Params

	KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/>	code	081usGtF0W1olc2cVevF0YHXtF0usGth	
<input type="checkbox"/>			
	Key	Value	Description

Body

Cookies

Headers (3)

Test Results

Status: 200 OK Time: 386 ms Size: 176 B

Pretty

Raw

Preview

JSON

```

1 {
2   "errcode": 0,
3   "errmsg": "Please First Register"
4 }

```

用户未注册

https://blog.csdn.net/qq_36303862

2.9 确认订单（即交易完成）

请设置好sessionId

请求路径: <https://moneydog.club:3030/Modified/FinishIssue>

闲置的返回信息有点不同

PUT <http://172.18.32.138:8080/Modified/FinishIssue?type=1&id=11>

Params **Authorization** Headers (9) Body Pre-request Script Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	type 快递, 跑腿, 求助, 二手: 0, 1, 2, 3	1
<input checked="" type="checkbox"/>	id key: id是订单的id, 如rid, fid等	11
	Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON

```

1 {
2   "errcode": 1,
3   "errmsg": "Finish successfully"
4 }

```

成功为1, 失败为0, 如果失败, 则需要给用户相应的提示 https://blog.csdn.net/qq_36303862

闲置类型:

成功: 与上面一致

失败:

```

{
  "errcode": 2,
  "msg": "余额出错",
  "errmsg": "余额错误",
  "statecode": -1
}

```

2.10 问卷

创建问卷

请求路径: <https://moneydog.club:3030/Create/questionair>

问卷题目统一格式:

```

{type:0,title:"",a:"",b:'',c:'',d:''}
// type :0 单选, 1 多选, 2 填空
//title为题目
//a,b,c,d 为选项, 填空题则留空


```

因为数据库不区分大小写, 会将大写改成小写, 所以直接统一都使用小写


传递的数据，可查看我提供的js文件create函数：

```
data:{
  name:name,
  description:description,
  pay:pay,
  content:content,
  content_count:content_count
  total_num:total_num
}
```

//name 为问卷名称, description为问卷描述, pay为每份问卷支付费用
//content 为问卷题目数组
//content_count 用于问卷对应题目的统计, 如,a,b,c,d选了多少人, 填空题填的内容
//content_count 和 content需要做些处理, 参考我给的js
//total_num:用户希望填写的问卷份数

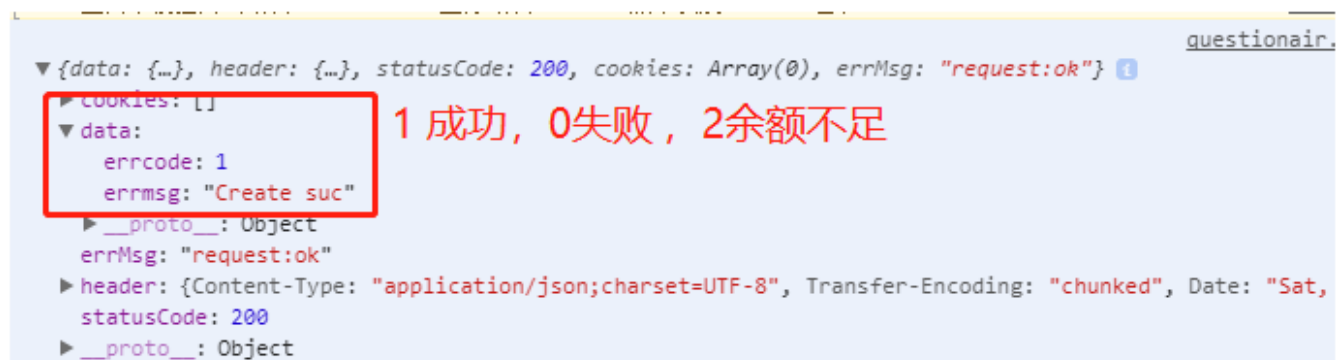

失败:

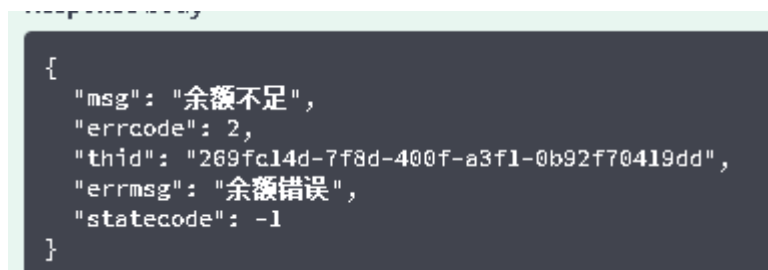

提交填写的问卷

请求路径: <https://moneydog.club:3030/Create/fill>

```
data:{
  content_count:content_count
  id:id
}
```

//content_count 请参照我提供的js文件 fill函数
//其格式为: content_count:[{}, {}, {}, {}, , ,], 一个{}就是一道题目
//注意, 每条填空题, 要在末尾添加一个分割符, 如“; ”, 用于前端后期处理,

```

▼ {data: {...}, header: {...}, statusCode: 200, cookies: Array(0), errMsg: "request:ok"}
  ► cookies: []
  ► data: {errcode: 2, errmsg: "you have fill this questionair"}
  ► errMsg: "request:ok"
  ► header: {Content-Type: "application/json;charset=UTF-8", Transfer-Encoding: "chunked", Date: "Sat, 01 Jun 2019
    statusCode: 200
  ► __proto__: Object

```

errcode: 0 填写失败, 1填写成功, 2 用户已填写过该问卷

获取问卷（用于填写）

请求路径: <https://moneydog.club:3030/Create/getQuestionairContent>

GET	http://172.18.32.138:3030/Create/getQuestionairContent?id=17
Params	Authorization Headers (7) Body Pre-request Script Tests
Query Params	
<input checked="" type="checkbox"/>	id 17
	Key Value

```

▼ {data: Array(1), header: {...}, statusCode: 200, cookies: Array(0), errMsg: "request:ok"}
  ► cookies: []
  ▼ data: Array(1)
    ▼ 0:
      content: "[{"type":0,"title":"对饭堂的满意度","a":"不满意","b":"一般","c":"较满意","d":"满意"},{"type":1,"title":"喜欢窗口","a":"不满意","b":"一般","c":"较满意","d":"满意"},{"type":2,"title":"对饭堂的
      content_count: null
      description: "饭堂满意度"
      name: "调查问卷"
      num: 0
      qid: 17
      ► __proto__: Object
      length: 1
      nv_length: (...)
      ► __proto__: Array(0)
      errMsg: "request:ok"
      header: {Content-Type: "application/json;charset=UTF-8", Transfer-Encoding: "chunked", Date: "Sat, 01 Jun 2019 16:39:57 GMT"}
      statusCode: 200

```

这两个用不到, 是个空值

加载问卷

请求路径: <https://moneydog.club:3030/Create/OnLoadQuestionair>

http://172.18.32.138:3030/Create/OnLoadQuestionair

GET	▼	http://172.18.32.138:3030/Create/OnLoadQuestionair
-----	---	--

Params Authorization Headers (7) Body Pre-request Script Tests

Query Params

KEY	VALUE
Key	Value

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON ▼ 

```
1 [
2   {
3     "qid": 18,
4     "name": "调查问卷",
5     "description": "饭堂满意度",
6     "pay": 4
7   },
8   {
9     "qid": 17,
10    "name": "调查问卷",
11    "description": "饭堂满意度",
12    "pay": 4
13  },
14  {
15    "qid": 16,
16    "name": "调查问卷",
17    "description": "饭堂满意度",
18    "pay": 4
19  },
20  {
21    "qid": 15,
22    "name": "调查问卷",
23    "description": "饭堂满意度",
24    "pay": 4
25  },
26  {
27    "qid": 14,
28    "name": "调查问卷",
29    "description": "饭堂满意度",
30    "pay": 4
31  },
32  {
33    "qid": 13,
34    "name": "调查问卷",
35    "description": "饭堂满意度",
36    "pay": 4
37  },
38 ]
```

https://blog.csdn.net/qq_36303862

上拉加载

请求路径: <https://moneydog.club:3030/Create/downloadQuestionair>

GET
http://172.18.32.138:3030/Create/downloadQuestionair?id=10

Params
Authorization
Headers (7)
Body
Pre-request Script
Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	id	10
	Key	Value

Body
Cookies
Headers (3)
Test Results

Pretty
Raw
Preview
JSON

```

1 [
2   {
3     "qid": 9,
4     "name": "调查问卷",
5     "description": "饭堂满意度",
6     "pay": 0
7   },
8   {
9     "qid": 8,
10    "name": "调查问卷",
11    "description": "饭堂满意度",
12    "pay": 0
13  },
14  {
15    "qid": 7,
16    "name": "调查问卷",
17    "description": "饭堂满意度",
18    "pay": 0
19  },
20  {
21    "qid": 6,
22    "name": "调查问卷",
23    "description": "饭堂满意度",
24    "pay": 0
25  },
26  {
27    "qid": 5,
28    "name": "调查问卷",
29    "description": "饭堂满意度",
30    "pay": 0
31  },
32  {
33    "qid": 4,
34    "name": "调查问卷",
35    "description": "饭堂满意度",
36    "pay": 0

```

https://blog.csdn.net/qq_36303862

终止问卷

请求路径: <https://moneydog.club:3030/Create/EndQuestion>

GET http://172.18.32.138:3030/Create/EndQuestion?id= 10

Params ● Authorization Headers (8) Body Pre-request Script Tests

Query Params

	KEY
<input checked="" type="checkbox"/>	id
	Key

Body Cookies Headers (3) Test Results

Pretty Raw Preview JSON ▾

```
1 {  
2   "errcode": 1,  
3   "errmsg": "End suc"  
4 }
```

0 失败, 1 成功

https://blog.csdn.net/qq_36303862

删除问卷

请求路径: <https://moneydog.club:3030/Create/DeleteQuestionair>

GET

http://172.18.32.138:3030/Create/DeleteQuestionair?id=11

Params

Authorization

Headers (8)

Body

Pre-request Script

Tests

Query Params

	KEY	VALUE
<input checked="" type="checkbox"/>	id	11
	Key	Value

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

1

{

2

"errcode": 1,

3

"errmsg": "Delete suc"

4

}

https://blog.csdn.net/qq_36303862

查看问卷填写情况

请求路径：<https://moneydog.club:3030/Create/viewAll>

GET

http://172.18.32.138:3030/Create/viewAll?id=16

Params

Authorization

Headers (8)

Body

Pre-request Script

Tests

Query Params

	KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/>	id	16	
	Key	Value	Description

Body

Cookies

Headers (3)

Test Results

Pretty

Raw

Preview

JSON

1

{

2

"errcode": 1, 0 失败, 1 成功

3

"viewAllList": {

4

"name": "调查问卷",

5

"description": "饭堂满意度",

6

"content": [{"type": 0, "title": "对饭堂的满意度", "a": "\不滿意", "b": "\一般", "c": "\较滿意", "d": "\滿意"}, {"type": 1, "title": "喜欢窗口", "a": "\不滿意", "b": "\一般", "c": "\较滿意", "d": "\滿意"}],

7

"content_count": [{"a": 8, "b": 0, "c": 0, "d": 0, "fill": ""}, {"type": 0}, {"a": 0, "b": 8, "c": 0, "d": 0, "fill": ""}, {"type": 1}, {"a": 0, "b": 0, "c": 0, "d": 0, "fill": ""}, {"type": 2}],

8

"num": 8,

9

"qid": 0,

10

},

11

"errmsg": "successfully"

12

}

填写人数

选项个数

这个没用，为空值

https://blog.csdn.net/qq_36303862