



A. Evidence-stratified heterogeneous graph schema

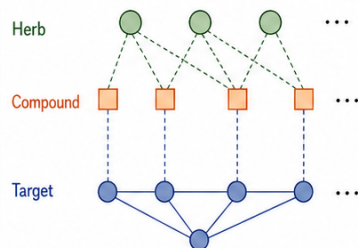


Label-free graph context plus train-only herb-target supervision

Relation	Edge style	Role
Herb-compound	-----	Label-free herb context
Herb-target	-----	Train-only herb-target supervision; not used for held-out encoding
Compound-target	-----	Evidence-stratified context
Target-target	-----	Shared target context

B. Training graph and label-free held-out herb query



Training graph excludes validation/test herbs.

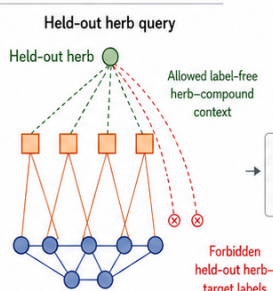

Compounds and targets are shared (frozen) graph context.

All 2,309 candidate targets scored

Rank	
1	●
k	●
...	○
2,309	○

Target scoring over shared graph context

Evaluation labels applied after scoring.

C. Generalization scope and positive-unlabeled evaluation

Generalization scope

Scope	Status / treatment
Held-out herbs — inductive query nodes	Evaluated (inductive)
Compounds / targets — shared transductive nodes	Used as shared context (transductive)
Unseen targets — not evaluated	Not evaluated / not claimed
Fully inductive all-graph learning	Not claimed

Positive-unlabeled ranking semantics

Rank	Candidate target	
1	●	Recorded positives
k	●	
...	○	Unlabeled comparison candidates
2,309	○	

Unrecorded pairs are not confirmed negatives.

Primary metric: macro herb-level AUPR over all 2,309 candidate targets per held-out herb.