# Bootstrap Component

## Tooltip

Inspired by the excellent jQuery.tipsy plugin written by Jason Frame; Tooltips are an updated version, which don't rely on images, use CSS3 for animations, and data-attributes for local title storage.

Tooltips with zero-length titles are never displayed.



```markup
<button type="button" class="btn btn-default" data-toggle="tooltip" data-placement="left"
  title="Tooltip on left">Tooltip on left</button>
```
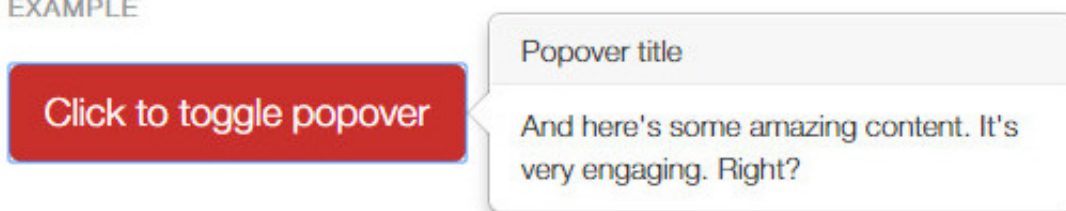
Other choices of direction are: right, top, bottom

## Popover

Add small overlays of content, like those on the iPad, to any element for housing secondary information.

Popovers whose both title and content are zero-length are never displayed.



```markup
<button type="button" class="btn btn-lg btn-danger" data-toggle="popover" title="Popover
  title" data-content="And here's some amazing content. It's very engaging. Right?">Click t
  o toggle popover</button>
```
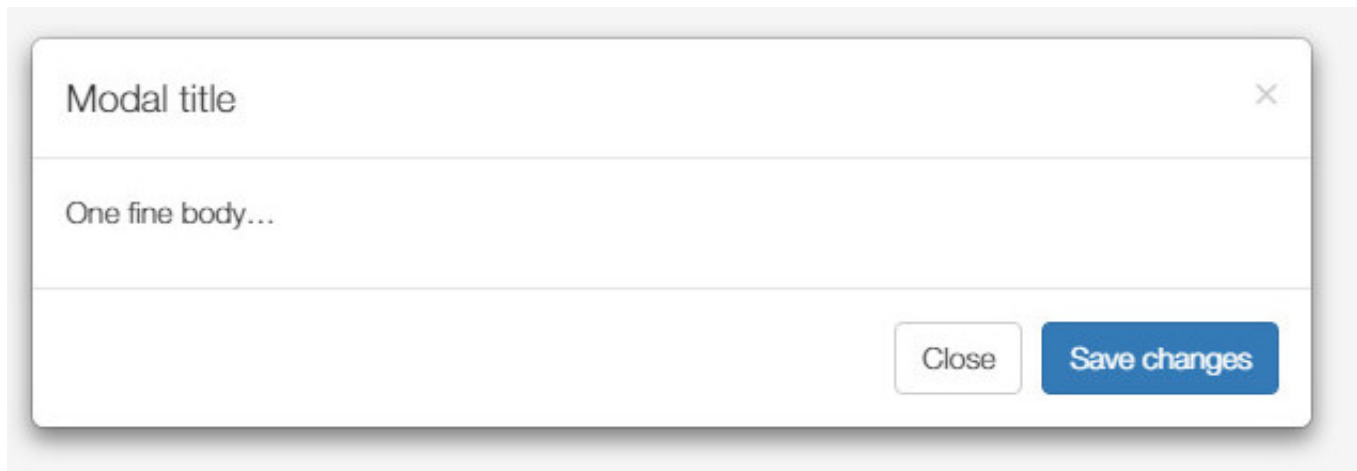
## Modal

Modals are streamlined, but flexible, dialog prompts with the minimum required functionality and smart

defaults.

Example of a rendered modal with header, body, and set of actions in the footer, triggered by button click.



```markup
<!-- Button trigger modal -->
<button type="button" class="btn btn-primary btn-lg" data-toggle="modal" data-target="#my
Modal">
  Launch demo modal
</button>

<div class="modal fade" id="myModal" tabindex="-1" role="dialog" aria-labelledby="myModal
Label">
  <div class="modal-dialog" role="document">
    <div class="modal-content">
      <div class="modal-header">
        <button type="button" class="close" data-dismiss="modal" aria-label="Close"><span
 aria-hidden="true">&times;</span></button>
        <h4 class="modal-title">Modal title</h4>
      </div>
      <div class="modal-body">
        <p>One fine body&hellip;</p>
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-default" data-dismiss="modal">Close</button>
        <button type="button" class="btn btn-primary">Save changes</button>
      </div>
    </div><!-- /.modal-content -->
  </div><!-- /.modal-dialog -->
</div><!-- /.modal -->
```

**Lab:bootstrap/component.htm**