



PRODUCT CATALOGUE



60+ Dealers | 30k Installations | 50+ Dental Products

INDEX

About Us	01
Dental Chairs	01
Dental Scanners	14
Dental Lasers	17
Radiology Products	18
Dental Autoclaves	21
Dental Accessories	22



ABOUT

Established in 1992, Chesa is one of the leading dental care product manufacturers in India possessing the widest dealer network which is providing extensive customer reach and unmatched service support.

The Company started off with just a team of 5 members, now holds the employee strength of over 300 and an experience of over 24 years in engineering, design, high volume production, supply, sales and marketing.



VISION

To be the focal point solution for any allied requirement in the field of Dentistry.



MISSION

To provide the best investment options for a dental practice, such that the dentist and patient get maximum return on that investment.

GROWTH PLAN

The Company has seen mass growth and expansion over the last 25 years, but what is yet to come can be termed as an exponential boom compared to the past.

Along with our current Manufacturing unit in Tumkur, Warehousing facility in Narasapura, Corporate office at Whitefield (Bangalore), Chesa has now expanded their wings to 14 branch offices to come closer to you all over India with equipment in display.

We have also fleshed out our wing by diversifying into radiology diagnostics centers pan India to provide a single stop solution to the dental practitioner. We plan to have multiple such centers all over India soon.

Further diversification into providing training programs with international support for education and helping the dentists in providing world class practice and live training facilities is also card for the upcoming year.

Chesa aims to be able to provide the dentist with a holistic solution, not just the merchandise but the correct information on how to best use and defend the same, thus making the Indian Dentist more aware and increasing the scope of dental Market in India.



O₂




Color Options



LED Light



Delivery Unit

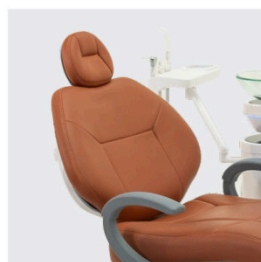

Back Rest



Spittoon



Foot Control

Description

➡ Introducing the O2 Dental Chair, a masterpiece of dental engineering that redefines the standards of comfort, functionality, and aesthetics. This state-of-the-art dental chair is equipped with a cart option and features a separate base water unit with a beautiful design, offering a complete dental solution that impresses both practitioners and patients alike.

Specification

Innovative Design: The O2 Dental Chair showcases a stunning and contemporary design that elevates the ambiance of any dental practice. Its sleek lines and elegant finishes exude professionalism and create a welcoming atmosphere for patients.

Cart Option for Mobility: This dental chair includes a convenient cart option, allowing effortless movement between operatories. The cart ensures easy accessibility to patients, simplifies workflow, and maximizes space utilization in the dental office.

Separate Base Water Unit: The O2 Dental Chair features a thoughtfully designed separate base water unit. This setup provides a clutter-free and organized treatment environment, enhancing the overall aesthetics of the dental operatory.

Ergonomic Comfort: Patient comfort is paramount. The O2 Dental Chair is ergonomically crafted to provide superior lumbar support and optimal patient positioning. Patients can relax throughout treatments, ensuring a positive dental experience. Chair is come with SYNCHRONIZED movement of back rest and seat rest

Delivery Unit: The Dental Chair Delivery Unit features a sleek and intuitive touch screen panel. This modern interface allows dental professionals to control various functions effortlessly, streamlining workflow and enhancing chair side efficiency. It having 3 air rotor Terminal + one three way syringe + inbuilt scaler optional. The Dental Chair Delivery Unit provides 9 memory programs and Gargle Program that enable practitioners to save and recall customized chair positions and settings

Silent Electric Motors: The chair's whisper-quiet electric motors enable smooth and precise adjustments, ensuring patients' comfort and minimizing any unnecessary noise.

User-Friendly Controls: The intuitive control panel empowers dental professionals with easy and precise chair adjustments. Dentists and assistants can customize the chair's position effortlessly, enhancing treatment efficiency.

Premium Upholstery: Upholstered with premium materials, the O2 Dental Chair offers luxurious comfort while maintaining high standards of cleanliness and infection control. The upholstery is easy to clean and maintain, promoting a hygienic treatment environment.


LED Operation Light: The integrated LED operation light provides a focused and bright illumination, ensuring clear visibility during procedures. Its energy-efficient design reduces power consumption, contributing to an eco-friendly dental practice.

Inbuilt Motorised suction: chair equipped with high power motorised suction with low and high canula suction capacity is 250 ltr/min with auto clean function and Designed with noise reduction in mind, the motorized suction system operates quietly, minimizing noise disruptions during treatments. The discreet operation creates a calming environment, reducing patient anxiety.

AGNI PLUS



Color Options

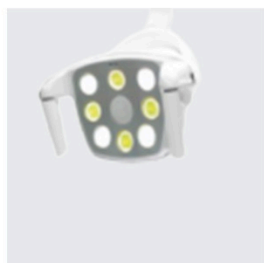

LED Light



Delivery Unit



Back Rest



Spittoon



Foot Control

"Agni Chair has served the Indian dentist for over 20 year!"

Unique Features

- ➞ Ergonomic design with synchronized chair movements & trendelenburg position for syncope.
- ➞ Feather touch control with 9 memory program and 2 preset program with Digital display.
- ➞ Unit fitted with 3 Airtor Points, One micromotor Point, One three Way Syringe & OPG Viewer.
- ➞ Seamless Sleek upholstery.
- ➞ All the tubing are made in USA
- ➞ Auto return to Zero position.
- ➞ 90° Movable spittoon bowl made of Glass/Ceramic.
- ➞ Chair mounted Glass & Tissue holder.
- ➞ Chair mounted Glass & Tissue holder.
- ➞ Chair mounted Glass & Tissue holder.

Chair

- ➞ Ergonomic design with synchronized chair movements & trendelenburg position for syncope.
- ➞ Feather touch control with 9 memory program and 2 preset program with Digital display.
- ➞ Unit fitted with 3 Airtor Points, One micromotor Point, One three Way Syringe & OPG Viewer.
- ➞ Seamless Sleek upholstery.
- ➞ All the tubing are made in USA
- ➞ Auto return to Zero position.
- ➞ 90° Movable spittoon bowl made of Glass/Ceramic.
- ➞ Chair mounted Glass & Tissue holder.

Light

- ➞ Luxurious 8 LED with Multi Intensity, Sensor operated POLYMERIZATION light with yellow & white light.
- ➞ 360°, 3-Axis movement.

Unit

- ➞ Counter balance Flex arm with pneumatic Lock.
- ➞ Air-Rotor terminal – 3 No.
- ➞ Inbuilt Micro-Motor terminal control – 1 No.
- ➞ Broad Delivery Tray.
- ➞ Three way syringe.

Assistant Arm

- ➞ 2-Canulae for Low & Medium Pneumatic suction on.
- ➞ Assistant side chair control.
- ➞ Three way syringe.

Stool

- ➞ ZERO BACK ACHE Dental stool for operator.
- ➞ Steel Base, height adjustment and 5 Castors.

USP

- ➞ Most popular Esthetically & Functionally designed Chair.
- ➞ Most Popular Model with Right Price and warranty
- ➞ Unique Design With Class and Quality
- ➞ Widest and Most comfortable Chair

VAYU PLUS



LED Light



Foot Control



Delivery Unit



Back Rest



Spittoon

Chair Specification

Chair

- ➞ Fully electrically operated Dental chair unit with Feather Touch panel for all controls of the chair.
- ➞ Under the arm delivery unit with 2 fixed PROGRAMS.
- ➞ Seamless Sleek Upholstery.
- ➞ All the tubing are made in USA
- ➞ Auto return to Zero position.
- ➞ 90° Movable spittoon bowl made of Glass/Ceramic

Light

- ➞ Luxurious 6 LED with Multi Intensity, Sensor Operated POLYMERIZATION light with yellow & white light.
- ➞ 360°, 3-Axis movement.

Unit

- ➞ Counter balance Flex arm with pneumatic Lock.
- ➞ Air-Rotor terminal – 3 No.
- ➞ Three way syringe.
- ➞ Broad Delivery Tray.
- ➞ Inbuilt Micro-Motor terminal control – 1 No.

Assistant Arm

- ➞ 2-Canulae for Low & Medium Pneumatic suction on.
- ➞ Assistant side chair control.
- ➞ Three way syringe.

Stool

- ➞ ZERO BACK ACHE Dental stool for operator
- ➞ Steel Base, height adjustment and 5 Castors.

USP

- ➞ Most popular Esthetically & Functionally designed Chair
- ➞ Most Popular Model with Right Price and warranty
- ➞ Unique Design With Class and Quality
- ➞ Widest and Most comfortable Chair.

Color Options



VAYU REGULAR



LED Light




Foot Control



Delivery Unit



Back Rest



Spittoon

Chair Specification

Chair

- ➞ Fully electrically operated Dental chair unit with Feather Touch panel for all controls of the chair.
- ➞ Under the arm delivery unit with 2 fixed PROGRAMS.
- ➞ Seamless Sleek Upholstery.
- ➞ All the tubing are made in USA
- ➞ Auto return to Zero position.
- ➞ 90° Movable spittoon bowl made of Glass/Ceramic

Light

- ➞ Luxurious 6 LED with Multi Intensity, Sensor Operated POLYMERIZATION light with yellow & white light.
- ➞ 360°, 3-Axis movement.

Unit

- ➞ Counter balance Flex arm with pneumatic Lock.
- ➞ Air-Rotor terminal – 3 No.
- ➞ Three way syringe.
- ➞ Broad Delivery Tray.
- ➞ Inbuilt Micro-Motor terminal control – 1 No.

Assistant Arm

- ➞ 2-Canulae for Low & Medium Pneumatic suction on.
- ➞ Assistant side chair control.
- ➞ Three way syringe.

Stool

- ➞ ZERO BACK ACHE Dental stool for operator
- ➞ Steel Base, height adjustment and 5 Castors.


USP

- ➞ Most popular Esthetically & Functionally designed Chair
- ➞ Most Popular Model with Right Price and warranty
- ➞ Unique Design With Class and Quality
- ➞ Widest and Most comfortable Chair.

Color Options



ONYX PREMIUM



LED Light



Foot Control



Delivery Unit



Back Rest



Spittoon

Chair Specification

Chair

- ➞ Ergonomically Designed , Solid frame with Black Paint.
- ➞ Sleek and Comfortable Back Rest, Double articulated Head rest.
- ➞ Aluminium easy to operate hand rest.
- ➞ Synchronized chair movement.

Light

- ➞ LED LIGHT with polymeeization option for light cure working
- ➞ 180 smooth movement.
- ➞ Beautifully designed sensor operated.

Unit

- ➞ Broad Working Tray with Unit fitting of 2 Airtor Points, One Micro motor Point, One three Way syringe, Feather touch control with 2 memory program and 2 preset program, Glass Spittoon box with 90 degree.
- ➞ Movement, Booster Bottle Connection & TFT Clam
- ➞ Gargle Program Feature.

Assistant Arm

- ➞ Assistant Tray with Low and High Suction.
- ➞ Feather touch control for chair movement

Stool

- ➞ Doctors Stool with 5 castors and Up down Movement.
- ➞ Stool with Back rest.


USP

- ➞ Unique Design With Class and Quality.
- ➞ Most Popular Model with Right Price and warranty 2Y
- ➞ LED Light sensor and polymerization option.
- ➞ Latest Design with Synchronized Chair Movements.
- ➞ Korean made Tubing
- ➞ DC Motors.
- ➞ Both Left and Right handed Options.

Color Options



ONYX REGULAR



LED Light



Foot Control



Delivery Unit



Back Rest



Spittoon

Chair Specification

Chair

- ➞ Ergonomically Designed , Solid frame with White Paint.
- ➞ Sleek and Comfortable Back Rest, Double articulated Head rest.
- ➞ Aluminium easy to operate hand rest.
- ➞ Synchronized chair movement.

Light

- ➞ LED light with polymerization option for light curing.
- ➞ 180 smooth movement.
- ➞ Beautifully designed sensor operated.

Unit

- ➞ Broad Working Tray with Unit fitting of 2 Airtor Points, One Micro motor Point, One three Way syringe, Feather touch control with 2 memory program and 2 preset program, Glass Spittoon box with 90 degree.
- ➞ Movement, Booster Bottle Connection & TFT Clam
- ➞ Gargle Program Feature.

Assistant Arm

- ➞ Assistant Tray with Low and High Suction.
- ➞ Feather touch control for chair movement

Stool

- ➞ Doctors Stool with 5 castors and Up down Movement.
- ➞ Stool with Back rest.

USP

- ➞ Unique Design With Class and Quality.
- ➞ Most Popular Model with Right Price and warranty 2Y
- ➞ LED Light sensor and polymerization option.
- ➞ Latest Design with Synchronized Chair Movements.
- ➞ Korean made Tubing
- ➞ DC Motors.
- ➞ Both Left and Right handed Options.

Color Options



NINJA

N4



LED Light



Foot Control



Delivery Unit



Back Rest



Spittoon

Chair Specification

Chair

- ➞ Fully electrically operated Dental chair unit with Feather Touch panel for all controls of the chair.
- ➞ Under the arm delivery unit with 2 fixed PROGRAMS.
- ➞ Seamless Sleek Upholstery.
- ➞ All the tubing are made in USA.
- ➞ Auto return to Zero position.
- ➞ 90° Movable spittoon bowl made of Glass/Ceramic.

Unit

- ➞ Under Hanging Broad Working Tray with Unit fitting of 2 Airotor Points, One Micro motor Point, One three Way syringe, X-Ray Viewer, Feather touch Chair control, 02 preset program, 02 memory programs.
- ➞ Ceramic / Glass Spittoon with 90 degree movement, geared motor.
- ➞ Assistant unit with feather touch control low & high suction, 3way syringe Stool.

Light

- ➞ LED Light with Two intensity sensor controlled

Stool

- ➞ Doctors Stool with 5 castors with Up down Movements.

USP

- ➞ Economical model.
- ➞ Strong , Reliable and Sturdy Chair
- ➞ Wide tray, Backrest with unique design.
- ➞ 03 side operated
- ➞ Warm water provision in spittoon


Color Options



NEW JWALA




LED Light



Foot Control



Delivery Unit



Back Rest



Spittoon

Chair Specification

Chair

- ➞ Perfect Design to suit every budget.
- ➞ Ergonomic Design , Broad and Comfortable Back Rest and Seat with Right arm rotatable
- ➞ LED Operating light having 28,000lux on/off and intensity control by non touch sensor with 3 directional movement.
- ➞ Chair side Porcelain spittoon with Auto water connection.
- ➞ High and low vacuum motorised suction with auto drain and auto-flush system.
- ➞ Modular (Delivery Hanging System).
- ➞ Airtor points - 2 Nos.
- ➞ Micromotor point - 1 No.
- ➞ Three way syringe - 1 Nos.
- ➞ SS instrument Tray X -Ray viewer.
- ➞ Dental operators stool.

Key Specifications

- ➞ Seamless Seat upholstery.
- ➞ Ceramic spitton and tumbler.
- ➞ LED Light.

Stool

- ➞ Zero Back Ache Doctors Stool with 5 castors back and Front and Up down Movements.

USP

- ➞ Attractive Design, Budget Friendly Model.
- ➞ Quality Standards maintained with Warranty.

Color Options



RUNYES 3D

INTRAORAL SCANNER

DESCRIPTION

Runyes 3Ds Intraoral Scanner revolutionizes dental imaging with unparalleled efficiency, accuracy, and stability compared to traditional methods.

Tailored for soft tissue scanning, it excels in digital repairs, orthodontics, and comprehensive oral health records, delivering real-color impressions that enhance diagnostic precision and patient satisfaction. The system captures 2D images that are transformed into detailed 3D models.

The handpiece features a protective glass cover and a tip made from medical-grade, non-corrosive steel and optical prisms, which can be sterilized. A stable blue light indicates readiness; press the light button to start scanning, indicated by a green light. After scanning, place the handpiece on its base to enter standby mode automatically.



Technical Specifications

- ⇒ **Accuracy:** 20 μ m
- ⇒ **Scanning Distance:** 0-17 mm
- ⇒ **Net Weight:** 210 g
- ⇒ **Image Capture Technology:** Optimal continuous video collection
- ⇒ **Export File Formats:** STL, PLY, OBJ
- ⇒ **Operating Time:** > 30,000 hours
- ⇒ **Size:** 240 x 49.5 x 30.5 mm
- ⇒ **Image Mode:** 3D Synchronized Video
- ⇒ **Additional Features:** Quick Reset, Model Optimization

- ⇒ **PC Specification Suggestions:**
 - Operating System:** Microsoft Windows 10 or Microsoft Windows 10 64 Pro or above
 - CPU:** Intel i7-8700 quad-core or above (Laptop requires i7-8750H or above)
 - Graphics Card & Video Memory:** NVIDIA GeForce 1660 GT or above, with more than 6 GB video memory
 - Memory:** 16 GB or above
 - Disk:** 1 TB SSD or above

- ⇒ **Equipment Operating Environment:**
 - Temperature:** 10°C to 40°C
 - Relative Humidity:** $\leq$ 85%
 - Atmospheric Pressure:** 86 kPa to 106 kPa

- ⇒ **Power Adapter:**
 - Input:** 100-240V, 50-60 Hz, 0.7 A
 - Output:** 12 V, 1.5 A

PIOON LASERS

DESCRIPTION

The design of H1 is timeless, featuring a traditional yet intuitive user interface. Its classic aesthetics ensure ease of use and provide an excellent user experience. The 2K Ultra HD touch screen display makes the laser operation more easy and convenient, what's more, it boasts the highest resolution in the industry, providing surgeons with an exceptional view during procedures. Its outstanding touch controls meet electromagnetic compatibility standards for medical devices, ensuring both precision and reliability.



Technical Specifications

- ➞ **Wavelength and Power**
980nm/20W
The wavelength and power of a laser determine its clinical application range
- ➞ **Operating Mode**
CW/Pulsed
Lasers operating in continuous mode and pulsed mode yield different effects in clinical applications
- ➞ **Frequency**
Up to 20KHZ
Frequency indicates the number of pulses emitted by a laser per second
- ➞ **Display**
7 inches 2K Ultra HD touch screen
Ultra-high-definition resolution enables viewing critical surgical details in video with exceptional clarity.
- ➞ **Control Software**
Smart OS
An intelligent operating system facilitates smoother and more convenient human-machine interactions.
- ➞ **Fiber Connection**
200μm, 300μm and 400μm with standard SMA905 connector
The SMA905 connector provides high-precision fiber alignment, effectively reducing reflections and minimizing insertion loss and return loss, thereby enhancing the overall performance of the optical system
- ➞ **Aiming Beam**
Wavelength-650nm, Power-<2mW
A 650 nm indicator light with an output of less than 2 mW is safe for human exposure.
- ➞ **Weight**
<=2KG Lightweight facilitating portability.
- ➞ **Battery Capacity**
3500mAh*4
- ➞ **Power Supply**
18VDC 5A

PORTABLE

X-RAY

DESCRIPTION

- ➞ Power adapter input: 100-240V 50/60Hz 1.5A
- ➞ Internal power supply: DC 10.8V
- ➞ Types of radiation: X-ray

- ➞ **Electric power:**
 - Maximum power: 0.21kw (70kV, 3mA, 0.1s)
 - Nominal electric power: 0.21kw (70kV, 3mA, 0.1s)
 - Tube voltage: tube voltage output is fixed at 70kV, error $\pm 10\%$
 - Tube current: tube current output is fixed at 3mA, error $\pm 20\%$

- ➞ **Product specifications :**
 - Dimension: 114mm $\times$ 363.8mm $\times$ 245.6mm
 - Weight: 2.4KG
 - Battery specification : 10.8V/2450~15000mAh



WOODPECKER

SENSOR

DESCRIPTION

- ➞ High-resolution imaging – 25 lp/mm theoretical resolution.
- ➞ CMOS Technology.
- ➞ Thinnest sensor 4.4mm for better bitewing radiographs.
- ➞ Curved Edges for easy sensor placement.
- ➞ Durable and reliable: 80000+ bending test & IP68 protection rating.
- ➞ Smart, powerful easy to use software with unlimited users with single license.
- ➞ Image processing function to improve your radiographs for better treatment plans.



AMS


DENTAL X-RAY



Portable xray



Wall Mount

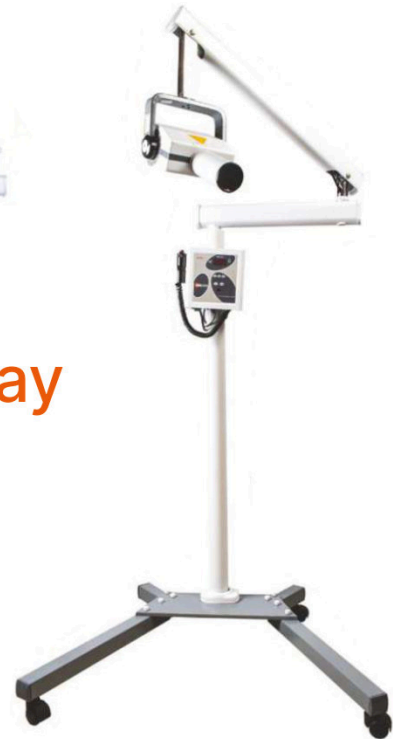

Floor Mount

- Exposure controlled by trigger button, remote and expose button on timer
- Both wall mount and floor mount model available

Product Specification

Power Supply: Volts 220 V

Power Supply Frequency: 50 Hz

Material : Metal

Type of Dental Equipment : X Ray

Power Source : Electricity

Tube Current : 7mA

Operation Mode : Automatic

Tube Focus: 0.8 mm(IEC)

(Grid Controlled Micro Focus for Sharp Tube)

Voltage : 230V

Power consumption : 1300W

Digital Timer With Timing From 0.2 Sec to 2.9 Sec- Adjustable, 0.1 sec up/down

Actual Timer In iopa mode and in Rvg mode timing from 0.01 sec to 2.9 sec adjustable - 0.01 sec up/down

High Tension : 70 kVp

STERILIZATION

FOSTER PLUS AUTOCLAVE

17L CLASS-B MFD BY FOMOS

DESCRIPTION

- Universal Class-B program only takes 23 minutes.
- Touch button control panel.
- Adjustable drying time.
- Double door's locking-system.
- Microcomputer control system.
- Air-conditional heat removal system, prevents machine from Over heating.
- Multi-safety protection system.
- Internal USB Module to record the sterilization process.



FOSTER PLUS AUTOCLAVE

22L CLASS-B MFD BY FOMOS

DESCRIPTION

- Universal Class-B program only takes 23 minutes.
- Touch button control panel.
- Adjustable drying time.
- Double door's locking-system.
- Microcomputer control system.
- Air-conditional heat removal system, prevents machine from Over heating.
- Multi-safety protection system.
- Internal USB Module to record the sterilization process



FOMOS WATER DISTILLER

DESCRIPTION

- Capacity 4 Ltrs.
- Economical & Easy to use.
- Automatically switches off at the end of the cycle.



WOODPECKER ENDO GOLD ENDOMOTOR

Woodpecker Endo Gold Endomotor is mainly used in Endodontic treatment. During root canal preparation procedure, it is used to mold & clean the root canal. Wireless handpiece enables more convenient operation. Adopt real-time feedback technology and dynamic torque control, effectively preventing needle breakage. Storage of 9 user-defined modes allows invocation at any time. Under each mode, Continuous Rotation Mode, Reciprocating Motion Mode, and Reverse Rotation are for options.

ADVANTAGES:

OLED display, 9 Programs Available, Operation mode, Battery consumption, Set speed, Set torque, File system, Operation mode, Torque setting, Real-time torque



WOODPEX III GOLD APEX LOCATOR WOODPECKER

The Woodpex 3 Standard from Woodpecker is a highly efficient apex locator that aids the dentist in accurately determining the working length to carry out the endodontic treatment. The use of apex locators has various advantages over the conventional methods of working length determination and locating the apical constriction. This fifth-generation apex locator is equipped with a clear bright LCD that displays a clear image and different colors to indicate the file trajectory. The working of the device is based on advanced multiple frequency network impedance measurement technologies. Moreover, automatic calibration ensures that the measurements are accurate. The parts of the Woodpex 3 Standard apex locator are autoclavable, thereby making it possible to reduce the risk of cross-infection. The rechargeable battery incorporated in the device enhances ease of use and eliminates the need for replacement of the battery repeatedly. The display can be folded to facilitate better viewing.



PHYSIODISPENSER

DESCRIPTION

- ➞ Imported powerful swiss motor.
- ➞ 6.2Ncm motor torque can guarantee 80Ncm output torque.
- ➞ Autoclavable motor and cable.
- ➞ A lighter micro motor realizes the flexible operation.
- ➞ Strong & stable contra-angle.
- ➞ Flexible multi-function foot pedal.
- ➞ Color touch screen with glass surface.
- ➞ Mute peristaltic pump.



WOODPECKER UDS-P ULTRASONIC SCALER

Performs Multi-function: Scaling, Perio, & Endo. The handpiece is detachable and can be autoclaved to 135°C and 0.22MPa. It Eliminates dental calculus, bacterial plaque, and tea stains on the teeth quickly without hurting the gum or the enamel. Automatic frequency tracking ensures that the machine always works at the best frequency and performs functions more steadily. Digitally controlled, easy operation, and more efficient in scaling. CE and FDA certificated.



The UDS-P Piezo Ultrasonic Scaler is mainly used for the purpose of tooth cleaning & is also the indispensable equipment for tooth disease prevention & treatment. The unit has an automatic frequency tracking feature, that ensures that the machine works on the best frequency. This also aids in the steady performance of the machine. The operation of the device is digitally controlled and is more efficient for scaling when compared to other ultrasonic scalers.

Technical Specifications

Power Source Output: 110V to 240V~ (50Hz/ 60Hz) 1.2A (max)

Main unit input: 30VDC 1.3A

Output Primary tip Vibration excursion: $\leq 100 \mu\text{m}$

Output half-excursion force: $< N$

Output tip Vibration frequency: $28\text{kHz} \pm 3\text{kHz}$

Output Power: 3W to 20W

Main Unit Fuse: 250VT 2.0AL

Water Pressure: 0.1bar to 5bar (0.01MPa to 0.5MPa)

Main Unit Weight: 0.68kg

Power Source Weight: 0.3Kg

WOODPECKER LED D CURING LIGHT UNIT


Wireless Three working modes:- Full, Ramping, Pulse.

Time setting:- 5s, 10s, 15s, 20s, 25s, 30s, 35s, 40s.

A full charge can be used for over 400 times. (10s/time) Constant light intensity, the solidification effect is not affected by the consumption of remaining power. With wire or wireless.

It can run directly on commercial power supply if the battery runs out.

It uses the principle of Ray Radiation to solidify the light-sensitive resin by shooting at it in a short time. It uses light emitting diodes that produce blue light that cures the dental material.

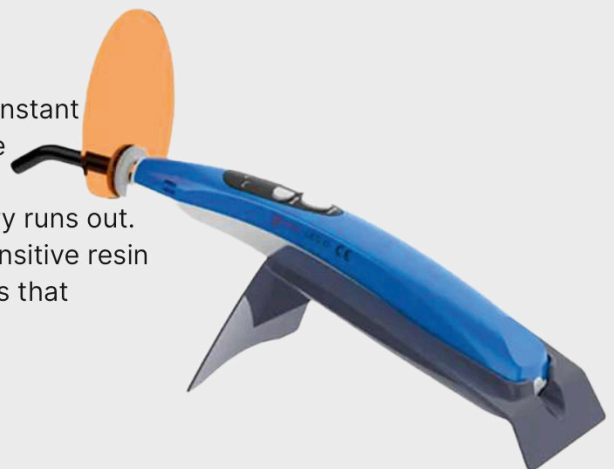

Technical Specifications

Power input:- AC100V-240V 50Hz/60Hz

Light Intensity-1000mW/cm² -1700mW/cm²

Wavelength- 420nm - 480nm

Net weight:- 143g

Dimensions 264mm x 32mm x 37mm

Power consumption: Less than or equal to SW

Compressors



1.5HP



2HP



1HP



Technical Data	1.5HP	1HP	2HP
Voltage (V)	100 - 240	100 - 240	100 - 240
Power (KW)	1- 1	0 - 75	1 - 5
Max. Air Flow(L/Min)	230	152	304
Air Flow	80	50	100
Max Pressure	8	8	8
Tank (Litre)	50	30	50
Noise Level (DB)	<70	<70	<70
Dimension (mm)	410*410*410	410*410*410	410*410*410
Weight (Kg)	60	33	114 - 5



Technical Data	Cyclone 1	Cyclone 2
Voltage (V)	230	230
Frequency(Hz)	50/60	50/60
Cylinder	1	2
Flow rate at 5 bar 1Hl/min)2)	67/77	110/126
Tank Capacity(!)	20	20
Noise level 4) at 5 bar db(A)	64	68
Noise level in the cabinet db(A)	54	56
Dimensions (H x W x D cm)	54X49X43	64X49X43
Weight (kg)	32	43

DÜRR DENTAL COMPRESSORS



Tornado 1



Tornado 2

Technical Data	Tornado 1 (Without Dryer)	Tornado 2 (With Dryer)
Voltage (V)	230	230
Frequency(Hz)	50/60	50/60
Cylinder	1	2
Flow rate at 5 bar 1) /min) 2)	67/77	110/126
Tank Capacity()	20	20
Noise level 4) at 5 bar db(A)	64	68
Noise level in the cabinet db(A)	54	56
Dimensions (H x W x D cm)	64x49x43	64x49x43
Weight (kg)	32	43

VS 250-S & VS 300-S

Technical Specifications

Model Name:	VS 250-S	VS 300-S
→ Voltage(V1--)	230	230
Frequency(Hz)	50	50
→ Power(kW)	0.6	0.58/0.8
Suction volume	250 /min	300 /min
→ Vaccum (mbar)	90	180
Noise level dB(A)	approx.64	approx.63-56
→ Dimensions (HxWxD)	32x28x28 cm	37x21x31 cm
VS 250-S Weight(kg)	13	12.5



VS 250-S



VS 300-S

Suctions

MOBILE & INBUILT SUCTIONS

Technical Specifications

Model Name:	MOBILE	INPUT
→ Voltage(V1-/V3--)	230/400	230/400
Frequency(Hz)	50	50
→ Power(kW)	1.1/1.1/1.4	1.1/1.1/1.4
Suction volume	300 /min	300 /min
→ Dimensions with housing"	65X49X53 cm	65X49X53 cm



Inbuilt



Mobile

Accessories



Woodpecker
Sensor



Cyclone



Apex Locator



Speedo



MEDIT i600



Endomotor



LED Light
Cure



Woodpecker
AI-RAY



Autoclave



Motorized Suction



UV Chamber



Woodpecker Scaler
UDS



Compressor



Portable xray



MM cord

OUR PRESENCE

 Chesa Direct Presence
Along with Chesa Dealer



#No. 1 Dental Equipment Company in India



www.chesadentalcare.com



+91-7338186333



enquiry@chesadentalcare.com



#180-D-2 & 180-E, VASANTHANARSAPURA INDUSTRIAL AREA
AGENAHALLI ROAD, KORA HUBLI, TUMKUR 572101

SOME OF OUR
Happy
Customers



#No. 1 Dental Equipment Company in India



www.chesadentalcare.com



+91-7338186333



enquiry@chesadentalcare.com



#180-D-2 & 180-E, VASANTHANARSAPURA INDUSTRIAL AREA
AGENA HALLI ROAD, KORA HUBLI, TUMKUR 572101