

PENETRATION TESTING REPORT

FOOTPRINTING & NETWORK SCANNING PHASES

W2-PM-FINAL | CYBERSECURITY | NETWORKWALKS

Pentester Name (Cybersecurity Professional)	Chesangha Quinneta
Program/Batch	B083-Networkwalks
Date	18 September 2026
Modules completed	W2-PM1 (Multiple Kali Tools) W2-PM5 (Zenmap Scanning)
Client/Target	1. Networkwalks (secured written permission already) 2. My own local LAN Network
Permission secured from client?	Yes
Phases covered	Phase 1: Reconnaissance & Footprinting Phase 2: Scanning & Network Discovery Phase 3-5: In Progress

1. Liability Disclaimer

I have performed these activities only on the systems & devices where I had secured written permission or the devices/systems that I own myself. All these materials are for education and research purpose only. Do not use anything from here to break the law. The instructor, the authors and Networkwalks are not responsible for what you do with this knowledge. Every action you take is your own responsibility. Misuse can lead to criminal charges, heavy fines, loss of your job and a permanent record. In most countries unauthorised access is a crime even when nothing is damaged.

2. Introduction

This report covers footprinting the networkwalks.com domain using multiple Kali Linux tools (W2-PM1) and scanning my own local network with Zenmap (W2-PM5). One module covers the footprinting phase and the other covers the scanning phase, so together they show how an attacker moves from gathering public information to mapping live hosts on a network. It is the Week 2 part of my ongoing internship program at Networkwalks.

All commands were run in Kali Linux (footprinting) and on a Windows PC with Zenmap installed (scanning). Every step below includes the exact command used, the result I observed, a screenshot as evidence, and a short note on why the finding matters from an attacker's point of view.

3. Tools Used

The table below lists each tool used in this report and its purpose.

Tool	Purpose
Kali Linux & Windows	Operating systems used for reconnaissance activities
WHOIS	Find domain registration details (owner, dates, name servers).
whatweb	Fingerprint web technologies (server, CMS, plugins, IP).
nslookup	Resolve the domain name to its IP address using DNS.
curl -I	Read the HTTP response headers of the website.
wafw00f	Detect whether a Web Application Firewall protects the site.
dnsrecon	Enumerate all DNS records (NS, MX, SPF, TXT, SRV).
Zenmap (Nmap GUI)	Scan the local subnet to find live hosts, IPs and MAC addresses.
Windows CMD	Local IP and MAC address identification

4. Activities Performed

4.1 Footprinting & Reconnaissance

I performed reconnaissance against the networkwalks.com domain using six Kali Linux tools: **WHOIS**, **WhatWeb**, **Nslookup**, **Curl**, **Wafw00f** and **DNSRecon**. Each tool was used to collect a different type of information about the target.

First, I used **WHOIS** to obtain publicly available domain registration information and identify the domain's name servers. The results provided information about the domain registration and hosting infrastructure.

I then used **WhatWeb** to identify technologies used by the website. The results identified **WordPress 7.1.1** and **WP Download Manager 3.3.58**, along with other information exposed by the website.

Using **Nslookup**, I resolved the domain name to its IP address. The provided result identified **192.232.216.135**.

I used **Curl** with the -I option to inspect the HTTP response headers. This provided additional information about the web application and exposed the WordPress REST API endpoint /wp-json/.

Next, I used **Wafw00f** to determine whether a Web Application Firewall was protecting the website. The result identified **ModSecurity (SpiderLabs)**.

Finally, I used **DNSRecon** to enumerate DNS records. The results provided information relating to name servers, mail servers, SPF/TXT records, service records and DNS software information.

4.2 Network Scanning with Zenmap

For the second activity, I used **Zenmap** to perform network discovery on my local network. The practical required me to identify my local IP address and subnet, discover live hosts, identify their IP and MAC addresses, and generate a network topology.

I first used the Windows ipconfig command to identify my local IP address and LAN subnet. I then entered the subnet into Zenmap and selected **Ping Scan** to identify active hosts. My computer's IP address was 172.20.10.10 and the subnet I scanned was 172.20.10.0/28 (subnet mask 255.255.255.240).

The scan of my local network identified 4 live hosts (including my own computer):

- 172.20.10.1 | MAC B2:8C:75:89:C1:64 (default gateway)
- 172.20.10.7 | MAC 1A:50:75:F2:76:3D
- 172.20.10.10 | my own computer (Nmap does not list its own MAC)
- 172.20.10.11 | MAC 9C:2F:9D:A0:2E:2F (Liteon Technology)

Nmap reported a MAC address for every host except my own computer. The scan covered 16 IP addresses and finished in 4.15 seconds.

After completing the scan, I opened the **Topology** section in Zenmap, enabled the legend and saved the network topology in PDF format as required by the practical task.

5. Risk Analysis / Impact

Based on the information collected during the footprinting and network scanning activities, I identified the following potential risks.

#	Risk / Finding	Evidence / Observation	Potential Impact	Risk Level
1	Web technology information exposed	WhatWeb identified WordPress and WP Download Manager	Attackers may use exposed technology/version information to identify software requiring further security review	● Medium
2	Server IP address identifiable	Nslookup resolved the domain to 192.232.216.135	Provides information about the network location of the web service	● Low
3	HTTP technical information exposed	Curl returned HTTP response headers and exposed /wp-json/	May assist technology fingerprinting and further enumeration	● Low
4	WAF technology identifiable	Wafw00f identified ModSecurity (SpiderLabs)	Reveals information about the web application's security architecture	● Low
5	DNS infrastructure information exposed	DNSRecon identified DNS, mail and service-related records	DNS information can help build a broader infrastructure profile	● Medium
6	Multiple live hosts visible on local network	Zenmap identified 4 live hosts on my local network	Unknown or unauthorized devices may potentially be present on a network	● Medium

Risk level key: ● Critical ● Medium ● Low

The risks above are observations from the footprinting and scanning exercises, not confirmed vulnerabilities.

The practical exercises primarily involved information gathering and host discovery. No exploitation or vulnerability validation was performed as part of these two modules.

Therefore, the presence of information such as a software version, IP address or DNS record does not by itself mean that the system is vulnerable. Further authorized security testing would be required to confirm any actual vulnerability.

6. Recommendations

Based on the observations from these activities, I recommend the following security improvements:

- 1. Review publicly exposed technology information**
Organizations should regularly review what information about their web technologies, CMS and plugins is publicly visible.
- 2. Keep software updated**
CMS platforms, plugins and other web technologies should be regularly updated and reviewed against current security advisories.

3. **Review HTTP headers**
HTTP response headers should be reviewed to determine whether unnecessary technical information is being exposed.
4. **Review DNS records regularly**
DNS records should be checked periodically to ensure that only required information and services are publicly exposed.
5. **Properly configure and monitor the WAF**
Keep the WAF (ModSecurity) enabled and tuned, since it already blocks naive attacks.
6. **Perform regular internal network discovery**
Organizations should periodically scan their own networks to identify active devices.
7. **Investigate unknown devices**
Any unexpected device discovered during network scanning should be investigated and verified.
8. **Maintain network documentation**
Network topology and device information should be documented and updated regularly.
9. **Perform security testing with authorization**
Reconnaissance and scanning should only be performed against systems and networks where appropriate authorization has been provided.

7. Conclusion

During Week 2 of my Cybersecurity & Ethical Hacking internship, I completed practical activities covering footprinting, reconnaissance and network scanning.

In the footprinting activity, I used six Kali Linux tools to collect information about the target domain. I learned how WHOIS can provide domain information, WhatWeb can identify web technologies, Nslookup can resolve domain names, Curl can inspect HTTP headers, Wafw00f can identify a WAF, and DNSRecon can provide additional DNS information.

In the network scanning activity, I used Zenmap to identify my local network configuration and discover active hosts. I also collected IP and MAC address information and created a network topology.


The exercises showed me that information gathering is an important part of cybersecurity. Even before attempting to exploit a system, a security professional can learn a significant amount about an environment by carefully analyzing publicly available information and network responses.

I also learned that technical findings should be documented clearly. A good cybersecurity report should explain what was performed, what was discovered, what the observation means, what risk it may create, and what can be done to reduce that risk.

Finally, I learned that reconnaissance and scanning must always be performed within an authorized scope. These activities were completed as part of the assigned educational cybersecurity lab.

8. Evidences Collected

Figure 1: Kali Linux – WHOIS output for networkwalks.com

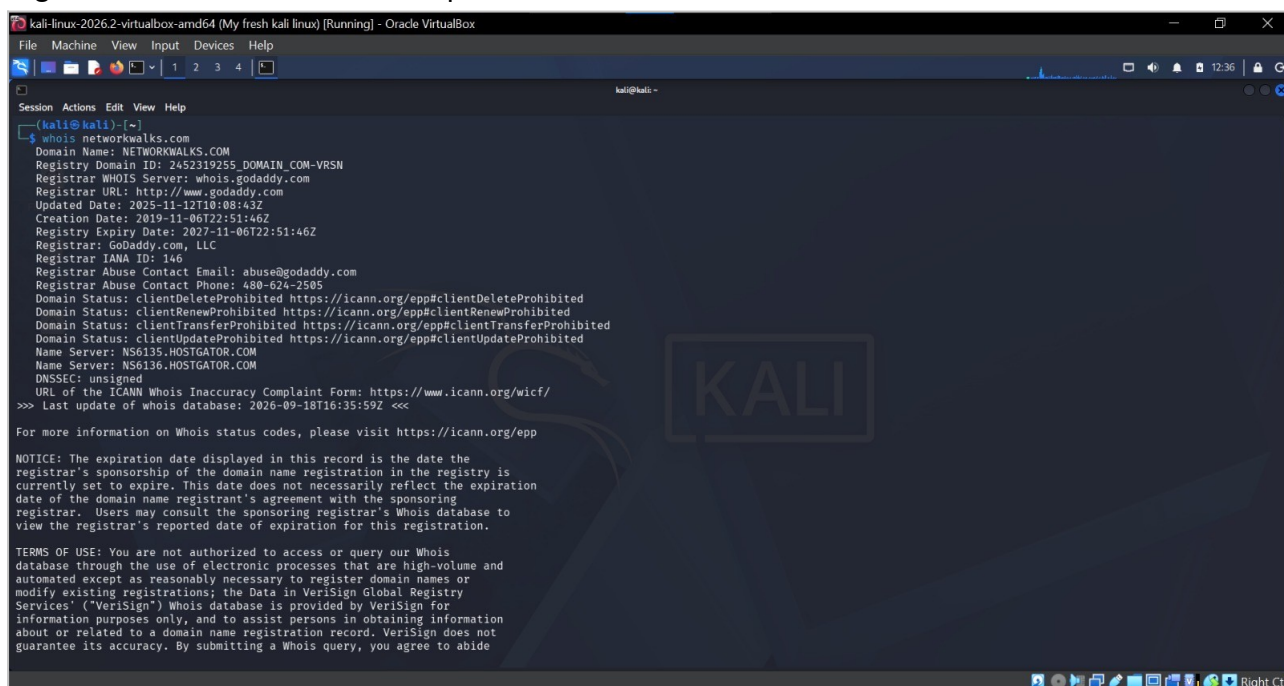


```
kali@kali:~$ whois networkwalks.com
Domain Name: NETWORKWALKS.COM
Registry Domain ID: 2452319255 DOMAIN_COM-VRSN
Registrar WHOIS Server: whois.godaddy.com
Registrar URL: http://www.godaddy.com
Updated Date: 2025-11-12T10:08:43Z
Creation Date: 2019-11-06T22:51:46Z
Registry Expiry Date: 2027-11-06T22:51:46Z
Registrar: GoDaddy.com, LLC
Registrar IANA ID: 146
Registrar Abuse Contact Email: abuse@godaddy.com
Registrar Abuse Contact Phone: 480-624-2505
Domain Status: clientDeleteProhibited https://icann.org/epp#clientDeleteProhibited
Domain Status: clientRenewProhibited https://icann.org/epp#clientRenewProhibited
Domain Status: clientTransferProhibited https://icann.org/epp#clientTransferProhibited
Domain Status: clientUpdateProhibited https://icann.org/epp#clientUpdateProhibited
Name Server: NS6135.HOSTGATOR.COM
Name Server: NS6136.HOSTGATOR.COM
DNSSEC: unsigned
URL of the ICANN Whois Inaccuracy Complaint Form: https://www.icann.org/wicf/
>>> Last update of whois database: 2026-09-18T16:35:59Z <<<

For more information on Whois status codes, please visit https://icann.org/epp

NOTICE: The expiration date displayed in this record is the date the
registrar's sponsorship of the domain name registration in the registry is
currently set to expire. This date does not necessarily reflect the expiration
date of the domain name registrant's agreement with the sponsoring
registrar. Users may consult the sponsoring registrar's Whois database to
view the registrar's reported date of expiration for this registration.


TERMS OF USE: You are not authorized to access or query our Whois
database through the use of electronic processes that are high-volume and
automated except as reasonably necessary to register domain names or
modify existing registrations; the Data in VeriSign Global Registry
Services' ("VeriSign") Whois database is provided by VeriSign for
information purposes only, and to assist persons in obtaining information
about or related to a domain name registration record. VeriSign does not
guarantee its accuracy. By submitting a Whois query, you agree to abide
```

Figure 2: Kali Linux – WhatWeb output (web technologies detected)

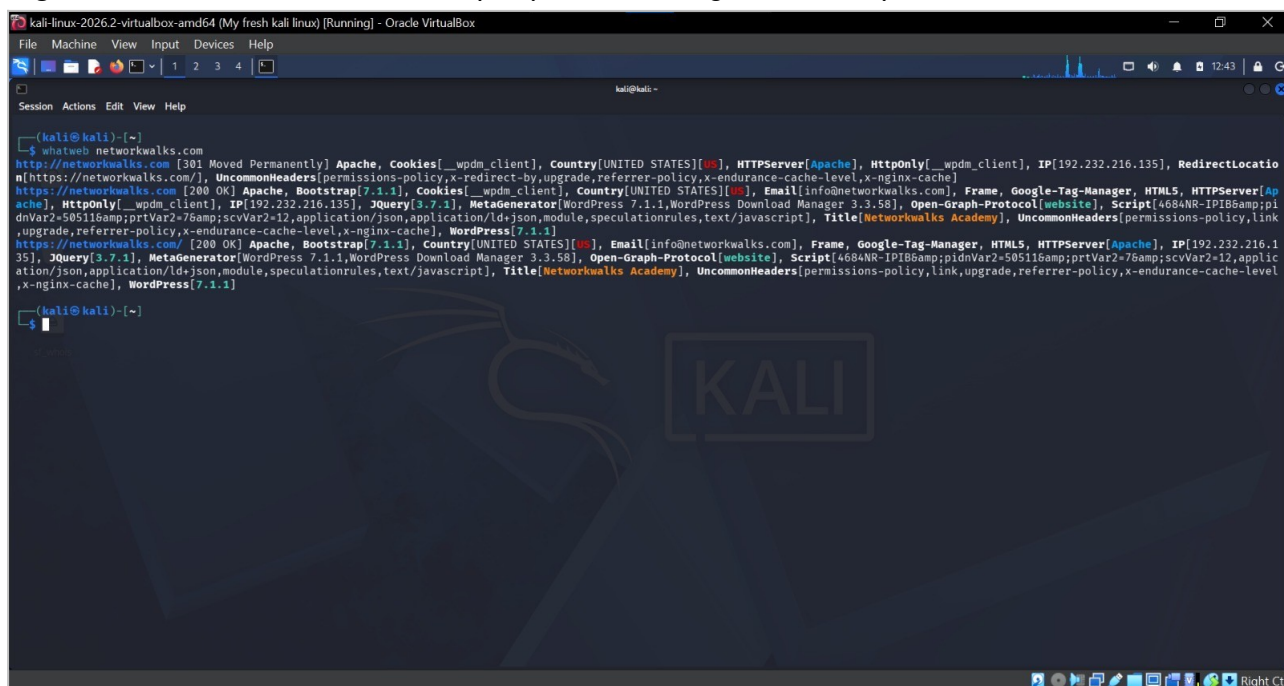

```
kali@kali:~$ whatweb networkwalks.com
http://networkwalks.com [301 Moved Permanently] Apache, Cookies[_wpdm_client], Country[UNITED STATES][us], HTTPServer[Apache], HttpOnly[_wpdm_client], IP[192.232.216.135], RedirectLocation[https://networkwalks.com/], UncommonHeaders[permissions-policy,x-redirect-by,upgrade,referrer-policy,x-endurance-cache-level,x-nginx-cache]
https://networkwalks.com [200 OK] Apache, Bootstrap[7.1.1], Cookies[_wpdm_client], Country[UNITED STATES][us], Email[info@networkwalks.com], Frame, Google-Tag-Manager, HTML5, HTTPServer[Apache], HttpOnly[_wpdm_client], IP[192.232.216.135], JQuery[3.7.1], MetaGenerator[WordPress 7.1.1,WordPress Download Manager 3.3.58], Open-Graph-Protocol[website], Script[4684NR-IP1B6amp;pidnVar2=505116amp;pvtVar2=76amp;scvVar2=12,application/json,application/ld+json,module,speculationrules,text/javascript], Title[Networkwalks Academy], UncommonHeaders[permissions-policy,link,upgrade,referrer-policy,x-endurance-cache-level,x-nginx-cache], WordPress[7.1.1]
https://networkwalks.com/ [200 OK] Apache, Bootstrap[7.1.1], Country[UNITED STATES][us], Email[info@networkwalks.com], Frame, Google-Tag-Manager, HTML5, HTTPServer[Apache], IP[192.232.216.135], JQuery[3.7.1], MetaGenerator[WordPress 7.1.1,WordPress Download Manager 3.3.58], Open-Graph-Protocol[website], Script[4684NR-IP1B6amp;pidnVar2=505116amp;pvtVar2=76amp;scvVar2=12,application/json,application/ld+json,module,speculationrules,text/javascript], Title[Networkwalks Academy], UncommonHeaders[permissions-policy,link,upgrade,referrer-policy,x-endurance-cache-level,x-nginx-cache], WordPress[7.1.1]
```


Figure 3: Kali Linux – Nslookup output (domain resolved to IP address)

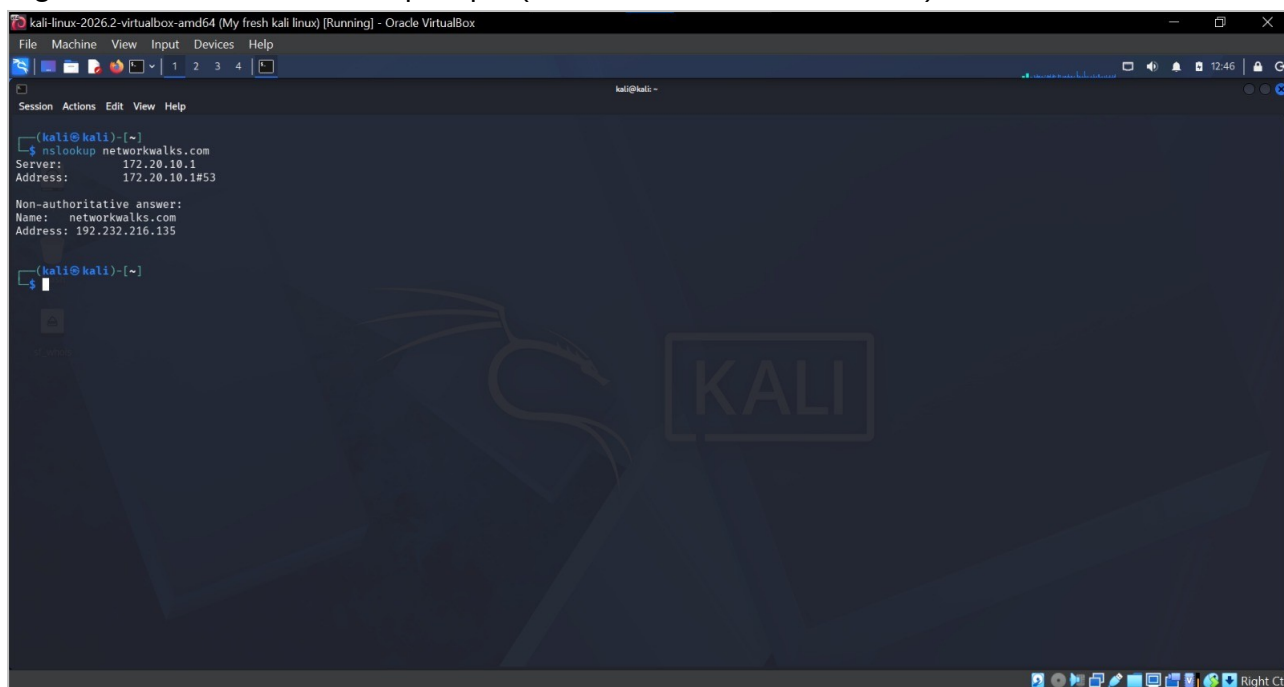

```
kali@kali:~$ nslookup networkwalks.com
Server:      172.20.10.1
Address:     172.20.10.1#53


Non-authoritative answer:
Name:   networkwalks.com
Address: 192.232.216.135
```

Figure 4: Kali Linux – Curl -I output (HTTP response headers)

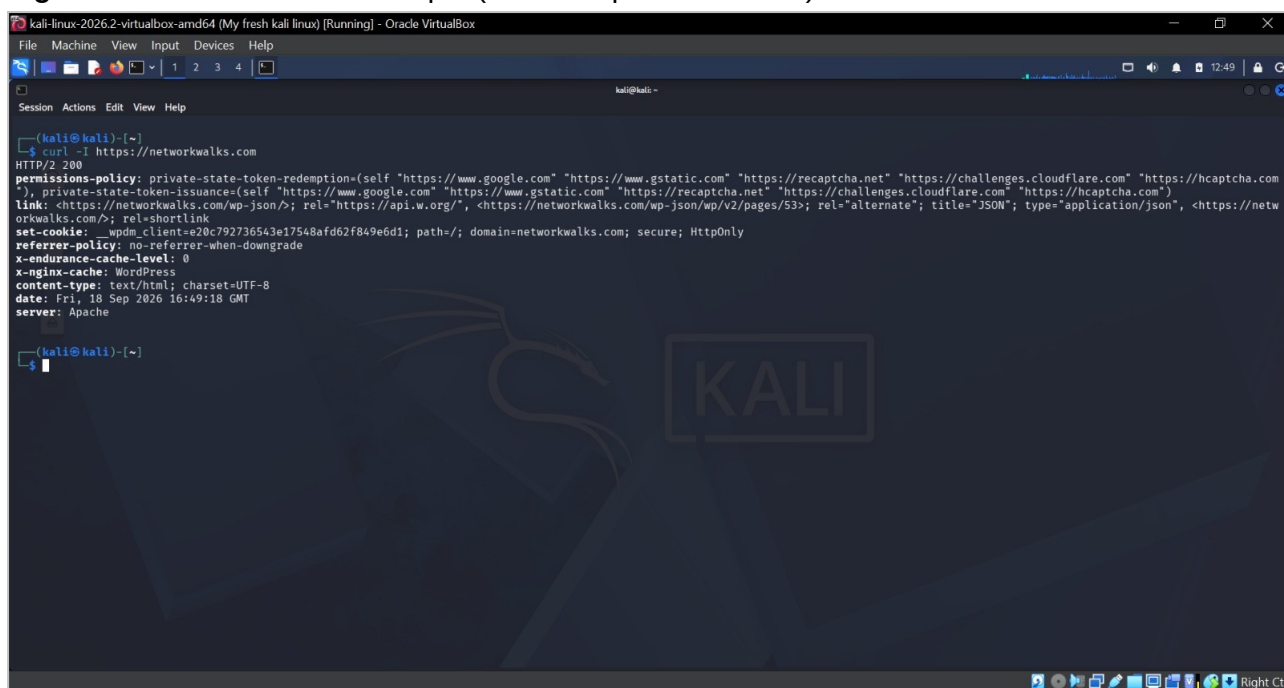

```
kali@kali:~$ curl -I https://networkwalks.com
HTTP/2 200
permissions-policy: private-state-token-redemption=(self "https://www.google.com" "https://www.gstatic.com" "https://recaptcha.net" "https://challenges.cloudflare.com" "https://hcaptcha.com"
), private-state-token-issuance=(self "https://www.google.com" "https://www.gstatic.com" "https://recaptcha.net" "https://challenges.cloudflare.com" "https://hcaptcha.com")
link: <https://networkwalks.com/wp-json/>; rel="https://api.w.org/", <https://networkwalks.com/wp-json/wp/v2/pages/53>; rel="alternate"; title="JSON"; type="application/json", <https://netw
orkwalks.com/>; rel=shortlink
set-cookie: __wpdm_client=e20c792736543e17548afd62f849e6d1; path=/; domain=networkwalks.com; secure; HttpOnly
referrer-policy: no-referrer-when-downgrade
x-endurance-cache-level: 0
x-nginx-cache: WordPress
content-type: text/html; charset=UTF-8
date: Fri, 18 Sep 2026 16:49:18 GMT
server: Apache
```

Figure 5: Kali Linux – Wafw00f output (WAF detection)

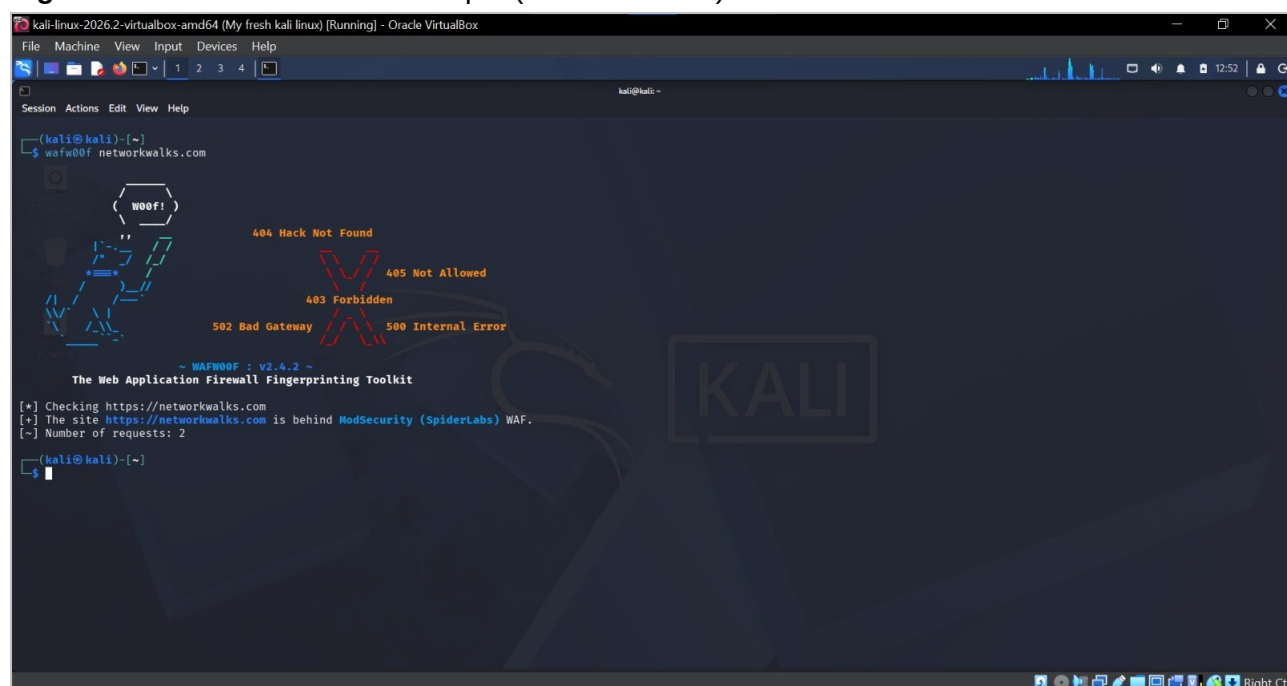

```
kali-linux-2026.2-virtualbox-amd64 (My fresh kali linux) [Running] - Oracle VirtualBox
File Machine View Input Devices Help
kali@kali:~$ wafw00f networkwalks.com

  WOOF!


404 Hack Not Found
405 Not Allowed
403 Forbidden
502 Bad Gateway
500 Internal Error

~ WAFW00F : v2.4.2 ~
The Web Application Firewall Fingerprinting Toolkit

[*] Checking https://networkwalks.com
[*] The site https://networkwalks.com is behind ModSecurity (SpiderLabs) WAF.
[*] Number of requests: 2

(kali@kali)-[~]
$
```

Figure 6: Kali Linux – DNSRecon output (DNS records)

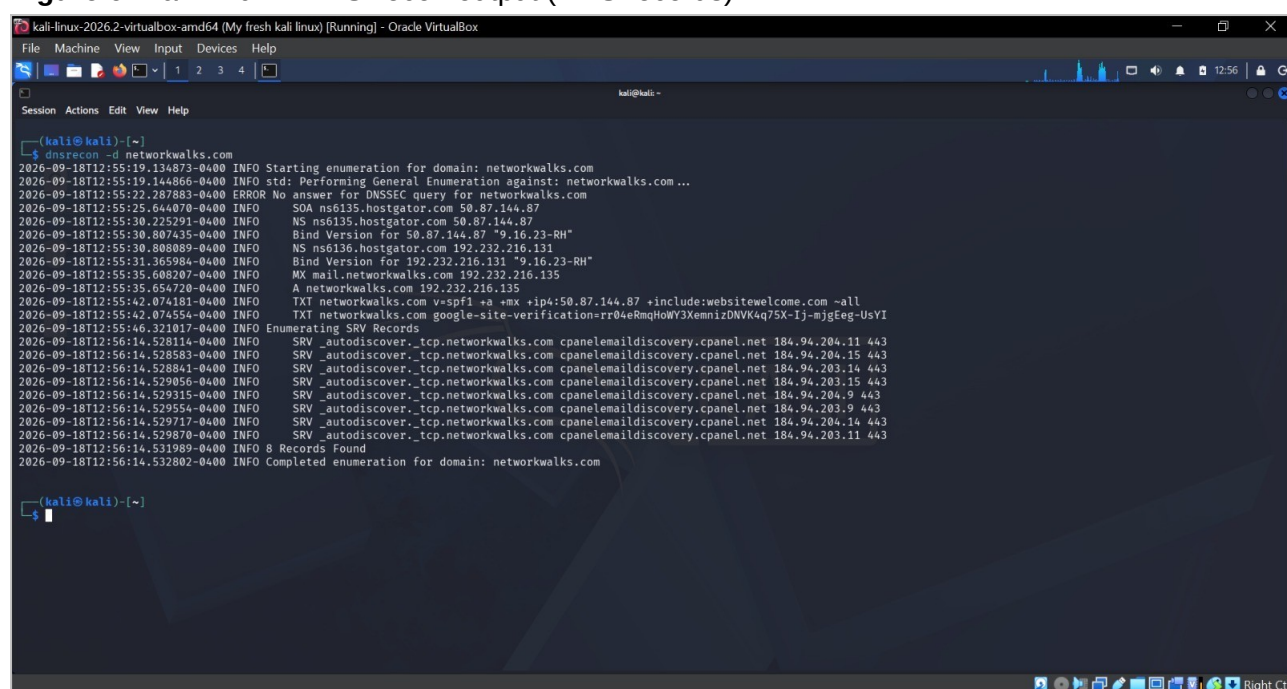

```
kali-linux-2026.2-virtualbox-amd64 (My fresh kali linux) [Running] - Oracle VirtualBox
File Machine View Input Devices Help
kali@kali:~$ dnsrecon -d networkwalks.com
2026-09-18T12:55:19.134673-0400 INFO Starting enumeration for domain: networkwalks.com
2026-09-18T12:55:19.144866-0400 INFO std: Performing General Enumeration against: networkwalks.com ...
2026-09-18T12:55:22.287883-0400 ERROR No answer for DNSSEC query for networkwalks.com
2026-09-18T12:55:25.644070-0400 INFO SOA ns6135.hostgator.com 50.87.144.87
2026-09-18T12:55:30.225291-0400 INFO NS ns6135.hostgator.com 50.87.144.87
2026-09-18T12:55:30.807435-0400 INFO Bind Version for 50.87.144.87 "9.16.23-RH"
2026-09-18T12:55:30.808089-0400 INFO NS ns6136.hostgator.com 192.232.216.131
2026-09-18T12:55:31.365984-0400 INFO Bind Version for 192.232.216.131 "9.16.23-RH"
2026-09-18T12:55:35.608207-0400 INFO MX mail.networkwalks.com 192.232.216.135
2026-09-18T12:55:35.654720-0400 INFO A networkwalks.com 192.232.216.135
2026-09-18T12:55:42.074181-0400 INFO TXT networkwalks.com v=spf1 +a +mx +ip4:50.87.144.87 +include:websitewelcome.com -all
2026-09-18T12:55:42.074554-0400 INFO TXT networkwalks.com google-site-verification=rr04eRmqHoWY3XemnizDNV4q75X-Ij-mjgEeg-UsYI
2026-09-18T12:55:46.321017-0400 INFO Enumerating SRV Records
2026-09-18T12:56:14.528114-0400 INFO SRV _autodiscover._tcp.networkwalks.com cpanelmaildiscovery.cpanel.net 184.94.204.11 443
2026-09-18T12:56:14.528583-0400 INFO SRV _autodiscover._tcp.networkwalks.com cpanelmaildiscovery.cpanel.net 184.94.204.15 443
2026-09-18T12:56:14.528841-0400 INFO SRV _autodiscover._tcp.networkwalks.com cpanelmaildiscovery.cpanel.net 184.94.203.14 443
2026-09-18T12:56:14.529056-0400 INFO SRV _autodiscover._tcp.networkwalks.com cpanelmaildiscovery.cpanel.net 184.94.203.15 443
2026-09-18T12:56:14.529315-0400 INFO SRV _autodiscover._tcp.networkwalks.com cpanelmaildiscovery.cpanel.net 184.94.204.9 443
2026-09-18T12:56:14.529554-0400 INFO SRV _autodiscover._tcp.networkwalks.com cpanelmaildiscovery.cpanel.net 184.94.203.9 443
2026-09-18T12:56:14.529717-0400 INFO SRV _autodiscover._tcp.networkwalks.com cpanelmaildiscovery.cpanel.net 184.94.204.14 443
2026-09-18T12:56:14.529870-0400 INFO SRV _autodiscover._tcp.networkwalks.com cpanelmaildiscovery.cpanel.net 184.94.203.11 443
2026-09-18T12:56:14.531989-0400 INFO 8 Records Found
2026-09-18T12:56:14.532802-0400 INFO Completed enumeration for domain: networkwalks.com

(kali@kali)-[~]
$
```

Figure 7: Windows CMD – ipconfig output (local IP address and subnet)

```
Command Prompt
(c) Microsoft Corporation. All rights reserved.

C:\Users\Admin>ipconfig

Windows IP Configuration

Ethernet adapter Ethernet:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter Local Area Connection* 1:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter Local Area Connection* 10:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Wireless LAN adapter Wi-Fi:

    Connection-specific DNS Suffix  . :
    Link-local IPv6 Address . . . . . : fe80::3c7e:2600:a5:3908%38
    IPv4 Address. . . . . : 172.20.10.10
    Subnet Mask . . . . . : 255.255.255.240
    Default Gateway . . . . . : 172.20.10.1

Ethernet adapter Bluetooth Network Connection:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

Mobile Broadband adapter Cellular:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :

C:\Users\Admin>
```

Figure 8: Zenmap – Ping Scan results (live hosts, IP and MAC addresses)


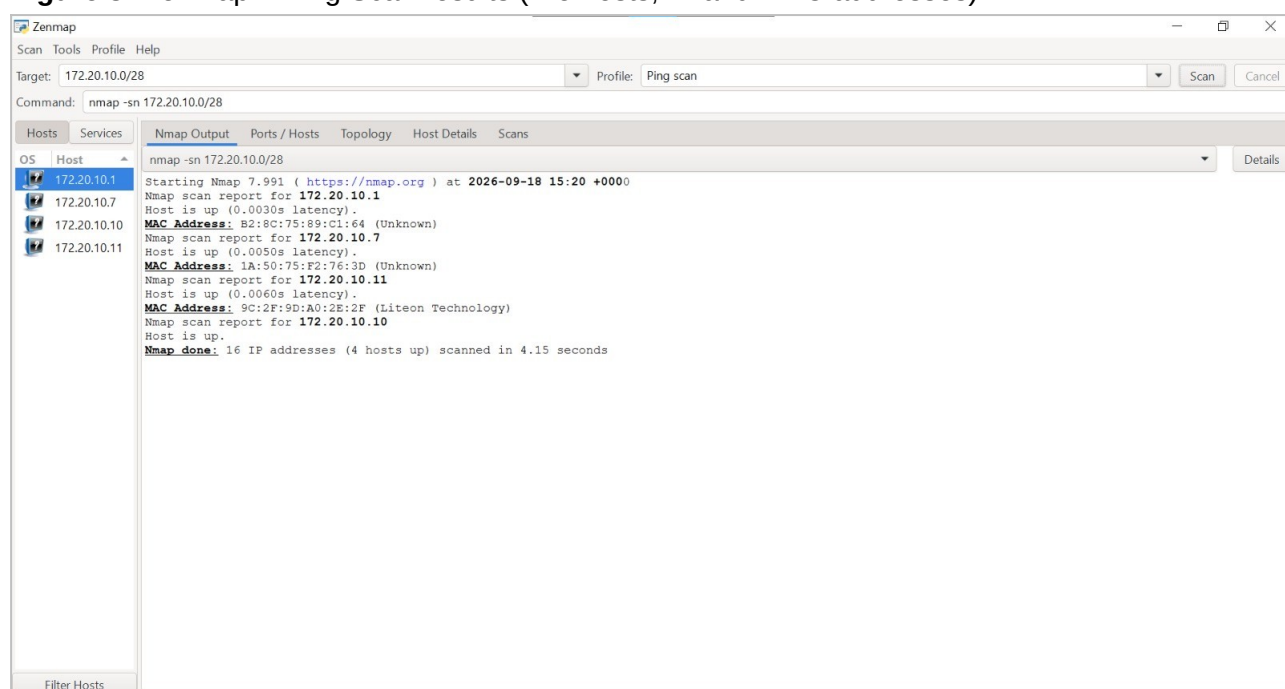


Figure 9: Zenmap – Network Topology view with legend enabled

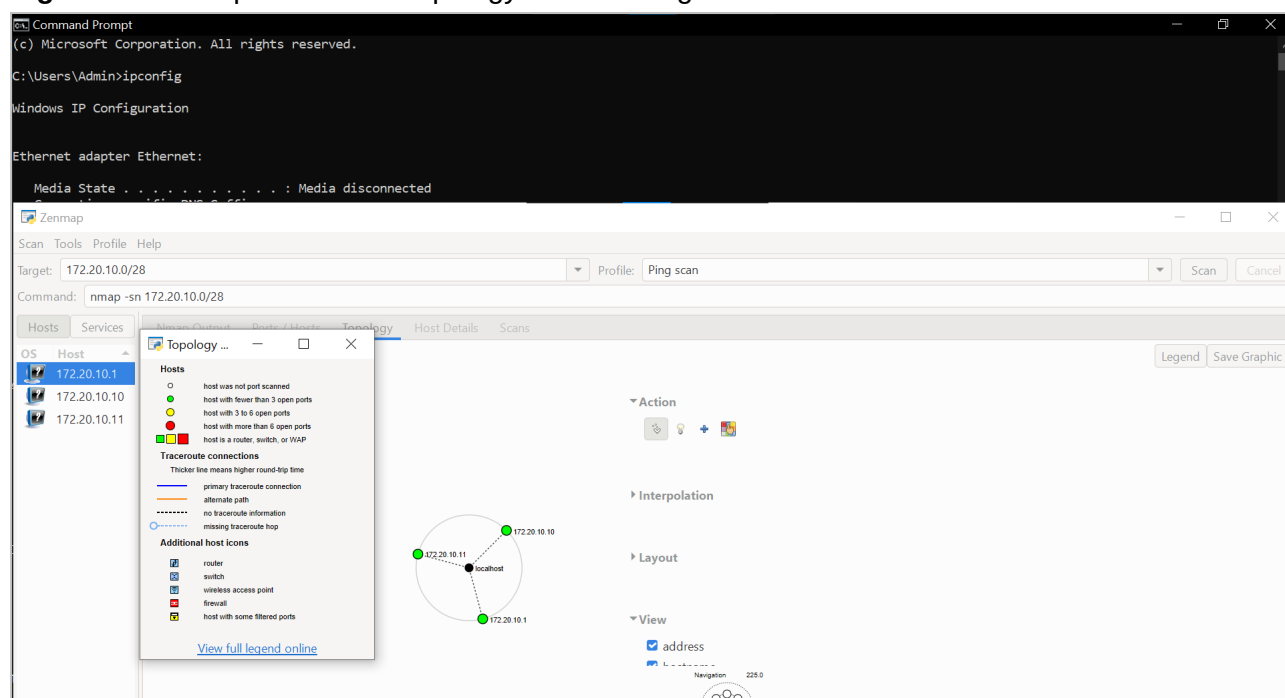

-End-

 **Author**
Chesangha Quinneta
Cybersecurity Professional B083
LinkedIn: <https://www.linkedin.com/in/cyber--nneta-77a37b3ab>

 **Project Information**
Program Name: Cybersecurity program at Networkwalks | **Week:** 02 | **Repository:** GitHub