omnisient

Omnisient
Platform Guide for Analysts
User Manual

Aspects of the Omnisient™ Platform is protected by patent.
US Patent No. 11,748,515 and patent pending GB2315353.9

Table of Contents

PII

Supported Personally Identifiable Information (PII) Types 3

Analytics tools: SQLPad, Jupyter and Power BI

Jupyter Notebook 9

Using Jupyter Notebook for Package Management 20

Available Packages and Libraries for Jupyter Notebook 22

How to Create a SQLPad Export 36

SQLPad Troubleshooting Guide 40

Approvals 42

Up-Skilling Guide: How to Assess SQLPad Exports with Confidence 46

Power BI Reports 56

Export Power BI Reports as PDF, PNG, or PPT 58

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Supported Personally Identifiable Information (PII) Types

When you mark a column as PII, Omnisient ensures it is anonymized and tokenized before upload, so your sensitive data is protected from the start. We use SMPC (Secure Multi-Party Computation) to keep these fields private while still enabling secure linking and collaboration across datasets. This approach helps support compliance with regulations such as POPIA, GDPR, and UAE data protection laws.

Summary of Supported Fields

PII Type	Display Name	What it's for	Important things to
iAPI	Anonymous PI	Used to hide source data that doesn't need to be treated as regulated PII (according to POPIA, GDPR, and UAE data protection laws), but should still be hashed before upload for privacy or internal policy reasons.	
iCCARDFIRST6	Credit Card First 6 Digits	Useful for identifying the issuing bank / card type without exposing the full card number.	
iCCARDLAST4	Credit Card Last 4 Digits	Helps verify payments or reconcile transactions while keeping the full card number protected.	
iCARDNO	Credit Card Number	A full payment card number used for secure matching or transaction linking when required.	
iDOB	Date Of Birth	Used for identity matching, segmentation, or age-based insights where allowed.	
iEMAIL	Email Address	Supports person-level matching across datasets using a commonly available identifier.	Must follow standard email formats (e.g., name@domain.com).

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

iFNAME	First Name	Helps support name-based matching for use cases where names are needed (often alongside surname).	
iMEDAIDNO	Medical Aid No	Used for healthcare / insurance matching and analysis while protecting member identity.	
iMERCHANTID	Merchant ID	Enables secure transaction analysis and matching for retailers, payment providers, and financial institutions.	
iPASSPORTNO	Passport Number	Used when matching individuals who do not have a national ID in the dataset.	
iPAYMENTACCREF	Payment Account Reference	Allows tokenized tracking of payment accounts (e.g., customer account references) across datasets.	
iPHONE	Phone No	Common identifier for matching customer records when email/ID is unavailable.	
iSNAME	Last Name	Used for name-based matching and identity resolution when combined with other signals.	More effective when combined with first name and DOB/ID. Surnames alone are not unique.
VIN	Vehicle Identification Number	Identifies a specific vehicle using a globally standardized identifier.	

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

South Africa Only

PII Type	Display Name	What it's for	Important things to
iADDITIONALID	Additional ID Number	Supports clients who need to upload multiple ID columns in a single dataset (e.g., dependents, spouses, multiple household members).	Designed for "extra" ID fields beyond the primary ID number. All values must be valid South African ID formats.
iIDNO	ID Number	Primary national ID field for strong, high-confidence person matching.	Only one ID Number field can be selected per dataset. Must be a valid South African ID format.
iSACOMPANYREGONO	SA Company Business Registration Number	Improves local compliance and supports matching and configuration for South African businesses.	

United States Only

PII Type	Display Name	What it's for	Important things to
iSSN	Social Security Number	Strong identity field used in regions where SSNs are standard identifiers.	

Formatting Guidelines

Quick formatting guide

Omnisient automatically applies formatting adjustments (such as trimming spaces, standardizing case, or removing special characters where relevant) to every dataset before validation.

> Tip: To ensure a smoother upload, we encourage formatting your source data close to the expected shape where feasible.

PII Type	Automated formatting we apply	What we check
Credit Card Number	- Trim spaces - Remove spaces & special characters	- Numeric only - 13-16 digits
Date of Birth	- Trim spaces - Use YYYYMMDD format	- Represents a valid date
Email	- Trim spaces - Use lowercase	- Contains @ - Valid domain after @

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

First Name / Last Name	- Trim spaces - Use Title Case	- Letters, accents, spaces, hyphens, apostrophes supported
ID Number (SA)	- Trim spaces - Remove spaces	- 13 digits - Numeric only - First 6 digits represent a valid date
Passport Number	- Trim spaces	- No enforced format - Avoid mixed identifiers in one column
Phone Number	- Trim spaces - Use a consistent format	- International numbers start with + - Local numbers may start with 0 or without
Vehicle Identification Number	- Trim spaces - Remove Spaces	- Should be a length of 17 characters

Social Security Number

An SSN consists of 9 digits, commonly displayed in the following format:

AAA-GG-SSSS Example: 123-45-6789

Section	Description
AAA	Area Number (first 3 digits). Historically linked to geography, but no longer reflects location.
GG	Group Number (next 2 digits). Used for administrative sequencing.
SSSS	Serial Number (last 4 digits). Sequential within each group.

Your validation checks

Validation area	What we check	Examples of invalid and valid formats
Total length	SSN must contain exactly 9 digits (excluding optional dashes).	123-45-6789 and 123456789 are valid formats
Allowed characters	Only numeric characters are allowed (dashes are optional).	Letters or special characters are invalid
Area number (AAA)	Must be between 001-899, excluding 666.	000, 666, 900-999 is invalid
Group number (GG)	Must be between 01-99.	00 is always invalid
Serial number (SSSS)	Must be between 0001-9999.	0000 is always invalid
Zeroed sections	No section may be entirely zero.	All the following is invalid: 000-12-3456 123-00-4567 123-45-0000
All zeros	SSN cannot be all zeros.	000-00-0000

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Restricted / example ranges	Known placeholder or example values are rejected.	Repeating or sequential digits is invalid: 123-45-6789 111-11-1111
Structural validity	SSN must follow the AAA-GG-SSSS structure.	Incorrect length or malformed values are invalid

South African Company Business Registration Number

The platform automatically validates two formats for South African company registration numbers:

Format Type	Structure	Example
Post-2002	YYYY/NNNNNN/NN	2021/123456/07
Pre-2002	XYYYY/NNNNNN	X1999/654321

Post-2002 CIPC Format Validation

Expected Pattern

YYYY/NNNNNN/NN

- YYYY = year (2008 -> current year)
- NNNNNN = exactly 6 digits
- NN = 2-digit entity type (e.g., 07 = Private Company)

Your validation checks

- Regex must match the pattern
- First 4 characters must be numeric (year)
- Year must be no later than the current year
- Input must contain exactly two slashes
- All other characters must be digits

Old / Regional Format Validation

Expected Pattern

XYYYY/NNNNNN

- X = a single alphabetic region code
- YYYY = year (no later than the current year)
- NNNNNN = 6 digits

Your validation checks

- Regex must match the old/regional pattern
- First character must be a letter
- Next 4 must form a valid year
- Input must contain one slash
- All remaining characters (after the first letter) must be digits or a slash

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

If a record does not conform to either format, it will be flagged during the transformation step for further review.


© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Jupyter Notebook

Python, a widely used programming language for data scientists, offers a wide selection of libraries that you can install with the pip command, simplifying complex calculations and data analysis tasks. It also facilitates the automation of tasks and processes, streamlining workflows for enhanced productivity and efficiency.

Jupyter Notebook is an open-source web application that's become one of the go-to tools for data scientists, analysts, and even educators in recent years. It provides an environment where you can write live code, equations, visualizations, and narrative text - all in a single document, making it a versatile choice for a variety of data projects.

What sets Jupyter Notebook apart is its ability to combine code execution with data visualization and rich text, facilitating a more interactive and insightful data exploration process. You can jot down your thought process while simultaneously running code snippets, making it an excellent tool for both the development and sharing of data analyses.

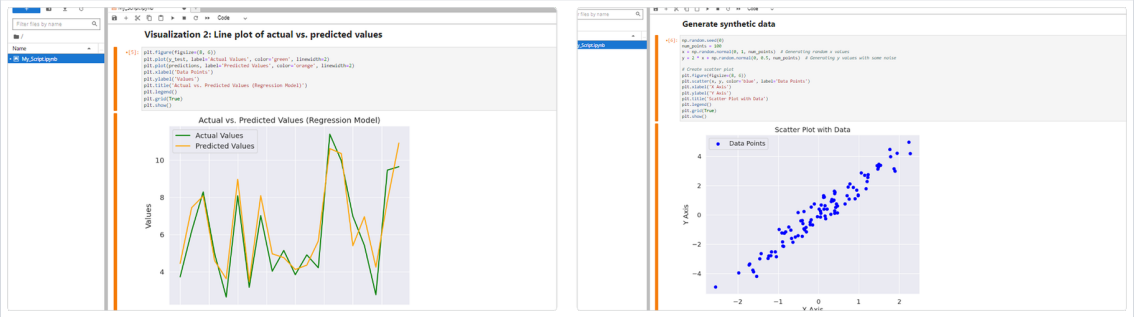

Getting started

Two things must be in place before you can access Jupyter Notebook in Omnisient:

- An active Jupyter Notebook subscription - your organization must have Jupyter Notebook enabled as part of your plan.
- A compatible project type - the project you are working in must have analytical tools enabled.

> If Jupyter Notebook is not showing in your project, it is likely one of these two reasons.

You can access Jupyter Notebook from two places:

From a project	Open your project and select Open With > Jupyter Notebook.
Own Data Preparation	Available via the Datasets and the project sections in the side navigation.

Each user has their own isolated Jupyter environment, you won't see other users' notebooks or files, and your workspace can be configured to suit your needs.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Having trouble loading Jupyter?
- Refresh the page and try again.
- Check your project status - Jupyter will not load if the project is in a Processing or Failed state.
- Log out and log back in to refresh your session.
- Check with your IT team that all required URLs and IP ranges are whitelisted. See Firewall Access Required for details.

Workspace size options

Three workspace sizes are available, allowing you to match compute resources to the demands of your work:

Workspace Type	CPU	Memory (RAM)
Standard	2	8GB
Medium	3	25GB
Large	4	50GB
Extra Large	12	108GB

Resources in Omnisient's AKS environment are allocated dynamically and managed by Kubernetes, which ensures efficient utilization of available resources while maintaining performance and scalability.

1. Resource limits and requests - each project is allocated resources based on predefined minimum and maximum limits. The minimum (resource request) ensures each Jupyter instance has enough resources to start and run. The maximum (resource limit) prevents any single instance from consuming excessive resources, ensuring fair distribution across all users.
2. Pod initialization - when a user opens a Jupyter instance, Kubernetes uses the defined resource requests and limits to create a new instance, known as a pod. A pod is a virtual environment that encapsulates the Jupyter application and its dependencies.
3. Scaling mechanism -the AKS setup includes a single server and two scale set instances to handle varying workloads. When resource usage reaches a threshold, Kubernetes automatically provisions additional instances. When demand decreases, it scales down and frees up resources.
4. Virtual server fit - each pod fits within the size constraints of the virtual server in use. Kubernetes continuously monitors resource usage and adjusts allocation to optimize performance.
5. Resource monitoring and management - Kubernetes provides built-in mechanisms for monitoring usage and managing pod lifecycle, ensuring each Jupyter instance operates within defined resource limits without impacting overall system performance.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

File browser


When you launch Jupyter in a project, the left panel opens by default to the File Browser. This displays your persisted storage - files, notebooks, and code saved here are maintained between Jupyter sessions, so your work is preserved each time you return to the project.

From the file browser you can:

- Create a new launcher - add a new .ipynb notebook, text file, .py file, and more
- Upload a file from your local computer to your project
- Create a folder within your file browser space

You can also write files out from your notebook directly to the file browser. Files are written to the project rather than to your local disk. For example, a dataframe can be written out as a .csv using standard Pandas functionality:

In a later session, you can read the file back into memory:

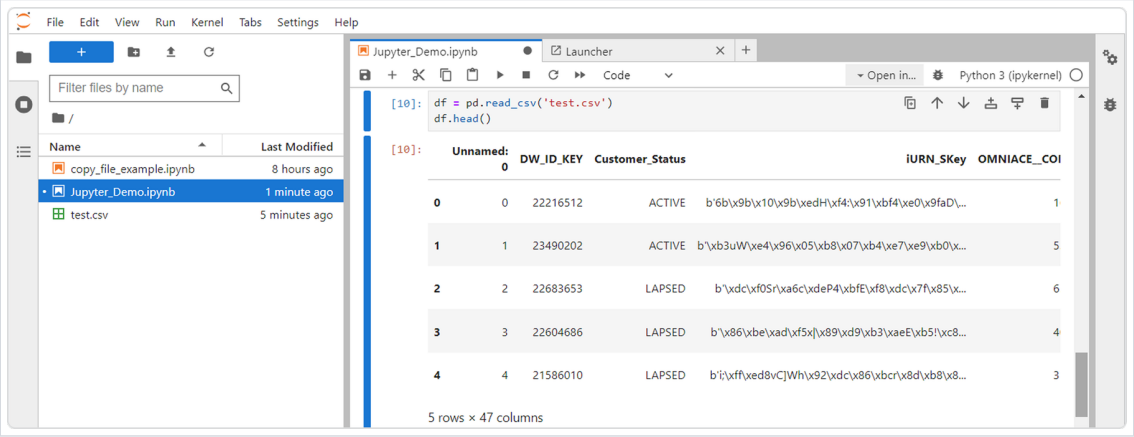

Any file that can be created using Python scripting can be written and stored in persisted storage.

Right-click context menu

Right-clicking a file in the file browser reveals additional options. Most of these are standard Jupyter actions - Open, Rename, Delete, Cut, Copy, and so on. One option is specific to Omnisient:

Promote to Library - submits a notebook for review and inclusion in your organization's Company Notebook Library. See Company Notebook Library below.

Working with your data in Jupyter

OmniHub reads data from the data warehouse into a Jupyter notebook, either from your own Data Preparation area or a project's shared tables. Queries are written as SQL strings and submitted through the omni_hub magic command; the result is a ResultSet object you convert to a pandas DataFrame with .DataFrame().

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Viewing available tables

Before querying, load the extension and list the tables available to you:

1. Load the extension:

```
%load_ext omni_hub
```

2. Return every table in a project:

```
%omni_hub --list-tables
```




Querying data

Define the query as a SQL string, submit it through omni_hub, then convert the result to a DataFrame:

```
%load_ext omni_hub
data = %omni_hub {'select top 100 * from [project_code].[table_name]'}
df = data.DataFrame()
print(df)
```

- Replace [project_code] with the project code, for example ClientName_Prj_00001. For Own Data Preparation, use ClientName_a.
- Replace [table_name] with the table to query.
- top 100 limits the extract to the first 100 rows. Remove it to pull the full table.

Queries use Microsoft SQL Server syntax, and can join a table against a partner's table within the same query - join on DW_ID_KEY or BestMatchID.

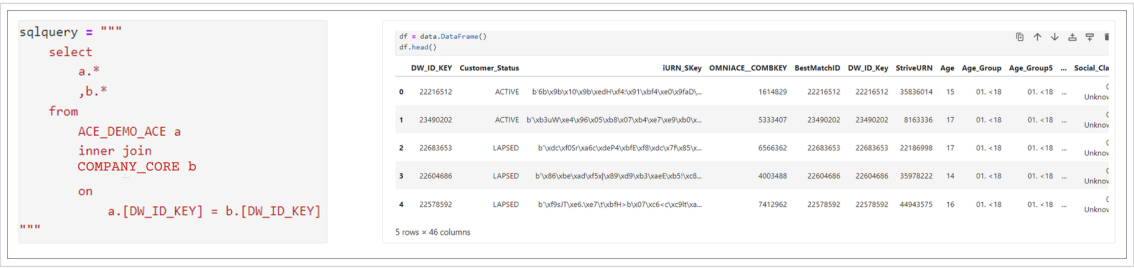

To identify a username for support queries or table-creation permission requests:

```
%omni_hub {'select current_user'}
```


© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

```
%omni_hub {'select current_user'}
Done.
ed3adc37-9f52-4ff9-b690-d300194938b9_cb9ab065-d351-4770-dba7-08d_OmnisientCS_OMNISIENTCS_PRJ_00005
```

The username is the long alphanumeric string ending in the project name.

Tips for managing memory:
- For large datasets, do as much data preparation, cleaning, joining, and sampling in SQL as possible before loading into the notebook - Python compute may run out of memory on very large datasets.
- Load only the data needed - a filtered query over a full table pull.
- Clear unused variables with Python's del, or restart the kernel to free memory between tasks.

Choosing a workspace size for a query

Query performance and processing time depend on the shape of the table being pulled, and the notebook's workspace size needs to match it.

- A wide table (many columns, e.g. 500 columns across 3 million rows) is compute- and memory-intensive to process column-by-column, and typically needs the Extra Large workspace size.
- A long table (few columns, e.g. 10 columns across 50 million rows) processes differently - the Large workspace size is typically sufficient.

See Workspace size options above for the full CPU/memory breakdown of each workspace size.

Pulling more data than a query actually needs increases the risk of the query timing out, independent of workspace size. Scope a query to the columns and rows actually needed rather than sizing up to compensate.

Optimizing memory for large tables

omni_hub returns a ResultSet object. Converting it directly to a DataFrame holds the data twice in memory - once as the ResultSet, once as the DataFrame - which can cause out-of-memory errors on large tables.

Export the ResultSet to CSV, delete it, then load the CSV into pandas instead. This holds only one copy at a time:

1. Run the query with omni_hub.
2. Save the result to CSV with .csv("path").
3. Delete the original object with del.
4. Load the CSV into pandas with pd.read_csv.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

```
# 1) Run query via omni_hub
sql_query = "select top 10 * from [project_code].[table_name]"
rs = %omni_hub {sql_query}
df = rs.DataFrame()
print(df)
df.to_csv("my_table.csv", index=False)
# 2) Save to CSV
rs.csv("my_table.csv")
# 3) Delete the ResultSet to free memory
del rs
# 4) Read the CSV into pandas
import pandas as pd
df = pd.read_csv("my_table.csv", low_memory=False)
```

Writing a DataFrame back to a project

To write the results of an analysis back to the project tables, use omni_lab.

1. Import the package:


```
import omni_lab
```

2. Copy the DataFrame back to the project:

```
omni_lab.copy_to_project_tables(df, "PROJECT_CODE", "table_name")
```

3. Replace PROJECT_CODE with your project code, for example QACOMPANYA_PRJ_00023, and table_name with a name of your choosing. Table names can't contain spaces.

The write runs asynchronously.

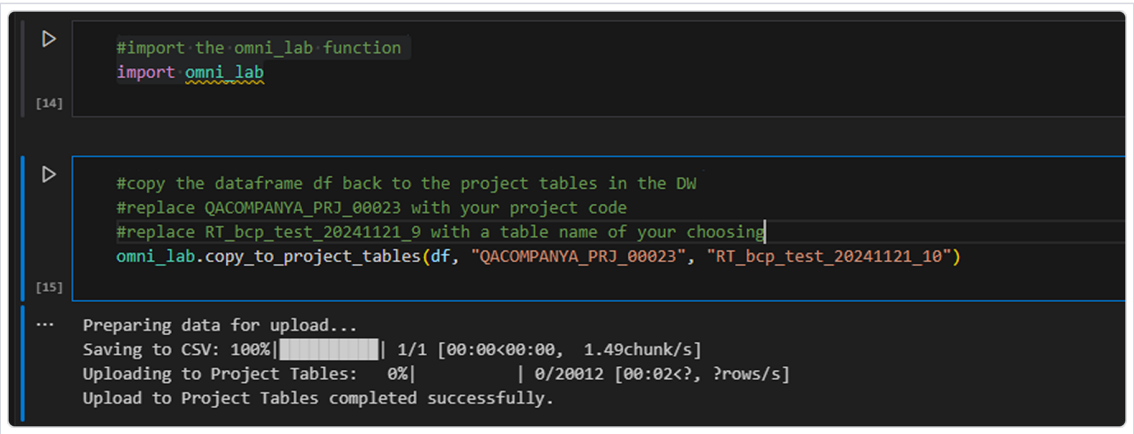

Libraries

Import a library using standard Python syntax:


```
import pandas as pd
import numpy as np
```

To view all libraries installed on the platform, run:

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

```
!pip list
```

This returns an alphabetized list of all available libraries.

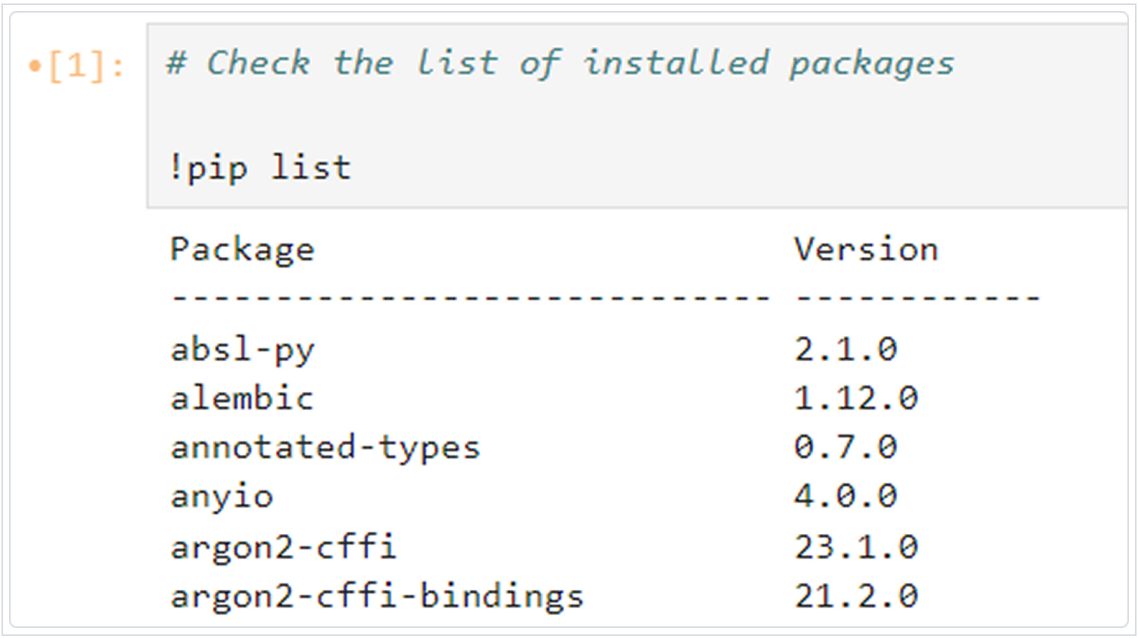

For the full list of packages and libraries available in Omnisient's Jupyter environment, see Available Packages & Libraries for Jupyter Notebook.

Virtual environments

A virtual environment (venv) is a persistent, isolated Python environment within a Jupyter project, separate from the project's shared Python installation. Packages installed inside a venv persist across sessions in the project's storage, avoiding the session-only installs and version drift that come with installing packages directly in the shared environment.

A venv is useful whenever a specific analysis or model needs a particular library version - for example, testing a newer release of a package without changing the version every other notebook in the project relies on. It also makes an analysis reproducible: recreating the same venv gives the same package versions, rather than whatever happens to be installed in the shared environment at the time.

Jupyter Notebook creates and activates project-specific venvs through the omni_helper extension.

Creating and activating a Venv

Run these two cells at the top of the notebook, every session:


1. Load the omni_helper extension:

```
%load_ext omni_helper
```

2. Create and activate the venv: Replace <env_name> with any name you choose. The first time, this creates the venv and activates it; every time after, it just activates it.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

```
%omni_helper venv-activate <env_name>
```

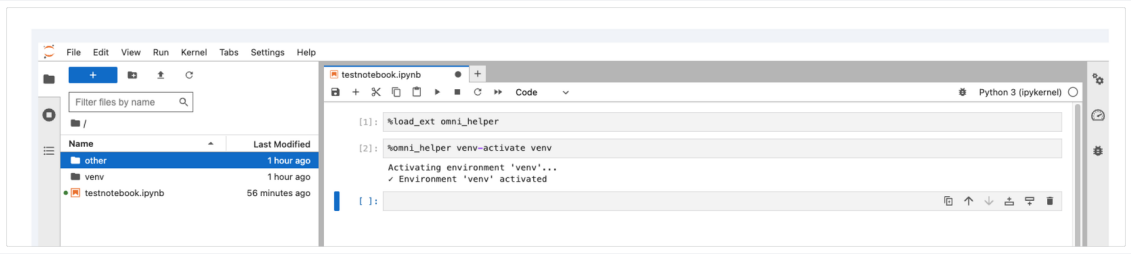

Note: Initial creation takes 15 to 30 minutes. The venv itself persists in the project's storage, but a new session still needs to run both cells (%load_ext omni_helper and %omni_helper venv-activate venv) to reactivate it - reactivating an existing venv takes seconds.

> Use the same venv name across every notebook in the project, so each one activates the same persisted venv and the packages already installed in it.

Installing packages inside a Venv

Once a venv is active, install a package the same way as outside one:

```
!pip install <package_name>
```

Packages install from Omnisient's vetted package library. A package installed inside an active venv persists across sessions in the project's storage - install it once, and it's available every time that venv is reactivated, without installing it again.

See Using Jupyter Notebook for Packages/Libraries Management for how package installs behave outside a venv.


> If a package isn't part of the vetted library, it isn't available to install this way. Contact support@omnisient.com to request it be added or updated.

Company Notebook Library

The Company Notebook Library allows analysts to share approved notebooks across your organization. Once a notebook has been reviewed and approved by the Omnisient team, it becomes available to all users within the company and can be copied into any project.


© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Accessing the library

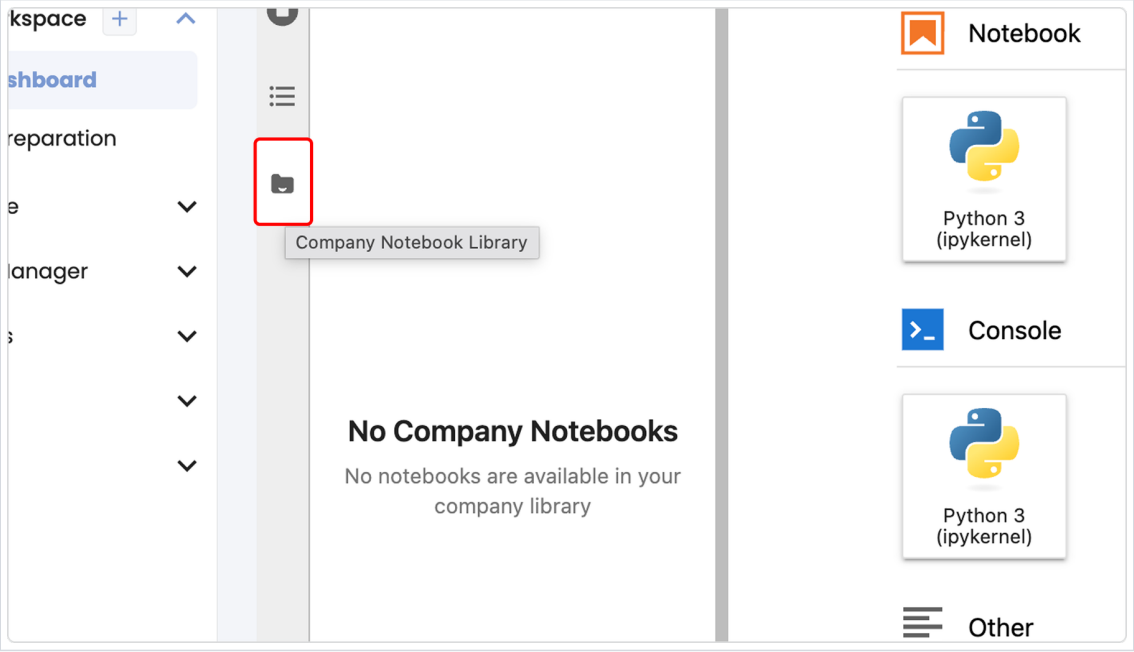

The Notebook Library panel is available in the left sidebar within Jupyter. It displays all notebooks your organization has had approved.


To use a notebook, right-click it and select Copy into Project - a copy is added to your current project's file browser.

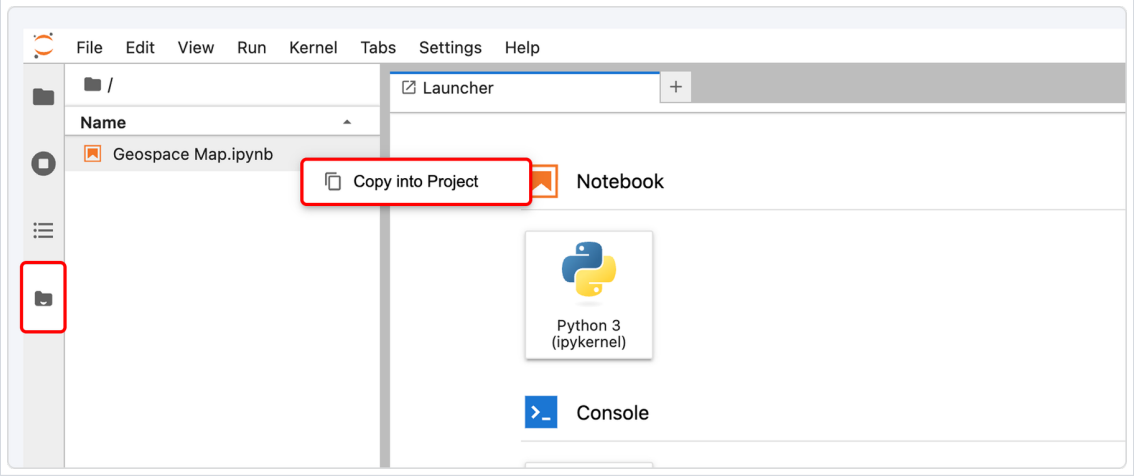

Promoting a notebook to the library

Any analyst can submit a notebook for inclusion in the Company Notebook Library.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

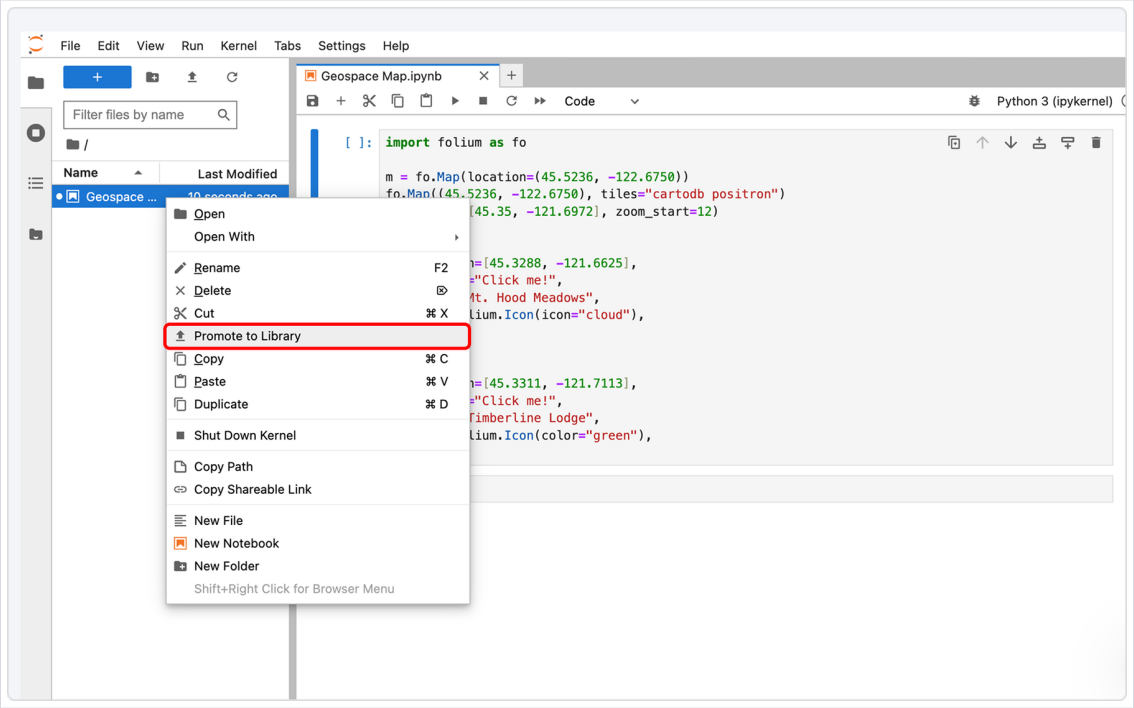

Clear your notebook outputs before submitting. Notebooks submitted with outputs will be declined. Before promoting, clear all outputs - go to Edit > Clear All Outputs, or Kernel > Restart Kernel and Clear All Outputs.

To submit a notebook:

1. In the file browser, right-click the notebook you want to promote.
2. Select Promote to Library.
3. A confirmation modal appears - review and confirm your submission.
4. Your submission has been logged, and the Omnisient team has been notified to begin the review process.

What happens next

Once submitted, your notebook enters a review queue. The Omnisient team will review it and communicate the outcome by email.

- Approved - the notebook is added to your organization's library and becomes visible to all users in the Notebook Library panel.
- Declined - you will receive an email with the reason for the decline. Review the feedback, make the necessary changes, and resubmit.

Sharing a notebook with a project member

To share directly with a specific project member, use omni_helper.

Permissions required: Active participant in the project.

Prerequisites: Jupyter Notebook open within your project.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies


Step 1: Load the extension

```
%load_ext omni_helper
```

Step 2: Get the recipient's user address

Run omni_helper project-members to return a list of project members and their user addresses. Copy the User Address of the intended recipient.

> User addresses are project-specific - the same user has a different address in each project they belong to.

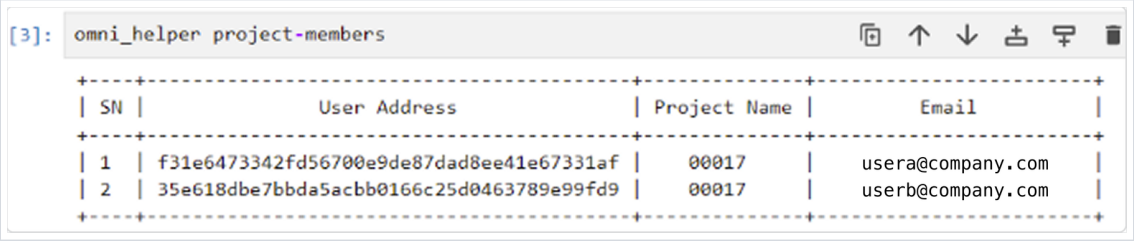

Step 3: Send the file

```
omni_helper send-files --paths [filename.ipynb] --receiver [user_address]
```

> Filenames cannot contain spaces. Rename the file before transferring if needed.



Step 4: Check transfer status

Run omni_helper transfer-history and match the output against the REQUEST_ID returned when you submitted.

Recipient: The file appears in a shared folder within their Jupyter workspace inside a dated subfolder. There is no automatic notification - they will need to check manually.

Issue	Likely cause	Fix
Recipient not listed in project-members	Not an active participant in this project	Confirm they have been added to the project
Transfer not completing	Filename contains spaces	Rename and retry
Wrong user address	Address copied from a different project	Re-run omni_helper project-members in this project

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Using Jupyter Notebook for Package Management

Starting 30 September 2024, you will now be able to install your own packages/libraries for use in Jupyter Notebook, and the platform will no longer pre-install the packages on your behalf. This allows for faster integrations with the exact libraries and versions you wish to work with.

NOTE:

The installs do not persist across your different notebooks and will have to be run in a block at the beginning of the notebook.

How to Install Packages in Jupyter Notebook using PIP

Jupyter Notebook allows you to install and manage Python packages efficiently using PIP. This can speed up integrations and empower users with self-service capabilities. You can even install specific versions of libraries to ensure compatibility with your projects.

Step-by-step Guide

1. Open your Jupyter Notebook:
   - Launch Jupyter Notebook from the Omnisient web app
2. Insert a new code cell:
   - Click on a new cell or press B to create a new code block.
3. Install a package using PIP:
   - In the code cell, type the following command to install any package:

```
!pip install <package_name>
```

   - For example, to install the pandas package, use:

```
!pip install pandas
```

4. Install a specific version of a package:
   - If you want to install a particular version of a package, specify the version number in your command. For example:

```
!pip install pandas==1.3.3
```

5. Run the cell:
   - Press Shift + Enter to execute the command and install the package.
   - Jupyter will display the installation progress in the output below the code cell.
6. Verify the installation:
   - You can verify that the package was installed successfully by importing it into a new

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

cell:

```
import pandas as pd
```

Available Libraries

See a full list of available libraries and packages.

Best Practices

- Check package compatibility: Before installing, make sure the package version is compatible with your environment or other libraries you are using.

Troubleshooting

- Permission denied error: If you encounter a permission issue, try adding the --user flag to your command:

```
!pip install --user <package_name>
```

- Package not found: If PIP is unable to find the package, make sure that the package name is spelled correctly, or that it exists in the Python Package Index (PyPI).

By following these steps, you can quickly install and manage the libraries you need for your projects, empowering faster integrations and more flexible, self-service development workflows.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies Platform Guide for Analysts

Available Packages and Libraries for Jupyter Notebook

Package Name	Description	Version	Pip install
absl-py	Google's collection of Abseil Python Common Libraries: utilities for flags, logging, app startup, and more. Widely used and production-tested.	2.1.0	pip install absl-py
accumulation-tree	A red/black tree implementation that stores aggregation info at each node to enable fast range-based sums (O(log N)). Useful for Fenwick-like operations.	0.6.4	pip install accumulation-tree
alembic	A lightweight database migration tool. Supports schema evolution via SQL ALTER scripts.	1.14.0	pip install alembic
annotated-types	Support tools for PEP-593's typing.Annotated, enabling runtime metadata like bounds, predicates, and size descriptors.	0.7.0	pip install annotated-types
attrs	Reduces boilerplate for Python classes, handling dunder methods. Favored for concise and correct code, even NASA uses it.	24.2.0	pip install attrs
azure-common	Part of the Azure SDK: foundational library for common utilities and shared code used by other Azure Python packages.	1.1.28	pip install azure-common
azure-core	Core client library for Azure SDKs, providing shared exceptions, retries, transports, and telemetry following Azure SDK guidelines.	1.31.0	pip install azure-core
azure-synapse-spark	Client library for interacting with Azure Synapse Spark from Python. Supports Synapse Spark workloads and SDK interactions.	0.7.0	pip install azure-synapse-spark
bambi	A high-level Bayesian model-building interface in Python built on top of PyMC. It lets users specify models using formula syntax (like in R) and easily fit mixed-effects or hierarchical Bayesian models.	0.15.0	pip install bambi
blinker	A fast and simple in-process signal/event dispatching system useful for decoupling components (e.g., event hooks).	1.9.0	pip install blinker
Boruta	Feature selection algorithm based on Random Forest; Boruta methodology identifies important features by comparing them to randomized shadow features. Typically used in ML pipelines.	0.4.3	pip install Boruta

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Bottleneck	Fast NumPy array functions written in C/Cython for efficient operations like moving windows and NaN-aware reductions.	1.4.0	pip install Bottleneck
cachetools	Extensible memoizing collections and decorators (e.g., LRUCache, TTLCache) as advanced variants of functools.lru_cache.	5.5.0	pip install cachetools
catboost	High-performance gradient boosting on decision trees library with native handling of categorical features and GPU support	1.2.7	pip install catboost
category-encoders	scikit-learn-style transformers for encoding categorical variables using methods like one-hot, target, weight of evidence, etc.	2.6.3	pip install category-encoders
certifi	Provides Mozilla's curated CA certificate bundle for SSL/TLS certificate verification.	2024.8.30	pip install certifi
cffi	Foreign Function Interface for calling C code from Python; lets you interface with C directly.	1.17.1	pip install cffi
charset-normalizer	A modern, reliable alternative to chardet for detecting and normalizing text encoding; pure Python.	3.4.0	pip install charset-normalizer
clarabel	A Rust-implemented interior-point solver (accessible via Python) for convex optimization: LP, QP, SOCP, SDP problems.	0.9.0	pip install clarabel
click	Simple and elegant command-line interface (CLI) creation package for Python.	8.1.7	pip install click
cloudpickle	Enhanced pickling library that supports serializing more complex Python objects, such as lambdas or nested functions.	3.1.0	pip install cloudpickle
contourpy	Python library for calculating contours of 2D quadrilateral grids, written in C++11 with pybind11, implementing Matplotlib's older algorithms plus newer ones in both serial and multithreaded forms.	1.3.1	pip install contourpy
creditpy	Python package for credit risk scoring and validation; successor to CreditR, supporting tasks like variable analysis, model development, calibration, and validation.	2.7	pip install creditpy
cryptography	A robust Python library providing cryptographic recipes and primitives	43.0.1	pip install cryptography
cvxpy	A Python-embedded modeling language for convex optimization; lets you define problems naturally in math form rather than solver form.	1.5.3	pip install cvxpy
cycler	Utility for creating composable cycles (e.g. line styles/colors) in plotting libraries like Matplotlib.	0.12.1	pip install cycler

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Cython	A static compiler for writing C extensions in Python; a superset of Python enabling optional static typing for high-performance code.	3.0.11	pip install Cython
dacite	Simplifies creation of data classes (PEP 557) from dictionaries.	1.8.1	pip install dacite
databricks-sdk	Python SDK to accelerate development with the Databricks Lakehouse; interfaces with public Databricks REST APIs and supports robust retries.	0.39.0	pip install databricks-sdk
Deprecated	A simple decorator to mark functions or classes as deprecated with warnings.	1.2.15	pip install Deprecated
dill	Extends Python's pickle module to serialize a broader set of Python objects (e.g., functions, closures, classes).	0.3.9	pip install dill
docker	Docker SDK for Python: Full control over the Docker Engine API for managing containers, images, swarms, and more via Python.	7.1.0	pip install docker
duckdb	Embedded, high-performance analytical SQL database for Python; optimized for OLAP workloads over data like CSV/Parquet, with easy SQL execution.	1.1.1	pip install duckdb
ecos	A numerical optimization solver for convex problems (e.g. SOCP), used by frameworks like cvxpy.	2.0.14	pip install ecos
entrypoints	Discover and load Python entry points, often used to register plugins/extensions.	0.4	pip install entrypoints
exceptiongroup	Backport of Python 3.11's ExceptionGroup and BaseExceptionGroup, letting multiple exceptions be represented and caught, even prior to Python 3.11.	1.2.2	pip install exceptiongroup
feature-engine	A Python library offering transformers for feature engineering and selection, following the scikit-learn fit()/transform() paradigm	1.8.1	pip install feature-engine
Flask	A lightweight WSGI web application framework that's easy to get started with and scalable.	3.1.0	pip install Flask
folium	Creates interactive Leaflet.js maps from Python. Visualize geospatial data with minimal code.	0.19.4	pip install folium
fonttools	A library for reading, manipulating, and converting font files.	4.55.3	pip install fonttools
fpdf	A simple library for generating PDF files in Python, ported from PHP's FPDF.	1.7.2	pip install fpdf

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

future	A compatibility layer to write code that runs cleanly on both Python 2 and 3. Includes porting tools like futurize and pasteurize.	1.0.0	pip install future
gap-stat	Implements the Gap Statistic method for estimating the optimal number of clusters in data, with optional Rust optimizations.	2.0.3	pip install gap-stat
gitdb	Provides low-level read/write access to Git object databases, used under the hood by GitPython.	4.0.11	pip install gitdb
GitPython	A Pythonic interface for working with Git repositories programmatically. Supports both high and low-level Git operations.	3.1.43	pip install GitPython
glmnet	This is a Python wrapper for the fortran library used in the R package glmnet. While the library includes linear, logistic, Cox, Poisson, and multiple-response Gaussian, only linear and logistic are implemented in this package.	2.2.1	pip install glmnet
google-auth	Supports Google authentication using OAuth 2.0	2.36.0	pip install google-auth
graphene	A code-first library for building GraphQL APIs in Python with built-in support for Relay and integrations with ORMs and web frameworks	3.4.3	pip install graphene
graphql-core	A Python port of GraphQL.js, providing a reference implementation of GraphQL in Python.	3.2.5	pip install graphql-core
graphql-relay	A library that enables creating Relay-compliant GraphQL servers using graphql-core.	3.2.0	pip install graphql-relay
graphviz	Facilitates the creation and rendering of graph descriptions in DOT language, using Graphviz's layout and rendering capabilities from Python.	0.20.3	pip install graphviz
greenlet	Lightweight in-process coroutines ("greenlets") for concurrent programming.	3.1.1	pip install greenlet
gunicorn	A fast, simple, and broadly compatible WSGI HTTP server for UNIX, using a pre-fork worker model and optimized for low resource usage.	23.0.0	pip install gunicorn
htmlmin	A configurable HTML minifier with safety features, capable of removing comments, collapsing whitespace, and offering WSGI middleware or decorator support.	0.1.12	pip install htmlmin
idna	Supports the IDNA2008 protocol (RFC 5891) for handling internationalized domain names (IDNs), intended as a drop-in replacement for the built-in encodings.idna module.	3.1	pip install idna

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

ImageHash	A Python library for perceptual image hashing techniques like average-hash, perceptual-hash, difference-hash, wavelet-hash, color-hash, etc., used to detect image similarity.	4.3.1	pip install ImageHash
imbalanced-learn	Tools to handle imbalanced datasets in machine learning; includes resampling methods like SMOTE and pipelines that integrate with scikit-learn.	0.12.3	pip install imbalanced-learn
immutabledict	An immutable (hashable) dictionary type. Useful when needing dict-like types that can be used as keys or safely cached.	4.2.0	pip install immutabledict
importlib-metadata	Provides programmatic access to metadata for installed Python packages (e.g., version, entry points). Acts as a backport for Python versions before 3.8.	8.5.0	pip install importlib-metadata
importlib-resources	Enables access to non-code resources bundled within Python packages (e.g., data files or templates); backported for older Python versions.	6.4.5	pip install importlib-resources
iniconfig	Parses .ini configuration files and is often used under the hood by pytest and other tools to manage configuration settings.	2.0.0	pip install iniconfig
isodate	Parses and formats ISO 8601 date, time, and duration strings in Python, converting them to datetime or timedelta.	0.6.1	pip install isodate
itsdangerous	Implements cryptographic signing to safely serialize data, commonly used for managing secure tokens (e.g., in Flask session cookies).	2.2.0	pip install itsdangerous
Jinja2	Fast, expressive, extensible templating engine for Python. Offers template inheritance, sandboxed environments, autoescaping for XSS prevention, and async support.	3.1.4	pip install Jinja2
joblib	Offers lightweight pipelining, transparent disk-caching, memoization, and simple parallel computing optimized for large data and NumPy arrays.	1.4.2	pip install joblib
kiwisolver	Fast and lightweight C++ implementation of the Cassowary constraint solver (e.g., for UI layout), up to 500× faster and using far less memory.	1.4.7	pip install kiwisolver
llvmlite	A lightweight LLVM Python binding for building JIT compilers; initially developed for Numba, it wraps parts of the LLVM C++ API in C and ctypes layers.	0.43.0	pip install llvmlite

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Mako	Python-based templating engine (inspired by Django and Jinja2) that compiles templates into Python modules for high performance; used by web frameworks like Pyramid and Reddit.	1.3.8	pip install Mako
Markdown	Python implementation of John Gruber's Markdown; compliant with reference implementation and supports extensible add-ons.	3.7	pip install Markdown
MarkupSafe	Provides a way to safely handle and escape strings for use in HTML/XML contexts, protecting against injection attacks.	3.0.2	pip install MarkupSafe
matplotlib	Comprehensive 2D plotting library for Python, supporting line, scatter, bar, histogram, heatmap plots and more, often paired with NumPy.	3.9.3	pip install matplotlib
mlflow	Open-source platform for managing the ML lifecycle: experimentation, reproducibility, deployment, and model tracking.	2.19.0	pip install mlflow
mlflow-skinny	Minimal version of MLflow, excluding heavy dependencies (like Spark and databases), ideal for lightweight use cases or small environments.	2.19.0	pip install mlflow-skinny
mlxtend	Provides reproducible machine learning tools: includes utilities like stacking, feature selection methods, and plotting functions that extend scikit-learn.	0.23.1	pip install mlxtend
more-itertools	Provides additional building blocks and routines for working with Python iterables. Extends the standard itertools module with many handy utilities.	10.5.0	pip install more-itertools
msrest	A client-side, REST-based helper library from Microsoft for building HTTP-based SDKs, especially in Azure.	0.7.1	pip install msrest
multimethod	Enables function overloading based on argument types, allowing multiple methods with the same name to dispatch dynamically.	1.12	pip install multimethod
networkx	A comprehensive library for the creation, manipulation, and study of complex networks (graphs). Supports graph algorithms, data structures, and visualizations.	3.3	pip install networkx
numba	A just-in-time (JIT) compiler. Compiles Python functions to optimized machine code at runtime using LLVM, improving performance for numeric workloads.	0.60.0	pip install numba

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

numpy	Foundational library for numerical computing in Python. Supports n-dimensional arrays, mathematical functions, and linear algebra operations.	2.2.0	pip install numpy
numpyro	A lightweight probabilistic programming library that provides a NumPy (and JAX) backend for Pyro, allowing automatic differentiation, JIT compilation (GPU/CPU), and high performance for Bayesian modeling.	0.18.0	pip install numpyro
nvidia-nccl-cu12	NVIDIA's Collective Communication Library (NCCL) runtime for GPU-based collective operations like all-reduce, broadcast, and gather. Optimized for deep learning communication.	2.23.4	pip install nvidia-nccl-cu12
oauthlib	A generic, spec-compliant library for building OAuth 1.0 and 2.0 clients and servers in Python. Used in projects requiring OAuth authentication.	3.2.2	pip install oauthlib
opentelemetry-api	Defines the OpenTelemetry API specification for metrics and tracing; used to instrument applications for distributed observability.	1.28.2	pip install opentelemetry-api
opentelemetry-sdk	The reference implementation of the OpenTelemetry API. Provides concrete exporters and sampling policies for telemetry data.	1.28.2	pip install opentelemetry-sdk
opentelemetry-semantic-conventions	Provides standardized semantic attributes (key naming conventions) for telemetry data via OpenTelemetry. Ensures consistent metric and trace labeling across applications.	0.49b2	pip install opentelemetry-semantic-conventions
optbinning	Offers optimal binning algorithms for numeric and categorical variables. Particularly valuable in credit scoring and regulatory-compliant modeling.	0.19.0	pip install optbinning
optuna	Optuna is an automatic hyperparameter optimization software framework, particularly designed for machine learning. It features an imperative, define-by-run style user API.	4.6.0	pip install optuna
ortools	Google's Operations Research tools for solving combinatorial optimization problems like routing, assignment, and scheduling via CP-SAT, CP, and linear solvers.	9.11.4210	pip install ortools
osqp	A Python wrapper for OSQP: the Operator Splitting Quadratic Program solver, used for efficiently solving convex QP problems.	0.6.7.post1	pip install osqp
packaging	Provides tools to parse and compare Python package versions and metadata, supporting PEP-440 version specifiers.	24.2	pip install packaging

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

pandas	The core Python library for data manipulation and analysis. Offers DataFrame, Series, and time-series functionality.	2.2.3	pip install pandas
patsy	Allows building statistical models using a formula language similar to R, with support for categorical encoding and transformations.	1.0.1	pip install patsy
phik	Implements the Phi_K correlation coefficient, a practical measure of feature correlation capturing linear/non-linear dependencies across mixed-variable types.	0.12.4	pip install phik
pillow	The actively maintained fork of PIL (Python Imaging Library), used for opening, manipulating, and saving many image formats.	11.0.0	pip install pillow
plotly	A feature-rich library for interactive and declarative plotting in Python; supports web-ready charts and dashboards.	5.24.1	pip install plotly
pluggy	A plugin and hook management system used by pytest and other frameworks to enable extensibility.	1.5.0	pip install pluggy
polars	A high-performance DataFrame library implemented in Rust, supporting fast query execution and lazy evaluation.	1.8.2	pip install polars
protobuf	Google's Protocol Buffers implementation for Python. Used to serialize structured data in a language-neutral binary format.	5.29.1	pip install protobuf
pure-sasl	A pure-Python implementation of the SASL (Simple Authentication and Security Layer) protocol, used for authentication in services like Hive and Kafka.	0.6.2	pip install pure-sasl
py	A namespace package historically used in pytest to manage modules like pytest.py; largely deprecated and replaced by standalone packages.	1.11.0	pip install py
py4j	Enables Python programs to dynamically access Java objects in a Java Virtual Machine, allowing bidirectional communication between Python and Java.	0.10.9.9	pip install py4j
pyarrow	Python bindings for Apache Arrow: a high-performance, language-agnostic columnar memory format for data interchange and analytics.	18.1.0	pip install pyarrow
pyasn1	Pure-Python implementation of ASN.1 data structures and codecs, commonly used in cryptographic and network protocols.	0.6.1	pip install pyasn1

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

pyasn1-modules	Collection of ASN.1 modules required for various protocols (e.g., X.509, LDAP), designed to work with pyasn1.	0.4.1	pip install pyasn1-modules
pycparser	Complete parser of the C language, in pure Python; parses C code into ASTs, often used as a backend for projects like CFFI.	2.22	pip install pycparser
pydantic	Data validation and settings management using Python type annotations; parses/serializes JSON using type-safe models.	2.9.2	pip install pydantic
pydantic-core	Rust-backed core library used by pydantic for high-performance validation and serialization.	2.23.4	pip install pydantic-core
pyHive	Python client for Hive and Presto, enabling SQL-style access to Hadoop-based data warehouses.	0.7.0	pip install PyHive
pyMC	A Python package for Bayesian statistical modeling and probabilistic programming. It allows you to build models and fit them using advanced MCMC and variational-inference algorithms.		pip install pymc
Pympler	Development tool to profile memory consumption in Python programs; offers heap tracking, object summary, and reference graph analysis.	1.1	pip install Pympler
pyodbc	Python DB API-compliant interface to ODBC databases; enables database connectivity to SQL Server, Access, MySQL, etc.	5.1.0	pip install pyodbc
pyparsing	A library for building recursive-descent parsers in Python using an easy-to-use syntax, often used for DSLs or config parsing.	3.2.0	pip install pyparsing
pyspark	Python API for Apache Spark, providing distributed dataframe and ML capabilities across big data instances.	3.5.5	pip install pyspark
pytest	A mature testing framework for Python that enables clean, scalable test writing using fixtures, parameterization, and plugins.	8.3.4	pip install pytest
pyro	A flexible, scalable deep probabilistic programming library built on PyTorch. It is designed to represent any computable probability distribution and scale to large datasets.	4.82	pip install pyro-ppl
pytest-runner	A setuptools extension that adds pytest command integration into the build process. Now deprecated and not recommended for new projects.	6.0.1	pip install pytest-runner

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

python-dateutil	Enhances Python's datetime module with powerful parsing, relative deltas, and timezone support.	2.9.0.post0	pip install python-dateutil
pytz	Enables accurate and cross-platform timezone calculations using the eponymous time zone database.	2024.2	pip install pytz
pyudorandom	Provides deterministic, non-successive iteration or shuffling of lists using modular arithmetic, without randomness guarantees.	1.0.0	pip install pyudorandom
PyWavelets	Implements wavelet transforms for signal and image processing. Frequently used for denoising and multiresolution analysis.	1.7.0	pip install PyWavelets
PyYAML	YAML parser and emitter for Python, enabling configuration or data serialization in YAML format.	6.0.2	pip install PyYAML
qdldl	Python bindings for the QDLDL (Quadruple-precision LDL) solver, used in quadratic programming contexts.	0.1.7.post4	pip install qdldl
querystring-parser	Parses HTTP query strings into nested Python data structures; supports advanced parsing as required in API backends.	1.2.4	pip install querystring-parser
requests	Elegant and simple HTTP library for Python, simplifying making API calls with support for URL parameters, headers, sessions, and more.	2.32.3	pip install requests
requests-oauthlib	Adds OAuth 1 and OAuth 2 support on top of requests, enabling authenticated API workflows with providers like Google, Twitter, etc.	2.0.0	pip install requests-oauthlib
ropwr	A library written in Python implementing several mathematical programming formulations to compute the optimal continuous/discontinuous piecewise polynomial regression given a list of split points.	1.0.0	pip install ropwr
rsa	Pure-Python implementation of RSA cryptography for encrypting, decrypting, and signing messages. Frequently used for simple crypto tasks.	4.9	pip install rsa
sasl	Python bindings for Cyrus SASL, providing authentication layers for various protocols.	0.3.1	pip install sasl
scikit-learn	A robust machine learning library offering tools for classification, regression, clustering, dimensionality reduction, and evaluation.	1.6.0	pip install scikit-learn
scikit-learn-extra	Extends scikit-learn with additional algorithms (e.g. clustering, robust models) not included in the main package.	0.3.0	pip install scikit-learn-extra

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

scipy	Core scientific computing library for Python, providing routines for optimization, integration, linear algebra, and signal processing.	1.14.1	pip install scipy
scorecardpy	Implements credit scorecard modeling techniques including binning, WOE encoding, and model evaluation, popular in financial risk analytics.	0.1.9.7	pip install scorecardpy
scs	A solver for convex cone problems such as linear, quadratic, and second-order cone programs commonly used with optimizers like CVXPY.	3.2.7	pip install scs
seaborn	Statistical data visualization library built on matplotlib; offers simplified syntax for complex plots and aesthetics.	0.13.2	pip install seaborn
semantic-version	Implements semantic versioning (SemVer v2.0.0) with parsing, comparison, and validation of version strings.	2.10.0	pip install semantic-version
setuptools	Python package for building and distributing Python distributions, managing dependencies, entry points, and package metadata.	75.6.0	pip install setuptools
setuptools-rust	Plugin for setuptools that simplifies building Rust extensions for Python projects using Rust/Cargo.	1.10.2	pip install setuptools-rust
sh	Python subprocess interface that lets you call shell commands as Python functions for more natural scripting.	2.0.7	pip install sh
shap	Explains machine learning model predictions using SHAP values (based on explainable AI theory) for model interpretability.	0.46.0	pip install shap
six	Cross-Python compatibility library that smooths differences between Python 2 and Python 3.	1.17.0	pip install six
slicer	Slicer wraps tensor-like objects and provides a uniform slicing interface via __getitem__.	0.0.8	pip install slicer
smmap	A sliding-window memory map manager that wraps mmap, automatically unloading unused regions with an LRU strategy to conserve file handles on memory-limited or 32-bit systems.	5.0.1	pip install smmap
splink	Fast, accurate, and scalable probabilistic record linkage and deduplication library for identifying and clustering duplicate records that lack unique identifiers.	4.0.16	pip install splink

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

SQLAlchemy	Python toolkit and ORM for SQL databases; offers a Core SQL expression language and a powerful ORM for efficient, Pythonic DB interactions.	2.0.36	pip install SQLAlchemy
sqlparse	Pure Python library to parse, format, and reindent SQL statements.	0.5.3	pip install sqlparse
statsmodels	Provides classes and functions for the estimation of many statistical models (e.g. regression, time series) and conducting statistical tests.	0.14.4	pip install statsmodels
sweetviz	Generates high-density visual EDA reports from pandas DataFrames with minimal code; outputs a standalone HTML report.	2.3.1	pip install sweetviz
tabulate	Formats tabular data in plain-text tables, supporting multiple layouts like grid, plain, and Markdown.	0.9.0	pip install tabulate
tangled-up-in-unicode	Helps categorize Unicode strings (e.g., digits, letters) per the Unicode standard; useful for parsing or validating text.	0.2.0	pip install tangled-up-in-unicode
tdigest	Implements Ted Dunning's t-Digest structure to estimate percentiles and quantiles efficiently from streaming or distributed data.	0.5.2.2	pip install tdigest
tenacity	General-purpose retrying library for Python, allowing configurable retry behavior for flaky operations or functions.	9.0.0	pip install tenacity
threadpoolctl	Detects and controls thread pools in use by compiled libraries (e.g. BLAS, OpenMP) for safe parallel behavior in scientific workflows.	3.5.0	pip install threadpoolctl
thrift	Apache Thrift implementation in Python for defining RPC services and using them across languages with code generation.	0.22.0	pip install thrift
thrift-sasl	Extends Apache Thrift with SASL support, enabling secure authentication layers for Thrift services.	0.4.3	pip install thrift-sasl
toad	Toolkit for Operational Analytics and Data science, including tools for binning, WOE transformation, and variable selection, often in credit scoring.	0.1.3	pip install toad
toml	TOML parser and writer for configuration files, compliant with the TOML format specification.	0.10.2	pip install toml
tomli	Fast TOML parser in pure Python; TOML parsing (read-only) for configuration needs.	2.2.1	pip install tomli

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

torch	PyTorch is a Python package that provides two high-level features: Tensor computation (like NumPy) with strong GPU acceleration and deep neural networks built on a tape-based autograd system.	2.9.1	pip install torch
tqdm	Fast, extensible progress bar library for Python loops and iterables.	4.66.5	pip install tqdm
typeguard	Runtime type checker for functions using PEP 484 type annotations; supports @typechecked decorators and import hooks to validate argument and return types.	4.3.0	pip install typeguard
typing-extensions	Backport of newer typing module features (e.g. TypeGuard, Literal) for older Python versions.	4.12.2	pip install typing-extensions
tzdata	Time zone database supporting accurate timezone info (often used alongside pytz or Python's zoneinfo).	2024.2	pip install tzdata
urllib3	Powerful HTTP client for Python with thread-safe connection pooling, retries, and support for secure connections.	2.2.3	pip install urllib3
visions	Provides logic to infer variable semantic types (e.g., categorical, numeric) to aid in exploratory data analysis.	0.7.6	pip install visions
wcwidth	Measures the display width of Unicode characters, critical for properly aligning terminal output.	0.2.13	pip install wcwidth
Werkzeug	A comprehensive WSGI utility library serving as the basis for Flask and providing request/response handling, routing, and other web utilities.	3.1.3	pip install Werkzeug
wheel	Standard Python package format (built distribution), allowing installations without needing to compile code.	0.45.1	pip install wheel
woe	Implements Weight of Evidence (WoE) encoding, commonly used in credit scoring models to transform categorical variables.	0.1.4	pip install woe
wordcloud	Generates word clouds from text, sizing words based on frequency. A visual tool for textual data exploration.	1.9.3	pip install wordcloud
wrapt	Offers decorators and function wrappers with proper introspection support. Commonly used to build robust and introspective instrumentation layers.	1.17.0	pip install wrapt

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

xgboost	High-performance gradient boosting library optimized for speed and accuracy across ML tasks; includes GPU support and advanced model features.	2.1.1	pip install xgboost
ydata-profiling	Formerly known as Pandas Profiling. Generates comprehensive exploratory data analysis reports (statistics, visualizations) in one line, exportable as HTML or JSON.	4.10.0	pip install ydata-profiling
zipp	Backport of zipfile.Path (from Python 3.8+) for uniform handling of zip archives as path-like objects.	3.21.0	pip install zipp

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

How to Create a SQLPad Export


As part of our ongoing effort to help clients get the most out of their data collaborations, the Omnisient platform allows users to request SQLPad exports when they need to run further analysis or generate insights outside the platform. SQLPad exports provide a secure way to extract aggregated query results so you can continue your analysis in external tools, while ensuring all data shared through the export follows the same approval and security standards that apply across the platform.
The process is simple, secure, and designed to ensure that all exports go through the necessary partner and internal reviews before becoming available for download. Here's how to create a SQLPad export.

Step 1: Navigate to the Project

Start by opening the project from which you want to create an export.
Click Open with, then select SQLPad.

Project types that currently support SQLPad exports include:


- ACE
- Overlap
- Predictive Modelling on Retail Data
- Financial Inclusion

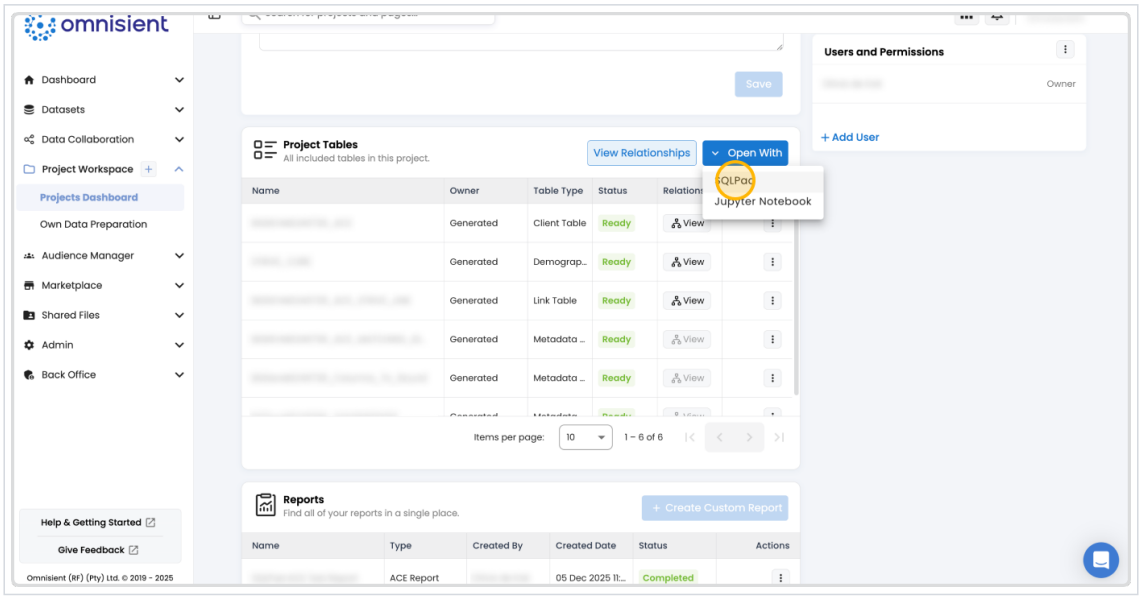

Step 2: Build and Run Your Query

Use SQLPad to build and run your query as usual.
Once the query completes successfully, a download icon will appear (only for supported project types). Select the icon and then choose Request CSV when you are satisfied with the results you want to export.


© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

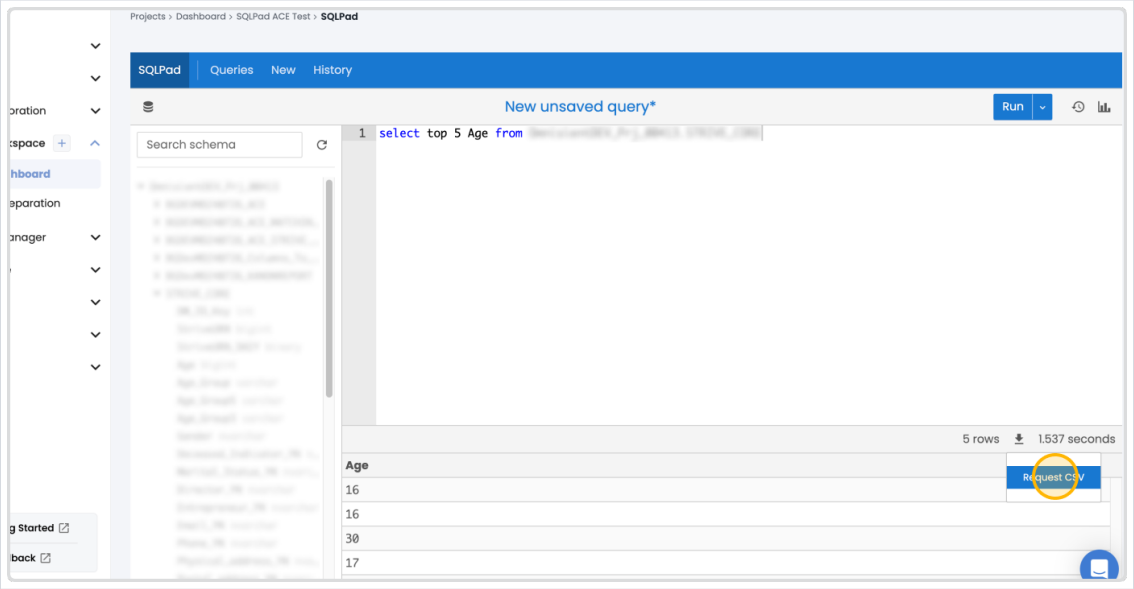

Step 3: Submit Your SQLPad Export Request

After selecting Request CSV, a modal will open prompting you to provide a few details.

Note: This request is sent to your collaboration partners for approval, followed by an additional security check by Omnisient. Once fully approved, your export will be available for download.

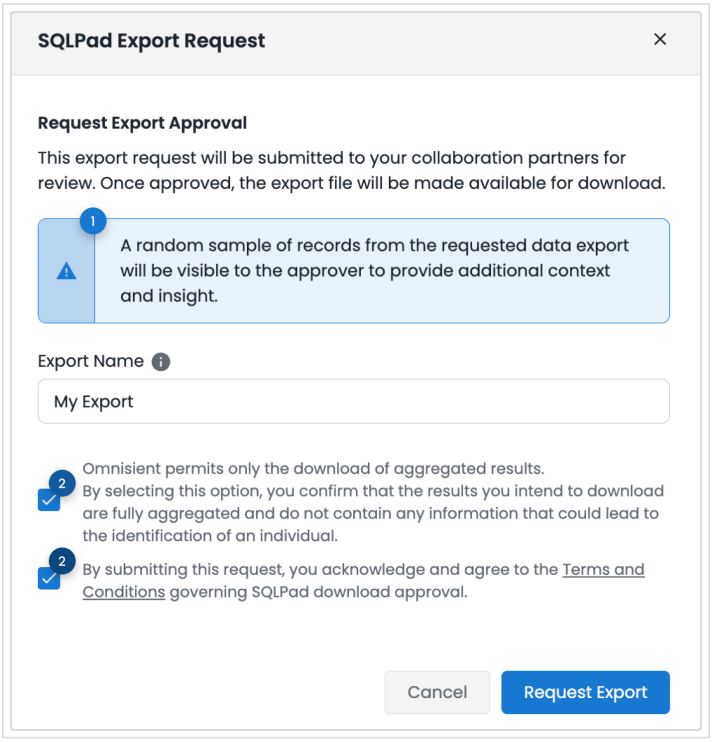

1. Sample of Records	A random sample of rows from your export will be shared with approvers to give them context and help them assess your request.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies


2. Aggregation Confirmation	You must confirm that Omnisient permits only the download of aggregated results. By selecting this option, you acknowledge that your export does not contain information that could lead to the identification of any individual.
3. Terms & Conditions	Confirm that you've read and agree to Omnisient's Terms and Conditions.

Once everything is complete and compliant, click Request Export to submit your request.

Step 4: Monitor Your Export's Progress

You can track the status of all your SQLPad exports under the All Files section in the side navigation. Each export follows a clear lifecycle, and its current status will tell you exactly where it is in the process.

> Note: Only exports you have created will surface here.

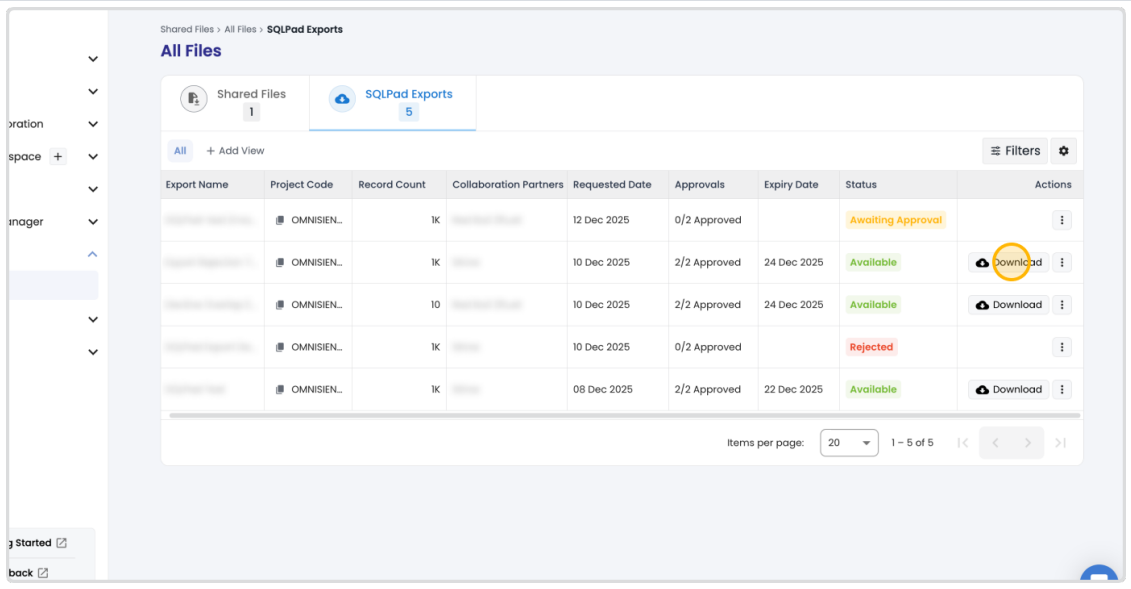

Statues to expect and what they mean:

Processing / New	The export has been received and Omnisient is performing additional automated security checks.
Awaiting Approval	Your collaboration partners are reviewing your export. The Approvals column shows how many partners have approved so far.
Available	Your export has passed all reviews and is ready for download.
Rejected	A collaborator has rejected your export. You'll receive an email with the rejection reason so you can adjust and resubmit if needed.
Failed	The export did not pass Omnisient's security checks. An email will explain what failed and why.
Locked	The export has expired or the underlying project has locked (for example, due to a dataset share expiry).

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

And that's it!

You've successfully created a SQLPad export.
This process ensures secure, transparent collaboration while enabling you to extract valuable insights from your projects.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

SQLPad Troubleshooting Guide

Overview

SQLPad is the SQL query editor available from Own Data Prep or inside your Omnisient project. This guide covers the most common errors users encounter and how to resolve them.

> SQLPad connects directly to your project's data environment. Most errors are caused by connection timeouts, write-back errors, or session issues - not problems with your data.

How to Access SQLPad

SQLPad is accessed from Own Data Prep or inside a project:

1. Open your project from the Projects Dashboard
2. In the project detail view, locate the Open with option
3. Select SQLPad from the menu

> If you don't see the Open with option, scroll down on the project detail page - it may be below the fold. Your project must also be in a Ready state before SQLPad can be opened.

Navigating Back to Your Project

To return to your project from SQLPad, use the breadcrumb navigation at the top of the page. Click your project name in the breadcrumb trail to go back to the project detail view.

Common Errors and Fixes

1. Error When Writing a Dataframe to SQL

What you see: You run a write operation from Jupyter (e.g., writing a dataframe back to a SQL table) and receive an error.

First thing to check: Confirm the exact source table name - even a small difference will cause this error. Cross-check the table name against what appears in your dataset on the Datasets page.

If the table name is correct and the error persists, contact support with:

- Your project name
- The source table name you were writing to
- The full error message

2. SQL Server Timeouts

What you see: Queries run for a long time and then time out, or SQLPad becomes unresponsive.

Steps to fix:

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

1. Add a LIMIT clause to reduce your result set - start with LIMIT 1000
2. Avoid SELECT * on large tables - select only the columns you need
3. Add filters to narrow the dataset before running aggregations
4. If timeouts persist on simple queries, contact support - the issue may be server-side

If timeouts started suddenly and your query hasn't changed, log a support ticket so the team can check server status.

3. SQLPad Fails to Load / Connection Error

What you see: SQLPad opens but shows a connection error, blank screen, or spins indefinitely.

Steps to fix:

1. Refresh the page and try opening SQLPad again
2. Check your project status - if it shows Processing or Failed, SQLPad will not connect until the project is ready
3. Log out and log back in to refresh your session
4. Check with your IT team that all required URLs and IP ranges are whitelisted and are not being blocked by your firewall. View Firewall Access Required for more details.

4. Query Returns No Results

What you see: Query runs successfully but returns 0 rows.

Steps to fix:

1. Remove all filters and run SELECT COUNT(*) FROM [table_name] to confirm the table has data
2. Check that your project is using the correct dataset version - if the dataset was re-uploaded, you may be querying an older version
3. Check for date filters in your query - the data range may not match what is in the dataset

Still Stuck

Contact support with the following information - this helps the team diagnose faster:

- Your project name
- The full error message (screenshot if possible)
- The query or operation you were running
- The table name you were querying or writing to

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies


Approvals

Approvals is where you control what partners can do with your shared data. When a partner creates a project or a SQLPad export using your dataset, the request goes to Approvals, where an Admin decides whether it's allowed to proceed.

> Permissions
> Only users with Admin permissions can access Approvals. See the User Management article.

Where to find Approvals

In the Omnisient Platform, go to Admin -> Approvals. This is your central hub for reviewing every request.

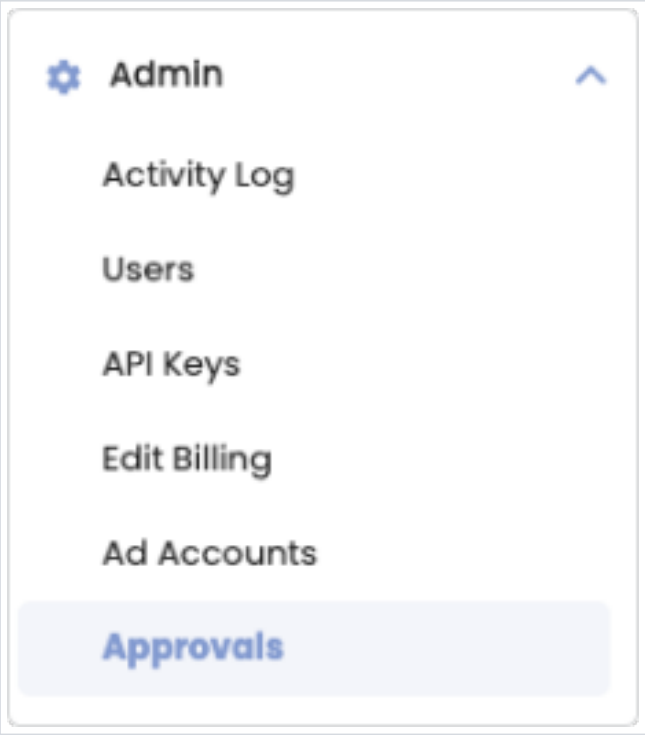

You'll get an email notification when a new request comes in, with a direct link to review it.

Make sure to action requests as promptly. If a request isn't actioned in time, it will lock and the partner will be blocked.

Approval request types

Approvals cover two request types:

Request type	What it covers	Approval required from	Supported project
Project	Projects a partner creates using your shared dataset	You (data owner)	- ACE - Overlap - Predictive Modelling on Retail Data - Financial Inclusion

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

SQLPad Export	SQLPad exports a partner creates from a project using your dataset	You (data owner) and an internal Omnisient reviewer	- ACE - Overlap - Predictive Modelling on Retail Data - Financial Inclusion

Project approval

Approving projects created on your data gives you control, visibility, and peace of mind around how your data is being used. This process is designed to be simple and transparent, so you always stay in the loop.

Request statuses

Status	What it means
Awaiting Approval	Ready for you to review
Approved	You have approved the project
Rejected	You have rejected the project
Locked	The dataset share behind the request has expired, or the subscription has expired.

How to review


1. Find the request and click Review in the final column.
2. Check the request details in the modal that opens. The review shows the request details, along with the shared dataset that the partner wants to use to create the project.
3. Click Approve or Reject.

Action	Detail
Approve	The requestor gets a confirmation email and the request moves into processing.
Reject	A modal opens asking for a rejection reason. Be specific here. It appears in the requestor's rejection email, so a clear reason means they know exactly what to fix before resubmitting their request.

The review modal breaks the request into two sections:

Section	What it shows
Project Creation Details	The name of the partner, the project type, date of request and project code.
Shared Dataset	The shared dataset's name, dates, status, and who shared it.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

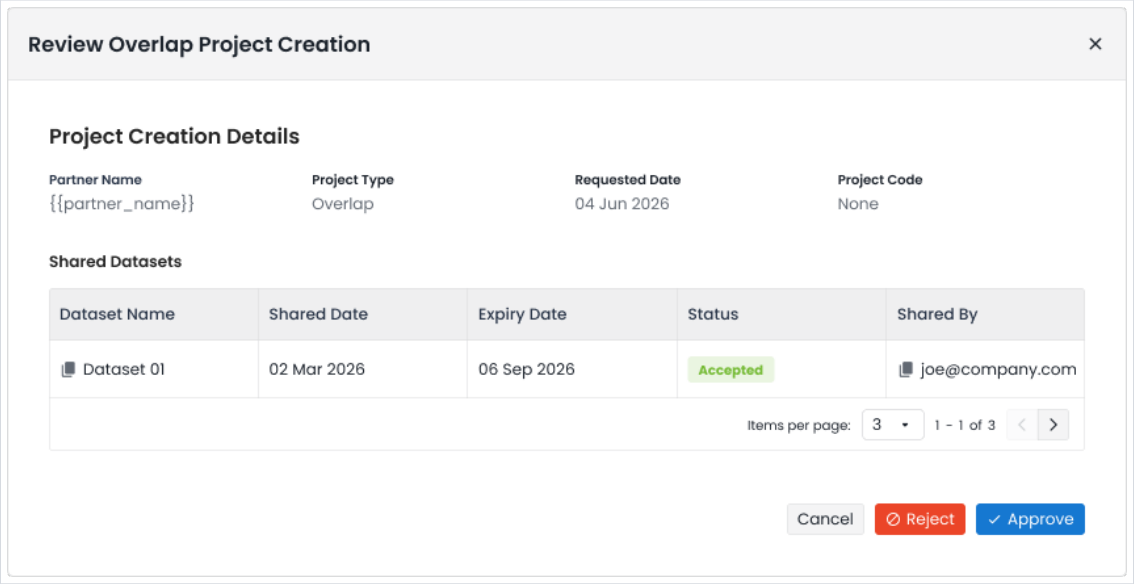

SQLPad export request approval

Approving SQLPad exports is an important part of ensuring that your data is used responsibly and transparently. It gives you clear visibility into how your data contributes to insights, while keeping you in control of what gets exported.

Once a SQLPad export is approved, Omnisient can no longer track or control copies saved locally by the user.

Request statuses

Status	What it means
Awaiting Approval	Ready for you to review

How to review

1. Find the request and click Review in the final column.
2. Check the request details in the modal that opens.
3. Click Approve or Reject.


Action	Detail
Approve	This will now be followed by an additional security check by Omnisient.
Reject	A modal opens asking for a rejection reason. Be specific here. It appears in the requestor's rejection email, so a clear reason means they know exactly what to fix before resubmitting their request.

The review modal breaks the request into six sections:

Section	What it shows
Export Details	Overview of what the export contains.
Project Code	Unique identifier linking the export to its originating project - reference this if you contact support.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Shared Dataset	The dataset used to generate the export.
Sample of Records	A preview of rows and columns, so you can judge whether you're comfortable with what's being shared. Unsure how to read it? See the Up-Skilling Guide: How to Assess SQLPad Exports with Confidence.
Additional Information	Record count once approved, plus a reminder that exports expire 14 days after approval.
Terms and Conditions Reminder	A prompt to confirm you acknowledge and agree to Omnisient's data usage terms governing SQLPad approvals.

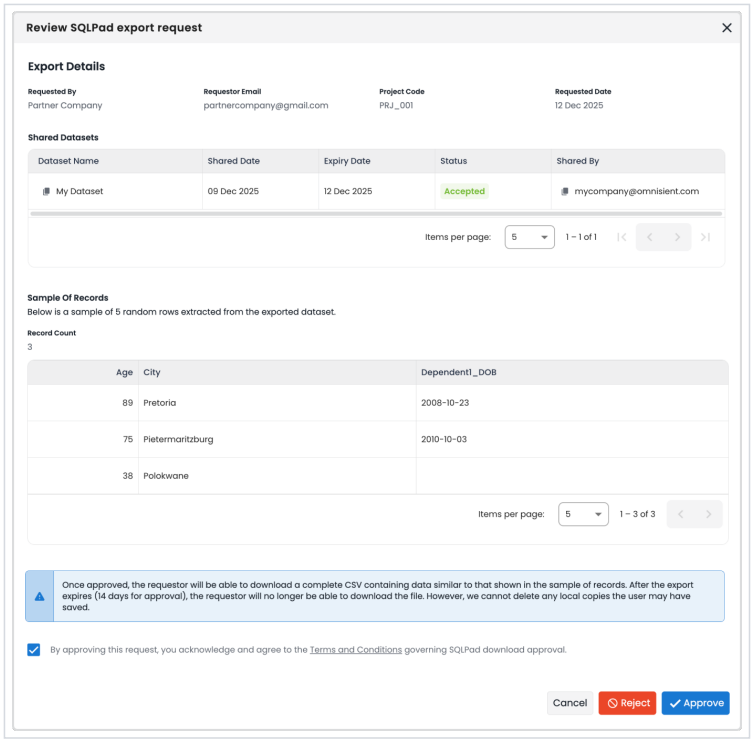

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Up-Skilling Guide: How to Assess SQLPad Exports with Confidence

As part of our ongoing effort to help clients get the most out of the data collaboration and enhancement capabilities that the Omnisient platform provides we've added SQLPad exports as a way to support insight generation and data analysis.

Protecting customer data sits at the core of everything that we do and our SQLPad export process is designed so that PII never leaves the system, and that export results are strictly limited to non-PII fields, with multiple guardrails in place to support this.

The review and approval process adds a critical human validation layer, giving you final control over how your data generates value in the marketplace. Your approval controls what insights leave your datasets while protecting your data assets and customer privacy.

This guide provides objective criteria to help you approve confidently while protecting your data assets.

The Golden Rule

> If you're unsure about any aspect of an export request: Reject for clarification.

Rejecting an export is not always a denial, it's a request for more information. The data buyer can revise their query or our support team can assist.

It is always safer to reject and clarify than to approve something you don't fully understand.

This protects both you and the data buyer: you maintain control over your data asset and they receive only compliant data exports that they can confidently use.

Understanding What You're Reviewing

What the Platform Already Blocks (You Won't See These)

These are automatically restricted and cannot appear in export requests:

Term	Definition
PII (Personally Identifiable Information)	Information that can directly identify an individual, such as names, email addresses, phone numbers, or government-issued identifiers. PII is never allowed to leave the platform.
Hashed Data	Data that has been transformed into a fixed-length string using a mathematical process. Hashing is often used to protect sensitive values, but hashed data can still behave like an identifier and is therefore restricted.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

What You're Reviewing (Allowed if Appropriate)

Term	Definition
Aggregation	A method of summarising data (for example, counts or averages) rather than showing individual records.
Non-PII Data	Information that does not directly identify an individual. SQLPad exports are limited to non-PII fields.

Red Flags to Watch For (Obfuscation Techniques)

Term	Definition
Column Aliasing	The practice of renaming a column when preparing data for export. This is commonly done to make data easier to read, but it can also make it less clear what the original field represents if the name is very generic or unexpected.
Identifiers	A value used to distinguish or reference a specific record, such as a key or reference number. Identifiers are often consistent in format and may appear sequential or structured.
SKEYS	A system-generated key used to link data across internal tables. SKEY values are not visible within SQLPad but may appear as references in exports under certain conditions.
DW Keys	A data warehouse key used internally to reference records. DW keys are identifiers and are restricted from being exported directly.

Your Job
Verify that what buyers are requesting matches the category they claim, and watch for attempts to disguise restricted data as allowed data.

Awareness Tips for Reviewing Export Samples

While SQLPad exports has been designed with strong safeguards to prevent sensitive information from ever being exported, it's still helpful to build familiarity with how data may appear in different formats. Occasionally, values might be presented in ways that are unexpected or unfamiliar, simply because of how users structure their queries or label their columns.

By understanding these patterns, you'll feel more confident when reviewing a sample and recognizing when something may need a second look or clarification. This section highlights a few indicators that may prompt you to pause and double-check.

1. Column Names and Labels

Column names provide the first layer of context when reviewing a dataset. In most cases, they clearly describe the information being shared. It can be helpful to pause and ensure the names align with the dataset and its intended purpose.

Things to consider:

- Do the column names make sense for this dataset? For example, would it be reasonable

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

for a demographics export to include a column related to revenue or transactions?
- Are any column names very generic (e.g. value, info, result) and therefore unclear about what they represent?
- Do any column names reference inherently sensitive concepts (such as salary or credit-related terms) that might benefit from additional context?
- Are there minor spelling variations or typos that make the meaning less clear?

Clear and well-aligned naming generally makes review easier. If a name feels unclear, a quick clarification can help ensure shared understanding.

2. How the Data Behaves

Beyond the column name, the values themselves can provide useful context. Looking at how data behaves across rows often helps confirm whether it aligns with what the label suggests.

Things to consider:

- Do the values vary in a way you would normally expect for this type of data?
- Are numbers unusually consistent, sequential, or uniformly structured?
- Do text values appear to follow a fixed pattern or length across all rows?

3. Formatting and Presentation

Formatting choices can sometimes make data easier to read and sometimes make it harder to interpret at a glance.

Things to consider:

- Are currency symbols, prefixes, or units applied consistently?
- Do decimals, number formats, or text styles align with what you would expect?
- Are there mixed formats within the same column (e.g. numbers and text together)?

If formatting makes a column harder to interpret, it's reasonable to pause and ask for clarification.

4. Dataset Context and Intended Use

Stepping back and considering the dataset as a whole can be one of the most helpful review techniques.

Things to consider:

- Does the sample feel consistent with the type of information being shared?
- Does it align with what the data partner requested and would reasonably need?
- Would the dataset still make sense if one or two column names were changed?

This broader context check often helps confirm whether everything fits together as expected.

Examples: What to Approve vs. Reject

Scenario 1: Rejected - Disguised Identifiers

A financial services company requests "customer segmentation data" for marketing purposes.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies



Items per page: 3 1 - 1

Sample of Records

Below is a sample of 5 random rows extracted from the exported dataset.

Record Count

23k

customer_type	value_bracket	region_code	activity_score
PREM_10001	HIGH_45231	JHB_2194	ACT_892341
PREM_10002	MID_23445	CPT_8001	ACT_234567
STAN_10003	LOW_12890	DBN_4001	ACT_456789
PREM_10004	HIGH_67234	JHB_2196	ACT_678901

Items per page: 3 1 - 1

Once approved, the requestor will be able to download the full CSV. The export expires after 14 days, after which the file is no longer available copies the requestor saves cannot be removed.

Why This Fails

Criteria	Issue
Column Names	Generic and vague. "value_bracket" and "activity_score" don't clearly describe what they measure.
Suspicious Patterns	Sequential numbering in "customer_type" (10001, 10002, 10003, 10004) suggests individual identifiers.
High Cardinality	Each row appears unique, this suggests data that's not truly aggregated.
Obfuscation	Column aliasing hides the true meaning. "value_bracket" could be income and "activity_score" could be a customer ID.


Reviewer Decision: Reject

Rejection Reason: "This export contains sequential identifiers (PREM_10001, 10002...) rather than aggregated segments. Please revise to show true customer categories (e.g., 'Premium Customers', 'Standard Customers') with counts or percentages rather than individual customer records."

Scenario 2: Rejected - Highly Granular Aggregations

A retailer requests "aggregated shopping behavior insights" across multiple dimensions.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies Platform Guide for Analysts

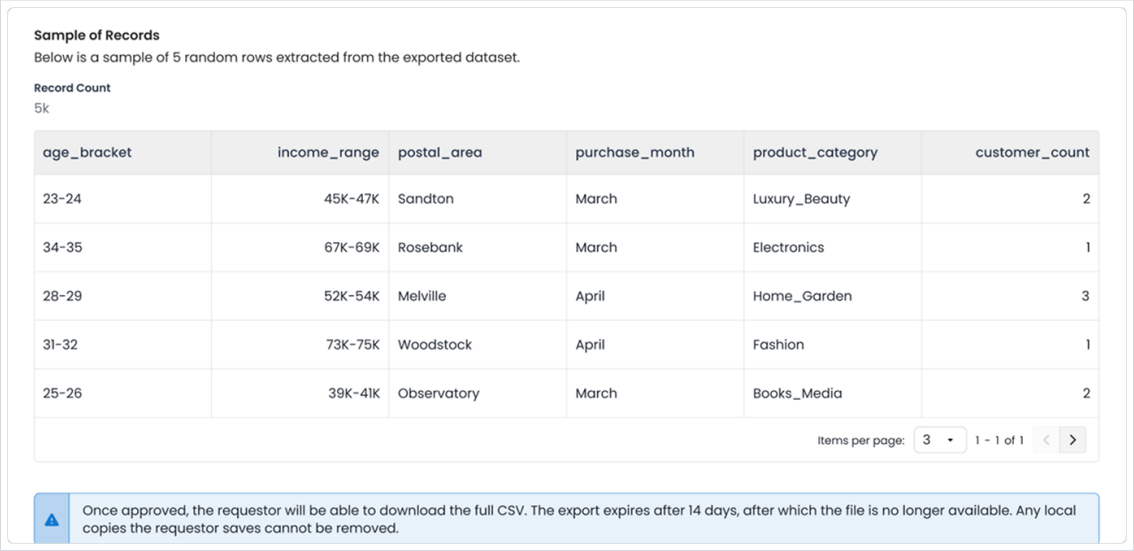

Sample of Records

Below is a sample of 5 random rows extracted from the exported dataset.

Record Count

5k

age_bracket	income_range	postal_area	purchase_month	product_category	customer_count
23-24	45K-47K	Sandton	March	Luxury_Beauty	2
34-35	67K-69K	Rosebank	March	Electronics	1
28-29	52K-54K	Melville	April	Home_Garden	3
31-32	73K-75K	Woodstock	April	Fashion	1
25-26	39K-41K	Observatory	March	Books_Media	2

Items per page: 3 1 - 1 of 1

Once approved, the requestor will be able to download the full CSV. The export expires after 14 days, after which the file is no longer available. Any local copies the requestor saves cannot be removed.

Why This Fails

Criteria	Issue
Granularity	Five dimensions combined create micro-segments of 1-3 customers each.
Re-identification Risk	Highly specific combinations could identify individuals e.g., "23-24 year old in Sandton earning 45-47K buying luxury beauty in March".
Pseudo-aggregation	Claims to be "aggregated" but group sizes are so small they're essentially individual records.
Privacy Violation	Combined attributes create unique or near-unique fingerprints.


Reviewer Decision: Reject

Rejection Reason: "This aggregation is too granular, creating segments of 1-3 customers that could enable re-identification. Please reduce dimensions (e.g., broader age groups: '20-30', larger geographic areas: 'Northern Suburbs') or focus on fewer combined attributes to ensure meaningful group sizes of 10+ customers."

Scenario 3: Rejected - Mismatched Columns and Values

A telecommunications company requests "customer demographic insights" for market research.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

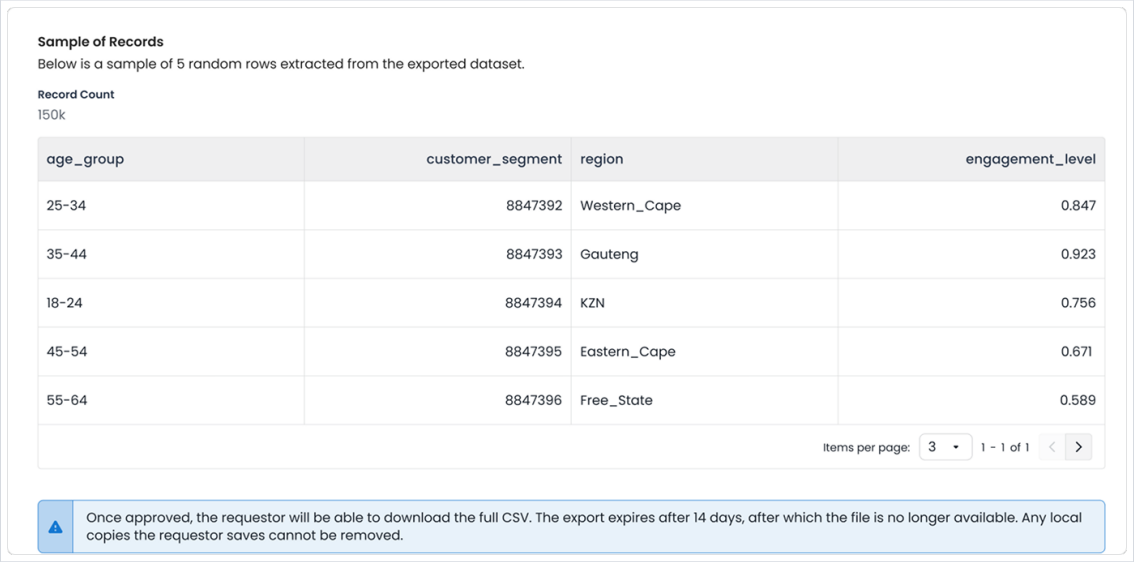

Sample of Records

Below is a sample of 5 random rows extracted from the exported dataset.

Record Count

150k

age_group	customer_segment	region	engagement_level
25-34	8847392	Western_Cape	0.847
35-44	8847393	Gauteng	0.923
18-24	8847394	KZN	0.756
45-54	8847395	Eastern_Cape	0.671
55-64	8847396	Free_State	0.589

Items per page: 3 1 - 1 of 1

Once approved, the requestor will be able to download the full CSV. The export expires after 14 days, after which the file is no longer available. Any local copies the requestor saves cannot be removed.

Why This Fails

Criteria	Issue
Value Mismatch	"customer_segment" shows sequential numbers instead of meaningful categories.
Disguised Identifiers	Numbers 8847392, 8847396 etc. appear to be system-generated customer IDs.
Inconsistent Data Types	"customer_segment" suggests categorical segments but contains numerical identifiers.
Pattern Recognition	Sequential numbering is a clear red flag for individual identifiers


Reviewer Decision: Reject

Rejection Reason: "The 'customer_segment' column contains sequential numerical values (8847392, 8847393...) that appear to be customer identifiers rather than segment names. Please replace with descriptive segment labels like 'High Value', 'Regular User', 'Occasional Customer' etc."

Scenario 4: Approved - Proper Aggregated Insights

A bank requests customer behavior analysis for product development and marketing strategy.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

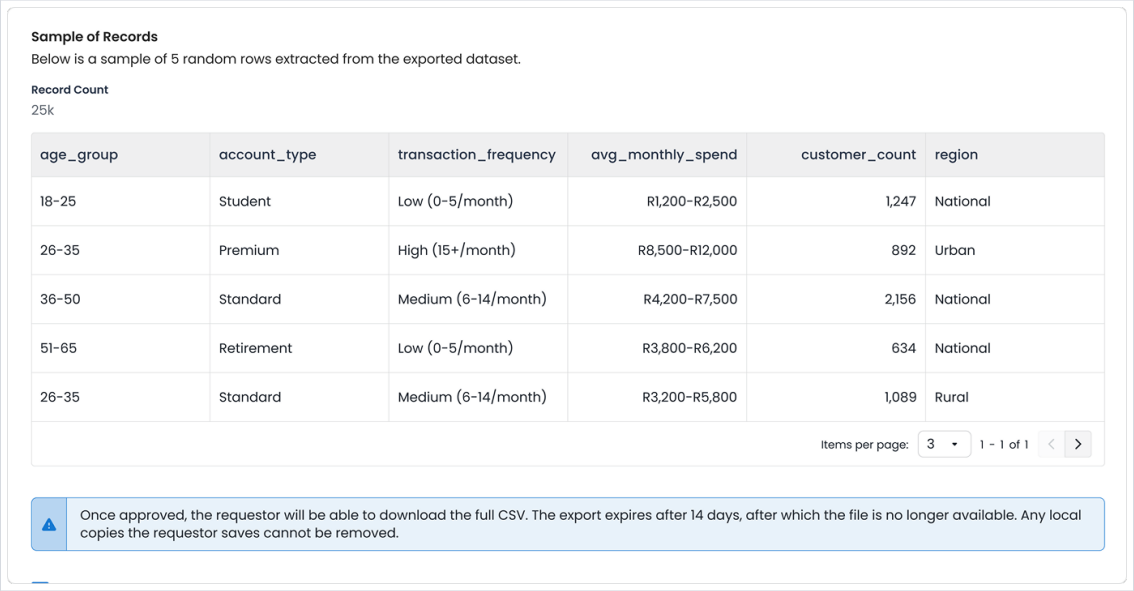

Sample of Records

Below is a sample of 5 random rows extracted from the exported dataset.

Record Count

25k

age_group	account_type	transaction_frequency	avg_monthly_spend	customer_count	region
18-25	Student	Low (0-5/month)	R1,200-R2,500	1,247	National
26-35	Premium	High (15+/month)	R8,500-R12,000	892	Urban
36-50	Standard	Medium (6-14/month)	R4,200-R7,500	2,156	National
51-65	Retirement	Low (0-5/month)	R3,800-R6,200	634	National
26-35	Standard	Medium (6-14/month)	R3,200-R5,800	1,089	Rural

Items per page: 3 1 - 1 of 1

Once approved, the requestor will be able to download the full CSV. The export expires after 14 days, after which the file is no longer available. Any local copies the requestor saves cannot be removed.

Why This Passes

Criteria	Issue
Clear Column Names	All columns clearly describe what they measure: age_group, account_type, etc.
Appropriate Granularity	Age ranges are broad (7-14 year spans), spending in ranges, not exact amounts.
Meaningful Groups	Customer counts range from 445-2,156 - true aggregation with substantial group sizes
No Identifiers	No sequential numbering or unique values that could identify individuals.
Logical Categories	Account types and frequency bands use descriptive labels.
Business Relevance	Data aligns with data-buyers purpose of product development.

Reviewer Decision: Approved

This export demonstrates proper aggregation with meaningful customer segments, appropriate group sizes, and clear business utility without privacy risks.

A Quick Review Checklist to Guide Your Decision

Before approving an export, verify all of the following criteria is met. If any of the criteria fails reject for clarification. If you are unsure that the criteria has passed reject for clarification.

Area	Criteria	Pass	Fail
Columns	All column names clearly describe the data.	"Age_Group", "Transaction_Month", "Product_Category"	"Value", "Info", "Data", "ID", "Key"
	Columns do not reference restricted concepts.		"Salary", "Credit_Score", "SSN", "Email_Domain", "User_ID"

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

	There is no obvious obfuscation through naming.		Misspellings or very generic labels that could hide identifiers.
Data Values	The values match what column names suggest.		"Age_Group" showing numbers like 10847392 instead of "25-34".
	The data varies naturally, not in suspicious patterns.		Sequential numbers (1,2,3,4) or uniform formats (AAAA1234, AAAA1235)
	No high-cardinality in supposedly aggregated fields.		"Customer_Segment" column has unique values across all rows
Context Alignment	Level of detail is appropriate.		Claims "aggregated insights" but every row is unique.
	Nothing feels inconsistent with previous approved exports from this buyer.		
Final Checks	Could these fields be combined with other data to re-identify individuals?		If YES -> Reject or escalate for expert review.
	Would you be comfortable explaining this approval in a compliance audit?		If NO -> Reject for clarification.

Support & Escalation

If you need support or feel unsure about an export, don't hesitate to reach out to the support team. The requester's email is included in the export, so you may also contact them directly if you'd like additional clarity or context.

Reject an export directly if:

- The issue is clear (disguised identifiers, mismatched columns, vague naming).
- Your rejection reason can guide the buyer to fix it.
- This is a standard case covered by the guide.

Escalate to support if:

- You suspect intentional policy violation or repeated problematic requests from the same buyer.
- Technical question about data formats you can't interpret.
- Disagreement with a buyer after an export is rejected and clarification has been attempted.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

- An urgent business need that requires faster resolution than a standard rejection/resubmission.

What to Include in Your Escalation:

- Project code and creation date from the export request.
- Screenshot highlighting the specific concern.
- What you've already tried.
- Why this needs escalation (e.g., "Buyer claims urgent business deadline").

What Buyers See

Understanding what guidance buyers receive helps you provide better feedback:

Buyers are told the following:

- "Omnisient permits only the download of aggregated results".
- They must confirm their export "does not contain information that could lead to the identification of any individual".
- Their request will be reviewed by data partners and Omnisient.

What buyers don't automatically see:

- Specific examples of what qualifies as "aggregated".
- The red flags you're checking for (sequential IDs, obfuscation, etc.)

Your rejection feedback is often the first time a buyer learns what's actually required. Ensure your rejection reason is educational:

Not helpful: "This doesn't look aggregated"

Helpful: "This export contains fields with sequential values (Customer_Type: CUST_10001, CUST_10002...) which appear to be identifiers rather than aggregated categories. Please revise your query to group data into meaningful segments (e.g., customer types: 'Frequent Buyer', 'Occasional', 'New') rather than exporting individual customer records."

Maintaining Consistency Across Your Review Team

If multiple people at your organization review SQLPad exports:

Best Practices

1. Designate a lead reviewer who makes final calls on edge cases.
2. Review first 5-10 exports together to calibrate standards.
3. Document your decisions. Keep internal notes on why specific exports were approved/rejected to build institutional knowledge.
4. Weekly sync (15 min) to discuss any unclear cases and align on standards.
5. Share this guide with all reviewers and confirm everyone understands the "reject if unsure" principle.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

If Reviewers Disagree

- Default to the MORE CAUTIOUS position: rejection.
- Escalate to your lead reviewer or our support team.
- Never approve if any reviewer has unresolved concerns.

Building Your Review Library

Consider keeping screenshots of:

- Good examples you've approved (reference for future).
- Bad examples you've rejected (training for new reviewers).
- Edge cases you escalated (learn from support's guidance).

Conclusion

Reviewing SQLPad exports doesn't need to feel complex or intimidating. With a small amount of attention and familiarity, most samples can be assessed quickly and confidently. Paying thoughtful attention to column names, formatting, and overall consistency helps ensure the data aligns with what was intended to be shared.

If something doesn't immediately make sense, it's perfectly reasonable to pause, seek clarification, or make use of the Support & Escalation guidance.

By taking a considered approach and using the tools and guidance available, you play an important role in maintaining consistent, well-reviewed data sharing.

Help Us Improve

This guide will evolve based on your feedback.

Have you encountered:

- An edge case not covered here?
- An obfuscation technique we didn't describe?
- Unclear guidance that needs improvement?

Share your feedback with us.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Power BI Reports

Power BI: Unveiling the Power of Data Visualization

Power BI is a dynamic ecosystem comprising software services, applications, and connectors, harmoniously engineered to transform disparate data sources into cohesive, visually captivating, and interactive insights. Power BI seamlessly connects to your data sources, enabling you to visualize, explore, and communicate key insights with ease.

Connecting and Visualizing Data

Build visually engaging reports that bring your data to life and help you uncover valuable insights.

Paginated Reports for Operational Insights

Explore another essential workflow in Power BI, focused on paginated reports.

Paginated reports are meticulously designed to fit neatly on a page and are often utilized for operational reporting purposes.

These reports present all data in a tabular format, ensuring comprehensive visibility, even across multiple pages.


Consuming Reports in the Power BI Service

In the Power BI service, you can seamlessly consume and interact with reports, as well as individual visual elements, directly from the Omnisient app.

Gain actionable insights and make informed decisions based on the reports generated within the Power BI environment.

With Power BI, the power of data visualization is at your fingertips. Empower yourself to unlock the full potential of your data, from connecting to diverse data sources to creating compelling reports and paginated insights. Whether you're a data analyst, business user, or decision-maker, Power BI equips you with the tools to drive meaningful outcomes and propel your organization forward. Explore the possibilities with Power BI and revolutionize the way you harness data-driven insights.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

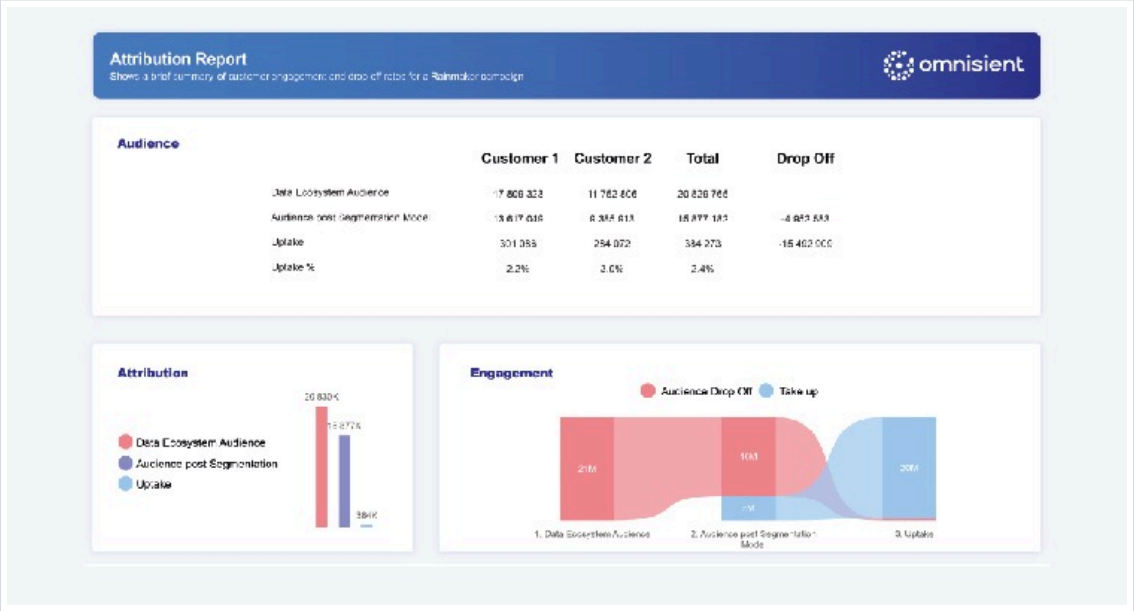

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Export Power BI Reports as PDF, PNG, or PPT

We've introduced a powerful export feature for Power BI reports in the Omnisient platform. This guide explains how to export reports in PDF, PNG, or PPT formats, either as individual pages or as a full report.


Target Audience

This feature is available to all users who have access to view reports on the platform.

How to Export a Power BI Report

Step-by-step Instructions

1. Open a Power BI Report Navigate to the report you want to export.
2. Click either the Export Full Report Button or Export Page Button Locate the Export button, now visible at the top of your report view.
    1. Choose File Format Select your preferred file format from the dropdown:
        - PDF
        - PNG
        - PPT

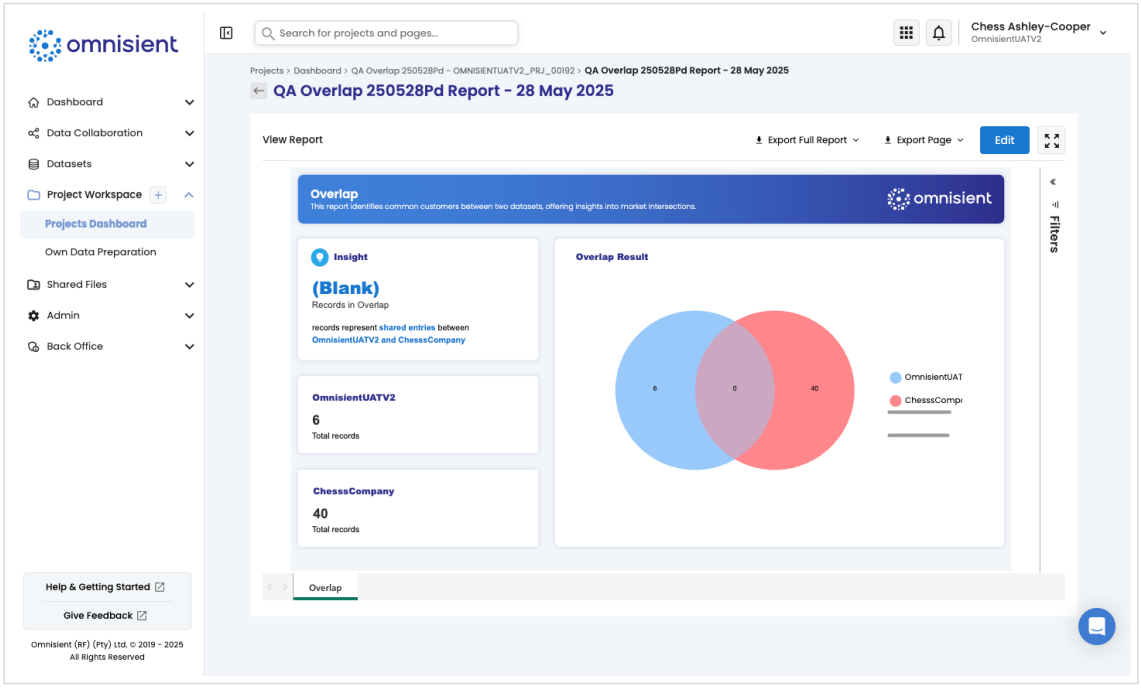

3. You'll see a confirmation message once your export is queued.
4. Receive Your Report via Email You'll receive an email with a download link once your report is ready.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies

Tips and Best Practices

- For quicker downloads, export individual pages instead of full reports.

Troubleshooting

- Didn't receive an email? Check your spam or junk folder. If it's not there, try exporting again or contact support.
- Button not visible? Ensure you have the correct report access permissions. If issues persist, reach out to your administrator or support support@omnisient.com.

If you have further questions, contact support@omnisient.com or use the Help button in the web app.

© 2014-2026. Omnisient (Pty) Ltd. All rights reserved. - www.omnisient.com - Legal Policies