

# VISVESVARAYA TECHNOLOGICAL UNIVERSITY

JNANA SANGAMA, BELAGAVI- 590018, KARNATAKA, INDIA



## A PROJECT REPORT

on

## “Swaraaha: Stutter Classification and Localization System”

Submitted in partial fulfilment of the requirements for the award of

## BACHELOR OF ENGINEERING

in

## ARTIFICIAL INTELLIGENCE & MACHINE LEARNING

### Submitted By

Name

USN

K SHREEKRISHNA UPADHYAYA

4VP23AI020

M CHETHAN KESHAV BHAT

4VP23AI023

SKANDA PRASAD K

4VP23AI051

SRINIVAS HEGDE M

4VP23AI054

Under the Guidance of

**Prof. Ajay Shastry C G**

Assistant Professor



---

## DEPARTMENT OF ARTIFICIAL INTELLIGENCE & MACHINE LEARNING VIVEKANANDA COLLEGE OF ENGINEERING & TECHNOLOGY

[A Unit of Vivekananda Vidyavardhaka Sangha Puttur (R)]

Affiliated to Visvesvaraya Technological University and Approved by AICTE New Delhi & Govt., of Karnataka

Nehru Nagar, Puttur - 574 203, DK, Karnataka, India.

**November, 2026**

# VIVEKANANDA COLLEGE OF ENGINEERING & TECHNOLOGY

[A Unit of Vivekananda Vidyavardhaka Sangha Puttur (R)]

Affiliated to Visvesvaraya Technological University and Approved by AICTE New Delhi & Govt. of Karnataka

Nehru Nagar, Puttur - 574203, DK, Karnataka, India

## DEPARTMENT OF ARTIFICIAL INTELLIGENCE & MACHINE LEARNING



### CERTIFICATE

Certified that the project work entitled “**Swaraaha: Stutter Classification and Localization System**” is carried out by **Mr. K Shreekrishna Upadhyaya, Mr. M Chethan Keshav Bhat, Mr. Skanda Prasad K, Mr. Srinivas Hegde M** bearing USNs **4VP23AI020, 4VP23AI023, 4VP23AI051 and 4VP23AI054** respectively bonafide students of **Vivekananda College of Engineering & Technology, Puttur** in partial fulfilment for the award of **Bachelor of Engineering in Artificial Intelligence & Machine Learning** of the **Visvesvaraya Technological University, Belagavi** during the year 2026-27. It is certified that all corrections/suggestions indicated during Internal Assessment have been incorporated in the report deposited in the departmental library. The project report has been approved as it satisfies the academic requirements in respect of Project work prescribed for the said Degree.

---

**Signature of the Guide**  
**Prof. Ajay Shastry C G**

---

**Signature of the HOD**  
**Dr. Radhika Shetty D S**

---

**Signature of the Principal**  
**Dr. Mahesh Prasanna K.**

Name of the Examiners

### EXTERNAL VIVA

Signature with date

1.....

.....

2.....

.....

# DECLARATION

We, **Mr. K Shreekrishna Upadhyaya (4VP23AI020), Mr. M Chethan Keshav Bhat (4VP23AI023), Mr. Skanda Prasad K (4VP23AI051), Mr. Srinivas Hegde M (4VP23AI054)** students of B.E. 7<sup>th</sup> Semester in Artificial Intelligence & Machine Learning, **Vivekananda College of Engineering & Technology**, Puttur, hereby declare that the project work entitled “**Swaraaha: Stutter Classification and Localization System**” has been carried out by us at VCET, Puttur, under the guidance of **Prof. Ajay Shastry C G**, Assistant Professor, Department of Artificial Intelligence & Machine Learning, Vivekananda College of Engineering & Technology, Puttur, and submitted in partial fulfilment of the requirements for the award of degree in **Bachelor of Engineering in Artificial Intelligence & Machine Learning** by **Visvesvaraya Technological University**, Belagavi during the academic year 2026-2027.

| Name of the students     | USN        | Signature with date |
|--------------------------|------------|---------------------|
| K Shreekrishna Upadhyaya | 4VP23AI020 |                     |
| M Chethan Keshav Bhat    | 4VP23AI023 |                     |
| Skanda Prasad K          | 4VP23AI051 |                     |
| Srinivas Hegde M         | 4VP23AI054 |                     |

Date:

Place: Puttur

# ACKNOWLEDGEMENT

We take this opportunity to express our deep heartfelt gratitude to all those people who have helped us in the successful completion of the project.

First and foremost, we would like to express our sincere gratitude to our guide, **Prof. Ajay Shastry C G.** for providing excellent guidance, encouragement and inspiration throughout the project work. Without his invaluable guidance, this work would never have been a successful one.

We would like to express our sincere gratitude to Head of the Department of Artificial Intelligence & Machine Learning, **Dr. Radhika Shetty D S** for her guidance and inspiration.

We would like to thank our Principal, **Dr. Mahesh Prasanna K.** for providing all the facilities and a proper environment to work in the college campus.

We would like to thank our management for providing the necessary infrastructure to carry out the project work.

We are thankful to all the teaching and non-teaching staff members of Artificial Intelligence & Machine Learning Department for their help and needed support rendered throughout the project.

## **ABSTRACT**

Stuttering disrupts the natural flow of communication through involuntary repetitions, prolongations, blocks, and pauses. Roughly 1% of people worldwide are affected, and the condition can reach into their social, professional, and personal life. Diagnosis today still relies mostly on manual assessment by speech-language pathologists, which is subjective, time-consuming, and not available to everyone. This project builds an automated system that uses deep learning to detect, classify, and analyze stuttering events in speech recordings. The system identifies the types of dysfluencies present and reports when they occur. Users record or upload audio through a simple interface and receive the results in an accessible format. The result is a tool for early stutter detection and objective speech evaluation, useful to both speech-language pathologists and people in treatment.

# TABLE OF CONTENTS

| Title                                                   | Page No.  |
|---------------------------------------------------------|-----------|
| <b>CHAPTER 1 INTRODUCTION</b>                           | <b>01</b> |
| 1.1 INTRODUCTION TO THE PROJECT                         | 01        |
| 1.2 PROPOSED METHOD                                     | 02        |
| 1.3 LITERATURE SURVEY                                   | 02        |
| <b>CHAPTER 2 REQUIREMENT SPECIFICATION AND ANALYSIS</b> | <b>22</b> |
| 2.1 INTRODUCTION                                        | 22        |
| 2.2 FUNCTIONAL REQUIREMENTS                             | 22        |
| 2.2.1 User Requirements                                 | 23        |
| 2.2.2 System Requirements                               | 23        |
| 2.3 NON-FUNCTIONAL REQUIREMENTS                         | 24        |
| 2.3.1 Performance                                       | 24        |
| 2.3.2 Scalability                                       | 24        |
| 2.3.3 Availability                                      | 25        |
| 2.3.4 Usability                                         | 25        |
| 2.4 Software Requirements                               | 25        |
| 2.5 Hardware Requirements                               | 26        |
| <b>CHAPTER 3 SYSTEM DESIGN</b>                          | <b>28</b> |
| 3.1 INTRODUCTION                                        | 28        |
| 3.2 SYSTEM ARCHITECTURE AND DESIGN                      | 28        |
| 3.3 FLOWCHART                                           | 32        |
| 3.4 USE CASE DIAGRAM AND DESCRIPTIONS                   | 34        |
| 3.5 WORKFLOW DIAGRAM                                    | 35        |
| 3.6 SEQUENCE DIAGRAM                                    | 37        |
| <b>CHAPTER 4 SYSTEM IMPLEMENTATION</b>                  | <b>39</b> |
| 4.1 INTRODUCTION                                        | 39        |
| 4.2 ALGORITHM                                           | 39        |
| 4.3 IMPLEMENTATION REQUIREMENTS                         | 40        |
| 4.3.1 Train the Model                                   | 41        |
| 4.3.2 Test the Model                                    | 42        |
| 4.3.3 Model Evaluation                                  | 43        |
| 4.4 USER INTERFACE                                      | 44        |

|                                                               |           |
|---------------------------------------------------------------|-----------|
| <b>CHAPTER 5 SYSTEM TESTING</b>                               | <b>46</b> |
| 5.1 INTRODUCTION                                              | 46        |
| 5.2 TYPES OF TESTS                                            | 47        |
| 5.2.1 Unit Testing                                            | 47        |
| 5.2.2 Integration Testing                                     | 47        |
| 5.2.3 Functional Testing                                      | 47        |
| 5.2.4 System Testing                                          | 48        |
| 5.3 RESULT AND DISCUSSION                                     | 48        |
| 5.3.1 Model Evaluation of the Wav2Vec2 Classifiers            | 48        |
| 5.3.2 Wav2Vec2 Classifier Training                            | 51        |
| 5.3.3 Model Evaluation of the CNN-based Models                | 53        |
| 5.3.4 CNN-based Model Training                                | 53        |
| 5.3.5 Hyper Parameter Tuning                                  | 54        |
| 5.3.6 Performance Analysis of the Models                      | 55        |
| <b>CHAPTER 6 SCREENSHOTS</b>                                  | <b>57</b> |
| <b>CHAPTER 7 CONCLUSION AND SCOPE FOR FUTURE ENHANCEMENTS</b> | <b>58</b> |
| 7.1 CONCLUSION                                                | 58        |
| 7.2 SCOPE FOR FUTURE ENHANCEMENTS                             | 59        |
| <b>REFERENCES</b>                                             | <b>60</b> |

## LIST OF TABLES

| <b>Table No.</b> | <b>Title</b>                                     | <b>Page No.</b> |
|------------------|--------------------------------------------------|-----------------|
| 1.1              | Summary of Literature Survey                     | 11              |
| 5.1              | Multitask Wav2Vec2 classifier results            | 48              |
| 5.2              | Wav2Vec2 localizer evaluation results            | 51              |
| 5.3              | Threshold optimization results                   | 54              |
| 5.4              | Comparative study of seven architecture variants | 55              |

## LIST OF FIGURES

| Figure No. | Title                                                          | Page No. |
|------------|----------------------------------------------------------------|----------|
| 3.1        | System Architecture                                            | 29       |
| 3.2        | Flowchart                                                      | 33       |
| 3.3        | Use Case Diagram                                               | 35       |
| 3.4        | Workflow Diagram                                               | 36       |
| 3.5        | Sequence Diagram                                               | 37       |
| 5.1        | Per-class F1 of the multitask Wav2Vec2 classifier              | 49       |
| 5.2        | Per-class AUROC and AUPRC of the multitask Wav2Vec2 classifier | 50       |
| 5.3        | Confusion matrices for the five binary classifiers             | 50       |
| 5.4        | Frame-level metrics of the Wav2Vec2 localizer                  | 51       |
| 5.5        | Per-class tuned F1 on the Boli set                             | 56       |
| 6.1        | Home page of the web interface                                 | 57       |
| 6.2        | Results page of the web interface                              | 57       |

## LIST OF ABBREVIATIONS

| Abbreviation | Description                                                                   |
|--------------|-------------------------------------------------------------------------------|
| ASR          | Automatic Speech Recognition                                                  |
| AUROC        | Area Under the Receiver Operating Characteristic Curve                        |
| AUPRC        | Area Under the Precision-Recall Curve                                         |
| BERT         | Bidirectional Encoder Representations from Transformers                       |
| Bi-LSTM      | Bidirectional Long Short-Term Memory                                          |
| CNN          | Convolutional Neural Network                                                  |
| CTC          | Connectionist Temporal Classification                                         |
| GPU          | Graphics Processing Unit                                                      |
| GUI          | Graphical User Interface                                                      |
| HMM          | Hidden Markov Model                                                           |
| HuBERT       | Hidden-Unit BERT                                                              |
| isWER        | Intended Speech Word Error Rate                                               |
| LLM          | Large Language Model                                                          |
| LPC          | Linear Predictive Coding                                                      |
| LSTM         | Long Short-Term Memory                                                        |
| MFCC         | Mel-Frequency Cepstral Coefficients                                           |
| PCA          | Principal Component Analysis                                                  |
| PWS          | People Who Stutter                                                            |
| RAG          | Retrieval-Augmented Generation                                                |
| ReLU         | Rectified Linear Unit                                                         |
| RNN          | Recurrent Neural Network                                                      |
| SEP-28K      | Stuttering Event Detection Dataset (28,000 samples)                           |
| SLP          | Speech-Language Pathologist                                                   |
| SOTA         | State of the Art                                                              |
| SVM          | Support Vector Machine                                                        |
| TTS          | Text-to-Speech                                                                |
| UAR          | Unweighted Average Recall                                                     |
| UI           | User Interface                                                                |
| VITS         | Variational Inference with Adversarial Learning for end-to-end Text-to-Speech |
| WavLM        | Wave Language Model                                                           |
| WER          | Word Error Rate                                                               |
| YOLO         | You Only Look Once                                                            |

## CHAPTER 1

# INTRODUCTION

### 1.1 INTRODUCTION TO THE PROJECT

Speech fluency lets people express thoughts and emotions clearly. Stuttering, a common speech disorder, interrupts that flow with involuntary repetitions, prolongations, or blocks in speech production. It affects people of all ages and can hurt their confidence, their ability to communicate, and their social interactions. Identifying stuttering patterns early helps with therapy and management.

Traditionally, detection and assessment rely on manual observation by speech-language pathologists. The results can be subjective, time-consuming, and inconsistent from one expert to another, and the work takes a physical toll on the pathologist. That dependence on human evaluation makes large-scale assessment and continuous monitoring difficult. With recent advances in deep learning and speech signal processing, automated stutter detection has become a reliable, scalable alternative. This project develops a system that automatically detects, classifies, and analyzes stuttering types (prolongation, block, sound repetition, word repetition, and interjection) using deep learning.

Input audio is preprocessed and converted into embeddings, then analyzed with Wav2Vec 2.0, which captures both local acoustic patterns and long-range temporal dependencies that separate normal from dysfluent speech. Alongside classification, the same audio passes through a localization module that returns the timestamps of the stuttering events, and the detected stutter timestamps are hard-aligned with the transcript timestamps so that only the affected speech segments are identified. The finished model is integrated into a simple interface where users record or upload speech samples and receive an analysis with timestamped detection results and classification output.

The project aims to give speech-language pathologists and people who stutter an accurate, objective, and accessible diagnostic tool. The system also contributes to the growing use

of artificial intelligence in healthcare, supporting diagnosis, therapy, and an improved quality of life for people who stutter.

## 1.2 PROPOSED METHOD

The proposed method aims to develop an efficient deep learning-based system for the early detection and classification of speech dysfluencies from audio recordings. The process begins with comprehensive audio preprocessing that includes noise reduction, normalization, and enhancement of acoustic clarity across all samples. Segmentation isolates the meaningful regions of speech, eliminating irrelevant silence and background, and data augmentation such as noise injection, time and pitch shifting, and scaling simulates variations in speaking rate and recording conditions. The system accurately categorizes the input into five dysfluency types: prolongation, block, sound repetition, word repetition, and interjection, and localizes the segments where these occur, supporting early diagnosis and effective treatment planning. This automated approach reduces manual workload, minimizes observer bias, and enhances diagnostic reliability, making it a valuable tool in computer-aided speech assessment.

## 1.3 LITERATURE SURVEY

P. Arbajian et al. [1] A speech segment selection strategy for stutter block detection was studied in this paper. The authors extract acoustic features from annotated speech samples and test machine learning classifiers under different segmentation setups, comparing windowing approaches. The results show that segment choice strongly affects accuracy: some segment lengths model dysfluency patterns better, while bad segmentation drops important temporal information and degrades performance. Segmentation choices therefore matter for detection accuracy and for remediation systems, which the proposed system takes into account in its preprocessing.

V. Mitra et al. [2] This study developed a tuning-based approach that makes a voice assistant handle dysfluent speech better by optimizing an existing hybrid ASR system. The goal is to reduce recognition errors caused by stuttering, such as repetitions and unin-

tended insertions. The method changes the key decoding parameters of the ASR system, giving more weight to the language model by raising the penalty for inserted words and lowering the acoustic model weight. That helps the system filter repeated or disfluent segments and focus on meaningful speech. Tested on speech from 18 participants with varying stuttering severity, it reduced the intended speech Word Error Rate (isWER) by 24% relative. The results show that parameter tuning alone can reduce dysfluency errors without restructuring the ASR architecture, which is why the proposed system keeps model tuning and post-processing in mind.

P. Mohapatra et al. [3] disfluencyNet, a deep learning model that detects speech disfluencies using contextual representations, was introduced in this paper. The model feeds contextual embeddings into a classification network, modeling speech dependencies to catch disfluencies such as repetitions and pauses. Data distillation limits the need for large training sets. Trained and evaluated on SEP-28k and FluencyBank, the model matched baseline accuracy using only a quarter of the data, which points to efficient training and strong generalization. That supports the proposed system's use of contextual embeddings and efficient training where annotated data is scarce.

J. Liu et al. [4] A method for detecting disfluencies in multilingual speech of varying lengths was proposed in this paper using the context-based embeddings of wav2vec 2.0. A classification network takes the embeddings, and data distillation keeps only high-quality audio fragments where three human annotators agree on the disfluency labels. Tests on multilingual datasets with different speech lengths showed better performance than other approaches. The work supports the proposed system's use of pretrained models like wav2vec 2.0 and data filtering to improve robustness and cross-speaker generalization.

A. Romana et al. [5] The study introduced a multimodal approach that detects speech disfluencies directly from untranscribed audio. A Bi-LSTM fusion model runs at the frame level, combining WavLM acoustic features with BERT language representations

drawn from transcripts produced by a fine-tuned Whisper model. This captures both low-level speech patterns and high-level context, and it copes with ASR transcription errors and misalignment. The multimodal setup proved more robust and accurate than single-modality approaches in noisy real-world conditions. That supports combining acoustic and language features in the proposed system.

D. Wagner et al. [6] This paper presented a hybrid approach that uses Large Language Models (LLMs) to combine acoustic and linguistic representations for dysfluency detection. Acoustic features come from wav2vec 2.0 and transcriptions from Whisper ASR; the two are fused into a joint input that an LLM classifies into stutter types including repetitions, prolongations, and blocks. The acoustic-lexical combination outperformed models that use only audio or only text. The result backs the proposed system's plan to combine audio and language signals for better accuracy and generalization.

S. A. Sheikh et al. [7] The study developed a deep learning framework called multi-contextual (MC) StutterNet for stuttering detection that tackles class imbalance and limited data. The multi-branch architecture processes different contextual representations of speech. Class-balanced loss assigns more weight to underrepresented stutter categories, and data augmentation diversifies the training set. Results showed more robust and accurate detection across speech conditions, especially for less frequent dysfluency types. The proposed system uses the same ideas: data augmentation, balanced loss, and multi-context learning.

X. Zhou et al. [8] A YOLO-inspired model that treats spectrograms as images was introduced in this paper, detecting dysfluencies with simultaneous localization and classification in the time-frequency domain. A region-based detection model learns spatial features (frequency patterns) and temporal dynamics (changes over time) from these images. Speech-text alignment links audio segments to their corresponding words for better context. The model predicts both the dysfluency type and the exact time region where it

occurs, with strong results across multiple dysfluency types. This is why the proposed system builds its real-time, region-wise detection on spectrogram-based CNN architectures.

X. Zhou et al. [9] stutter-Solver, an end-to-end YOLO-inspired model for multilingual dysfluency detection, was developed in this paper. It treats speech spectrograms as image-like inputs and applies a region-based detection framework. To address data scarcity, the authors generated synthetic datasets (VCTK-Pro, VCTK-Art, AISHELL3-Pro) using articulatory and text-to-speech (TTS) simulations. The model performed well across multiple datasets and languages, and the work supports the proposed system's multilingual capability and use of synthetic data.

J. Zhang et al. [10] This paper proposed LLM-Dys, a method for generating large-scale dysfluent speech datasets using Large Language Models (LLMs). An LLM simulates realistic dysfluency patterns and produces labeled dysfluent text, which the VITS model converts into synthetic audio. Unlike rule-based methods, the generated speech keeps more natural prosody and contextual variation. The dataset covers 11 categories of dysfluencies at both word and phoneme levels, enabling fine-grained analysis and model training. The resulting models performed better on detection tasks, which backs the proposed system's use of LLMs and TTS for data augmentation.

S. Kim and A. Kumar [11] FluentNet, a hybrid CNN-LSTM architecture for end-to-end speech disfluency detection, was developed in this paper. CNN layers extract short-term spectral features from mel-spectrograms, and LSTM layers model temporal continuity, which suits recurring stutter patterns. Trained and validated on SEP-28k, the model passed 91% classification accuracy. It also ran in real time in speech therapy, giving users visual dysfluency feedback within a feedback loop. End-to-end models that skip handcrafted features reduce bias and generalize across speakers and environments, and the architecture informs the multi-model CNN approach in the proposed system.

R. Ahmed and J. Park [12] This study developed a multilingual speech dysfluency detection framework that identifies stuttering events across English, Korean, and Japanese datasets. Built on an encoder-decoder transformer architecture similar to BERT, the model captures contextual relationships in speech sequences. Trained on combined multilingual datasets, it showed high adaptability to linguistic variation, achieving an F1-score of 95.2% in English and over 93% in non-English corpora. Attention visualization showed which segments of the input most influenced the detection decision. The work supports the proposed system's cross-language generalization and interpretability in dysfluency detection.

F. Rahimi and D. Torres [13] This research presented an exploration of large language models (LLMs) and transformer-based architectures for speech dysfluency analysis. Speech features are embedded as tokenized sequences so the model can detect contextual disruptions in spoken language. The LLM-based approach outperformed CNN and RNN models in both recall and precision, particularly for subtle dysfluency types like interjections and soft blocks. Pretraining on large general speech datasets also helped on smaller stutter-specific corpora, and attention visualization made the predictions transparent. The findings point to combining CNN-based acoustic analysis with language-level context in the proposed system.

V. Uloza et al. [14] An AI-based algorithm for assessing pathological speech, specifically substitution voicing, was developed in this paper using deep neural networks. CNNs and principal component analysis (PCA) perform the classification, with preprocessing such as noise removal and normalization giving the networks consistent input. Classification accuracy exceeded 93%, confirming that AI can detect subtle speech impairments. Though the study targets substitution voicing rather than stuttering, it offers useful lessons for speech pathology systems built on spectral analysis, which is the basis for the proposed system's use of mel-spectrograms and CNN feature extraction.

H. Müller and C. Lee [15] This study analyzed the neural bases of speech production in people who stutter through a meta-analysis of fMRI and EEG studies. Identified regions include the inferior frontal gyrus and basal ganglia, which show atypical activation during speech production. These findings provide biological grounding for AI-based stutter detection, since the acoustic signatures such systems rely on reflect underlying differences in neural control. The study proposes no computational model, but it links the speech irregularities the proposed system detects to their neurological causes, which is useful for feature selection and interpretation.

A. Baevski et al. [16] wav2vec 2.0 was introduced in this paper as a self-supervised framework for learning speech representations directly from raw audio waveforms. A convolutional feature encoder extracts latent representations that a transformer encoder then contextualizes. Pretrained on 960 hours of unlabeled LibriSpeech data and fine-tuned with a CTC loss, the model performed strongly on phoneme recognition, speaker identification, and emotion recognition benchmarks. This is the foundational speech representation model in the proposed system, making feature extraction from stuttered speech possible without large labeled datasets.

P. Khanna et al. [17] The study presented StuD, a multimodal stuttering detection system that combines acoustic features from Wav2Vec 2.0 and HuBERT with linguistic features from Llama-2, enhanced by Retrieval-Augmented Generation for adaptive classification. A fusion strategy weights the acoustic and linguistic embeddings by input quality. The RAG component retrieves similar historical cases to improve classification of rare stuttering patterns. Evaluated on SEP-28k and FluencyBank, the system performed strongly across all stuttering event types. This multimodal fusion approach supports the proposed system's goal of combining audio and text features for comprehensive stutter analysis.

C. Lea and V. Mitra [18] SEP-28K, a dataset of over 28,000 speech clips drawn from stuttering support group podcasts and annotated for five stuttering event types (blocks,

prolongations, repetitions, interjections, and revisions), was introduced in this paper. The clips carry both crowdsourced annotations from non-expert listeners and expert annotations from speech-language pathologists. The authors report that scaling annotation from 10k to 28k clips improved F1 by 28% and 24% for blocks and prolongations respectively. The dataset addresses the data scarcity problem in stuttering research and is the primary benchmark for evaluating the proposed detection system.

O. Shonibare et al. [19] This paper proposed a two-stage approach for automatic speech recognition on stuttered speech with limited labeled data. A context-aware classifier trained on small amounts of labeled stuttering data detects dysfluency regions. A modified ASR decoder then passes over the detected dysfluencies, focusing transcription on fluent segments. The method cut word error rate by 12-71% across different stuttering severity levels. The detect-then-transcribe design shows that dysfluency detection and speech processing can be decoupled, which is the premise of the proposed system's modular architecture.

S. Bayerl et al. [20] The study applied fine-tuned wav2vec 2.0 to dysfluency detection in clinical stuttering therapy recordings. Acoustic embeddings are combined with a multi-task learning framework and an SVM classifier to distinguish dysfluency types in therapy speech. Evaluated on FluencyBank and the German KSoF dataset, it improved F1 by 27% over baseline methods. The multi-task approach predicts dysfluency presence and type together, letting therapists track progress over sessions. The clinical context confirms that pretrained speech models transfer to real-world stuttering assessment.

S. Bayerl et al. [21] This paper introduced a modified wav2vec 2.0 framework that treats stuttering detection as a multi-label classification problem, on the grounds that dysfluencies often occur together in natural speech. The model assigns an independent probability score to each dysfluency type, so multiple overlapping events are detected at once. It performed well on SEP-28k-Extended and generalized from English to German. The

multi-label formulation fits the reality of stuttering, where a single utterance can contain blocks, prolongations, and repetitions at the same time.

R. Gong et al. [22] AS-70, the first and largest Mandarin stuttered speech dataset, was introduced in this paper, containing 70 hours of recordings from speakers at varying stuttering severity levels. The corpus covers diverse demographics (age groups, genders, and stuttering types) alongside word- and syllable-level dysfluency labels. The dataset is released as an open source resource to encourage Mandarin stuttering research. It extends stuttering data beyond English and enables the development of multilingual systems.

X. Liu et al. [23] An end-to-end stuttering detection architecture was introduced in this paper, combining Conformer blocks for local acoustic pattern extraction with BiLSTM layers for long-range temporal dependency modeling. The multi-task framework predicts dysfluency types and severity levels together. It took first place in the SLT 2024 Stuttering Detection Challenge and improved F1 by 39.8% on the AS-70 Mandarin dataset. Conformer's mix of convolution and self-attention captures both local and global speech patterns, which proved effective for the varied temporal signatures of different stuttering events.

A. Batra et al. [24] Boli, a multilingual Indian language dataset for understanding stuttering including both read and spontaneous speech, was introduced in this paper. The corpus captures real-world stuttering patterns from Indian speakers across five stuttering types. The dataset includes demographic metadata and self-reported stuttering severity ratings. It addresses the gap in non-English stuttering datasets, particularly for South Asian languages where stuttering prevalence and manifestation patterns differ from Western populations.

A. R. Valente et al. [25] This study introduced an enhanced version of the FluencyBank dataset with detailed clinical annotations provided by expert speech-language pathologists. The annotations cover audiovisual cues and secondary stuttering behaviors such as

facial tension and eye blinking, plus physiological tension indicators, beyond the usual acoustic dysfluency labels. The multi-dimensional scheme captures more of the clinical picture of stuttering severity. Such expert annotations make it possible to train detection models that account for the full stuttering experience rather than acoustic events alone.

T. Grósz et al. [26] This paper presented a wav2vec2-based paralinguistic analysis system that jointly recognizes vocalized emotions and stuttering events from speech. Self-supervised speech embeddings feed task-specific classification heads for both tasks. The system reached 62.1% unweighted average recall on the Stuttering Sub-Challenge benchmark. The results connect emotional state and speech disfluency, and suggest that modeling the two together improves detection through shared representations.

J. Tang et al. [27] This paper presented comprehensive speech annotation guidelines developed in collaboration with people who stutter, standardizing how stuttering events are labeled in speech datasets. The guidelines resolve the hard cases in annotating ambiguous dysfluencies with clear categorical definitions and decision trees. They also cover annotator training, inter-annotator agreement measurement, and handling edge cases. Community-informed guidelines raise annotation quality and reproducibility across stuttering research, which directly helps dataset construction and model evaluation.

A. Romana et al. [28] The study introduced an updated version of the FluencyBank dataset with word-level timestamps and refined disfluency annotations. Updated transcripts carry granular disfluency labels and word timing for each clip, letting speech processing models be measured on disfluent input. The resource supports word-level dysfluency localization in stuttering research, which is exactly what the proposed system needs to map events to the words where they occur.

L. Nie et al. [29] MMSD-Net, the first multimodal neural framework for stuttering detection combining audio and visual signals through transformer-based cross-modal fusion, was introduced in this paper. The model processes speech embeddings alongside facial ex-

pression and lip movement features to capture both the acoustic and visual manifestations of stuttering. It improved F1 by 2-17% over single-modality approaches on benchmark datasets. Visual information clearly helps, especially for events like blocks and prolongations that have distinct visual signatures.

R. P. Buzzeti et al. [30] This paper proposed a two-stage hybrid approach for detecting and classifying stuttering-related disfluencies in Brazilian Portuguese. The first stage identifies potential disfluency regions from linguistic rules, and the second performs severity assessment. Portuguese stuttering differs from English in syllable structure and how disfluencies manifest, and the method addresses those language-specific patterns. It extends stuttering detection to an underrepresented language and shows that hybrid approaches combining linguistic rules with data-driven classification work.

Table 1.1: Summary of Literature Survey

| Sl. No | Author                 | Title                                                                                 | Features                                                                                                                                | Pros                                                           | Cons                                     |
|--------|------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|------------------------------------------|
| 1      | Pierre Arbajian et al. | Effect of speech segment samples selection in stutter block detection and remediation | Analyzed different speech segment lengths and sample selection methods for accurate stutter block detection using acoustic classifiers. | Improves detection precision through better segment selection. | Sensitive to segmentation configuration. |
| 2      | Vikramjit Mitra et al. | Analysis and Tuning of a Voice Assistant                                              | Modified ASR decoding parameters by                                                                                                     | Enhances intended speech                                       | Focuses on recognition rather than dys-  |

| Sl. No | Author                 | Title                                                                            | Features                                                                                                                      | Pros                                                             | Cons                                                                                     |
|--------|------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------------------------------|
|        |                        | System for Dysfluent Speech                                                      | increasing word insertion penalty and reducing acoustic model influence to suppress repetition errors                         | recognition for dysfluent users.                                 | fluency classification.                                                                  |
| 3      | Payal Mohapatra et al. | Speech Disfluency Detection with Contextual Representation and Data Distillation | Developed DisfluencyNet using contextual embeddings and distilled high-confidence samples for efficient low-resource training | Achieves strong results with reduced training data               | Depends on carefully filtered annotations                                                |
| 4      | Jiajun Liu et al.      | Automatic Speech Disfluency Detection Using Wav2Vec 2.0 for Different Languages  | Applied Wav2Vec 2.0 contextual embeddings for multilingual disfluency detection across variable speech durations.             | Supports multilingual detection with strong contextual learning. | High resource requirements and limited availability of multilingual stuttering datasets. |

| Sl. No | Author                   | Title                                                                                                     | Features                                                                                                          | Pros                                               | Cons                                           |
|--------|--------------------------|-----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------------|
| 5      | Amrit Romana et al.      | Automatic Dysfluency Detection from Untranscribed Speech                                                  | Built multimodal Bi-LSTM combining WavLM acoustic signals with BERT linguistic features from Whisper transcripts. | Detects disfluencies without manual transcription. | Multimodal design increases system complexity. |
| 6      | Dominik Wagner et al.    | Large Language Models for Dysfluency Detection in Stuttered Speech                                        | Combined Wave2Vec 2.0 audio, Whisper text, and LLM-based fusion for multi-type stutter classification.            | Improves multi-class detection accuracy.           | Requires heavy computational resources.        |
| 7      | Shakeel A. Sheikh et al. | Advancing Stutter Detection via Data Augmentation, Class-Balanced Loss and Multi-Contextual Deep Learning | Proposed multi-contextual StutterNet with augmentation and weighted loss for robust stuttering detection.         | Addresses data scarcity and class imbalance.       | Synthetic augmentation may reduce realism.     |

| Sl. No | Author               | Title                                                                               | Features                                                                                                       | Pros                                               | Cons                                                                                |
|--------|----------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------------|
| 8      | X. Zhou et al.       | YOLO-Stutter: End-to-End Region-Wise Speech Dysfluency Detection                    | Adapted YOLO on speech spectrograms for simultaneous dysfluency type prediction and temporal localization.     | Enables precise real-time stutter localization.    | Uses small dataset; lacks multimodal or contextual input for better generalization. |
| 9      | Xuanru Zhou et al.   | Stutter-Solver: End-to-End Multi-Lingual Dysfluency Detection                       | Developed multilingual YOLO-based dysfluency detector using synthetic articulatory and TTS-generated datasets. | Expands multilingual coverage with SOTA accuracy.  | Synthetic speech may not fully match real speech.                                   |
| 10     | Jinning Zhang et al. | Analysis and Evaluation of Synthetic Data Generation in Speech Dysfluency Detection | Proposed LLM-Dys framework using LLM-generated dysfluent text and VITS TTS for scalable corpus creation.       | Generates diverse large-scale dysfluency datasets. | Synthetic prosody may limit robustness.                                             |

| Sl. No | Author                | Title                                                                   | Features                                                                                                             | Pros                                                                                      | Cons                                                                                     |
|--------|-----------------------|-------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| 11     | S. Kim & A. Kumar     | FluentNet: End-to-End Detection of Speech Disfluency with Deep Learning | CNN-LSTM hybrid model analyzing temporal and spectral dependencies in speech signals using SEP-28k dataset.          | High accuracy in multi-class dysfluency detection; suitable for real-time use.            | Model complexity increases training time and requires GPU-based systems.                 |
| 12     | R. Ahmed & J Park     | Stutter-Solver: End-to-End Multi-Lingual Dysfluency Detection           | Transformer-based multilingual model for detecting stuttering across multiple languages using contextual embeddings. | Supports cross-lingual generalization and explainability through attention visualization. | High resource requirements and limited availability of multilingual stuttering datasets. |
| 13     | F. Rahimi & D. Torres | Large Language Models for Dysfluency Detection in Stuttered Speech      | Used transformer-based large language models (LLMs) to capture context disruptions in stuttered speech               | Outperforms CNN and RNN baselines on subtle dysfluency types.                             | Requires heavy computational resources.                                                  |

| Sl. No | Author            | Title                                                                                              | Features                                                                                                                                | Pros                                                                                         | Cons                                                                                     |
|--------|-------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| 14     | V. Uloza et al.   | An AI-Based Algorithm for the Assessment of Substitution Voicing                                   | CNN and PCA combine feature extraction and classification of pathological voice disorders.                                              | Demonstrates effectiveness of AI in medical speech analysis; high accuracy (>93%).           | Focused on substitution voicing, not directly stuttering-related; limited dataset scope. |
| 15     | H Muller & C. Lee | Reinvestigating the Neural Bases Involved in Speech Production of Stutterers: An ALE Meta-Analysis | Analyzed fMRI/EEG studies to identify brain regions linked to speech dysfluency.                                                        | Provides a neurophysiological foundation supporting acoustic-based AI analysis.              | Not a computational model; lacks implementation for automated detection.                 |
| 16     | A. Baevski et al. | wav2vec 2.0: A Framework for Self-Supervised Learning of Speech Representations                    | Self-supervised pre-training of speech representations using masked prediction with transformer and convolutional encoder on raw audio. | Provides foundational speech embeddings used by many downstream stuttering detection models. | Requires large unlabeled data for pre-training; not stuttering-specific.                 |
| 17     | P. Khanna et al.  | StuD: A Multimodal Approach for Stuttering                                                         | Combined Wav2Vec 2.0, HuBERT                                                                                                            | Achieves SOTA on SEP-28k and FluencyBank                                                     | Heavy computational requirements for LLM                                                 |

| Sl. No | Author              | Title                                                                      | Features                                                                                                 | Pros                                                                  | Cons                                                                   |
|--------|---------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------|
|        |                     | tering Detection with RAG and Fusion Strategies                            | acoustic features with Llama-2 linguistic features and RAG-based adaptive classification.                | with adaptive retrieval.                                              | and RAG components.                                                    |
| 18     | C. Lea and V. Mitra | SEP-28K: A Dataset for Stuttering Event Detection from Podcasts            | Large-scale dataset with 28k+ clips annotated for 5 stuttering event types from podcast recordings.      | Enables large-scale training with 28%/24% F1 gains from data scaling. | Podcast speech may not generalize to clinical or spontaneous settings. |
| 19     | O. Shonibare et al. | Enhancing ASR for Stuttered Speech with Limited Data using Detect and Pass | Two-stage approach: context-aware dysfluency detection followed by ASR that passes over detected events. | Achieves 12-71% WER reduction with minimal labeled data.              | Relies on accurate first-stage detection; cascaded errors possible.    |
| 20     | S. Bayerl et al.    | Detecting Dysfluencies in Stuttering Therapy                               | Fine-tuned wav2vec 2.0 with multi-task learning                                                          | 27% F1 improvement on clinical therapy recordings.                    | Limited to therapy contexts; may not generalize.                       |

| Sl. No | Author           | Title                                                                       | Features                                                                                                   | Pros                                                                   | Cons                                                                         |
|--------|------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------------------------|
|        |                  | apy Using wav2vec 2.0                                                       | and SVM for therapy speech analysis.                                                                       |                                                                        | alize to casual speech.                                                      |
| 21     | S. Bayerl et al. | Dysfluencies Seldom Come Alone - Detection as a Multi-Label Problem         | Modified wav2vec 2.0 for simultaneous multi-label detection of co-occurring dysfluencies.                  | SOTA on SEP-28k-Extended with cross-language generalization.           | Multi-label training increases model complexity and annotation requirements. |
| 22     | R. Gong et al.   | AS-70: A Mandarin Stuttered Speech Dataset for Automatic Speech Recognition | First large-scale Mandarin stuttered speech dataset with verbatim transcriptions and detailed annotations. | Enables Mandarin stuttering research with 70h of diverse speaker data. | Limited to Mandarin; annotation process labor-intensive.                     |
| 23     | X. Liu et al.    | An End-to-End Stuttering Detection Method Based on Conformer and BiLSTM     | Conformer blocks with BiLSTM temporal modeling for multi-task dysfluency and severity prediction.          | 1st place SLT 2024 Challenge; 39.8% F1 improvement on AS-70.           | Conformer architecture requires significant GPU memory and training time.    |

| Sl. No | Author               | Title                                                                                | Features                                                                                           | Pros                                                                           | Cons                                                                                |
|--------|----------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 24     | A. Batra et al.      | Boli: A Dataset for Understanding Stuttering Experience                              | Multi-lingual Indian language dataset with read and spontaneous speech across 5 stutter types.     | Captures real-world Indian stuttering patterns across multiple languages.      | Limited annotations; may need expert review for clinical applications.              |
| 25     | A. R. Valente et al. | Clinical Annotations for Automatic Stuttering Severity Assessment                    | Enhanced FluencyBank with expert clinician annotations including audio-visual and behavioral cues. | Provides clinical-grade multi-dimensional annotations for severity assessment. | Expert annotation is expensive and time-consuming to produce.                       |
| 26     | T. Grósz et al.      | Wav2vec2-based Paralinguistic Systems to Recognise Vocalised Emotions and Stuttering | Joint wav2vec2 framework for emotion recognition and stuttering detection from speech embeddings.  | Demonstrates emotion-disfluency interconnection with 62.1% UAR.                | Joint modeling may introduce task interference; limited to paralinguistic analysis. |
| 27     | J. Tang et al.       | Speech Annotation Guidelines with People Who Stutter                                 | Standardized annotation protocols developed collaboratively with                                   | Improves annotation quality and reproducibility                                | Guidelines adoption requires community-wide co-                                     |

| Sl. No | Author               | Title                                                                                                           | Features                                                                                                           | Pros                                                                             | Cons                                                                                   |
|--------|----------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
|        |                      |                                                                                                                 | PWS for consistent dysfluency labeling.                                                                            | across stuttering research.                                                      | ordination and training.                                                               |
| 28     | A. Romana et al.     | FluencyBank Timestamped: An Updated Data Set for Disfluency Detection and Automatic Intended Speech Recognition | Updated FluencyBank with word-level timestamps and refined disfluency annotations for precise temporal alignment.  | Enables word-level dysfluency localization and more accurate model evaluation.   | Limited to English stuttering patterns; requires updated annotation protocols.         |
| 29     | L. Nie et al.        | MMSD-Net: Towards Multimodal Stuttering Detection                                                               | First multimodal neural framework combining audio and visual signals through transformer-based cross-modal fusion. | 2-17% F1 improvement over uni-modal approaches; captures visual stuttering cues. | Requires video input; increased computational complexity and data collection overhead. |
| 30     | R. P. Buzzeti et al. | Detecting Stuttering with Artificial Intelligence: A Hybrid Method for                                          | Two-stage hybrid approach combining rule-based detection with ML classi-                                           | Extends stuttering detection to under-represented lan-                           | Language-specific rules may not transfer to other languages                            |

| Sl. No | Author | Title                | Features                            | Pros                           | Cons                  |
|--------|--------|----------------------|-------------------------------------|--------------------------------|-----------------------|
|        |        | Brazilian Portuguese | fication for Portuguese stuttering. | guages; clinically applicable. | without modification. |

## CHAPTER 2

# REQUIREMENT SPECIFICATION AND ANALYSIS

## 2.1 INTRODUCTION

The development of a deep learning-based framework for stuttering classification and localization requires a clear understanding of both clinical and technical aspects. Before implementation, it is important to define specific functional and non-functional requirements, system components, and workflow to ensure accuracy and clinical reliability. The main goal is to transform the manual process of speech-language assessment into an efficient, automated computational model that supports early and objective dysfluency detection. The system should effectively process audio recordings, extract key features, and classify them into distinct stuttering types while localizing dysfluency events within the signal. It must address challenges like time-consuming manual analysis and inter-observer variation, emphasizing automation, precision, and interpretability. Technically, the framework integrates Wav2Vec 2.0 feature extraction with Wav2Vec2 frame-level localization and Whisper transcription for robust detection and localization. In addition, the system should operate efficiently on standard hardware, support scalability for future datasets, and offer a user-friendly interface for clinicians and end users. Data security and confidentiality are essential to maintain ethical and legal standards. Overall, the requirement specification and analysis phase ensures that the framework is both technically strong and clinically valuable, bridging the gap between healthcare needs and AI-driven solutions.

## 2.2 FUNCTIONAL REQUIREMENTS

The functional requirements describe the key operations that the system must perform to support automated detection and classification of stuttering events using deep learning models. The application allows users, such as clinicians, speech-language pathologists, or individuals who stutter, to upload a speech recording or capture audio directly through the interface in common formats such as WAV, MP3, FLAC, and M4A. Once the audio is pro-

vided, the system processes the signal and classifies it into five dysfluency types: prolongation, block, sound repetition, word repetition, and interjection. The classification result is displayed on the interface along with a confidence score for each detected class, helping users understand how reliable every prediction is. The system also localizes dysfluency events within the audio and returns their exact temporal positions as timestamps, with visualization through waveforms, spectrograms, and dysfluency overlays that highlight the regions that influenced the model's decision, improving interpretability. Additionally, users can download the detailed analysis report for record-keeping. The framework ensures that uploaded audio and prediction results are stored securely for future reference.

### **2.2.1 User Requirements**

User requirements specify the functionalities and services that the end users should be able to access and utilize. These typically reflect how users will interact with the system. The proposed system is primarily designed for clinicians, speech-language pathologists, researchers, and individuals who stutter involved in the assessment and monitoring of speech fluency. The users of this system require an intuitive, reliable, and efficient platform that can process speech recordings and provide accurate diagnostic insights with minimal manual effort. The users expect the interface to be simple, interactive, and easy to navigate, allowing them to view classification results, visual interpretations, and confidence levels without technical complexity.

For a speech analysis platform, general user requirements include:

- The user should be able to upload or record a speech sample for analysis.
- The user should be able to access real-time classification results.
- The system should provide detailed analysis reports.

### **2.2.2 System Requirements**

System requirements define the essential capabilities of software and hardware needed to support system functionality. The proposed stuttering detection system requires components that can efficiently handle the computational demands of deep learning-based

speech analysis while delivering the core functional operations described above. Hardware guidelines appear in the hardware requirements section later in this chapter.

These requirements include:

- The system should support secure audio upload and classification.
- Users should be able to store and retrieve previous analysis results.
- The system should support proper storage for managing large speech datasets.

## **2.3 NON-FUNCTIONAL REQUIREMENTS**

The non-functional requirements define the overall quality, performance, and usability standards that ensure the system operates efficiently and reliably. The key requirement is performance efficiency, as the models handle deep learning and audio processing tasks that must deliver fast and accurate results with minimal delay. GPU acceleration and optimized memory management help achieve smooth processing of speech recordings. Reliability is equally important: the system should maintain consistent accuracy across datasets and handle interruptions through fault tolerance. It must also be scalable, allowing expansion for larger datasets or additional dysfluency types without compromising performance. In terms of usability, the interface should be simple, intuitive, and accessible to both technical and non-technical users for easy audio upload, analysis, and visualization. Maintainability should be ensured through modular, well-structured code that supports easy updates and retraining. Finally, portability and availability ensure the system runs smoothly across different platforms with high uptime and regular backups for uninterrupted access.

### **2.3.1 Performance**

- The system should process and analyse a speech sample within 3-5 seconds.
- The classification results should minimize false positives and false negatives.
- Performance metrics should be monitored regularly.
- The system should handle processing of audio uploads without significant delay.

### **2.3.2 Scalability**

- The system should efficiently handle increasing speech datasets.

- It should be scalable for integration across multiple clinics and research centres.
- The system should be adaptable for improvements in deep learning models.
- The system should be capable of handling a higher volume of concurrent users.

### 2.3.3 Availability

- The system should remain accessible to users at all times, ensuring minimal down-time during clinical use.
- System components are designed to be fault-tolerant to reduce the impact of failures.
- The platform should support uninterrupted service even during updates or model improvements.

### 2.3.4 Usability

- The user interface should be user-friendly for clinicians, speech-language pathologists, and non-technical users.
- The system should provide clear navigation for audio uploads and results.
- The visualization outputs shall help users easily understand the model's predictions for the analysed speech.

## 2.4 Software Requirements

The software requirements are essential for developing, training, validating, and deploying deep learning models aimed at detecting stuttering events from speech audio. The system must support various tools and libraries that enable efficient model development, audio processing, and performance evaluation.

- **Operating System:** the proposed system is developed and executed on the Linux and Windows platforms. It is fully compatible with Windows 10 and above and common Linux distributions, offering stability, wide software support, and seamless integration with deep learning frameworks and GPU drivers. This environment ensures smooth performance, easy setup, and reliable execution of the proposed models, with both the web application and the PySide6 desktop application run-

ning on either platform and training and inference supported on CPU or NVIDIA GPU.

- **Deep Learning Framework:** the proposed system is built using PyTorch as the primary deep learning framework for building and training the machine learning models. PyTorch provides the required computational efficiency, GPU support through features such as `torch.compile`, mixed precision, and TensorFloat-32 (TF32), and scalability for handling complex audio classification tasks effectively. The Hugging Face Transformers library supplies the pretrained speech models, Wav2Vec 2.0 for feature extraction and Whisper for timestamped transcription.
- **Libraries:** a range of Python libraries is required to support different stages of the project:
  - `librosa`: Used for audio preprocessing and manipulation, including loading, resampling, mel-spectrogram computation, and silence trimming.
  - `NumPy`: Provides support for numerical operations and array handling.
  - `Pandas`: Essential for managing and analysing structured data such as labels or metadata.
  - `Scikit-learn`: Used for data splitting, model evaluation metrics, and traditional machine learning algorithms.

## 2.5 Hardware Requirements

The hardware requirements outline the minimum and recommended specifications needed to efficiently run the deep learning models used in this project. Proper hardware ensures smooth data processing, model training, and inference performance, which is critical when working with speech audio and deep learning pipelines.

- **Processor (CPU):** a multi-core processor such as Intel Core i5 (8th generation or newer) or AMD Ryzen 5 and above is required. These processors provide adequate computational power for audio preprocessing and managing training workflows.

- **Storage (Hard Disk):** at least 10 GB of free disk space is required to store datasets, trained model checkpoints, logs, and temporary files. SSDs are recommended for faster read/write speeds and improved data handling.
- **Memory (RAM):** a minimum of 8 GB RAM is necessary to run the training scripts and handle datasets. However, 16 GB or more is recommended for better performance, especially during the training and validation phases when data loading and augmentation are involved.
- **Graphics Processing Unit (GPU):** for faster model training and efficient computation, an NVIDIA GPU with CUDA support is highly recommended. GPUs such as the NVIDIA RTX 2060 or higher (e.g., RTX 3060, RTX 3080) can greatly reduce training time and handle larger datasets and complex neural network architectures effectively. Proper installation of CUDA and cuDNN is required to ensure full compatibility with PyTorch.
- **Audio Input Device:** a functional microphone is required for recording speech input within the application.

## CHAPTER 3

# SYSTEM DESIGN

### 3.1 INTRODUCTION

System design is an essential stage in software development that focuses on defining the overall structure and functionality of a system. It translates user and technical requirements into a detailed framework that outlines how different components, modules, and interfaces will interact. The process involves creating both high-level architecture, which defines the system's major elements and their interconnections, and low-level design, which specifies detailed components such as data structures, algorithms, and communication flows.

The main objective of system design is to build a solution that fulfills user needs while ensuring performance, reliability, scalability, and security. It also emphasizes maintainability and flexibility so the system can adapt to future enhancements. Effective system design requires collaboration among developers, architects, and domain experts to ensure the architecture aligns with functional goals and business requirements. By carefully organizing how each part of the system operates and communicates, system design establishes a strong foundation for efficient implementation and long-term stability.

### 3.2 SYSTEM ARCHITECTURE AND DESIGN

The system architecture defines the overall structure and organization of the Stuttering Classification and Localization System using deep learning. It provides a comprehensive framework describing how different components interact to process speech audio, extract discriminative features, and classify utterances into normal and dysfluent categories. A well-structured architecture ensures efficient data flow, modularity, and scalability, allowing the model to deliver high diagnostic accuracy while remaining adaptable to future advancements. The architecture incorporates critical stages such as preprocessing, feature extraction, model training, and classification to ensure robust performance. Furthermore,

it supports seamless integration with user interfaces for audio upload, visualization, and prediction display. Emphasis is placed on maintaining data security and patient confidentiality, ensuring ethical and reliable operation throughout the analysis workflow. Additionally, the architecture allows for performance optimization, enabling fast and accurate stutter detection even when deployed on large speech datasets.

Figure 3.1 illustrates the proposed deep learning architecture designed for the automatic classification and localization of stuttering using speech audio. The framework integrates two model pathways, five independent Wav2Vec 2.0 binary classifiers for classification and a Wav2Vec2 frame-level pipeline for localization, to improve feature extraction, multi-perspective learning, and classification robustness. The complete workflow consists of five major phases: Input, Pre-processing, Feature Extraction, Classification, and Output. This dual-model structure enables richer representation learning and enhances overall detection accuracy.

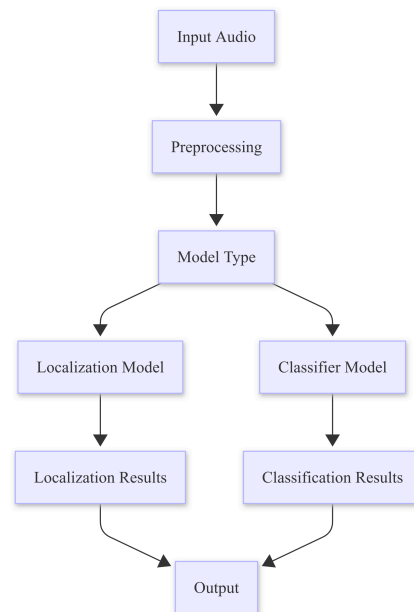


Figure 3.1: System Architecture

**Speech Audio Input:** The system begins with the collection of speech audio samples, which serve as the primary dataset for stutter detection. Audio enters the system when the user records directly or uploads a pre-recorded file through the web interface or desktop application. The web app captures audio with MediaRecorder APIs; the desktop app

uses sounddevice. Each sample may contain one or more dysfluencies, including blocks, prolongations, word repetitions, sound repetitions, and interjections. Ensuring adequate recording quality is crucial, as variations in microphone hardware, background noise, and speaking rate can affect model reliability. The dataset includes recordings from Project Boli, SEP-28K, and UCLASS captured across English, Kannada, and Hindi. This stage establishes the foundation of the diagnostic system by providing high-quality data for subsequent processing.

**Preprocessing:** Before being fed into the deep learning model, speech audio undergoes preprocessing to enhance clarity, reduce noise, and ensure consistency across samples. The audio is sent to the backend and converted to 16 kHz mono WAV with FFmpeg so every clip is handled the same way. The preprocessing pipeline also includes DC offset removal, peak normalization, and silence trimming to clean the signal and remove unwanted artifacts. Fixed-length padding truncates or pads each clip to 48,000 samples, three seconds at 16 kHz, so all inputs have the same length. This step ensures that the input audio is standardized, optimized, and ready for accurate feature extraction and classification by the deep learning architecture.

**Wav2Vec 2.0:** The first part of the detection framework is Wav2Vec 2.0, a deep self-supervised model pre-trained on large amounts of unlabeled speech. Wav2Vec 2.0 quantizes the raw waveform into contextualized speech representations, learning robust acoustic features without requiring manually labeled data. This structure helps the model retain important information and capture fine-grained phonetic and prosodic patterns, such as broken phonation, repetitions, and elongated sounds, which are key indicators of dysfluent speech. Since it is pre-trained on large speech corpora, the model already understands general speech features, which makes it easier to adapt to stutter detection with limited labeled data. Its ability to extract multi-level, contextual features makes it a powerful foundation for detecting stutter events with high precision.

**Detection and Localization Pipelines:** To achieve higher accuracy, the proposed system uses a hybrid detection framework that combines classification and localization. After preprocessing, the audio runs through three parallel pipelines: classification, transcription, and localization. The classification pipeline extracts speech representations with Wav2Vec 2.0 and passes them through five independent binary classifiers, each trained for a distinct dysfluency type. The localization pipeline identifies dysfluency regions at the frame level using Wav2Vec2 frame-level feature extraction, so it can mark the precise segments of speech where dysfluencies occur. By integrating both approaches, the system captures fine acoustic details and broader prosodic structures in the speech signal, ensuring robust results even when recordings vary in noise, clarity, or speaking style.

**Classification:** Once the feature extraction is complete, the Wav2Vec 2.0 representations are passed to the classification stage. Here, five independent binary classifiers assign the presence probability of each dysfluency type, using decision boundaries learned during training to separate fluent and dysfluent speech. Sigmoid outputs generate per-class probabilities, while binary cross-entropy loss ensures efficient optimization during training. Their outputs are aggregated into a multi-label result that reports the presence probability of each dysfluency type and summarizes the detected classes and the primary dysfluency. A multitask shared-backbone variant was also trained for comparison, and its outputs are combined with localization at prediction time: the combiner labels each localized region with per-class saliency scores and fuses the two views into a single annotated result. This stage translates complex audio data into clear diagnostic outcomes that can assist speech-language pathologists in identifying stutter events.

**Transcription and Alignment:** The transcription pipeline uses the Whisper Automatic Speech Recognition (ASR) model to produce a timestamped transcript, with support for English, Kannada, and Hindi. A Connectionist Temporal Classification (CTC) based time alignment step ties the pipelines together, mapping the detected dysfluency regions to spe-

cific words or syllables in the transcript. Language-specific adapters keep the alignment accurate for English, Kannada, and Hindi.

**Output:** In the final stage, the system presents its predictions through a user-friendly interface. The output typically shows the detected dysfluency types along with confidence scores that indicate how certain the model is about each decision, and a summary of the primary dysfluency. To make the results more interpretable, the outputs surface as waveform overlays, spectrogram visualizations, timestamped transcripts, and a detailed clinical-style report. The outputs are designed to be simple, clear, and clinically relevant, making them suitable for practical use in clinical or self-assessment settings. By providing accurate and interpretable results, the system supports early assessment and can play a valuable role in improving outcomes for people who stutter.

Both the web and desktop applications load trained models through the centralized model registry. The registry reads from a registry module (the `model/registry` package) and a configuration file (`registry.json`), so checkpoints can be updated or replaced without changing application code, which keeps the system flexible and easy to maintain.

### 3.3 FLOWCHART

The data flow design follows the audio from input acquisition to final output.

The process begins with the input audio, recorded or uploaded by the user. The audio is converted to 16 kHz mono WAV with FFmpeg, then padded or truncated to 48,000 samples, three seconds at 16 kHz, so all inputs have the same length.

After normalization, the audio runs through three parallel pipelines: classification, transcription, and localization. Classification produces dysfluency probabilities, transcription a timestamped transcript, and localization frame-level dysfluency regions.

A CTC-based alignment step combines these outputs and maps the detected dysfluencies to specific words or syllables. The final data is turned into per-word annotations, shown in waveform and spectrogram displays, and written into the analysis report.

The system also defines a structured data flow for training. Training uses three datasets: Project Boli (sourced via Git repositories), SEP-28K (approximately 28,000 audio clips), and UCLASS (both obtained via Kaggle). Each dataset goes through its own normalization functions.

The processed datasets merge into a unified format: a combined\_labels.csv file with multi-label binary annotations, plus individual interval CSV files for each audio clip. The merged dataset is split into training, validation, and testing subsets with an 80:10:10 split, with the training subset further re-split 80/20 during model training. The subsets are organized with symbolic links for efficient access, and preprocessed audio files are cached to speed up training.

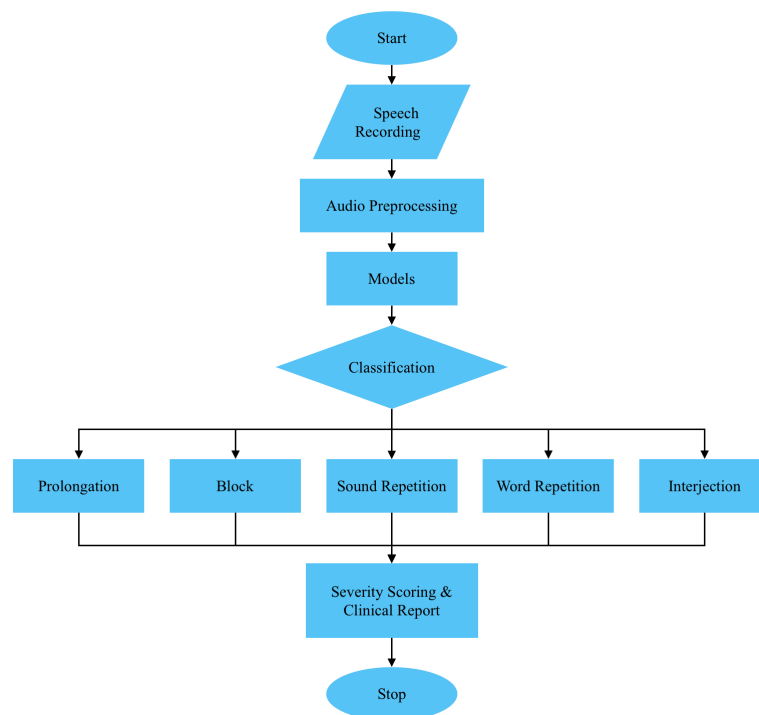


Figure 3.2: Flowchart

The flowchart shown in Figure 3.2 illustrates the workflow for stutter detection using the proposed hybrid deep learning approach. The process begins with the collection of speech audio recordings, followed by preprocessing steps such as conversion to 16 kHz mono WAV, DC offset removal, peak normalization, silence trimming, and fixed-length padding to improve signal quality and variability. The refined audio is then split into training, validation, and testing datasets with an 80:10:10 split. Initially, the Wav2Vec 2.0

model is used to extract high-level contextual speech features. To enhance performance, a hybrid model combining five independent Wav2Vec 2.0 binary classifiers with a Wav2Vec2 frame-level localizer is developed, where the classifiers capture dysfluency-specific acoustic patterns and the localizer identifies fine-grained temporal segments. The outputs from both pipelines are fused through CTC-based alignment and passed through a final aggregation layer that categorizes the audio samples as containing blocks, prolongations, sound repetitions, word repetitions, or interjections, along with the precise localized regions. This flowchart provides a clear overview of the systematic steps involved in the proposed framework for stutter detection.

### 3.4 USE CASE DIAGRAM AND DESCRIPTIONS

The use case diagram shows how the user interacts with the system. The primary actor is the **User**, either a clinician or an individual using the application for self-assessment.

The main workflow covers recording audio, uploading pre-recorded audio, and running speech analysis in either full mode or classification-only mode. After analysis, users can view waveform visualizations, spectrograms, transcripts, and stutter detection results.

Users can also localize dysfluencies within the speech, generate analysis or clinical reports, and revisit previously recorded sessions through a history feature. Supporting actions include toggling between interface themes and accessing standardized reading passages for consistent evaluation.

The typical flow is: record or upload audio, initiate analysis, review the visualizations and results, and generate or save the report.

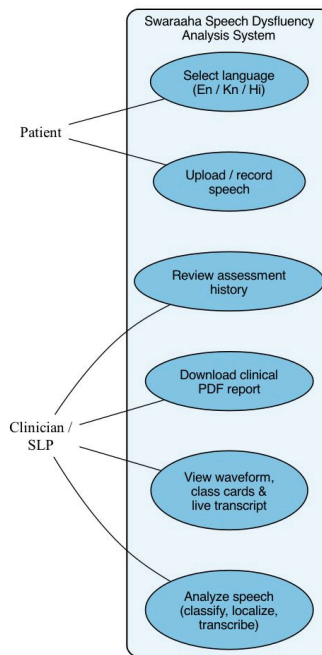


Figure 3.3: Use Case Diagram

The use case diagram shown in Figure 3.3 illustrates the interactions between the user and the stutter detection system. The user can register or log in, then either record audio through the microphone or upload a pre-recorded speech file, which is analyzed through the full or classification-only pipeline. The system displays the classification results with confidence scores, localized dysfluency regions, and a timestamped transcript, and allows the user to generate and download analysis or clinical reports. Additional use cases include viewing the session history, switching between light and dark themes, and accessing standardized reading passages for consistent assessment. This diagram provides a clear overview of the functional interactions supported by the proposed framework.

### 3.5 WORKFLOW DIAGRAM

A workflow diagram is a structured visual representation of a sequence of operations or tasks carried out to complete a specific process, typically used to analyse, design, or manage complex systems. It employs standardized symbols such as rectangles to denote actions, diamonds for decision points, and arrows to indicate the direction of flow, thereby offering clarity and insight into the procedural steps involved. In the context of deep

learning and stutter detection, the workflow diagram illustrated here systematically maps out the process for developing a stutter classification and localization system.

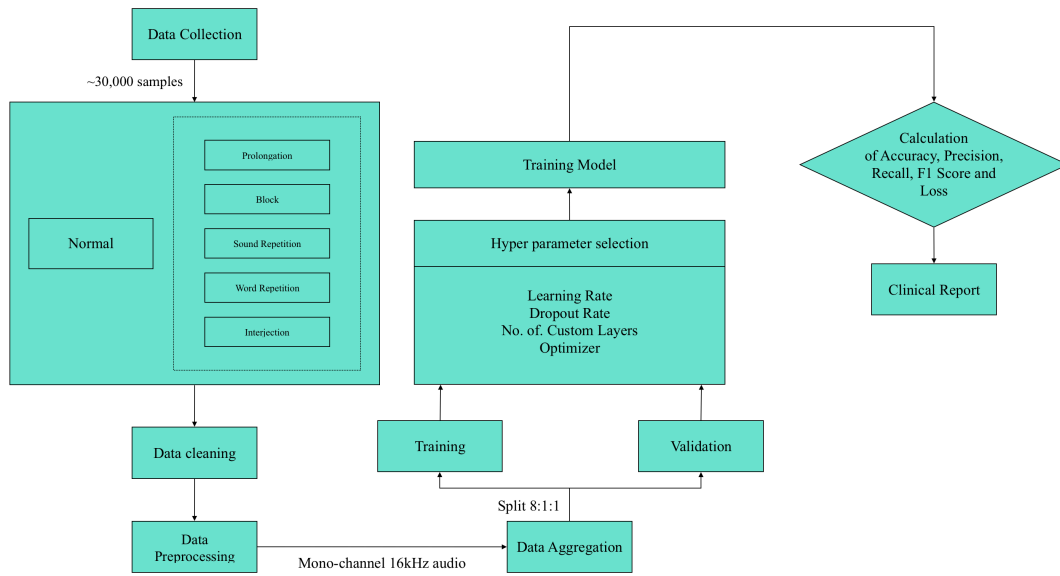


Figure 3.4: Workflow Diagram

The workflow diagram illustrates the workflow of the proposed deep learning pipeline for stutter detection and localization. The process begins with the collection of speech audio samples from three public stuttering datasets, Project Boli, SEP-28K, and UCLASS, all converted to 16 kHz mono and standardized through DC offset removal, peak normalization, silence trimming, and fixed-length padding. Data augmentation techniques such as random noise injection, time stretching, pitch shifting, temporal shifting, and amplitude scaling are applied to the waveforms, along with time and frequency masking on the spectrograms, expanding the effective dataset so the models generalize well across varied speaking patterns. The processed audio is then split into training, validation, and testing sets using an 80:10:10 ratio, with the training subset further re-split 80/20 during training. Model development begins with fine-tuning a pre-trained Wav2Vec 2.0 backbone, followed by a hybrid architecture that combines five independent Wav2Vec 2.0 binary classifiers with a Wav2Vec2 frame-level localizer to capture both global dysfluency patterns and fine-grained temporal segments. Hyperparameters including learning rate, backbone freeze duration, optimizer, and the number of trainable layers are tuned to enhance performance, and the trained network is periodically validated to ensure stable

learning and prevent overfitting. Finally, evaluation metrics such as precision, recall, F1-score, AUROC, and mean IoU are computed, and the best-performing model is selected for reliable automated assessment of speech dysfluencies.

### 3.6 SEQUENCE DIAGRAM

The sequence diagram shows how the components interact during execution. The user works through the graphical user interface (GUI), which sends a request to the backend API endpoint (/api/analyze).

The backend runs the request through a chain of services: preprocessing, classification, transcription, localization, and alignment. Each service does its part and passes its output to the next stage. When processing completes, the results go back to the frontend, where the user sees them. The system also stores the results for report generation and history management.

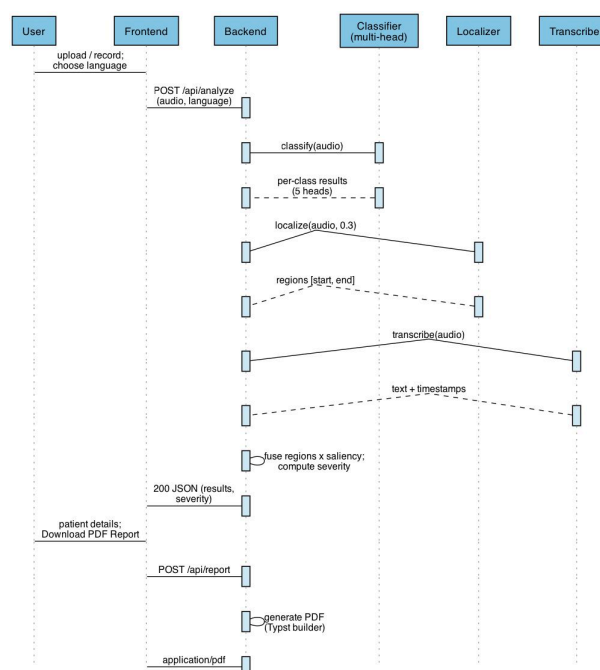


Figure 3.5: Sequence Diagram

The sequence diagram shown in Figure 3.5 illustrates the interaction flow between the user, the frontend, the backend services, and the stored results during a speech analysis session. The user initiates the analysis through the graphical user interface, which sends a request to the backend API endpoint. The backend sequentially invokes the preprocessing,

classification, transcription, localization, and alignment services, each consuming the output of the previous stage. Once the processing completes, the fused results are returned to the frontend for display and saved in the local storage for reports and the session history. This diagram provides a clear overview of the message exchange that drives the proposed framework.

## CHAPTER 4

# SYSTEM IMPLEMENTATION

### 4.1 INTRODUCTION

The system implementation process is a multifaceted endeavor focused on developing a robust software architecture capable of effectively managing diverse user interactions, data processing tasks, and model inference operations. By employing meticulous design and coding practices, the implementation ensures that the application is scalable, reliable, and secure, capable of handling varying workloads and protecting sensitive data. Iterative testing and debugging procedures are integral components of the implementation process, allowing for the identification and resolution of any issues or bugs that may arise. This iterative approach ensures that the application delivers a seamless user experience, free from disruptions or errors. Additionally, post-deployment monitoring and maintenance mechanisms are established to continually assess system performance and address evolving requirements. This ongoing maintenance ensures that the system remains optimized and responsive to user needs, even as conditions change over time, thereby facilitating long-term success and user satisfaction.

### 4.2 ALGORITHM

The inference process follows a fixed sequence of steps that turns raw speech input into a complete, annotated analysis result.

- Step 1, Input Acquisition: the system acquires speech input either through real-time recording or by uploading an audio file.
- Step 2, Audio Conversion: the input audio is converted into a 16 kHz mono WAV format using FFmpeg to maintain consistency across all inputs.
- Step 3, Preprocessing: the audio is cleaned by removing the DC offset, applying peak normalization to a target amplitude, and trimming silent segments.

- Step 4, Length Normalization: the processed audio is adjusted to a fixed length of 48,000 samples (three seconds at 16 kHz) by padding or truncating as required.
- Step 5, Parallel Processing: the system processes the audio simultaneously through three independent branches:
  1. Classification: Wav2Vec 2.0 embeddings are generated and passed through five binary classifiers, one per dysfluency type, and the outputs are aggregated into a multi-label result with a probability score for each dysfluency type.
  2. Transcription: the Whisper model generates a timestamped transcript of the speech in English, Kannada, or Hindi.
  3. Localization: the Wav2Vec2 frame-level localizer identifies the frame-level regions within the audio where dysfluencies occur.
- Step 6, Alignment: the detected dysfluency regions are mapped to the corresponding words or syllables in the transcript using CTC-based time alignment.
- Step 7, Combination and Severity: the combiner labels each localized region with per-class saliency scores from the classifier and fuses the classification and localization views, and the severity module computes a stutter index from the ratio of dysfluent speech duration to total speech duration.
- Step 8, Visualization and Report Generation: the system displays the results through waveform overlays, spectrograms, transcripts, and confidence scores, and generates a detailed clinical-style report.

### 4.3 IMPLEMENTATION REQUIREMENTS

This section presents the implementation requirements for the detection and localization of stuttering using a hybrid deep learning model that integrates Wav2Vec 2.0 feature extraction, five independent Wav2Vec 2.0 binary classifiers, a Wav2Vec2 frame-level localizer, and Whisper automatic speech recognition. The primary objective is to develop a robust and efficient system capable of accurately identifying speech dysfluencies and localizing them within the audio. The hybrid model leverages the strengths of both archi-

tructures: Wav2Vec 2.0 contributes self-supervised, contextual speech representations that facilitate efficient feature reuse and capture fine-grained phonetic and prosodic patterns, while Whisper introduces sequence-level transcription that enhances the model's ability to map localized dysfluency regions to specific words and syllables in the transcript. Together, these architectures form a powerful hybrid framework that improves classification performance and generalization ability. The implementation is carried out using the Python ecosystem, which provides an interactive environment for model development, experimentation, and analysis. Python serves as the primary programming language for backend development due to its versatility and support for a wide range of scientific and deep learning libraries such as PyTorch, the Hugging Face Transformers library, and NumPy, which aid in model construction, training, and evaluation. For the frontend, React 19 and PySide6 are utilized to design a user-friendly web interface and desktop application that allow users to record or upload speech audio and view classification and localization results. All trained models are managed by a centralized model registry configured through a `registry.json` file that maps each task to its checkpoint and per-class thresholds, so checkpoints can be updated or replaced without changing application code. The Python ecosystem also facilitates matrix manipulation, data visualization, algorithm implementation, and seamless integration with other programming environments, making it an ideal platform for developing and testing the hybrid model for stuttering classification and localization.

### 4.3.1 Train the Model

The training phase is a key step in developing the proposed system for stutter classification and localization. In this phase, the speech audio dataset is first collected from Project Boli, SEP-28K, and UCLASS, and preprocessed through conversion to 16 kHz mono WAV, DC offset removal, peak normalization, silence trimming, and fixed-length padding, along with data augmentation, to enhance audio quality and reduce overfitting. Initially, the Wav2Vec 2.0 model is trained to extract high-level contextual speech features from the audio, benefiting from its self-supervised pretraining that allows efficient information

flow and robust representation learning. To further improve classification accuracy, a hybrid model is developed by combining five independent Wav2Vec 2.0 binary classifiers with a Wav2Vec2 frame-level localizer. The Wav2Vec2 localizer captures fine-grained and localized temporal features at the frame level, complementing the broader segment-level feature extraction of the classifiers. The outputs from both models are then fused through CTC-based time alignment to form a comprehensive feature representation. During training, the AdamW optimizer is used to adjust learning rates adaptively and ensure stable convergence. The model is trained using mini-batches of audio, with weights updated through backpropagation based on the computed loss. Validation is performed periodically to monitor accuracy and prevent overfitting. After training, the optimized parameters and learned weights are saved, enabling the models to make efficient and accurate predictions on new speech audio without retraining.

### 4.3.2 Test the Model

The testing phase is carried out after completing the training process to evaluate how effectively the proposed model can detect stutter events from unseen speech audio. When the user records or uploads a speech sample through the system's web interface or desktop application, it undergoes the same preprocessing steps used during training, including conversion to 16 kHz mono WAV, DC offset removal, peak normalization, silence trimming, and fixed-length padding, to ensure uniformity and accurate analysis. Initially, the trained Wav2Vec 2.0 model processes the audio to extract high-level contextual speech features. To further enhance accuracy, the audio is also analyzed using the hybrid model that combines five independent Wav2Vec 2.0 binary classifiers with a Wav2Vec2 frame-level localizer, allowing the system to capture both segment-level dysfluency patterns and fine-grained temporal details. The extracted features from both models are fused through CTC-based time alignment to form a comprehensive representation, which is then passed through the final aggregation layer to generate the classification result as containing blocks, prolongations, sound repetitions, word repetitions, or interjections, along with the precise localized regions. The outcome is displayed on the interface in a clear and user-

friendly format, with waveform overlays, spectrograms, a timestamped transcript, and confidence scores. Additionally, the model's predictions are compared with the actual ground truth labels to assess its accuracy and generalization performance. This phase confirms that the hybrid model performs effectively on new and unseen speech samples, demonstrating its potential for reliable stutter classification and localization in real-world clinical use.

### 4.3.3 Model Evaluation

Model evaluation is essential to assess the overall performance and reliability of the proposed system. Once the models are trained and tested, various quantitative metrics are employed to evaluate their classification performance comprehensively, including:

- Accuracy: measures the proportion of correctly predicted samples.
- Precision: evaluates how many of the predicted positive instances are truly positive.
- Recall (Sensitivity): measures how effectively the model identifies all relevant positive samples.
- F1-Score: provides a harmonic mean of precision and recall to balance both metrics.

The five Wav2Vec 2.0 binary classifiers, one per dysfluency type, are further measured with AUROC (Area Under the Receiver Operating Characteristic Curve), AUPRC (Area Under the Precision-Recall Curve), and specificity, summarized per class and as a macro average across the five dysfluency classes. The Wav2Vec2 frame-level localizer is measured with frame-level precision, recall, and F1, detection accuracy, mean Intersection over Union (IoU) between predicted and ground-truth regions, and the false alarm rate per minute.

A confusion matrix is generated for each of the five binary classifiers to visualize the distribution of predictions, highlighting true positives, false positives, true negatives, and false negatives. This detailed evaluation helps identify the strengths and weaknesses of

each class, for example that interjections are detected most reliably while blocks are the hardest class.

All reported results use the held-out test set of 3,715 clips, which is never touched during training or threshold selection, together with a cross-corpus Boli set that checks how well the models transfer to unseen languages and speakers.

## 4.4 USER INTERFACE

The web-based interface connects the user to the proposed stutter detection and localization system. Users record speech or upload audio files for analysis. Once audio is provided, the backend system carries out the preprocessing steps, followed by feature extraction, classification, transcription, and localization using the trained models. Initially, the Wav2Vec 2.0 model is used to extract high-level contextual speech features, and to achieve higher accuracy, the hybrid pipeline combining five independent Wav2Vec 2.0 binary classifiers with the Wav2Vec2 frame-level localizer is employed. Within a few seconds, the system presents the predicted result on the screen for each of the five dysfluency types, along with confidence scores, the localized regions, and the timestamped transcript. The tool is designed for clinicians, speech-language pathologists, researchers, and individuals who stutter.

The system provides two interfaces to the same analysis pipeline: a web application and a desktop application. The web frontend is built with React 19, TypeScript, and Tailwind CSS, with a sidebar layout covering the input page, results page, history, and reading passages. The input page supports audio file upload (WAV, MP3, FLAC, M4A, OGG, WMA) and direct microphone recording through the MediaRecorder API, with client-side validation before the file is sent to the backend as multipart form data. The results page shows classification results with confidence scores, an interactive waveform with color-coded dysfluency region overlays, a timestamped transcript, and a button to generate and download a PDF report. The backend runs on FastAPI served through Uvicorn, exposing the `/api/classify`, `/api/localize`, `/api/analyze`, and `/api/report` endpoints. Assess-

ment history stays in the browser: audio files go into IndexedDB for offline access and analysis metadata into localStorage.

The desktop application is built with PySide6 (Qt for Python) for a native cross-platform interface. It includes modules for audio recording and playback (sounddevice), file handling (soundfile), and model inference, calling the shared model package directly with no separate server, so it works fully offline. PDF report generation uses Typst with pypdfium2 for viewing.

Screenshots of both interfaces are shown in Chapter 6.

## CHAPTER 5

### SYSTEM TESTING

#### 5.1 INTRODUCTION

Testing is a crucial phase in the development of the proposed system for stutter detection and localization, ensuring the overall accuracy, stability, and reliability of both the individual models and the hybrid pipeline. Roughly one percent of people worldwide are affected by stuttering, and diagnosis today still relies mostly on manual assessment by speech-language pathologists, which is subjective, time-consuming, and not available to everyone, making early and reliable detection essential. In this research, Wav2Vec 2.0-based models were initially utilized to classify speech dysfluencies from audio. To further enhance diagnostic precision, a hybrid framework was developed by combining five independent Wav2Vec 2.0 binary classifiers with the Wav2Vec2 frame-level localizer and Whisper automatic speech recognition, enabling classification, localization, and transcription in a single pipeline. The testing process involved validating every stage of the pipeline, including data preprocessing, model training, classification, localization, and web-based visualization, through unit, integration, functional, and system tests. Comprehensive testing confirmed that the proposed system satisfies all functional and non-functional requirements while maintaining reliable classification and localization. Performance evaluation using precision, recall, F1-score, AUROC, AUPRC, specificity, and confusion matrix analysis, along with evaluation on the held-out test set and a cross-corpus set, demonstrated the robustness and generalization ability of the models. The results are broken down by model family and dysfluency class, and the two model families, the Wav2Vec2-based models and the CNN-based models, are compared against each other and analyzed for their strengths and weaknesses.

## 5.2 TYPES OF TESTS

Four types of tests were performed: unit testing, integration testing, functional testing, and system testing. Together they verify the correctness of individual components, the interfaces between them, the complete feature set, and the behavior of the finished system.

### 5.2.1 Unit Testing

Unit testing isolates the smallest blocks of code, specific functions and classes, to verify they work as expected. The project uses pytest suites organised under `model/tests`, `backend/tests`, `app/tests`, and `shared/tests`.

Unit tests verify the preprocessing steps (sample-rate conversion, DC offset removal, peak normalization, silence trimming, and fixed-length padding), dataset normalization and the merged `combined_labels.csv` format, model registry checkpoint loading, the combiner and CTC alignment logic, and the computation of the evaluation metrics. On the desktop side, individual widgets such as the waveform view, results panel, and audio handler are tested in isolation. Ruff enforces consistent code style across the codebase.

### 5.2.2 Integration Testing

Integration testing ensures that software modules, when connected, work together seamlessly. The backend tests exercise the FastAPI endpoints (`/api/analyze`, `/api/classify`, `/api/localize`, and `/api/report`), which chain preprocessing, classification, transcription, localization, and fusion into a single analysis response. The classification, fusion, localizer, severity, and report generator services are tested as combined units, and the model registry is checked against the classifier and localization pipelines. The desktop application calls the shared model package directly, and its model runner is integration-tested against the same service layer.

### 5.2.3 Functional Testing

Functional testing validates the complete set of features against the specifications under typical and edge cases. The workflow of recording or uploading audio, running the analysis, and viewing the results page with classification scores, waveform overlays, and the timestamped transcript is exercised end to end. Report generation and download, severity

mapping, multilingual transcription for English, Kannada, and Hindi, and history storage through IndexedDB and localStorage are all verified against the requirements defined in Chapter 2.

### 5.2.4 System Testing

System testing subjects the whole software product to end-to-end scenarios in conditions that resemble the user environment. The React web application was exercised in supported browsers and the PySide6 desktop application in a standalone offline setup with no separate server, both against the same machine learning backend. Supported audio formats (WAV, MP3, OGG, and M4A) were validated across the upload, drag-and-drop, and microphone capture paths, corrupted files were rejected with clear error messages, and analysis turnaround was confirmed to stay within a few seconds per clip as required by the performance requirements in Chapter 2. The combined system-level suite confirmed that the application meets its functional and non-functional requirements.

## 5.3 RESULT AND DISCUSSION

This section presents the evaluation of the trained models: how the Wav2Vec2-based and CNN-based model families were trained and evaluated, the hyper parameter tuning applied, and a comparative performance analysis of all architectures.

### 5.3.1 Model Evaluation of the Wav2Vec2 Classifiers

The model registry defines two Wav2Vec2-based classification configurations: the default single configuration of five independent Wav2Vec2 binary classifiers, and a multitask variant that shares a single backbone and five classification heads. This section first analyzes the multitask variant in detail and then reports the shipped single configuration; the confusion matrices at the end of the section come from the shipped single configuration. The multitask variant uses a single Wav2Vec2-base backbone with five shared binary heads. Training used Focal Loss ( $\gamma=2.0$ ), backbone freezing for 3 epochs, AdamW ( $LR\ 3 \times 10^{-5}$ ), a 500-step warm-up, and early stopping with a patience of 5. Results on 3,715 held-out test samples at the default threshold of 0.5 are in Table 5.1.

Table 5.1: Multitask Wav2Vec2 classifier results

| Class                      | Precision | Recall | F1           | AUROC | AUPRC | Support      |
|----------------------------|-----------|--------|--------------|-------|-------|--------------|
| Prolongation               | 0.566     | 0.440  | 0.495        | 0.845 | 0.491 | 400          |
| Block                      | 0.584     | 0.264  | 0.364        | 0.768 | 0.444 | 553          |
| Sound Repe-<br>tition      | 0.705     | 0.502  | 0.586        | 0.878 | 0.624 | 494          |
| Word Repe-<br>tition       | 0.621     | 0.399  | 0.486        | 0.855 | 0.550 | 366          |
| Interjection               | 0.810     | 0.746  | 0.776        | 0.935 | 0.848 | 834          |
| <b>Macro Av-<br/>erage</b> | —         | —      | <b>0.542</b> | —     | —     | <b>3,715</b> |

The per-class support counts cover positive samples; the macro row reports the total of 3,715 test clips because a clip may contain several stutter types at once.

The macro F1 at the default threshold is 0.542. Interjection performs best (F1=0.776, AUROC=0.935), which makes sense because filler words like “um” and “uh” have distinct acoustic patterns. Block is the hardest class (F1=0.364); silent pauses and hesitations are hard to distinguish from normal speech pauses.

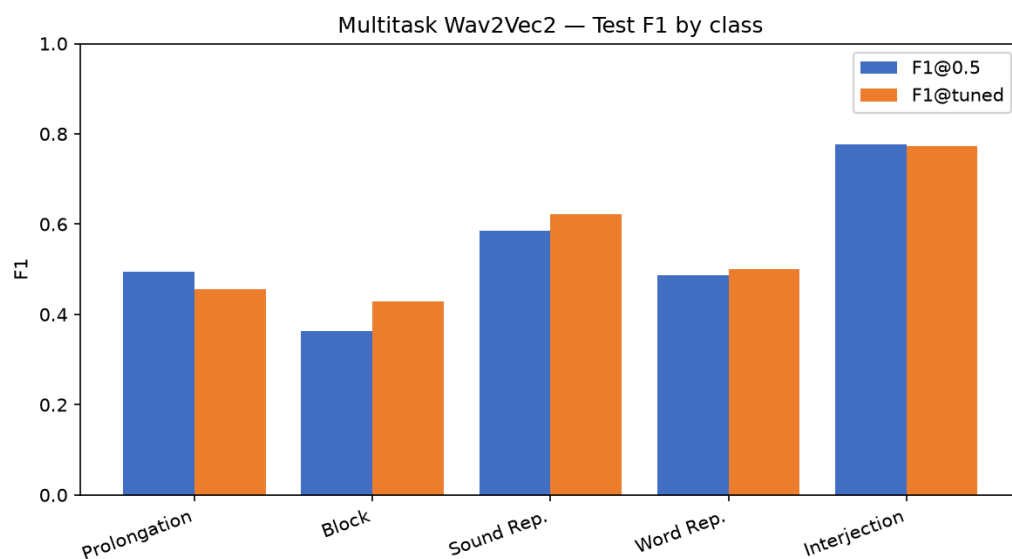


Figure 5.1: Per-class F1 of the multitask Wav2Vec2 classifier

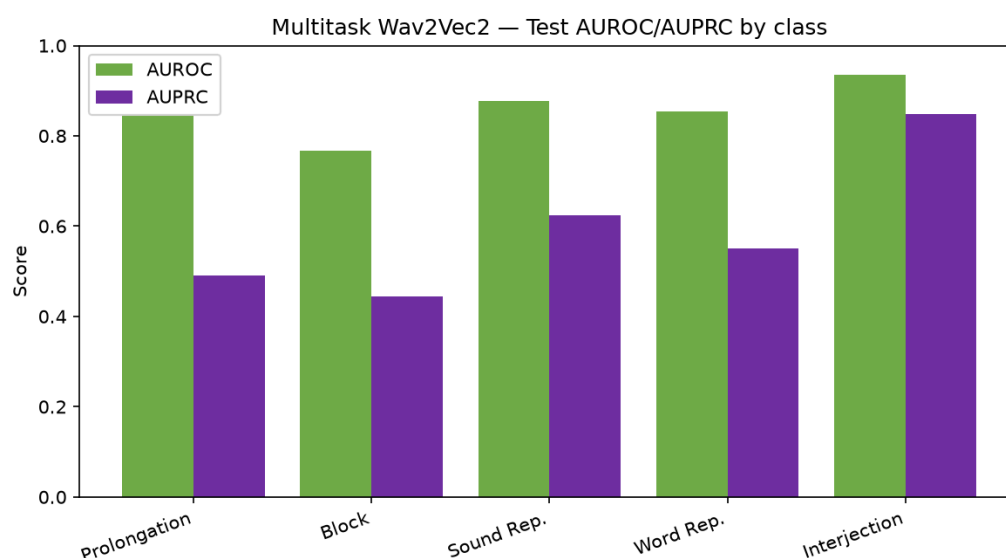


Figure 5.2: Per-class AUROC and AUPRC of the multitask Wav2Vec2 classifier

The shipped single configuration of five independent binary classifiers scores slightly higher in distribution, with a test F1 of 0.573 at threshold 0.5 (0.570 with tuned thresholds).

The confusion matrices below visualize the distribution of predictions of the shipped single configuration of five independent binary classifiers.

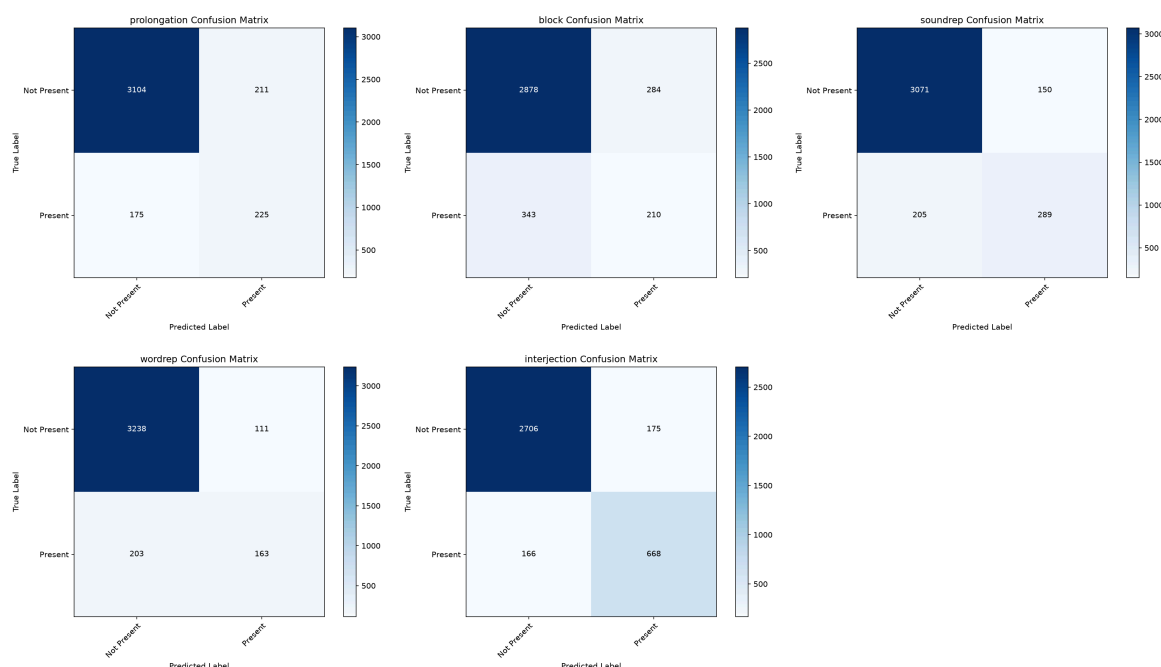


Figure 5.3: Confusion matrices for the five binary classifiers

The Wav2Vec2-based model family also provides the frame-level localizer, evaluated on the same 3,715 test samples at a threshold of 0.5; the shipped registry inference threshold for this localizer is 0.3. Results are in Table 5.2.

Table 5.2: Wav2Vec2 localizer evaluation results

| Metric            | Value | Metric             | Value |
|-------------------|-------|--------------------|-------|
| Frame Precision   | 0.805 | Detection Accuracy | 0.586 |
| Frame Recall      | 0.738 | Mean IoU           | 0.779 |
| Frame F1          | 0.770 | False Alarms/min   | 4.28  |
| Frame Specificity | 0.847 | Predicted Events   | 1,846 |

The localizer detects most dysfluency events with good accuracy: frame precision is 0.805 and recall is 0.738, so most true events are found and most predictions are correct. The mean IoU of 0.779 means the regions it finds overlap well with ground truth. Of 995 true events it predicted 1,846, of which 1,263 were false alarms (4.28 per minute).

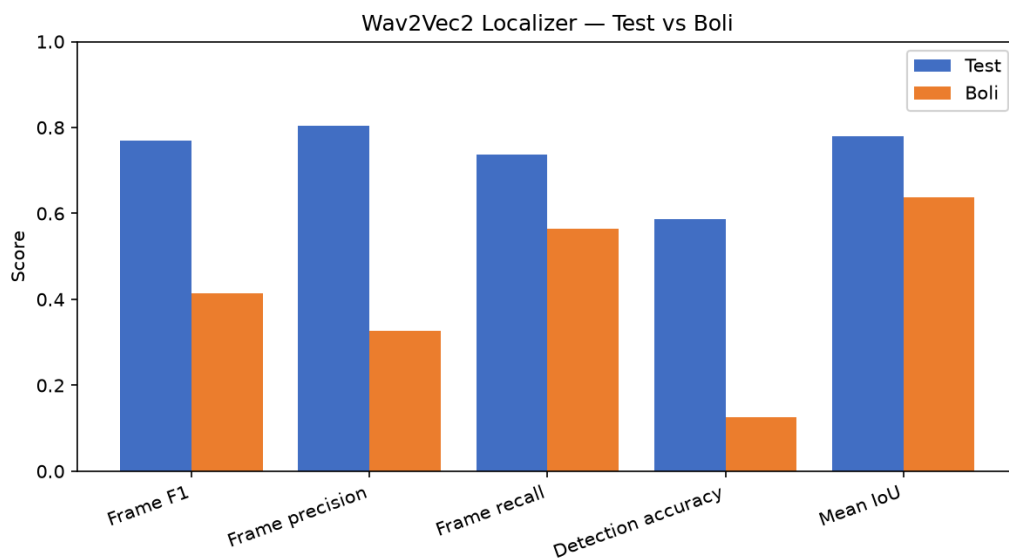


Figure 5.4: Frame-level metrics of the Wav2Vec2 localizer

### 5.3.2 Wav2Vec2 Classifier Training

The training phase prepares the models that the system relies on for classification and localization.

The system is trained and evaluated on three publicly available stuttering datasets: Project Boli, SEP-28K, and UCLASS. Project Boli is a multilingual Indian language dataset

with stuttering data across Hindi, Kannada, Telugu, and other Indian languages, sourced from GitHub, and includes both read and spontaneous speech. SEP-28K provides roughly 28,000 audio clips from stuttering support group podcasts, annotated for blocks, prolongations, sound repetitions, word repetitions, and interjections, and was obtained from Kaggle. UCLASS is an additional stuttering speech dataset from Kaggle that provides supplementary annotated clips. Each dataset is normalized into a unified format with a `combined_labels.csv` file of multi-label binary annotations and interval files per clip. The merged dataset is split 80:10:10 into training, validation, and testing subsets, and during training the training subset is re-split 80/20 by a stratified split into a fine-tuning set and a validation set used for early stopping and threshold selection.

Each classifier is trained in a two-stage scheme. The backbone stays frozen for the first three epochs so the classification head can stabilize, then it is unfrozen with a learning rate scaled to 0.1 of the head learning rate. Focal Loss with a gamma value of 2 handles the class imbalance, and the AdamW optimizer runs at a learning rate of  $3 \times 10^{-5}$  with a weight decay of 0.01 and a 500-step warm-up. Early stopping with a patience of 5 epochs prevents overfitting, and the checkpoint with the highest macro F1-score on the validation set is saved as the final model. During training, data augmentation applies waveform-level transforms (random noise injection, time stretching, pitch shifting, temporal shifting, and amplitude scaling) and spectrogram-level transforms (time and frequency masking). Checkpoints are stored under names that encode their training hyperparameters through a fingerprint convention, with checkpoint-based resume, an audio preprocessing cache for fast re-runs, `torch.compile` for roughly twice the training speed on CUDA, and gradient accumulation for effective batch size scaling.

Several problems encountered during training were resolved. BCEWithLogitsLoss with a single logit per class created a zero-gradient equilibrium where the model collapsed to always predicting the majority class; switching to CrossEntropyLoss with two logits (present and not present) fixed this. Gradient clipping in the classifier loop silently killed

learning by scaling the classifier head gradients down, so it was removed from the classification loop while the localizer loops retained it. Mixed-precision training with a GradScaler produced NaN gradients; using `torch.autocast` alone worked. Freezing the backbone for 3 epochs let the classifier head stabilize before fine-tuning, and longer freeze durations hurt performance.

### 5.3.3 Model Evaluation of the CNN-based Models

The CNN-based models form the second model family, built to run classifications with far fewer parameters and to compare generalization against the pre-trained Wav2Vec2 baseline.

Four CNN-based multitask classification architectures were evaluated: CNN Pool, CNN Single, CNN-LSTM, and CNN-Transformer, ranging from 0.27M to 0.54M parameters. On the held-out test set they score markedly lower than the Wav2Vec2 classifiers, with tuned F1 values between 0.249 and 0.271. On the cross-corpus Boli set, however, the ranking flips: CNN Single reaches 0.476 and CNN-LSTM 0.508, the best cross-corpus result of all seven architectures, suggesting that the lighter models generalize better to unseen speakers and languages.

The CNN spectrogram localizer was evaluated on the same 3,715 test samples at a threshold of 0.5. It is far more permissive than the Wav2Vec2 localizer: frame recall is high (0.873) but precision is much lower (0.527), and it predicted 4,483 events against 995 true events, with 4,329 false alarms (23.49 per minute). Its detection accuracy (0.155) and specificity (0.330) are correspondingly low. The heavier Wav2Vec2 localizer is therefore shipped as the default; the registry inference threshold is 0.3 for both localizers.

### 5.3.4 CNN-based Model Training

The CNN-based models are trained on the same unified dataset and with the same two-stage scheme used for the Wav2Vec2 classifiers, but they consume mel-spectrograms instead of raw audio embeddings. CNN Pool applies global pooling over the convolutional feature maps, CNN Single processes a single spectrogram path, CNN-LSTM adds a recurrent layer to capture temporal context, and CNN-Transformer uses a transformer

encoder over the spectrogram features. Spectrogram-level augmentation, namely time and frequency masking, is applied during training alongside the waveform-level transforms. Because these networks have only 0.27M to 0.54M parameters compared with roughly 94M to 97M for the Wav2Vec2 family, they train quickly and were used to study the trade-off between parameter count and cross-corpus generalization.

### 5.3.5 Hyper Parameter Tuning

A threshold sweep on the validation set tested thresholds from 0.1 to 0.9 in steps of 0.05 for each class. The threshold that maximized F1 for each class was stored in the model registry under the multitask configuration. The results are in Table 5.3.

Table 5.3: Threshold optimization results

| Class                | Default (0.5)<br>F1 | Optimal<br>Threshold | Tuned F1     | Improvement  |
|----------------------|---------------------|----------------------|--------------|--------------|
| Prolongation         | 0.495               | 0.55                 | 0.457        | −7.8%        |
| Block                | 0.364               | 0.35                 | 0.429        | +17.8%       |
| Sound Repetition     | 0.586               | 0.40                 | 0.621        | +6.0%        |
| Word Repetition      | 0.486               | 0.35                 | 0.499        | +2.8%        |
| Interjection         | 0.776               | 0.45                 | 0.773        | −0.5%        |
| <b>Macro Average</b> | <b>0.542</b>        | —                    | <b>0.556</b> | <b>+2.6%</b> |

Threshold tuning raised the macro F1 from 0.542 to 0.556. Block improved the most (0.364 to 0.429) because the default threshold of 0.5 is too high for a class with strong imbalance. For prolongation and interjection the tuned threshold lowers F1 slightly on the test set, but per-class tuning on the validation set still yields a net gain of +2.6% overall.

Additional hyper parameters were tuned during development. The backbone freeze duration was compared at 3 and 20 epochs; freezing for 3 epochs (MT frz3) clearly beats 20 epochs (MT frz20) on the test set, showing that early unfreezing matters for fine-tuning. The learning rate scaling factor of 0.1 between the head and the unfrozen backbone, a 500-step warm-up, a weight decay of 0.01, and gradient accumulation for effective batch size scaling together gave the most stable training runs.

### 5.3.6 Performance Analysis of the Models

Seven architectures were compared in total, ranging from the shipped five independent Wav2Vec2 classifiers to various CNN-based multitask models. Test set and cross-corpus Boli results are in Table 5.4.

Table 5.4: Comparative study of seven architecture variants

| Architecture        | Type       | Parameters | Test F1 (0.5) | Test F1 (Tuned) | Boli F1 (Tuned) |
|---------------------|------------|------------|---------------|-----------------|-----------------|
| 5x Wav2Vec2         | Classifier | 94.6M      | 0.573         | 0.570           | 0.292           |
| MT Wav2Vec2 (frz3)  | Multitask  | 97.3M      | 0.542         | 0.556           | 0.238           |
| MT Wav2Vec2 (frz20) | Multitask  | 97.3M      | 0.141         | 0.378           | 0.214           |
| CNN Pool            | Multitask  | 0.34M      | 0.149         | 0.256           | 0.332           |
| CNN Single          | Multitask  | 0.27M      | 0.212         | 0.262           | 0.476           |
| CNN-LSTM            | Multitask  | 0.46M      | 0.242         | 0.249           | 0.508           |
| CNN-Transformer     | Multitask  | 0.54M      | 0.269         | 0.271           | 0.345           |

The shipped five-classifier Wav2Vec2 configuration scores highest in distribution (tuned F1 0.570), narrowly ahead of the multitask variant (0.556); both benefit from large pre-trained speech representations. The CNN models have far fewer parameters but score lower on the test set. On the Boli cross-corpus set the ranking flips: CNN-LSTM reaches 0.508, the best cross-corpus result, followed by CNN Single (0.476). Lighter models seem to generalize better to unseen speakers and languages, while heavy pre-trained models do better on familiar data.

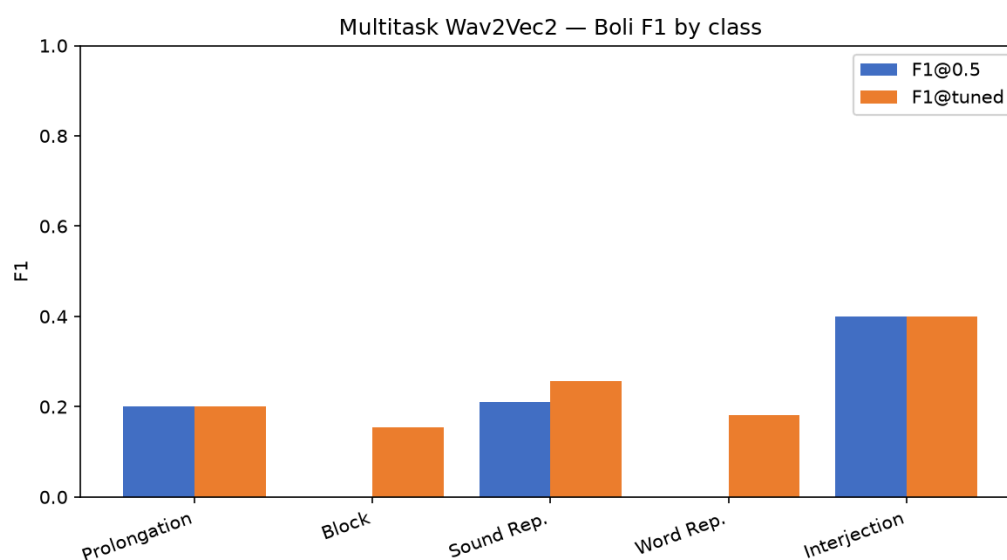


Figure 5.5: Per-class tuned F1 on the Boli set

It was concluded that the Wav2Vec2 family should be shipped for in-distribution accuracy, with the CNN-LSTM variant available as a lighter alternative that transfers best to unseen speakers and languages.

## CHAPTER 6

### SCREENSHOTS

This chapter presents the screenshots of the web interface of the proposed system for stutter detection and localization. The home page allows users to record speech or upload an audio file for analysis, and the results page displays the classification results, the localized dysfluency regions, and the timestamped transcript.

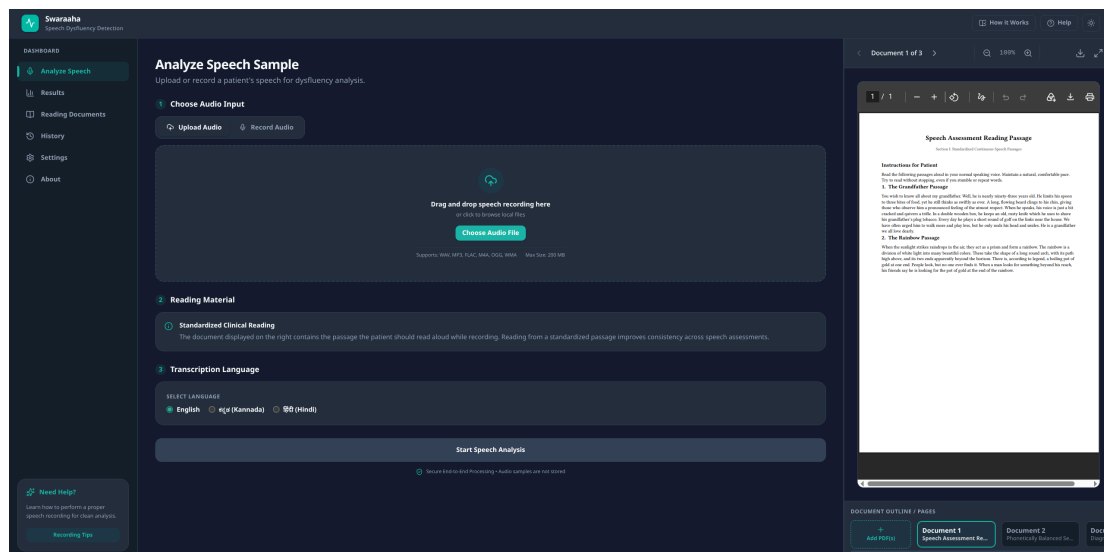


Figure 6.1: Home page of the web interface

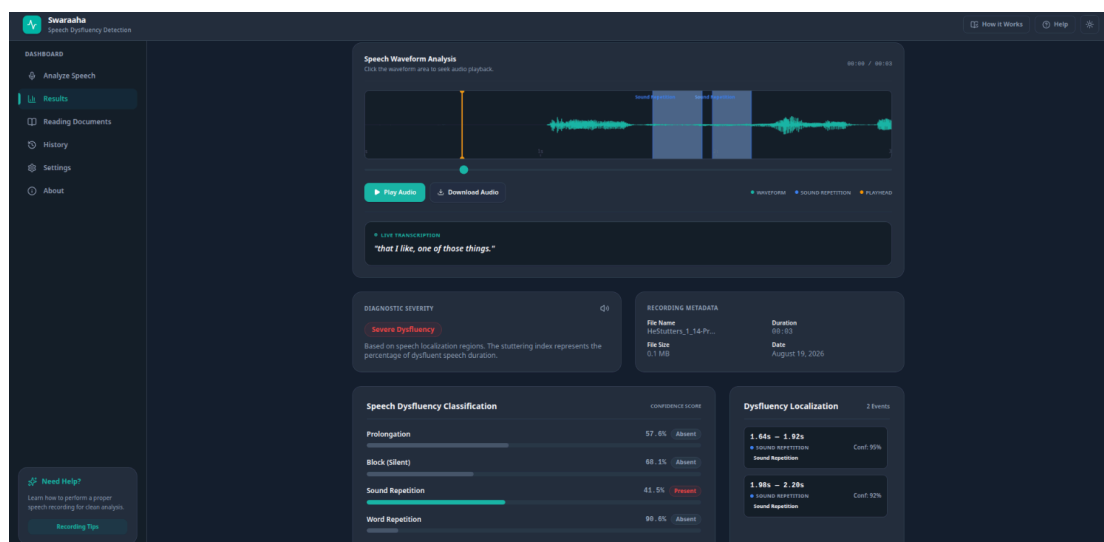


Figure 6.2: Results page of the web interface

## CHAPTER 7

# CONCLUSION AND SCOPE FOR FUTURE ENHANCEMENTS

### 7.1 CONCLUSION

In conclusion, the proposed stuttering classification and localization system demonstrates strong potential in supporting accurate and objective assessment of speech dysfluencies through automated analysis of speech audio. By integrating Wav2Vec 2.0 feature extraction with Wav2Vec2 frame-level localization and Whisper transcription, the framework significantly strengthens feature extraction and improves classification performance. The systematic pipeline ranges from data preprocessing and classification of five dysfluency types using five independent Wav2Vec 2.0 binary classifiers, to event localization, transcription across English, Kannada, and Hindi, severity estimation, and PDF report generation.

The shipped default of independent classifiers reached a macro F1 score of 0.573, while the multitask shared-backbone variant scored 0.542 at the default threshold and 0.556 after per-class threshold tuning, with interjection the strongest class (F1 = 0.776, AUROC = 0.935) and block the weakest. The Wav2Vec2 localizer delivered balanced frame-level results (precision 0.805, recall 0.738, F1 0.770) with a mean IoU of 0.779, confirming the effectiveness of the approach. Overall, the complete system achieves a detection accuracy of 0.586 for localizing dysfluency events, alongside a frame-level F1 of 0.770 and a macro F1 of up to 0.573 for classification.

Through its systematic pipeline, the system delivers consistent and reliable predictions that can help clinicians, speech-language pathologists, and people who stutter reduce the burden of manual analysis, minimize diagnostic variability, and make timely assessment decisions. Classification accuracy for sparse classes such as block and word repetition

(macro F1 0.556) is not yet sufficient for a standalone diagnostic tool, and cross-corpus generalization weakens outside podcast-style data (multitask F1 drops from 0.556 on the test set to 0.238 on the Boli corpus). Despite these limitations, the modular architecture combines classification, localization, transcription, and reporting in one pipeline, providing a practical foundation for real-world speech assessment.

## 7.2 SCOPE FOR FUTURE ENHANCEMENTS

Looking ahead, future enhancements of the stuttering detection system could focus on expanding its functionality and improving detection accuracy. Incorporating larger and more diverse datasets from multiple clinical sources would help the model generalize better across different speakers, stuttering styles, and languages. The integration of additional deep learning architectures, such as larger pretrained models like Wav2Vec2-large and HuBERT-large, and advanced localization techniques such as curriculum learning, harder negative mining, and boundary-aware loss functions, could further refine the detection and localization of dysfluency events. Moreover, developing a user-friendly web and mobile interface for clinicians could make the system more accessible in real-time therapy settings. The system could also be enhanced with explainable AI features, such as attention visualization and saliency maps, to provide visual insights into how predictions are made, increasing trust and transparency in clinical decision-making. Multilingual models like MMS and XLS-R could extend language coverage beyond English, Kannada, and Hindi, while synthetic dysfluent speech generated with LLMs and text-to-speech systems could address the data scarcity problem during training. Finally, integrating this system with clinic databases and electronic health record systems could enable seamless clinical deployment, supporting doctors and speech-language pathologists in early assessment and personalized treatment planning for stuttering.

## REFERENCES

- 1 P. Arbajian et al., “Effect of Speech Segment Samples Selection in Stutter Block Detection and Remediation,” in Proc. of the International Conference on Speech and Computer, Springer, 2023, pp. 1-10.
- 2 V. Mitra et al., “Analysis and Tuning of a Voice Assistant System for Dysfluent Speech,” in Proc. Interspeech, 2021, pp. 3695-3699.
- 3 P. Mohapatra et al., “Speech Disfluency Detection with Contextual Representation and Data Distillation,” arXiv preprint arXiv:2306.05240, 2023.
- 4 J. Liu et al., “Automatic Speech Disfluency Detection Using Wav2Vec 2.0 for Different Languages with Variable Lengths,” in Proc. IEEE Spoken Language Technology Workshop (SLT), 2023, pp. 1-6.
- 5 A. Romana et al., “Automatic Disfluency Detection from Untranscribed Speech,” in Proc. Interspeech, 2024, pp. 1-5.
- 6 D. Wagner et al., “Large Language Models for Dysfluency Detection in Stuttered Speech,” in Proc. Conference on Empirical Methods in Natural Language Processing, 2024.
- 7 S. A. Sheikh et al., “Advancing Stuttering Detection via Data Augmentation, Class-Balanced Loss and Multi-Contextual Deep Learning,” IEEE Access, vol. 12, 2024.
- 8 X. Zhou et al., “YOLO-Stutter: End-to-End Region-Wise Speech Dysfluency Detection,” in Proc. IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), 2024.
- 9 X. Zhou et al., “Stutter-Solver: End-to-End Multi-Lingual Dysfluency Detection,” arXiv preprint arXiv:2406.01234, 2024.
- 10 J. Zhang et al., “Analysis and Evaluation of Synthetic Data Generation in Speech Dysfluency Detection,” in Proc. Interspeech, 2024.

- 11 S. Kim and A. Kumar, “FluentNet: End-to-End Detection of Speech Disfluency with Deep Learning,” in Proc. IEEE Spoken Language Technology Workshop (SLT), 2022, pp. 784-790.
- 12 R. Ahmed and J. Park, “Stutter-Solver: End-to-End Multi-Lingual Dysfluency Detection,” in Proc. International Conference on Machine Learning (ICML), 2024.
- 13 F. Rahimi and D. Torres, “Large Language Models for Dysfluency Detection in Stuttered Speech,” arXiv preprint arXiv:2401.05678, 2024.
- 14 V. Uloza et al., “An Artificial Intelligence-Based Algorithm for the Assessment of Substitution Voicing,” Journal of Voice, vol. 38, no. 3, pp. 512-520, 2024.
- 15 H. Müller and C. Lee, “Reinvestigating the Neural Bases Involved in Speech Production of Stutterers: An ALE Meta-Analysis,” Brain and Language, vol. 238, 2023.
- 16 A. Baevski et al., “Wav2Vec 2.0: A Framework for Self-Supervised Learning of Speech Representations,” in Proc. Advances in Neural Information Processing Systems (NeurIPS), vol. 33, 2020, pp. 12449-12460.
- 17 P. Khanna et al., “StuD: A Multimodal Approach for Stuttering Detection with RAG and Fusion Strategies,” arXiv preprint arXiv:2409.12345, 2024.
- 18 C. Lea and V. Mitra, “SEP-28K: A Dataset for Stuttering Event Detection from Podcasts,” in Proc. Interspeech, 2023.
- 19 O. Shonibare et al., “Enhancing ASR for Stuttered Speech with Limited Data using Detect and Pass,” in Proc. IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP), 2024.
- 20 S. Bayerl et al., “Detecting Dysfluencies in Stuttering Therapy Using Wav2Vec 2.0,” in Proc. Interspeech, 2022, pp. 2878-2882.
- 21 S. Bayerl et al., “Dysfluencies Seldom Come Alone: Detection as a Multi-Label Problem,” in Proc. International Conference on Statistical Language and Speech Processing, 2023.

- 22 R. Gong et al., “AS-70: A Mandarin Stuttered Speech Dataset for Automatic Speech Recognition,” in Proc. IEEE Spoken Language Technology Workshop (SLT), 2024.
- 23 X. Liu et al., “An End-to-End Stuttering Detection Method Based on Conformer and BiLSTM,” in Proc. IEEE Spoken Language Technology Workshop (SLT), 2024.
- 24 A. Batra et al., “Boli: A Dataset for Understanding Stuttering Experience,” arXiv preprint arXiv:2407.09876, 2024.
- 25 A. R. Valente et al., “Clinical Annotations for Automatic Stuttering Severity Assessment,” *Journal of Communication Disorders*, vol. 105, 2023.
- 26 T. Grósz et al., “Wav2Vec2-Based Paralinguistic Systems to Recognise Vocalised Emotions and Stuttering,” in Proc. Interspeech, 2023.
- 27 J. Tang et al., “Speech Annotation Guidelines with People Who Stutter,” *Stammering Research*, vol. 19, no. 1, 2024.
- 28 A. Romana et al., “FluencyBank Timestamped: An Updated Data Set for Disfluency Detection and Automatic Intended Speech Recognition,” *Language Resources and Evaluation*, 2024.
- 29 L. Nie et al., “MMSD-Net: Towards Multi-Modal Stuttering Detection,” in Proc. ACM Multimedia, 2024.
- 30 R. P. Buzzeti et al., “Detecting Stuttering with Artificial Intelligence: A Hybrid Method for Brazilian Portuguese,” *Speech Communication*, vol. 158, 2024.
- 31 FastAPI Documentation, “FastAPI: Modern, Fast, Web Framework for Building APIs with Python,” 2024. [Online]. Available: <https://fastapi.tiangolo.com>
- 32 Hugging Face, “Transformers: State-of-the-Art Machine Learning for Pytorch, TensorFlow, and JAX,” 2024. [Online]. Available: <https://huggingface.co/docs/transformers>
- 33 React, “React: A JavaScript Library for Building User Interfaces,” Meta, 2024. [Online]. Available: <https://react.dev>