


See Fedora Proxy viewer chart for application authentication method.

/batch_space/institution/batchset/mets/new
.
/batch_space/institution/batchset/mets/updates

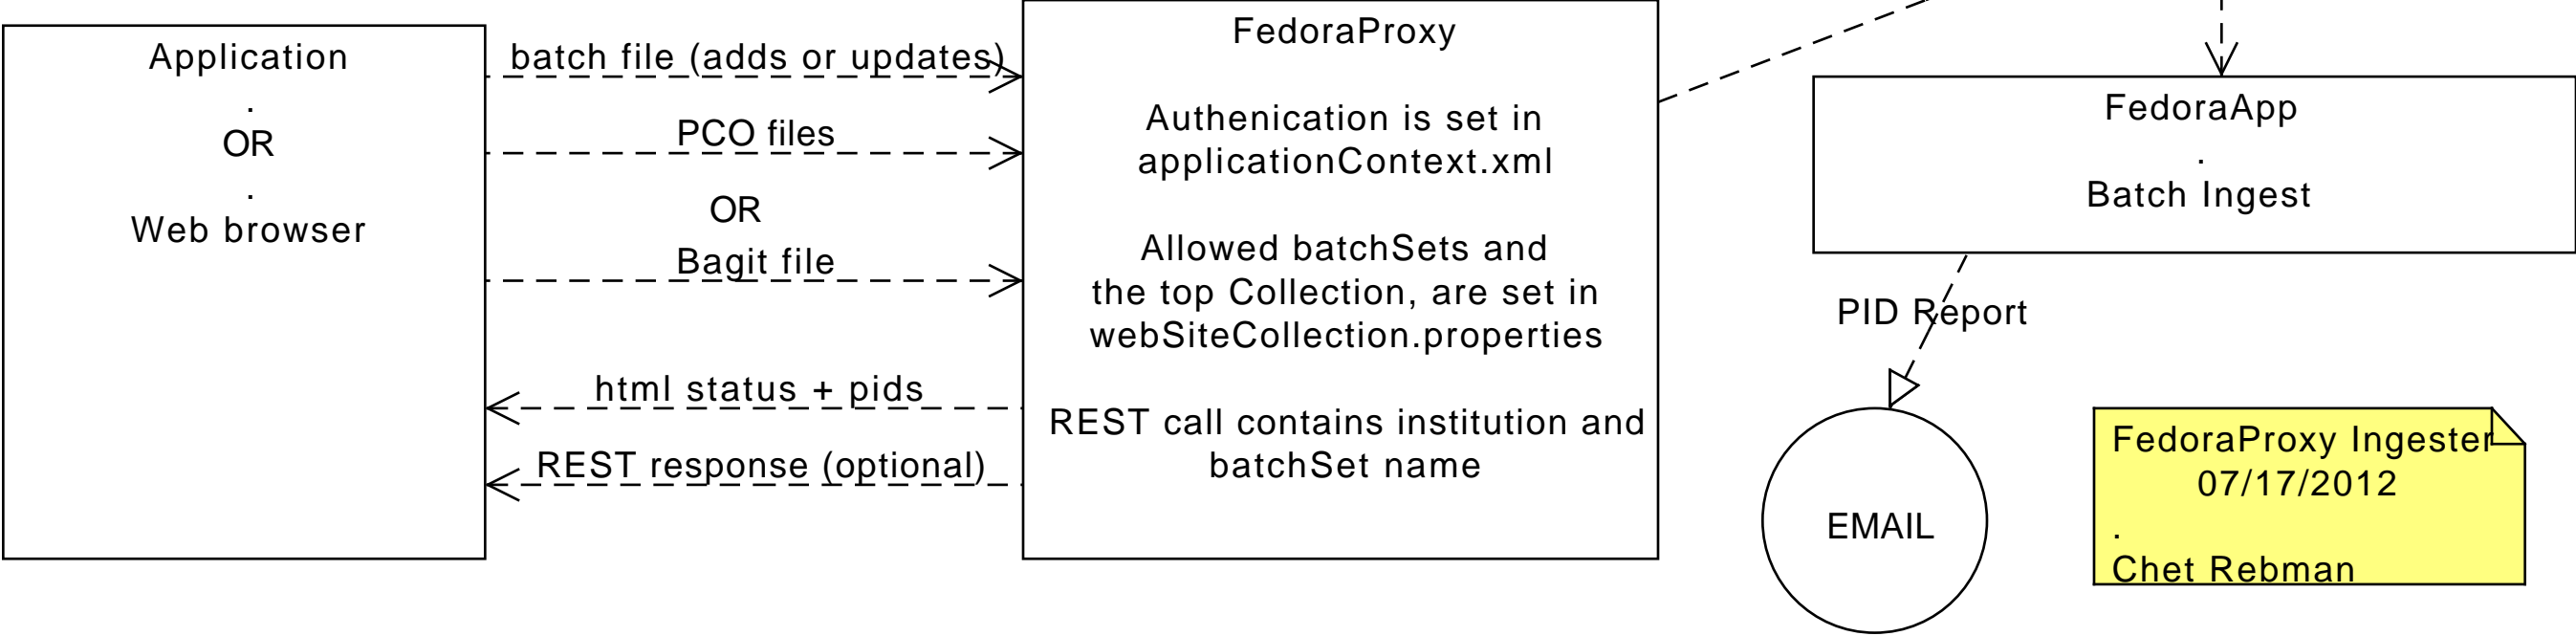

FedoraProxy Ingested
07/17/2012
Chet Rebman

```
<batch version="2"> (1)

  <batchDescription batchCreationDate="yyyy/MM/dd" > (0..1)
    <literal>unformatted text....</literal>
  </batchDescription>

  <ingestControl command="a | u" type="xxxxx" (a=add | u=update) REQUIRED
    types for add      are "normal | replyWithPid | pidInOBJID"
    types for updates are "all | meta | pco" ;
    response="html status | pids to be assigned"> (1)

    <mets> (0..*)
      .....
    </mets>

  </ingestControl>

</batch>
```

Note..

- PCOs prefixed with OPEN_ or CLOSED_ to select public open or closed access controls.
- (just below <mets:mets>)
<mets:dmdSec ID="dmdAlliance">
 <mets:mdWrap LABEL="Custom Alliance Metadata">
 <mets:xmlData>
 <islandora collection="codu:maps" contentM

Note..
PCO = Primary Contect Object (pdf, image, etc.)
PID = unique persistent identifier (assigned by Fedora)
A | B means A or B
(0..1) number of occurances, ie. can occur 0 to 1 times.

<batch></batch> is valid, generates warning.