AGENTIC APP NOTES · SECTION V

Agent App Flows

All 11 types of agent apps from your notes, each drawn as a user flow, plus five of your own projects traced step by step. Dashed arrows go back to an earlier step: that is the agent loop.

Person · App / screen · Server · Agent (AI) · Tool · Data store · Check / pause · Result · ----- Loop back · ----- Not allowed


16 flows: 11 agent app types, then 5 of your own apps. One flow per page.

Type 1

Single agent with tools

the basic type

One agent, a few tools, and one loop. The user asks, the agent looks something up, then answers.

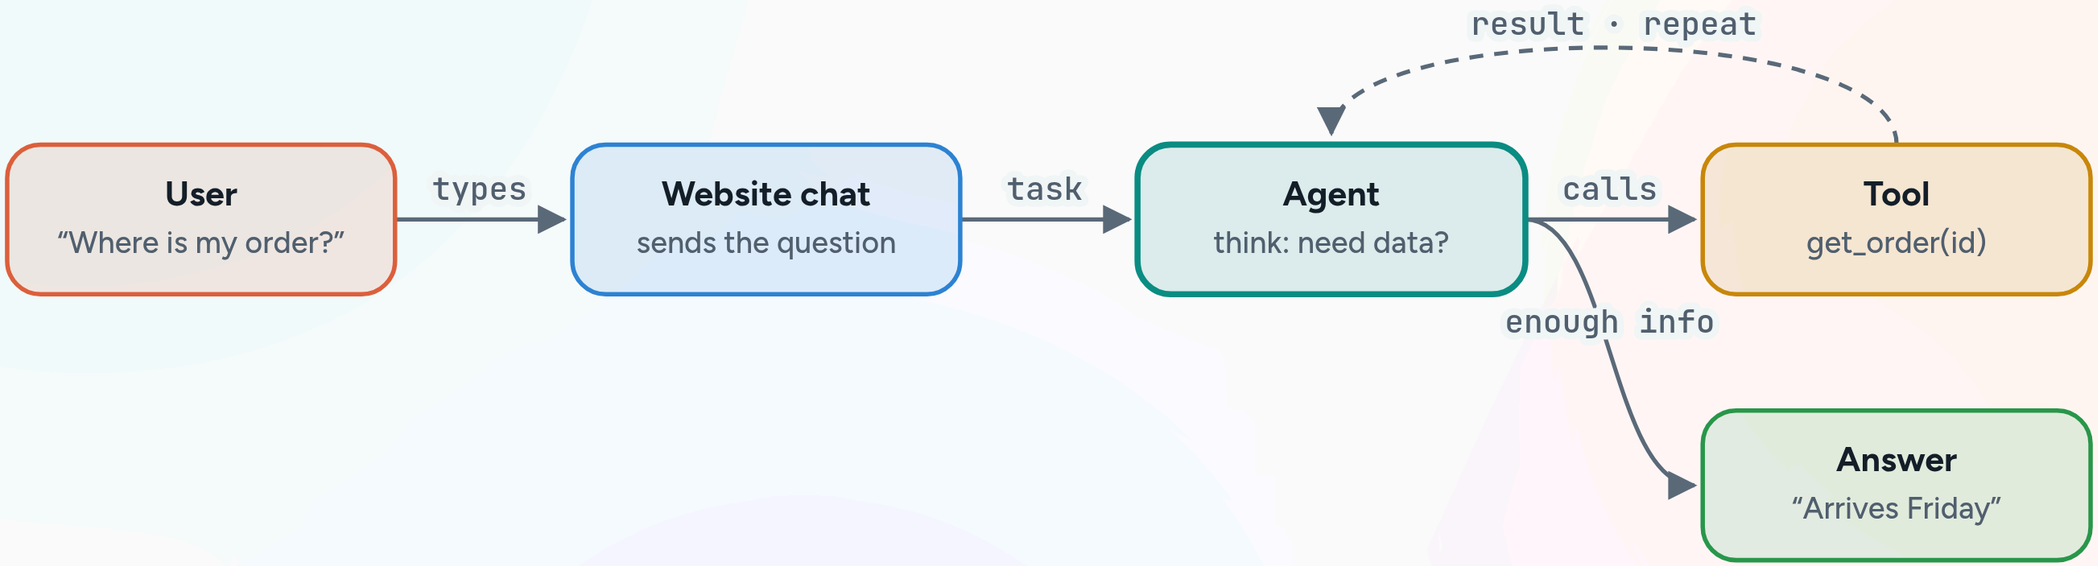

The agent decides each round whether to call a tool again or answer. A safety limit caps the rounds.

EXAMPLES


- FAQ bot on a website
- Order status bot
- Repo Q&A bot
- Log reader

Type 2

Router + specialist agents

handoff / multi-agent

A small front-desk agent decides who should handle the request, then hands it over.

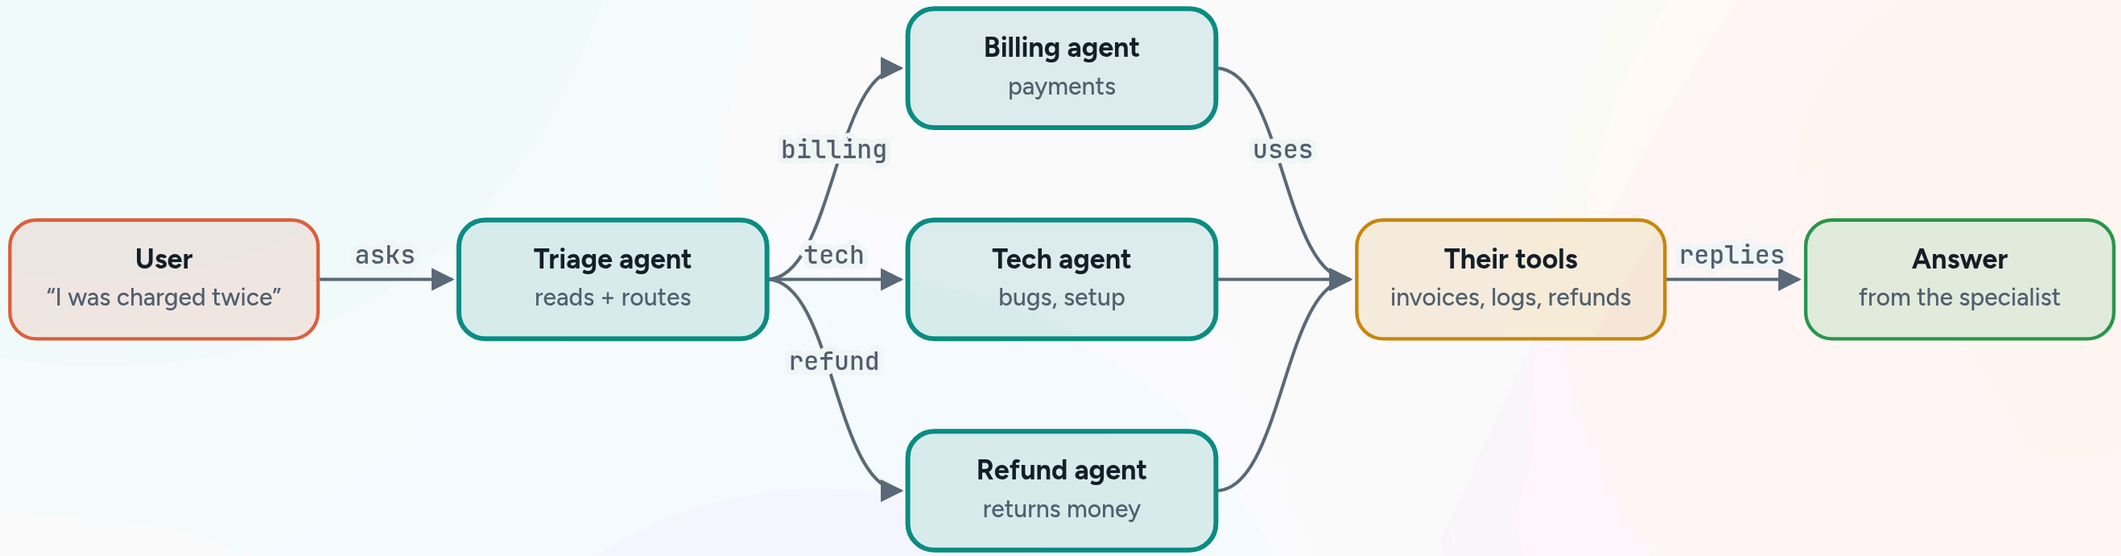

Only one specialist gets each request. Each specialist sees only its own tools.

EXAMPLES


- Support desk (billing / tech / refund)
- Travel planner (flight, weather, budget)
- Stack: help agent → bug-triage agent

Type 3

Chat with your documents

RAG

The agent first finds the right pieces of your documents, then answers only from them.

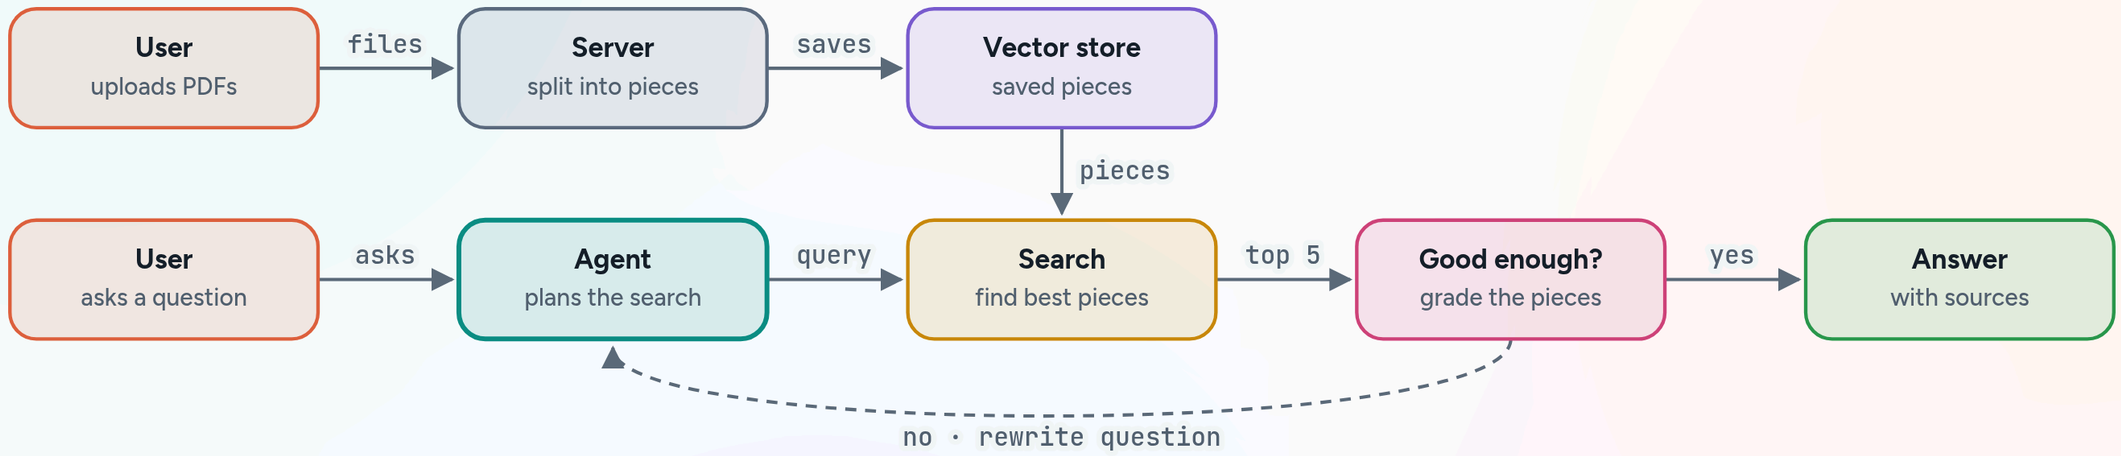

Top row runs once per upload. Bottom row runs for every question. The dashed loop is “careful RAG”.

EXAMPLES


- Chat with your PDFs
- Company handbook assistant
- Careful RAG

Type 4

Structured output

fill a fixed form

The agent doesn't chat. It returns data in a fixed shape the app can use directly.

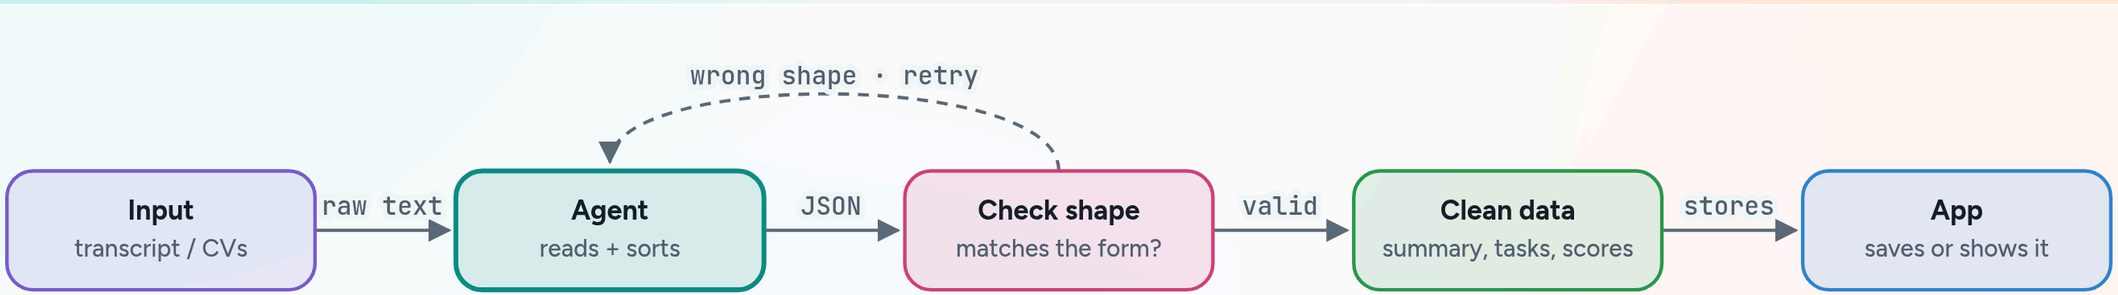

The app never reads free text. It only accepts output that fits the form.

EXAMPLES


- Meeting notes → summary + tasks
- Resume screener → score per job
- Stack “Remember”: highlights → quiz questions

Type 5

Human approval

pause and ask

The agent prepares an action but stops and waits for a person to say OK before doing it.

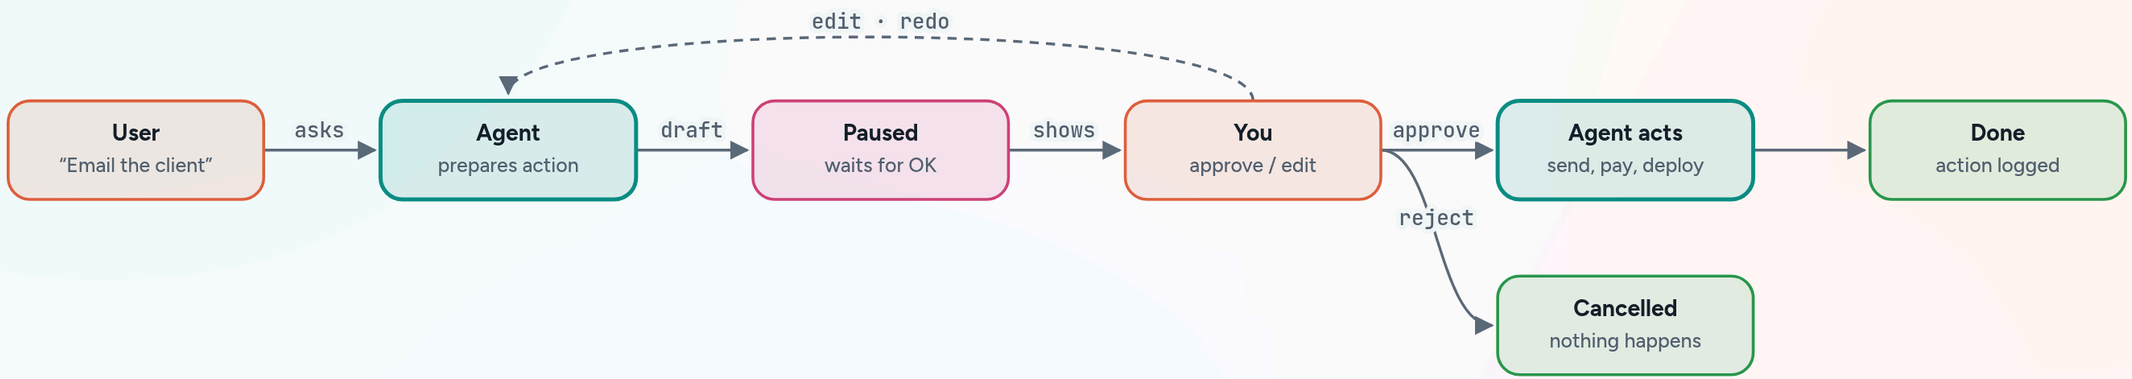

Nothing risky runs until the person approves. Sending, paying, deleting and deploying always go through this pause.

EXAMPLES


- Email draft → approve → send
- DevOps helper runs fix after OK
- Mitra AI
- Harvey

Type 6

Coding / file agent

works on a computer

The agent works on files and runs commands, checking again until the job is done.

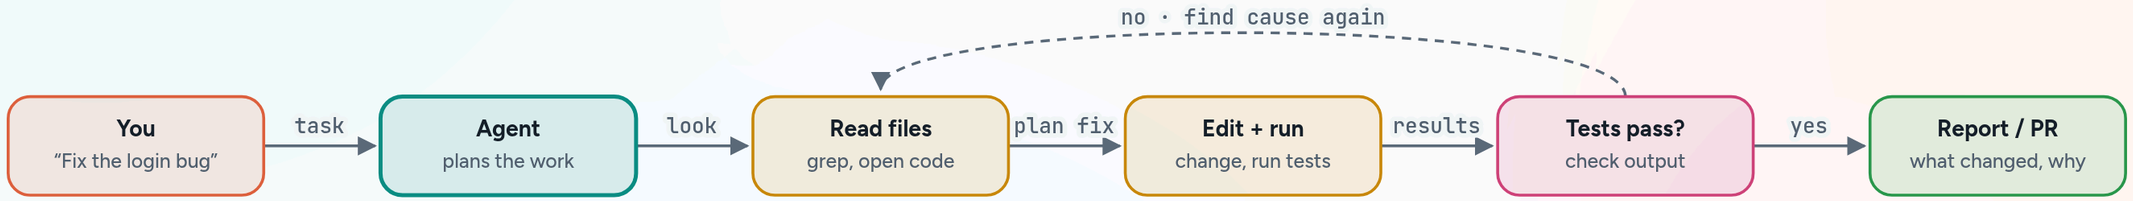

The loop is read, edit, test. It stops when the tests pass or the round limit is hit.

EXAMPLES


- PR reviewer
- Docs / README writer
- Bug fixer (test, fix, re-test)
- Stack: build APK, emulator tests, report

Type 7

Team of role agents

crew

Several agents with job titles work one after another, each passing its work to the next.

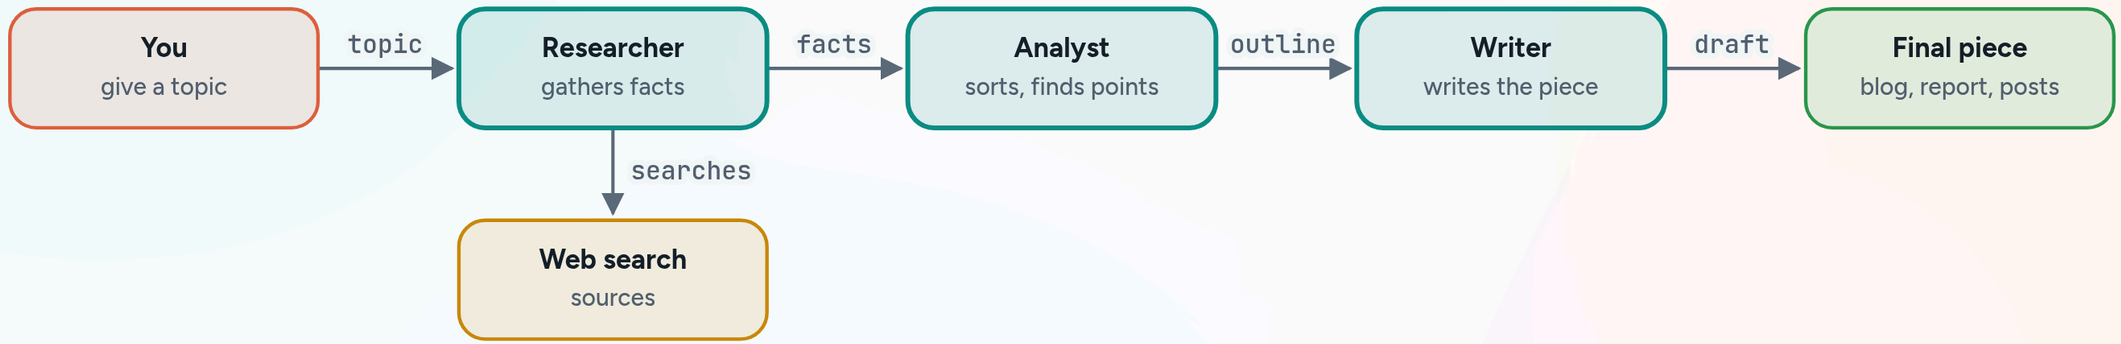

Each agent only sees the previous agent's output, so each role keeps a narrow job.

EXAMPLES


- Blog crew
- Market report crew
- Job apply crew (post → resume → cover letter)
- Stack launch: LinkedIn, Play Store, emails

Type 8

Background / scheduled agent

no user waiting

It runs on its own, on a timer or when an event happens. The user sees the result later.

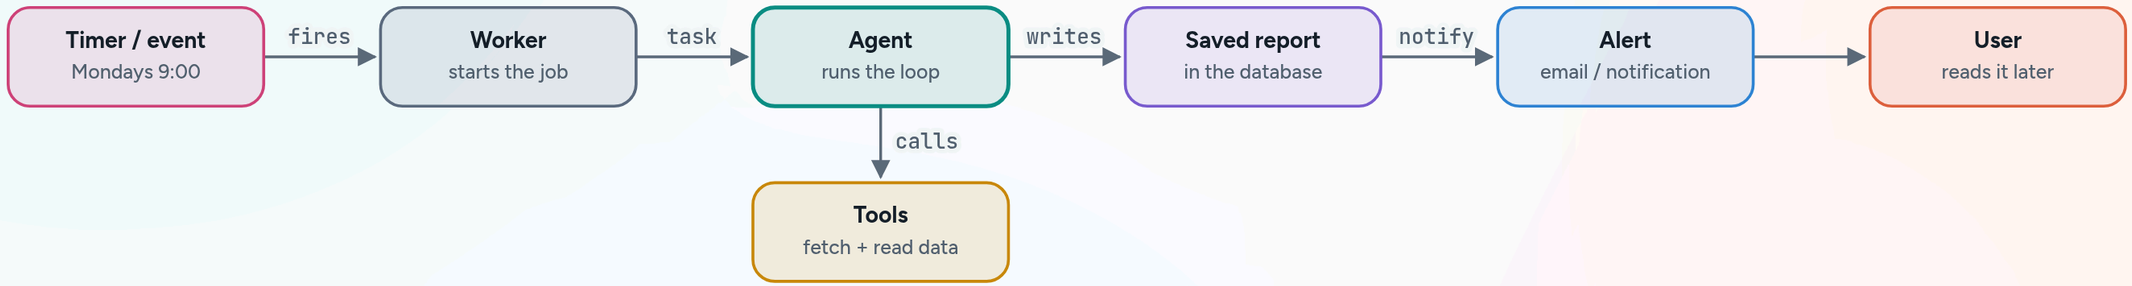

No chat window is involved. The trigger is a clock or an event, and the output is saved first.

EXAMPLES

- Weekly competitor watch
- Daily standup summary from commits
- Job leads: one draft email per company

Type 9

Voice agent

speak and listen

Same loop, but the user speaks and hears the answer.



The agent in the middle is the same as type 1. Speech is converted at both ends.

EXAMPLES

Voice receptionist that books appointments


Mitra AI voice grocery ordering

Type 10

Mobile app + agent

keys stay on the server

The phone app has no safe place for secret keys, so it always goes through your server.

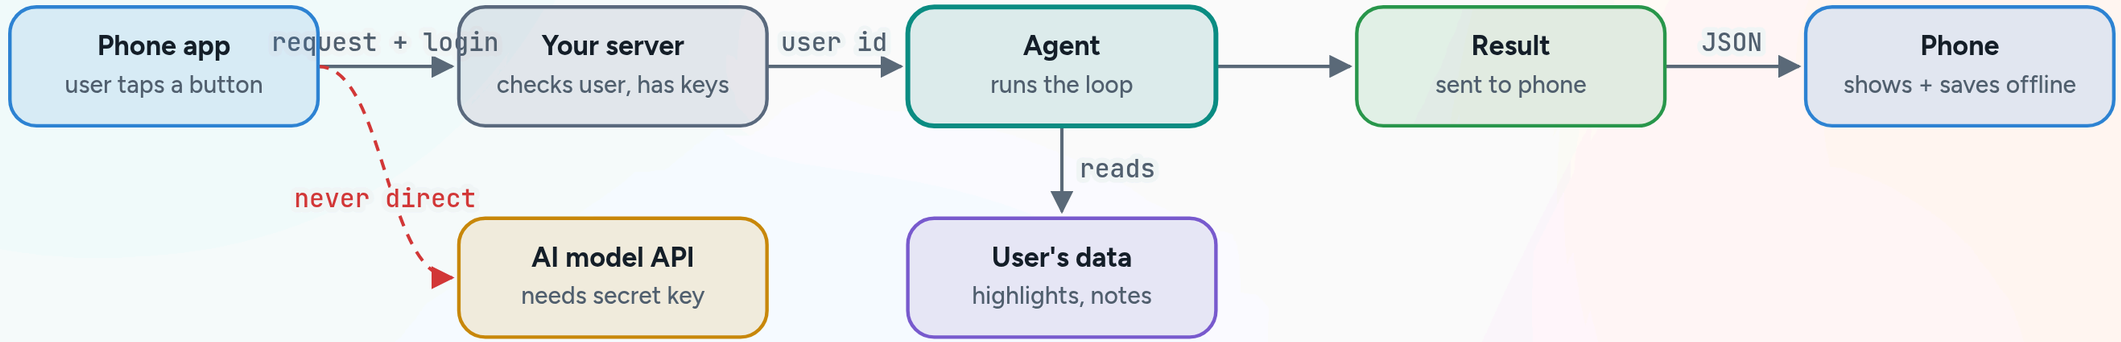

The red dashed path is the mistake to avoid: a key inside the phone app can be pulled out by anyone.


EXAMPLES Stack “Quiz me”

Type 11

Local / private agent

runs on your machine

The AI model runs on your own computer, so no data leaves it.

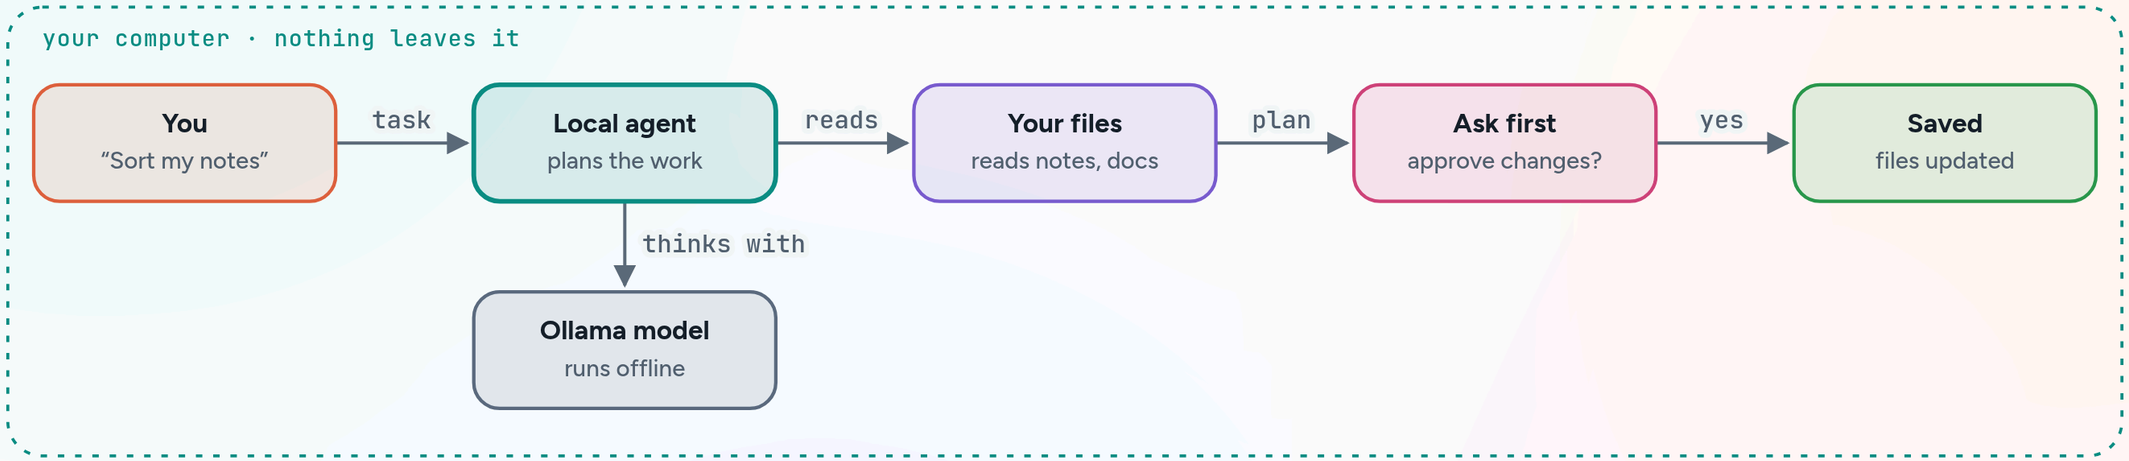

Everything inside the dashed boundary stays on your machine, including the model.


EXAMPLES Private notes / file assistant on Ollama

Your app

Mitra AI

voice + human approval

Voice grocery ordering: the user speaks a list, confirms it, and the family gets an alert.

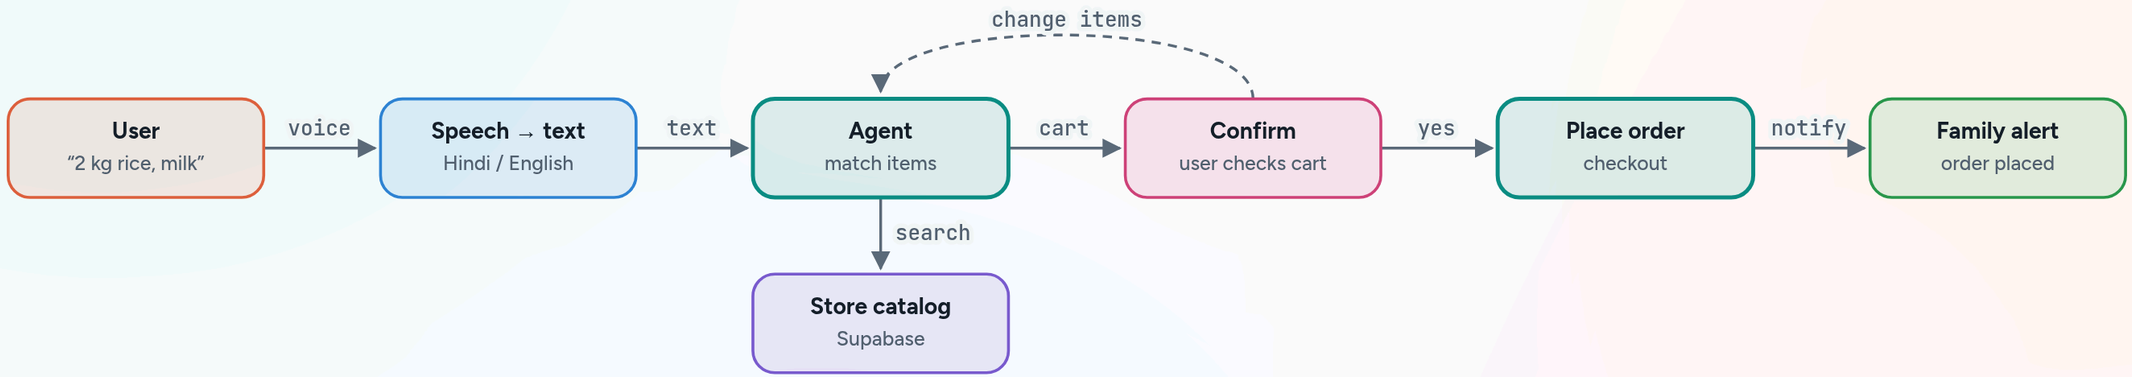

Voice agent (type 9) with a human-approval pause (type 5) before any money moves.


BUILT FROM Voice agent · Human approval

Your app

Harvey

draft-only cold email

Cold-email agent for Stack outreach. It only drafts; you check every email before anything sends.

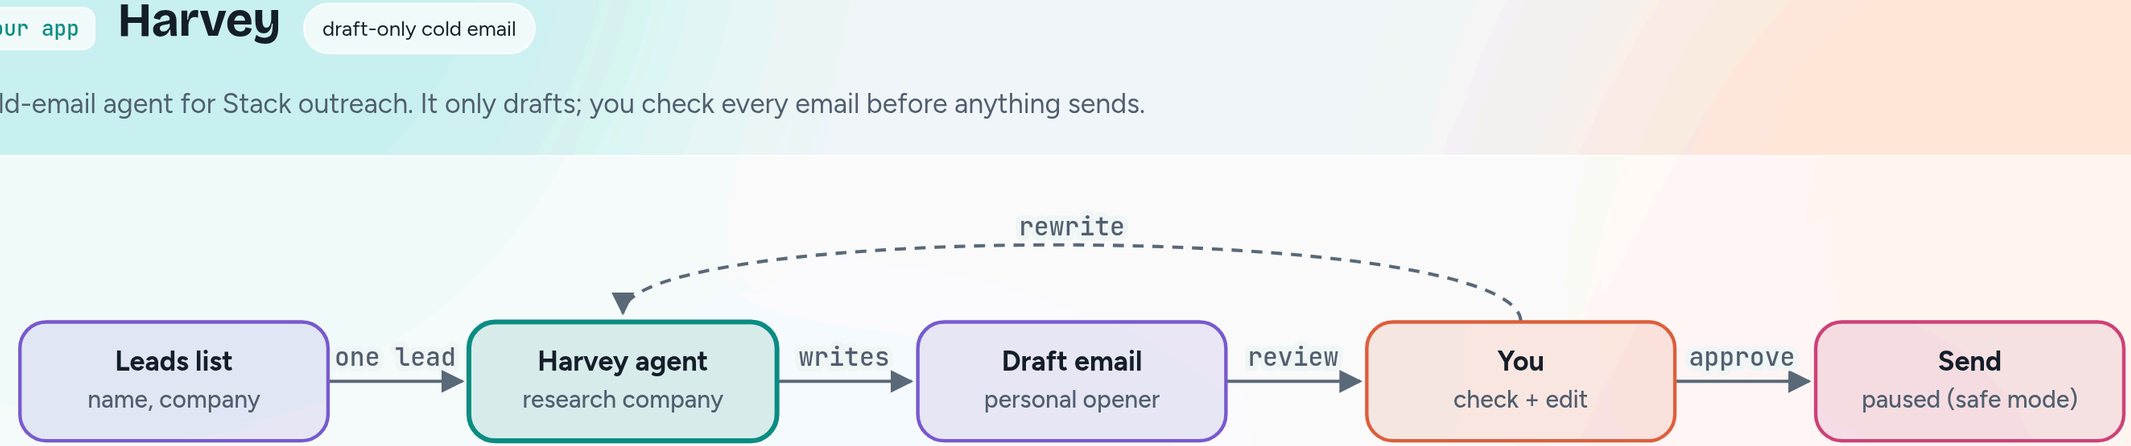

Human approval (type 5). Sending is switched off in safe mode, so the last step only runs when you turn it on.


BUILT FROM Human approval

Your app

Job leads drafts

scheduled

Reads your job-leads sheet and drafts one email per company for you to check.

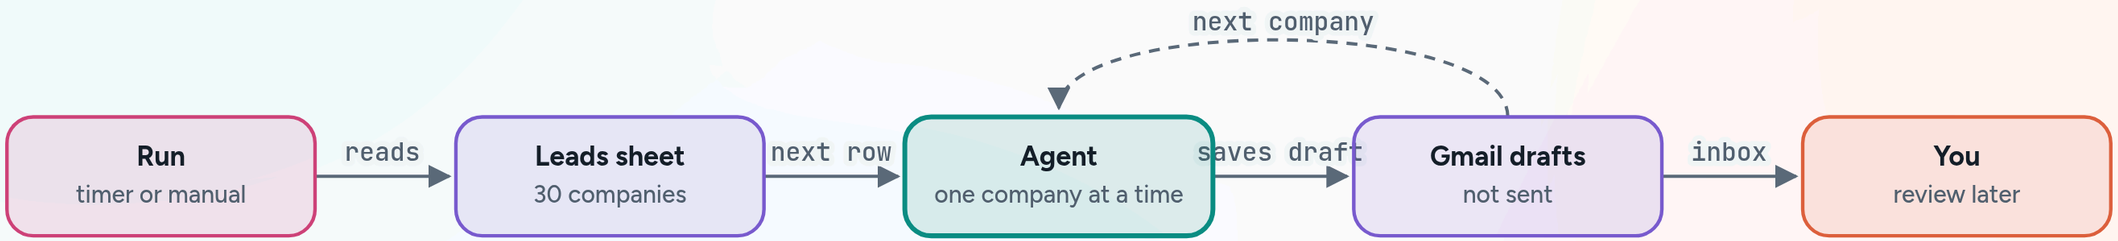

Background agent (type 8). Nobody waits on it; the drafts are ready the next time you open Gmail.

BUILT FROM Background / scheduled

Your app

Stack “Quiz me”

mobile + structured output

The phone asks the server, the agent reads your highlights, and you get a quiz on your phone.



Mobile + agent (type 10) returning structured output (type 4) that the app can store directly.


BUILT FROM Mobile app + agent · Structured output

Your app

Stack help desk

router + specialists

An in-app help agent answers questions and passes bug reports to a bug-triage agent.

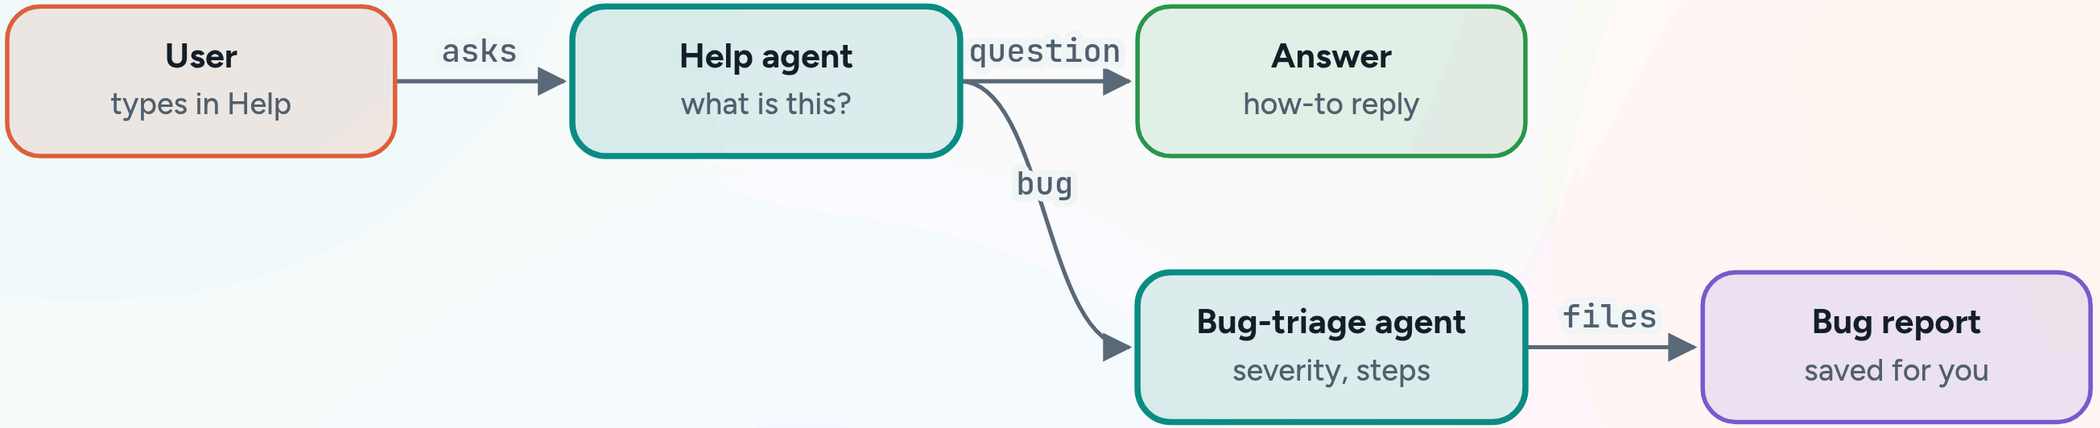

Router + specialist (type 2): the help agent keeps questions and hands only bugs over.

BUILT FROM Router + specialists