

## 100% importance

examples:

`mmap, clone, read, exit, getpid,`  
`socket, writev, dup, symlink,`  
`ioctl`

## 10~100% importance

examples:

`waitid, pread, time,`  
`sendfile`

## less than 10% importance

examples:


`ustat, mq_open, tee,`  
`nfsservctl`

## Zero importance

examples:

`mq_notify,`  
`move_pages`

API importance

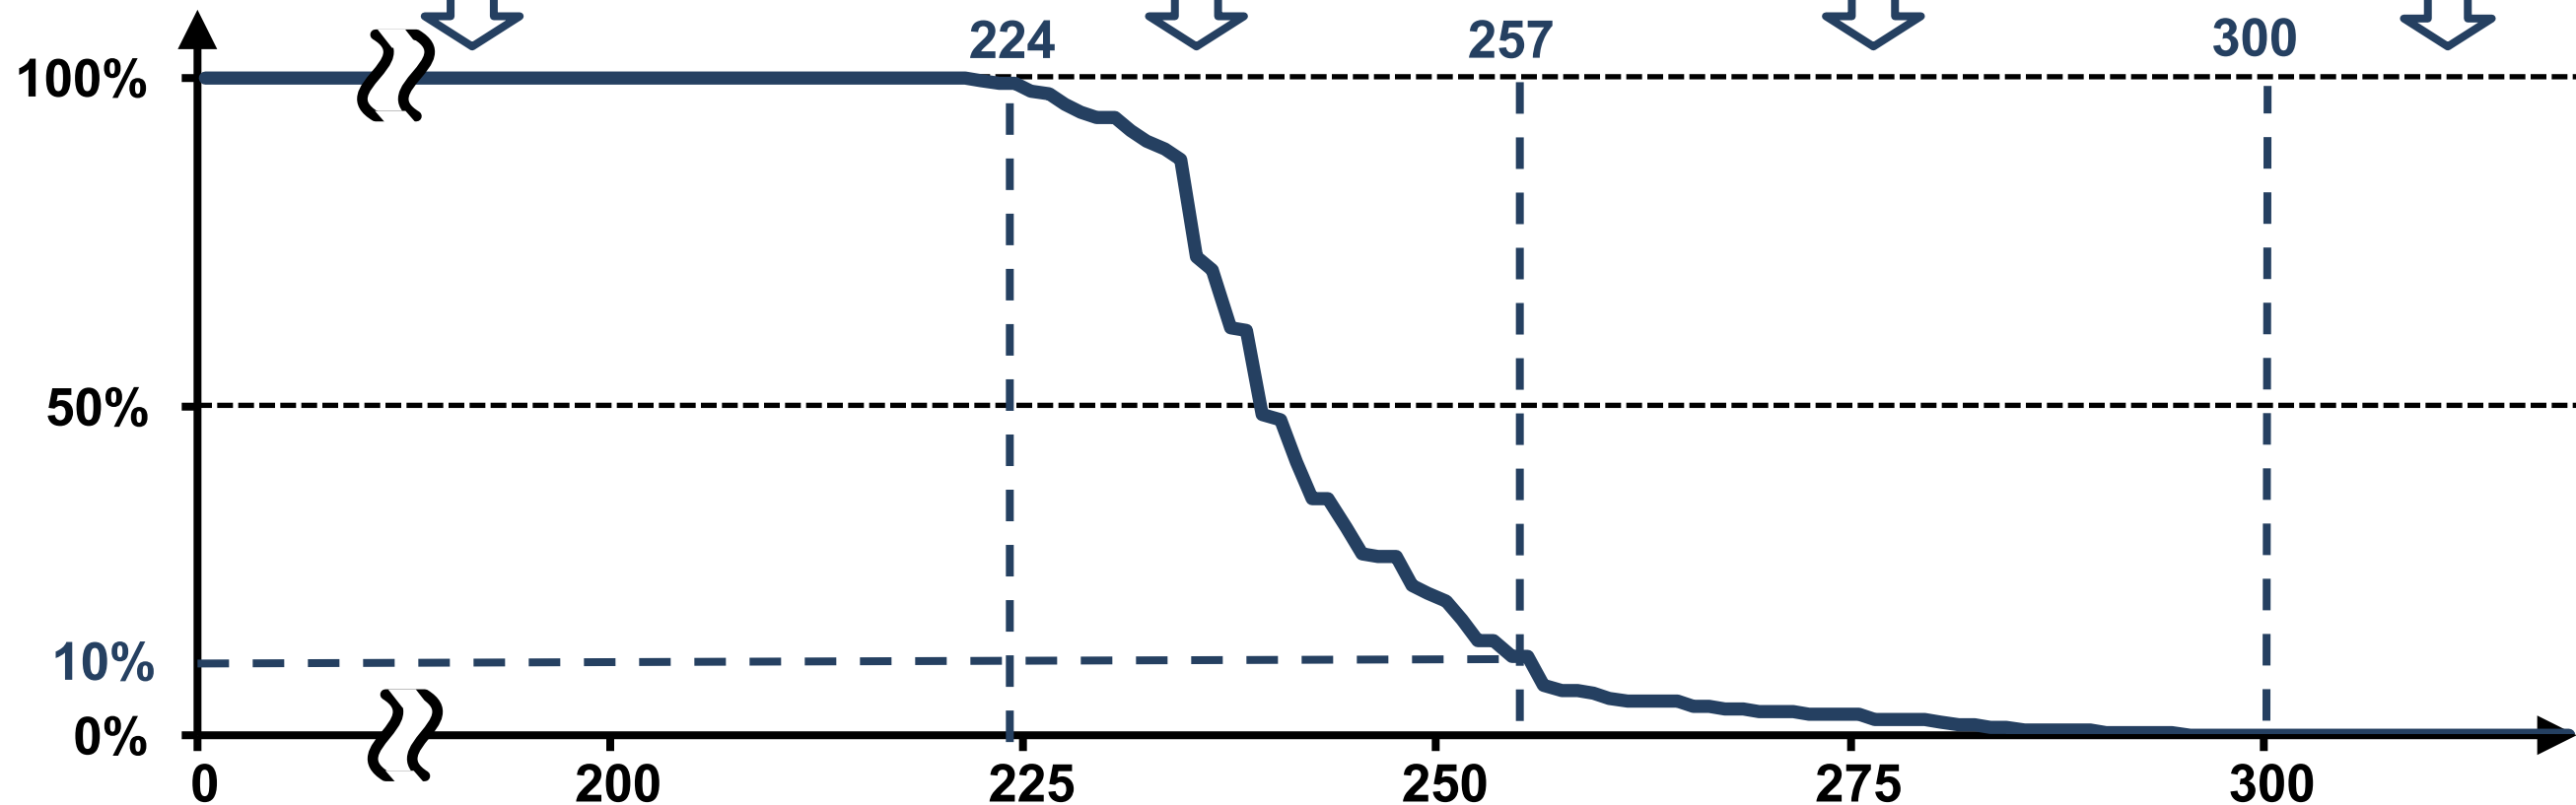

N-most important Linux system calls