

100% importance

examples:

mmap, clone, read, exit, getpid,
socket, writev, dup, symlink

10~100% importance

examples:

waitid, pread, time,
sendfile

less than 10% importance

examples:


ustat, mq_open, tee,
nfsservctl

0% importance

examples:

mq_notify,
move_pages

API importance

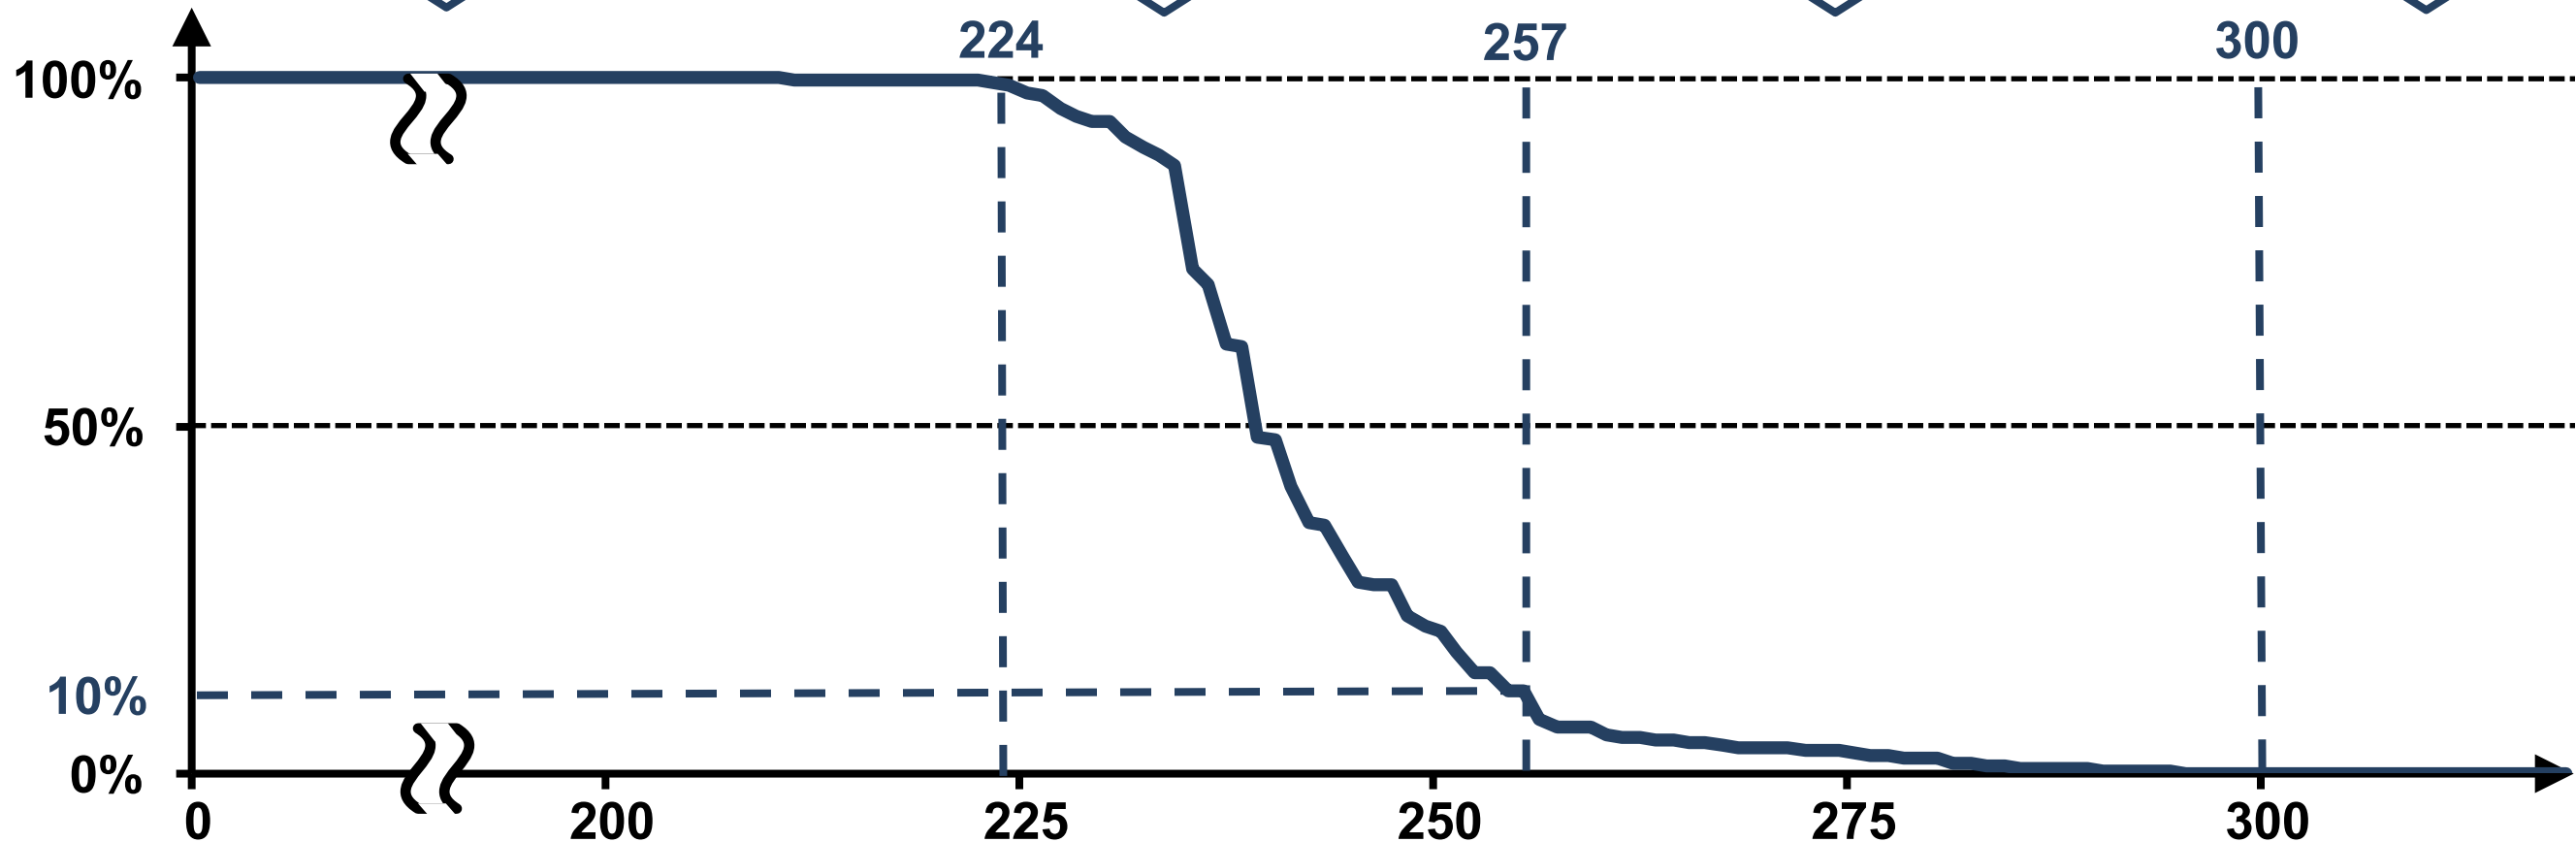

N-most important Linux system calls