

Rate-Distortion Loss Attribution for AV1 Intra Partition Decisions

Pablo Rosa

Video Technology Research Group (ViTech)
Federal University of Pelotas
Pelotas, Brazil
pablo.rosa@inf.ufpel.edu.br

Daniel Palomino

Video Technology Research Group (ViTech)
Federal University of Pelotas
Pelotas, Brazil
dpalomino@inf.ufpel.edu.br

Marcelo Porto

Video Technology Research Group (ViTech)
Federal University of Pelotas
Pelotas, Brazil
porto@inf.ufpel.edu.br

Luciano Agostini

Video Technology Research Group (ViTech)
Federal University of Pelotas
Pelotas, Brazil
agostini@inf.ufpel.edu.br

Abstract—The AOMedia Video 1 (AV1) codec decides how to split each intra-frame super block through a recursive search that evaluates ten partition shapes per node, and learned pruners are the dominant strategy to shorten that search. Every such pruner couples the quality of the source that scores a node with the aggressiveness of the policy acting on that score, so the reported time savings do not identify which information carries the decision. This paper presents an offline attribution protocol for AV1 intra partitioning that reads the rate-distortion loss of competing representations at matched search-cost reduction. The protocol fixes one pruning policy, sweeps its confidence threshold, and charges each forced decision the overhead recorded by an exhaustive reference search, so that representations are compared at the same amount of work skipped. Experimental results over 3.81 million held-out decision nodes show that twenty-four compact descriptors reduce the loss of isolated block variance by 7.0 times, that eight causal partitioning columns reduce it by a further 1.60 times, and that four quantization and position columns add nothing. A ConvNeXt with 28.1 million parameters reading raw pixels stays 4.1 times behind the compact descriptors, which hold 2481 times fewer parameters, and doubling its fusion width makes it worse. The protocol is ordinal and does not convert into Bjontegaard delta bitrate. To the best of the authors’ knowledge, this is the first work to attribute rate-distortion loss to information access in AV1 partitioning under matched cost.

Index Terms—Video coding, AV1, intra-frame partitioning, feature representation, model capacity, machine learning.

I. INTRODUCTION

Video coding removes the spatial and statistical redundancy of a raw sequence so that it can be stored and transmitted at a small fraction of its original rate. Every coding choice trades bitrate against reconstruction fidelity, and encoders resolve that trade-off by rate-distortion optimization, selecting at each decision the candidate of lowest Lagrangian cost [8]. Coding efficiency is the fidelity obtained at a given rate, and it degrades whenever a decision is taken without evaluating the candidate that the full search would have selected. That degradation, and not encoding time, is the quantity this work measures.

Two families of codecs pursue that efficiency. The standardization path produced High Efficiency Video Coding [1] and Versatile Video Coding [2], both developed jointly by ISO/IEC MPEG and ITU-T VCEG, while the Alliance for Open Media released the AOMedia Video 1 (AV1) in 2018 as an open and royalty-free codec [3], drawing on VP9, Thor, and Daala.

AV1 follows the hybrid block-based coding flow, combining intra-frame and inter-frame prediction, transforms, quantization, in-loop filters, and entropy coding, and it introduced new tools at every one of those stages [4], [5]. Among them, the partition structure was extended to ten shapes per node, against the four of VP9. That coding efficiency is paid for in computational effort, and comparative studies report AV1 encoding times far above those of its competitors [6], [7], with the gap widening at the highest quality configuration.

Inside intra-frame coding, the recursive partition search is the single most expensive stage at that configuration. The search visits a quad-tree of square nodes, evaluates up to ten shapes at each one, and descends into every node it does not resolve, so the cost grows with the number of nodes rather than with the difficulty of the content.

Several works attack this cost with learned decisions. In AV1, tool selection guided by user priority and by coding efficiency was proposed in [9], [10], a fast intra mode decision based on the accuracy of a rate-distortion model in [11], and decision trees for inter prediction in [12]. The same problem in Versatile Video Coding was addressed with light gradient boosting [13], random forests [14], and variance and gradient heuristics [15], while dedicated hardware architectures targeted the AV1 intra prediction modes [16], [17]. These works can be classified as coding-efficiency oriented [10], [11], [13]–[15], hardware oriented [16], [17], or aimed at a different coding stage [9], [12]. All of them report time savings under a policy of their own choosing, and none of these works separates the quality of the scoring source from the aggressiveness of the policy, nor measures which information

is decisive for the partition choice.

This paper presents an offline attribution protocol for AV1 intra partitioning. The main strategy of this work is to hold the pruning policy and the amount of skipped search work fixed, and to vary only what a representation is allowed to see, so that the resulting difference in rate-distortion loss is attributable to information access alone. Under this protocol, compact descriptors outperform a high-capacity convolutional model reading raw pixels, and the causal partitioning neighborhood carries decision information that luminance does not provide.

II. INTRA PARTITION SEARCH IN AV1

AV1 partitions each frame into super blocks of 128×128 samples, which the encoder may alternatively set to 64×64 [4]. Each super block is recursively divided by a search over a quad-tree of square nodes that may descend to 4×4 samples. At every node the encoder may evaluate ten partition shapes, organized in four groups: the undivided block `PARTITION_NONE`, the quaternary `PARTITION_SPLIT`, the two rectangular shapes, and the six extended shapes, which comprise four AB shapes and two four-way shapes.

The evaluation order inside a node is fixed: `PARTITION_NONE` first, then `PARTITION_SPLIT`, whose opening triggers the recursion into the four children, then the rectangular shapes, and the extended shapes last.

This order defines when each kind of information becomes available, the property this work exploits. Before the search of a node begins, the encoder already holds the source luminance of the block, the frame quantization index, the position of the node, and the partition decisions of the causal neighbors above and to the left, but it does not yet hold any rate-distortion cost for the current node. Fig. 1 summarizes this timeline.

The action studied in this paper is the earliest one available: committing the node to the undivided shape before any rate-distortion evaluation is paid, and therefore skipping every remaining candidate of the node and the whole subtree below it. This single action has two measurable consequences, the search work that is no longer performed and the rate-distortion cost that is lost whenever the discarded subtree was the optimal choice.

This work is focused on that commitment at the pre-search insertion point of the intra-frame partition tree. Inter-frame prediction, transform type selection, quantization, in-loop filters, and entropy coding are not included in the loop attacked here, and therefore they are not focused on this work. The decision at the 128×128 root is also outside this scope: the protocol attaches at the four 64×64 quadrants of each super block and models the 64, 32, and 16 sample levels. Blocks of 8×8 samples were never split in this dataset, no divided label appearing among 16.91 million of them, so 4×4 nodes do not occur and 8×8 is the effective leaf; they are excluded from modeling while kept in the cost accounting.

III. PROPOSED ATTRIBUTION PROTOCOL

The proposed protocol compares representations by what they are allowed to see, under one fixed pruning policy and at a matched amount of skipped search work.

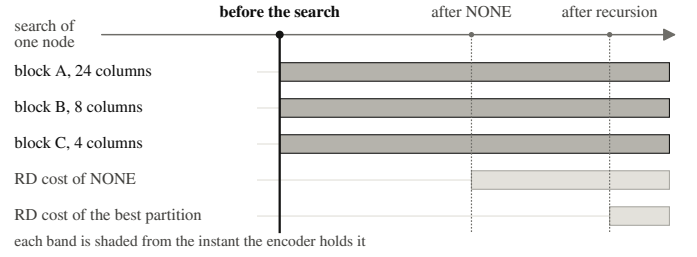


Fig. 1. Information available to a pruner at each instant of the search of a partition node. Each band is shaded from the instant the encoder holds it, so the three column blocks are free at the pre-search instant addressed in this work, while the rate-distortion costs are not yet defined there.

A. Representations Declared by Information Access

The representations are declared by information access rather than by architecture. The first is the isolated variance of the block, the classical descriptor of partition heuristics. The second, denoted A, is a twenty-four column vector of compact luminance descriptors: second-order and gradient statistics of the block and of its quadrants, edge measures, and the contrast against its parent and sibling blocks. Three of those columns do not derive from luminance, namely the normalized quantization index and the two coordinates of the node inside the 64-sample unit.

Block B adds eight columns of causal partitioning neighborhood: availability of the above and left neighbors, their already decided widths and heights in logarithmic scale, the relative granularity of the neighborhood, and its anisotropy. Block C adds four columns of effective quantization and position, namely the dequantization step of the direct-current coefficient, the normalized position within the frame, and the depth of the node. Four tabular representations are built from these blocks, namely A, A+B, A+C, and A+B+C, the last one holding thirty-six columns. All of these columns are natively available during encoding at the pre-search instant, ensuring zero computational overhead for feature extraction.

The remaining representation is the deep pixel arm, a multi-level convolutional model of the ConvNeXt family [18] that mirrors the partition hierarchy. Its input is a two-channel tensor formed by the luminance of the 64×64 unit and a constant quantization plane. Three stages of its trunk are merged top-down, so that each cell of the resulting map holds both local detail and the context of the whole unit, and per-level heads read average poolings of it. This arm is present as a test of the hypothesis that raw pixels plus representation capacity suffice, and not as an architectural baseline. A random scorer is included as a control.

Each of the four is read by three multilayer perceptrons, one per block size, with two hidden layers of 64 and 32 rectified units, trained with hard-label cross entropy and AdamW [20], learning rate 1×10^{-3} , batches of 4096, and a fixed budget of 30 epochs. All four share this training strategy and differ only in which columns they read, so the verdict falls on information rather than on capacity or on how the models were trained.

Each is trained with three seeds and the reported value is their mean.

B. Policy, Cost Model, and Loss

The policy is fixed for every representation. A node n is committed to `PARTITION_NONE` whenever the probability the model assigns to that class exceeds a confidence threshold τ , in which case the node is charged only its own `PARTITION_NONE` evaluation and the recursion stops; otherwise the node is evaluated in full and the search descends. The rate-distortion loss charged to a committed node is the overhead of that commitment against the partition the full search selected,

$$r(n) = J_{\text{none}}(n) - J^*(n), \quad (1)$$

where $J_{\text{none}}(n)$ is the rate-distortion cost of `PARTITION_NONE` and $J^*(n)$ is the cost of the partition the reference search chose for n . It is non-negative by construction, and zero whenever `PARTITION_NONE` already was the reference decision. No encoding is repeated, since the whole protocol is a counterfactual replay over the log of one exhaustive search.

Search work is counted analytically rather than timed. Each node is charged the number of shape candidates a full search would evaluate there, weighted by the area of the block: nine candidates for blocks of 64, 32, and 16 samples, and four for blocks of 8 samples, which admit neither the AB nor the four-way shapes. `PARTITION_SPLIT` is not among the nine, since its cost is the recursion into the four children and is already charged there. The cost reduction $\Delta(\tau)$ is the percentage difference between the work performed by the policy and the work of the full search. It is a counted quantity and not wall-clock time, nor an estimate of it.

Summing (1) over the committed nodes gives the loss the pruning incurred,

$$L(\tau) = 100 \frac{\sum_{n \in P(\tau)} r(n)}{\sum_{n \in N} J_{\text{none}}(n)}, \quad (2)$$

where $P(\tau)$ is the set of nodes committed at threshold τ and N is the set of all decision nodes of the four quantization points. The denominator is accumulated before any threshold is fixed and stays constant along the sweep, so L tends to zero as pruning tends to zero.

Three properties of L restrict its reading, and they are stated before any number is reported. First, the denominator aggregates the `PARTITION_NONE` costs of the three hierarchy levels, which cover the same image area, so it is systematically larger than the cost of coding the frame and L is systematically smaller than any efficiency loss observable in the encoder. Second, the replay discounts recorded values, whereas pruning inside the encoder also alters the reconstruction that serves as reference to later blocks, a propagation absent here. Third, the sum runs over four quantization points, whose Lagrangian multipliers differ, so the aggregate is weighted toward the coarsest of them, where rate-distortion costs are largest. Consequently, no conversion factor between L and the Bjøntegaard

delta bitrate [25] is postulated, and L is used strictly in an ordinal regime, in which every ratio is taken between representations read at the same operating point.

Lowering τ prunes more, which raises Δ and L together. Each representation is therefore a curve rather than a point, and representations are compared by reading their curves at the same cost reduction. The reference reading in this paper is $\Delta = 25\%$, one quarter of the search work skipped.

C. Dataset and Experimental Setup

The reference labels were extracted from libaom v3.10.0 [22], instrumented under a compile-time guard so that the production binary remains byte-identical to the original. The encoder was configured for All-Intra following the AOM Common Test Conditions [23] at `cpu-used=0`, which enables the full rate-distortion search and therefore makes the recorded decisions optimal by construction.

The experiments use sixteen sequences of the UVG dataset [24] at 4K resolution (3840×2160), 8 bits and 4:2:0 chroma subsampling. The restriction to 4K is deliberate. The search cost grows with the number of nodes, so this is the resolution at which the exhaustive partition search is most prohibitive; and resolution also governs the super block size the encoder selects, so averaging over resolutions would average over different tree depths. Each sequence was encoded at four quantization points (`cq-level` 20, 32, 43, and 55) over five frames sampled uniformly along the whole clip, since consecutive frames are nearly identical under All-Intra. The resulting dataset holds 26.98 million samples, of which 10.07 million are decision nodes. The split is by sequence and was frozen before any measurement: ten sequences for training, three for validation, three for the reserved test set. No video sequence was reused across the training, testing, or evaluation datasets, thus avoiding data leakage and overfitting. All results reported here are measured on the six held-out sequences, which contribute 226 447 units of 64 samples and 3 808 703 decision nodes. The models were implemented in PyTorch [21].

D. Fair Treatment of the Deep Arm

The deep arm carries the hypothesis that raw pixels plus capacity suffice, so a negative result on it only counts if the arm was given every advantage. Three controls were applied.

The first is exposure. The arm was trained on the same training and validation sets as the tabular representations, so none sees data that another does not. The second is capacity. The fusion width was doubled from 128 to 256 channels, and the wider model is 1.0% worse in validation loss, so additional capacity does not help and capacity is not the binding constraint.

The third is the training objective. A plain cross entropy and a cost-sensitive variant [19], which weights each node by the rate-distortion loss its misclassification would incur, were trained on the same data with the same schedule and selection criterion. The cost-sensitive objective is better at every operating point from 10% of cost reduction onward,

TABLE I
RATE-DISTORTION LOSS AT MATCHED COST REDUCTION, IN UNITS OF
 10^{-3} Percent of the Aggregated Undivided Cost

Representation	10%	15%	20%	25%	30%
Random control	196.3	298.9	406.6	516.6	634.2
Variance	4.3	12.7	25.0	37.4	55.5
ConvNeXt, plain CE	6.5	10.5	16.4	27.2	44.2
ConvNeXt, width 256	7.5	12.2	19.4	29.4	44.4
ConvNeXt, cost-sensitive	5.4	8.0	14.0	21.9	37.9
A (24 columns)	0.5	1.3	2.8	5.3	9.1
A+C (28 columns)	0.5	1.2	2.7	6.4	12.2
A+B+C (36 columns)	0.2	0.6	1.8	4.0	7.8
A+B (32 columns)	0.2	0.5	1.5	3.3	6.9

PLACEHOLDER — rate-distortion loss versus matched cost reduction, logarithmic vertical axis, one curve per representation, with seed-amplitude bars on the tabular ones.

Fig. 2. Rate-distortion loss as a function of matched search-cost reduction. Bars on the tabular representations show the amplitude over three training seeds.

and it is the one reported in Section IV, so the deep arm is read at the better of the two objectives measured.

IV. RESULTS AND DISCUSSION

The representations were evaluated over the six held-out sequences and 3 808 703 decision nodes, under the All-Intra configuration of libaom v3.10.0 at `cpu-used=0`. Table I reports the loss L of (2) at five matched cost reductions, in units of 10^{-3} percent, where lower is better, and Fig. 2 shows the corresponding frontiers.

The main conclusion when observing Table I is that the ordering of the representations is preserved across the whole range, so it is not an artifact of one operating point. At 25%, isolated variance loses 37.4 units while the twenty-four compact columns of A lose 5.3, a reduction of 7.0 times, against the 516.6 units of the random control. This is the largest single gain in the table, and it contradicts any reading in which the information available in the pixel domain would be exhausted by variance.

Adding the eight causal partitioning columns to A lowers the loss from 5.3 to 3.3 units, a further reduction of 1.60 times. The separation is robust to initialization, since the worst of the three seeds of A+B, at 3.6, is still better than the best of the three seeds of A, at 4.9. This is the central result: those eight columns describe the partition choices of the already coded neighbors, are not computable from the

luminance of the block under any transformation, and therefore carry information produced by the encoding process itself.

Conversely, the four columns of effective quantization, frame position, and node depth add nothing. A+C reaches 6.4 units against 5.3 for A at 25%, and its seed amplitude is 4.5 units against 0.8 for A, so the two distributions overlap and block C does not add information while destabilizing the fit. Once combined with the causal columns the effect is no longer ambiguous, as A+B reaches 3.3 units against 4.0 for A+B+C, all nine pairwise seed comparisons agree, and Fig. 2 shows A+B dominating A+B+C across the entire frontier. The thirty-six column vector is therefore not the offline optimum, although this superiority of A+B has not been verified inside the encoder.

The deep arm does not support the hypothesis that raw pixels plus representation capacity suffice. In its most favorable configuration it reaches 21.9 units at 25%, which is 4.1 times worse than A, although it holds 28 128 638 parameters against the 11 337 of the three networks of A, a factor of 2481. Doubling the fusion width degrades the result rather than improving it, at 29.4 against 27.2 units under the same objective. This may be attributed to missing information rather than to available capacity: the deep arm reads the same pixels as A, and eight columns of encoder state close a further factor of 1.60 with 4291 parameters per level. The deep arm is therefore not an upper bound of the pixel domain, since a model outperformed by another with strictly smaller information access establishes no ceiling.

Three further limitations qualify these results. The three seeds provide an amplitude and not a confidence interval. The objective ablation of the deep arm covers two objectives, and the strength of the cost weighting was not swept. And the dataset is 4K only, so whether the causal neighborhood carries the same weight where the super block is 64×64 is not established here.

V. CONCLUSIONS

This paper presented an offline attribution protocol that measures the rate-distortion loss of competing representations of the AV1 intra partition decision at matched search-cost reduction, reaching the conclusion that the causal state of the encoding process carries decision information that luminance alone does not provide. The protocol holds the pruning policy and the training strategy fixed and varies only the information a representation may read. It was evaluated over 3.81 million held-out decision nodes of sixteen UVG 4K sequences encoded with libaom v3.10.0. Twenty-four compact descriptors improve on isolated variance by 7.0 times, eight causal partitioning columns improve on those by a further 1.60 times, and four quantization and position columns add nothing. A ConvNeXt with 28.1 million parameters remains 4.1 times behind the compact descriptors, and doubling its width makes it worse, so capacity is not the binding constraint. Besides, to the best of the authors' knowledge, this is the first attribution of rate-distortion loss to information access in AV1 partitioning.

ACKNOWLEDGMENT

This study was financed in part by the Coordenação de Aperfeiçoamento de Pessoal de Nível Superior – Brasil (CAPES) – Finance Code 001, and also by the Brazilian research support agencies CNPq and FAPERGS.

REFERENCES

- [1] ITU-T. (2013). *H.265: High Efficiency Video Coding*. [Online]. Available: <https://www.itu.int/rec/t-rec-h.265>
- [2] ITU-T. (2020). *H.266: Versatile Video Coding*. [Online]. Available: <https://www.itu.int/rec/t-rec-h.266>
- [3] Alliance for Open Media. (2019). *AV1 Video Codec*. [Online]. Available: <https://aomedia.org/av1>
- [4] J. Han *et al.*, “A technical overview of AV1,” *Proc. IEEE*, vol. 109, no. 9, pp. 1435–1462, Sep. 2021.
- [5] Y. Chen *et al.*, “An overview of core coding tools in the AV1 video codec,” in *Proc. Picture Coding Symp. (PCS)*, Jun. 2018, pp. 41–45.
- [6] D. Grois, T. Nguyen, and D. Marpe, “Coding efficiency comparison of AV1/VP9, H.265/MPEG-HEVC, and H.264/MPEG-AVC encoders,” in *Proc. Picture Coding Symp. (PCS)*, Dec. 2016, pp. 1–5.
- [7] M. A. Layek *et al.*, “Performance analysis of H.264, H.265, VP9 and AV1 video encoders,” in *Proc. 19th Asia-Pacific Netw. Oper. Manage. Symp. (APNOMS)*, Sep. 2017, pp. 322–325.
- [8] G. J. Sullivan and T. Wiegand, “Rate-distortion optimization for video compression,” *IEEE Signal Process. Mag.*, vol. 15, no. 6, pp. 74–90, Nov. 1998.
- [9] M. Xu and B. Jeon, “Selection of intra prediction tools for fast AV1 encoding,” in *Proc. IEEE Int. Symp. Broadband Multimedia Syst. Broadcast. (BMSB)*, Oct. 2020, pp. 1–4.
- [10] M. Xu and B. Jeon, “User-priority based AV1 coding tool selection,” *IEEE Trans. Broadcast.*, vol. 67, no. 3, pp. 736–745, Sep. 2021.
- [11] J. Jeong, G. Gankhuyag, and Y.-H. Kim, “A fast intra mode decision based on accuracy of rate distortion model for AV1 intra encoding,” in *Proc. 34th Int. Tech. Conf. Circuits/Syst., Comput. Commun. (ITC-CSCC)*, Jun. 2019, pp. 1–3.
- [12] J. Kim, S. Blasi, A. S. Dias, M. Mrak, and E. Izquierdo, “Fast inter-prediction based on decision trees for AV1 encoding,” in *Proc. IEEE Int. Conf. Acoust., Speech Signal Process. (ICASSP)*, May 2019, pp. 1627–1631.
- [13] M. Saldanha, G. Sanchez, C. Marcon, and L. Agostini, “Configurable fast block partitioning for VVC intra coding using light gradient boosting machine,” *IEEE Trans. Circuits Syst. Video Technol.*, vol. 32, no. 6, pp. 3947–3960, Jun. 2022.
- [14] Q. He, W. Wu, L. Luo, C. Zhu, and H. Guo, “Random forest based fast CU partition for VVC intra coding,” in *Proc. IEEE Int. Symp. Broadband Multimedia Syst. Broadcast. (BMSB)*, Aug. 2021, pp. 1–4.
- [15] J. Chen, H. Sun, J. Katto, X. Zeng, and Y. Fan, “Fast QTMT partition decision algorithm in VVC intra coding based on variance and gradient,” in *Proc. IEEE Vis. Commun. Image Process. (VCIP)*, Dec. 2019, pp. 1–4.
- [16] M. Corrêa, B. Zatt, D. Palomino, G. Corrêa, and L. Agostini, “A high-throughput hardware architecture for AV1 non-directional intra modes,” *IEEE Trans. Circuits Syst. I, Reg. Papers*, vol. 67, no. 5, pp. 1481–1494, May 2020.
- [17] L. Netto, M. Corrêa, D. Palomino, L. Agostini, and G. Corrêa, “Power-quality configurable hardware design for AV1 directional intra-frame prediction,” *IEEE Design Test*, vol. 39, no. 2, pp. 38–45, Apr. 2022.
- [18] Z. Liu, H. Mao, C.-Y. Wu, C. Feichtenhofer, T. Darrell, and S. Xie, “A ConvNet for the 2020s,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun. 2022, pp. 11976–11986.
- [19] C. Elkan, “The foundations of cost-sensitive learning,” in *Proc. 17th Int. Joint Conf. Artif. Intell. (IJCAI)*, Aug. 2001, pp. 973–978.
- [20] I. Loshchilov and F. Hutter, “Decoupled weight decay regularization,” in *Proc. Int. Conf. Learn. Represent. (ICLR)*, May 2019, pp. 1–18.
- [21] A. Paszke *et al.*, “PyTorch: An imperative style, high-performance deep learning library,” in *Proc. Adv. Neural Inf. Process. Syst. (NeurIPS)*, Dec. 2019, pp. 8024–8035.
- [22] Alliance for Open Media. *AV1 Codec Library*, v3.10.0. [Online]. Available: <https://aomedia.googlesource.com/aom>
- [23] X. Zhao *et al.*, “AOM common test conditions v9.0,” Alliance for Open Media, Codec Working Group, doc. CWG-G082, Mar. 2026.
- [24] A. Mercat, M. Viitanen, and J. Vanne, “UVG dataset: 50/120fps 4K sequences for video codec analysis and development,” in *Proc. ACM Multimedia Syst. Conf.*, Istanbul, Turkey, Jun. 2020. [Online]. Available: <https://ultravideo.fi/dataset.html>
- [25] G. Bjøntegaard, “Calculation of average PSNR differences between RD-curves,” Video Coding Experts Group (VCEG), doc. VCEG-M33, Mar. 2001.