


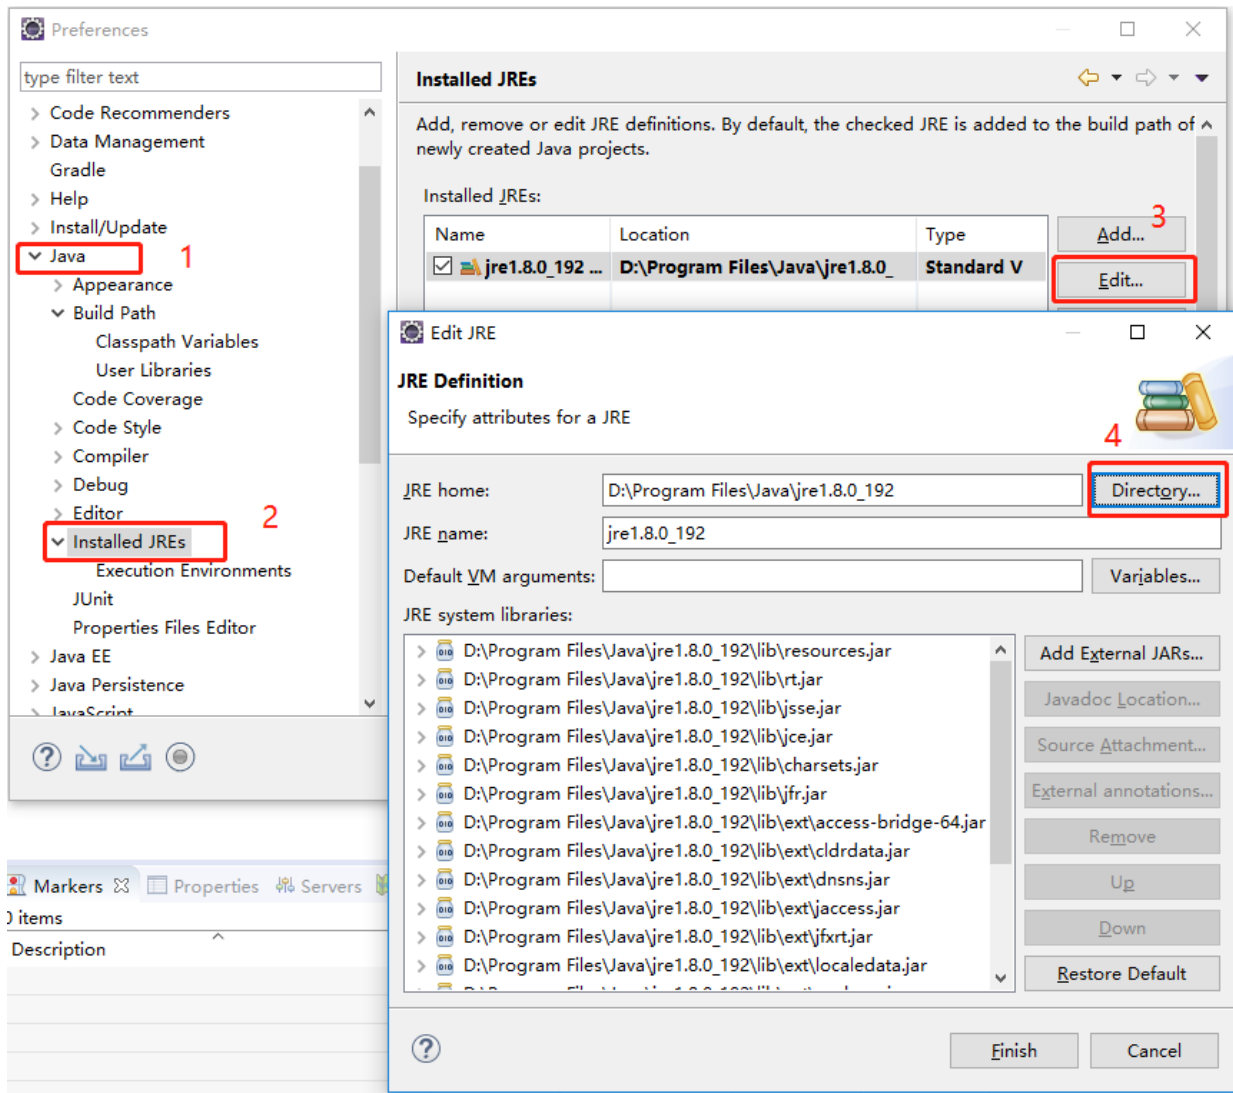


1, 设置JDK环境

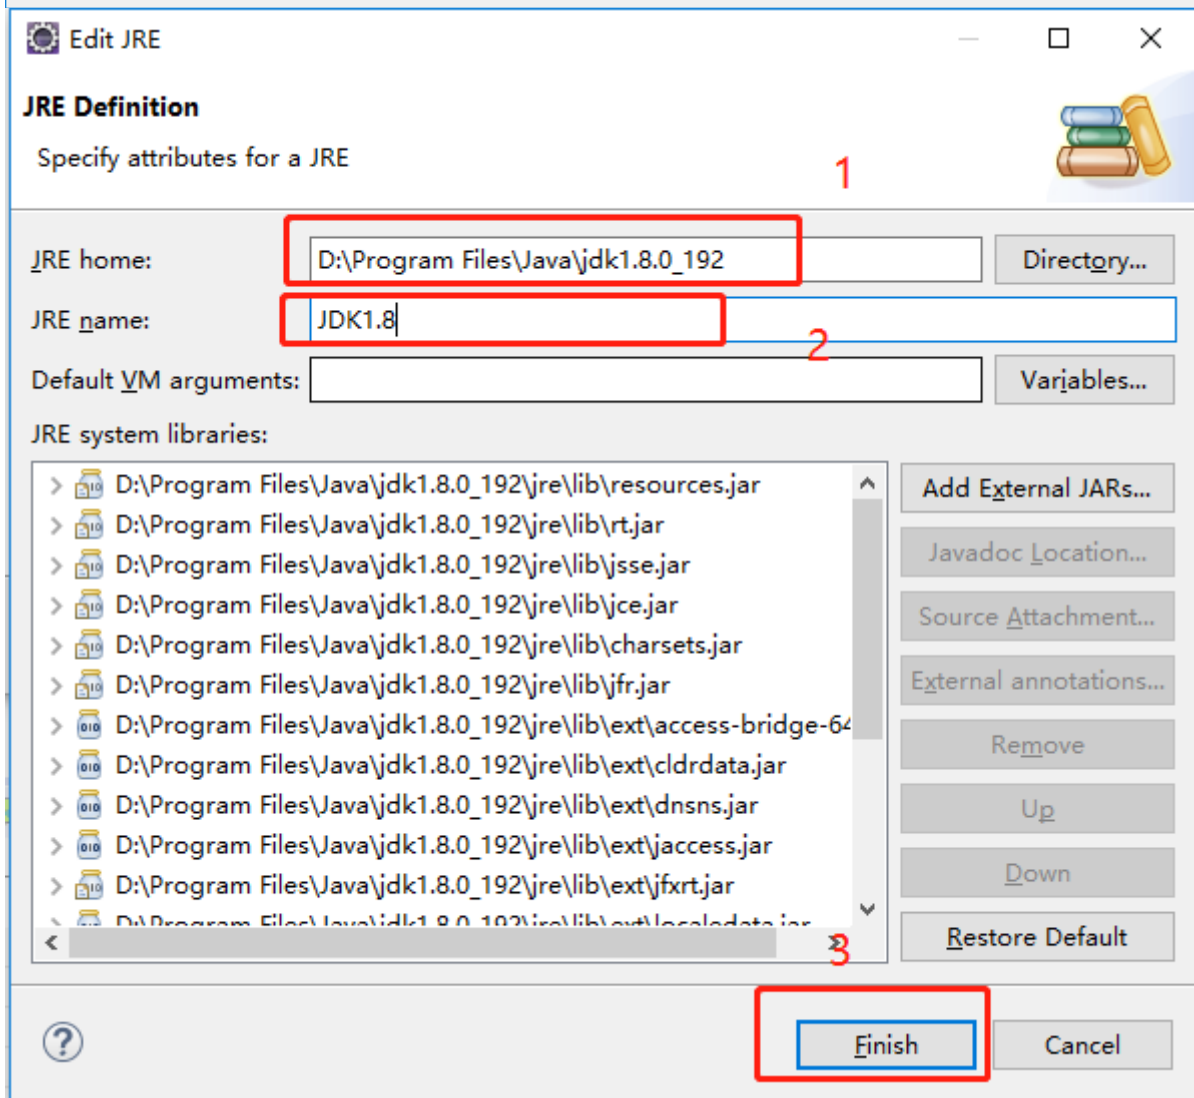


这里我们选择JDK文件夹

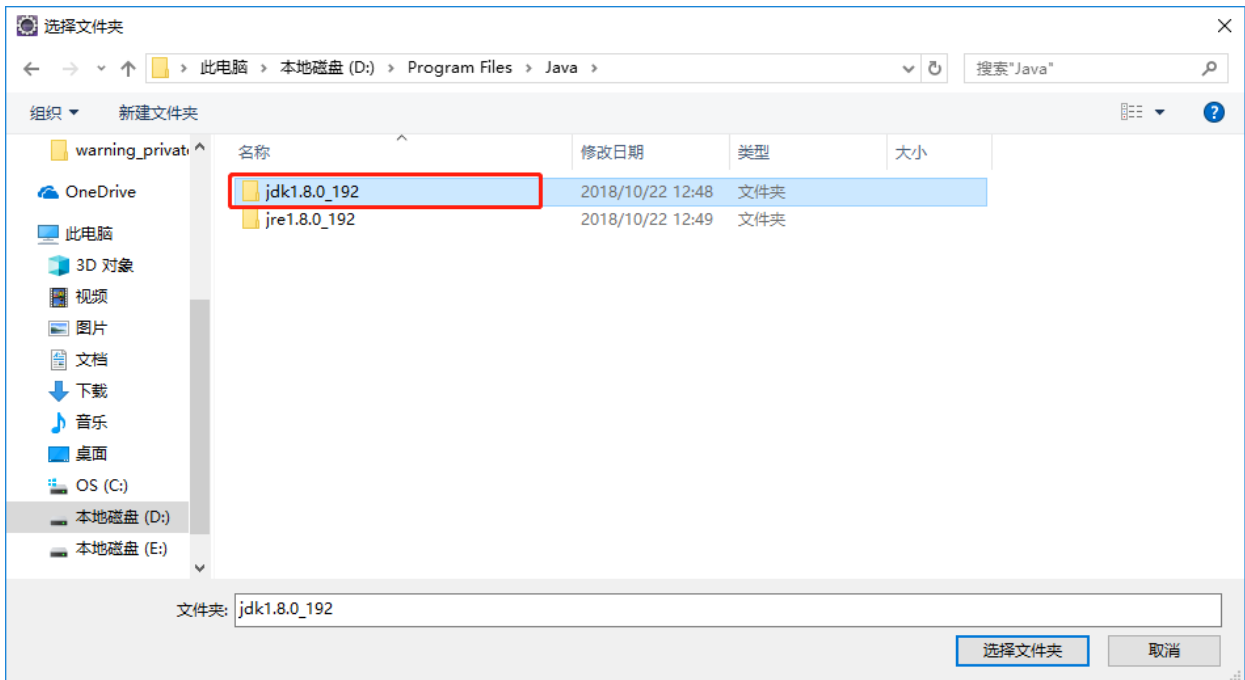

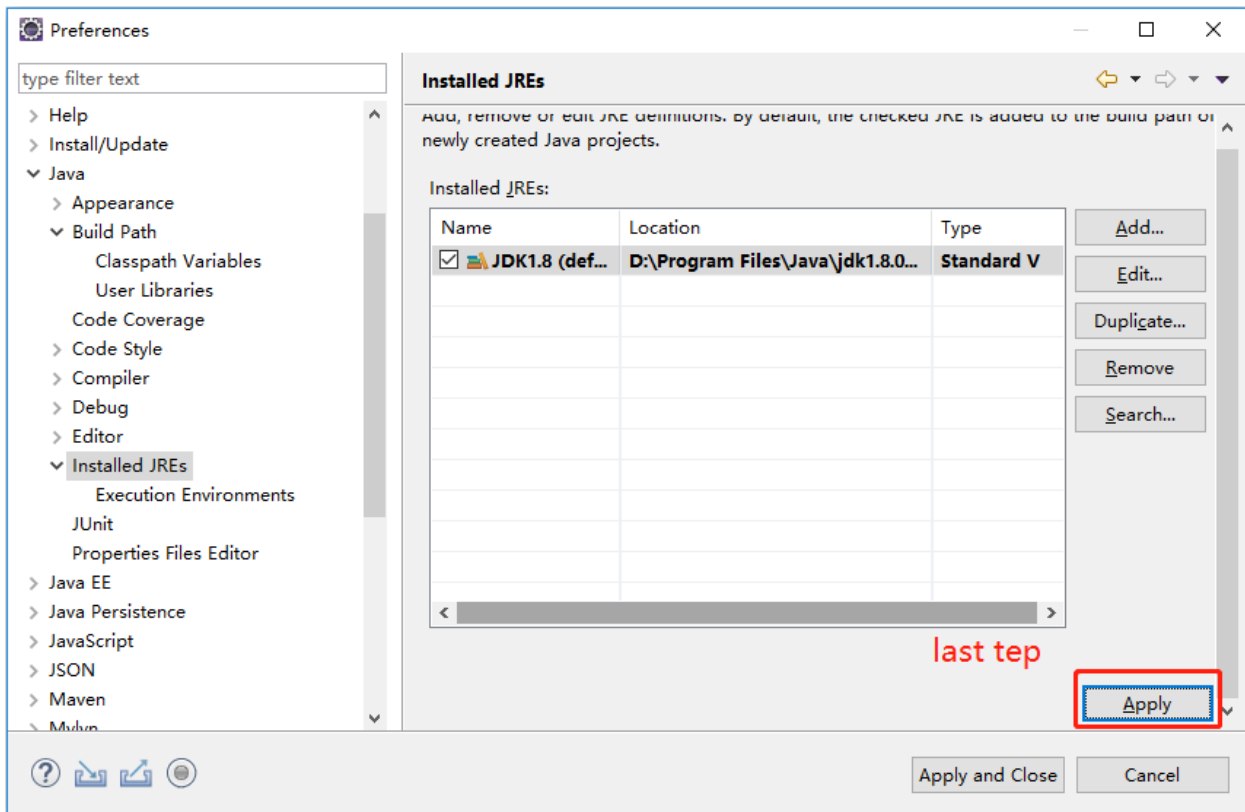


2, 修改maven中的setting.xml文件, 也是修改其仓库路径。


默认如下:

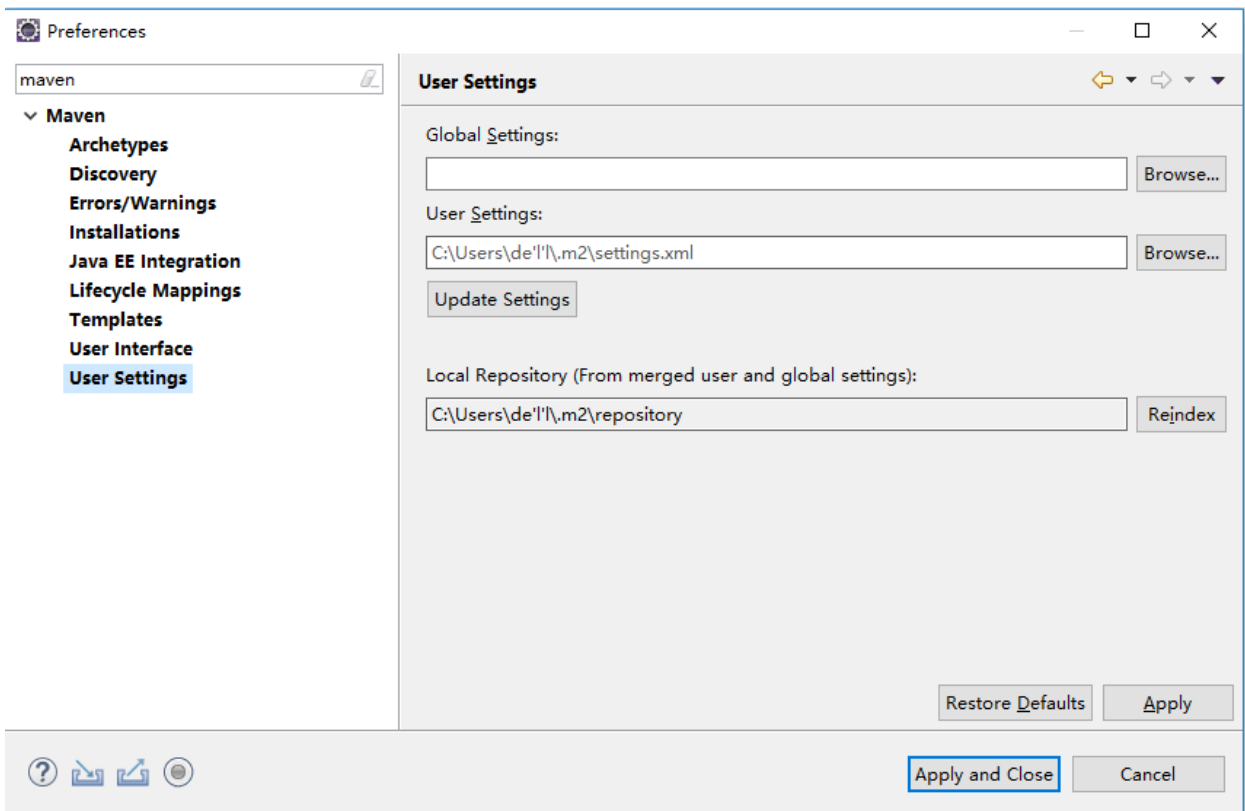


修改后:

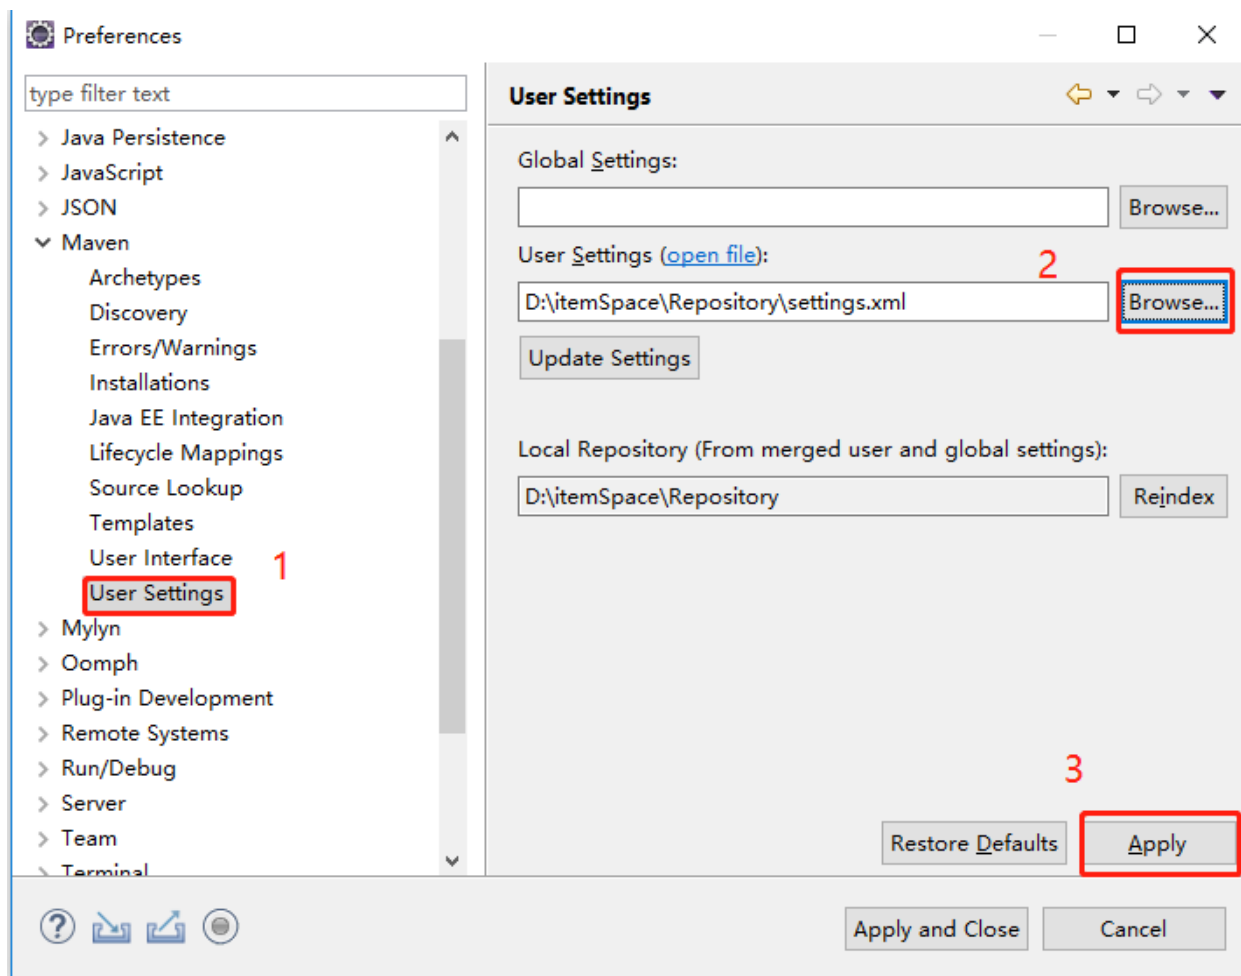


3, 项目编码设置

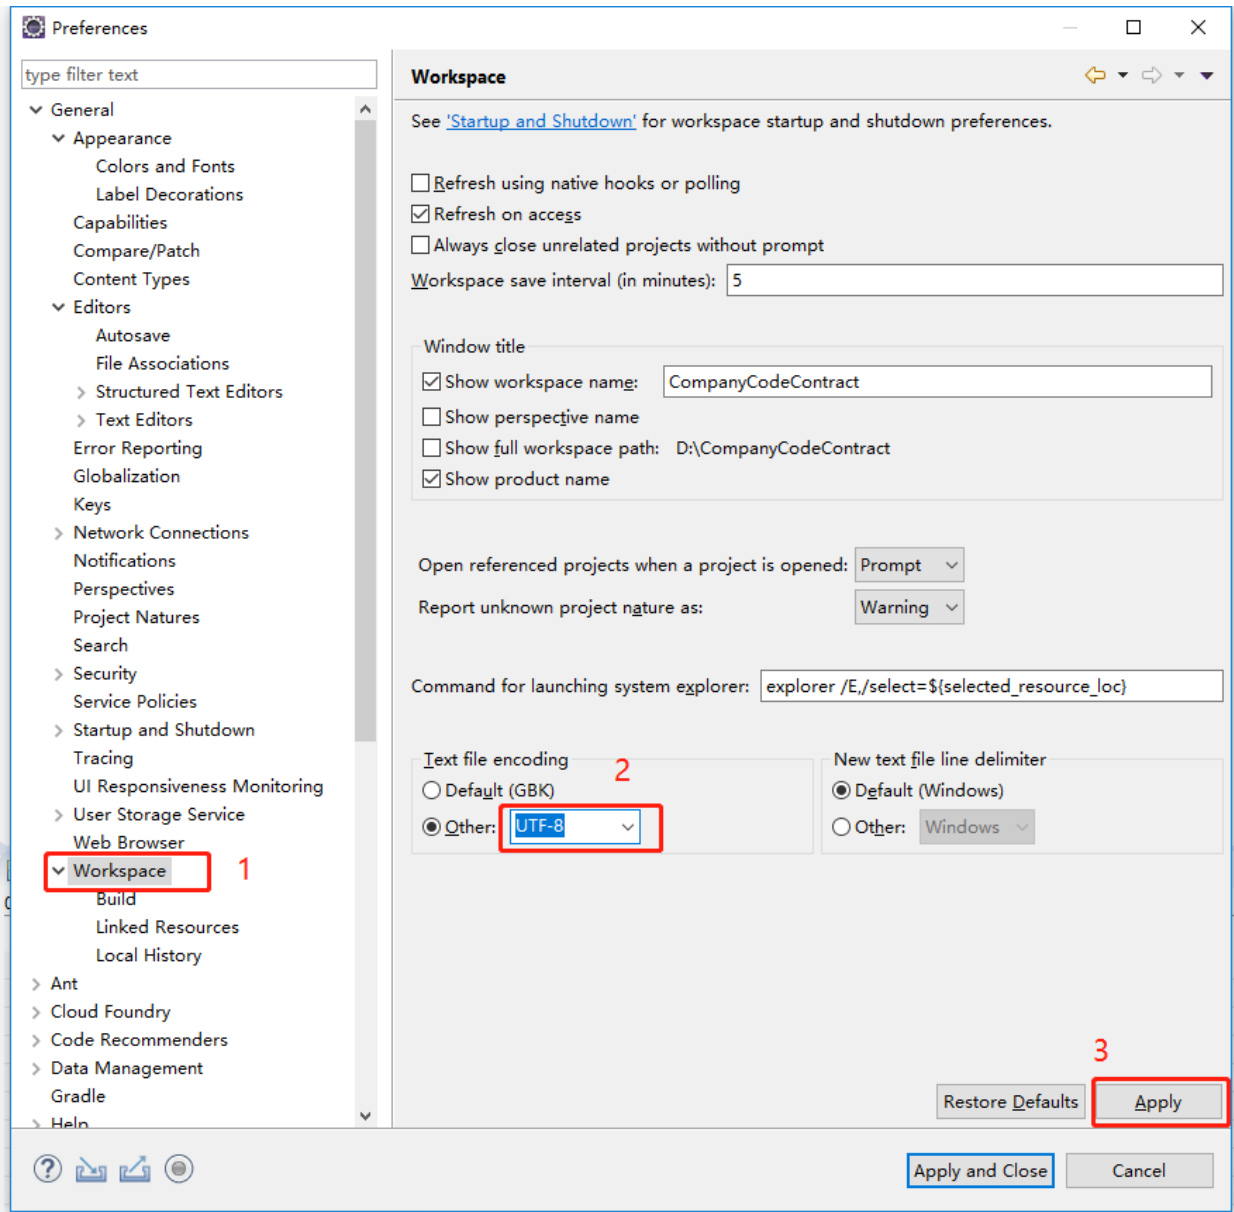


4, eclipse文字设置

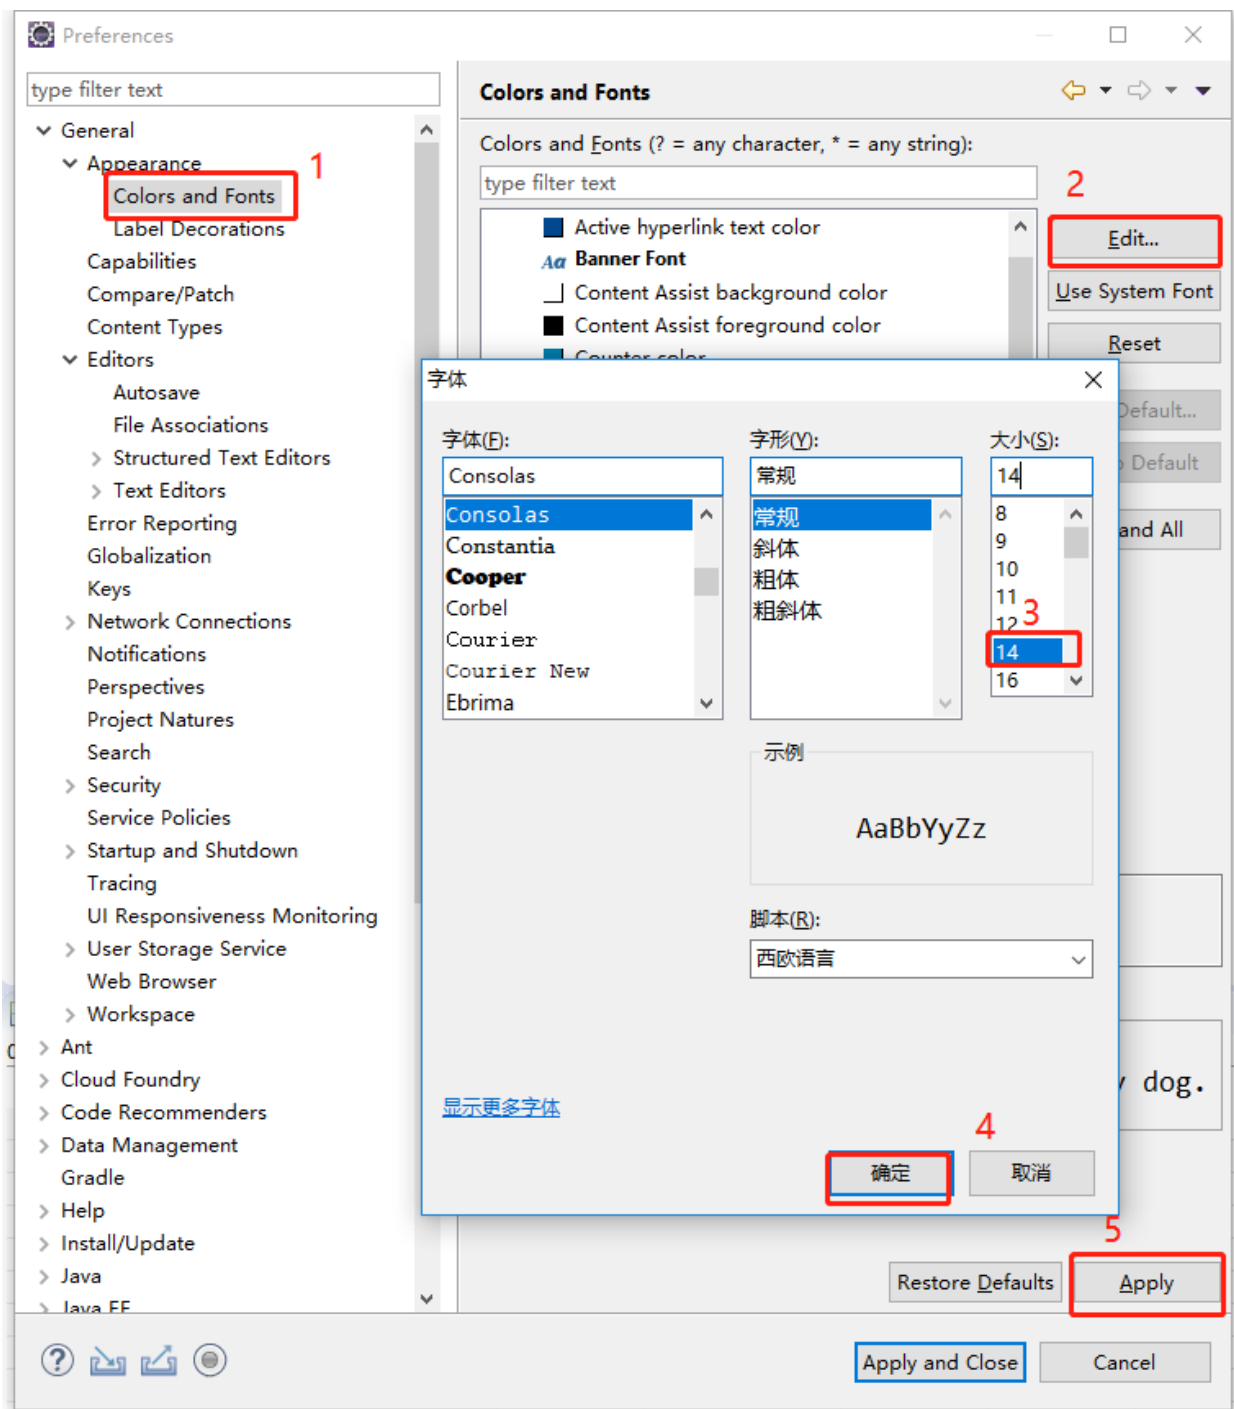


5, 代码提示设置

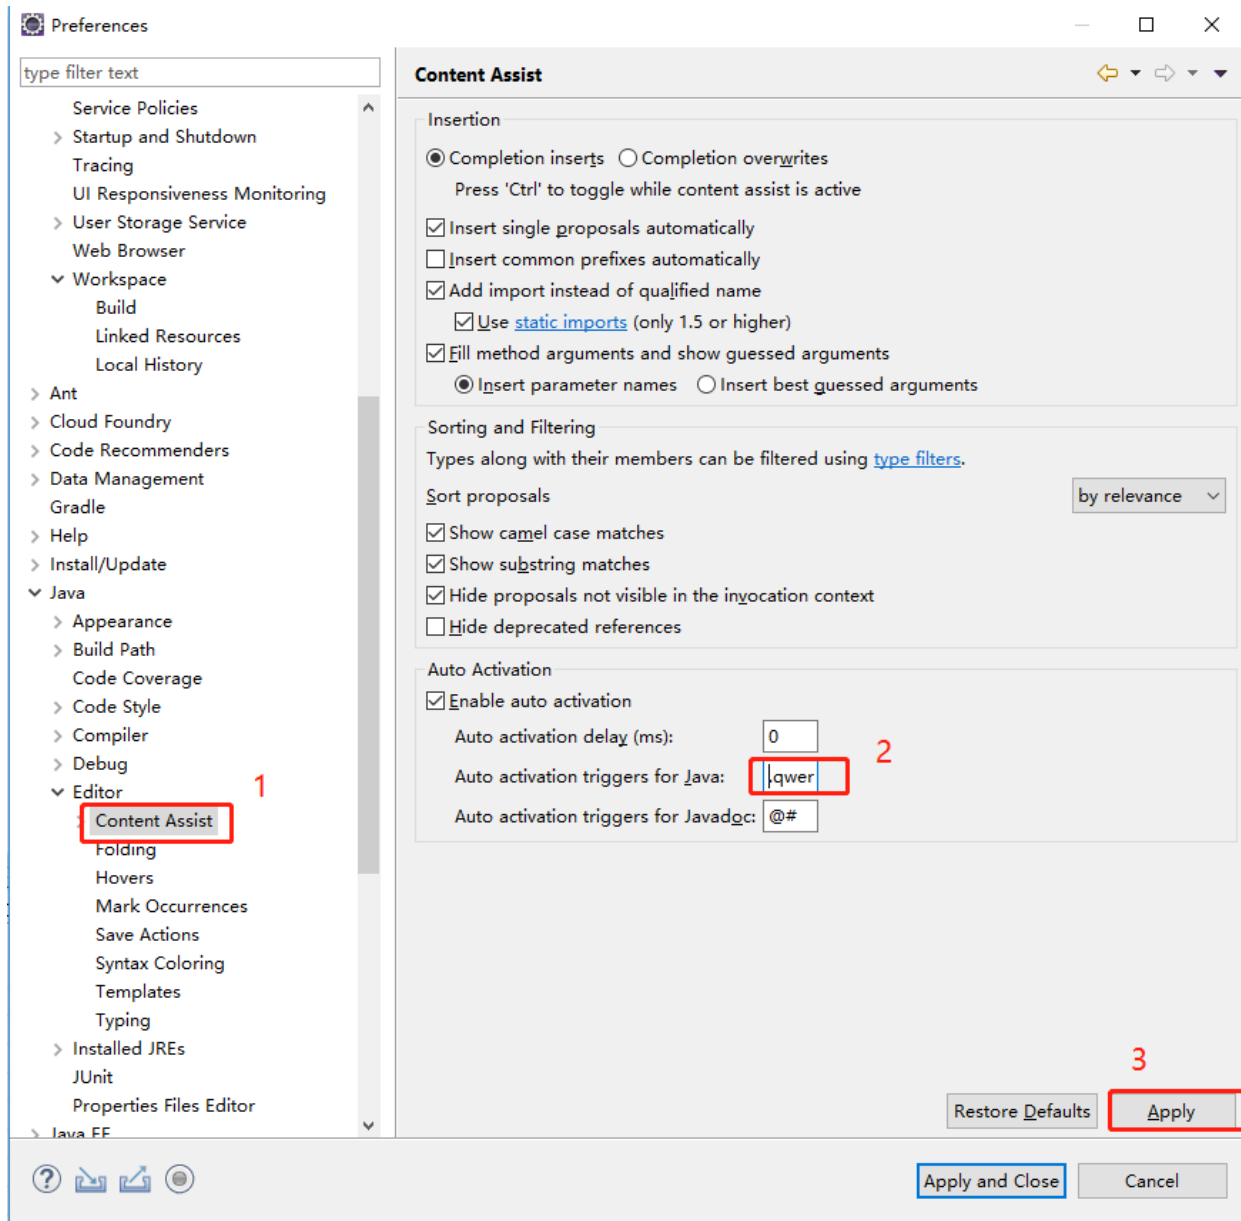

6, 代码注释配置

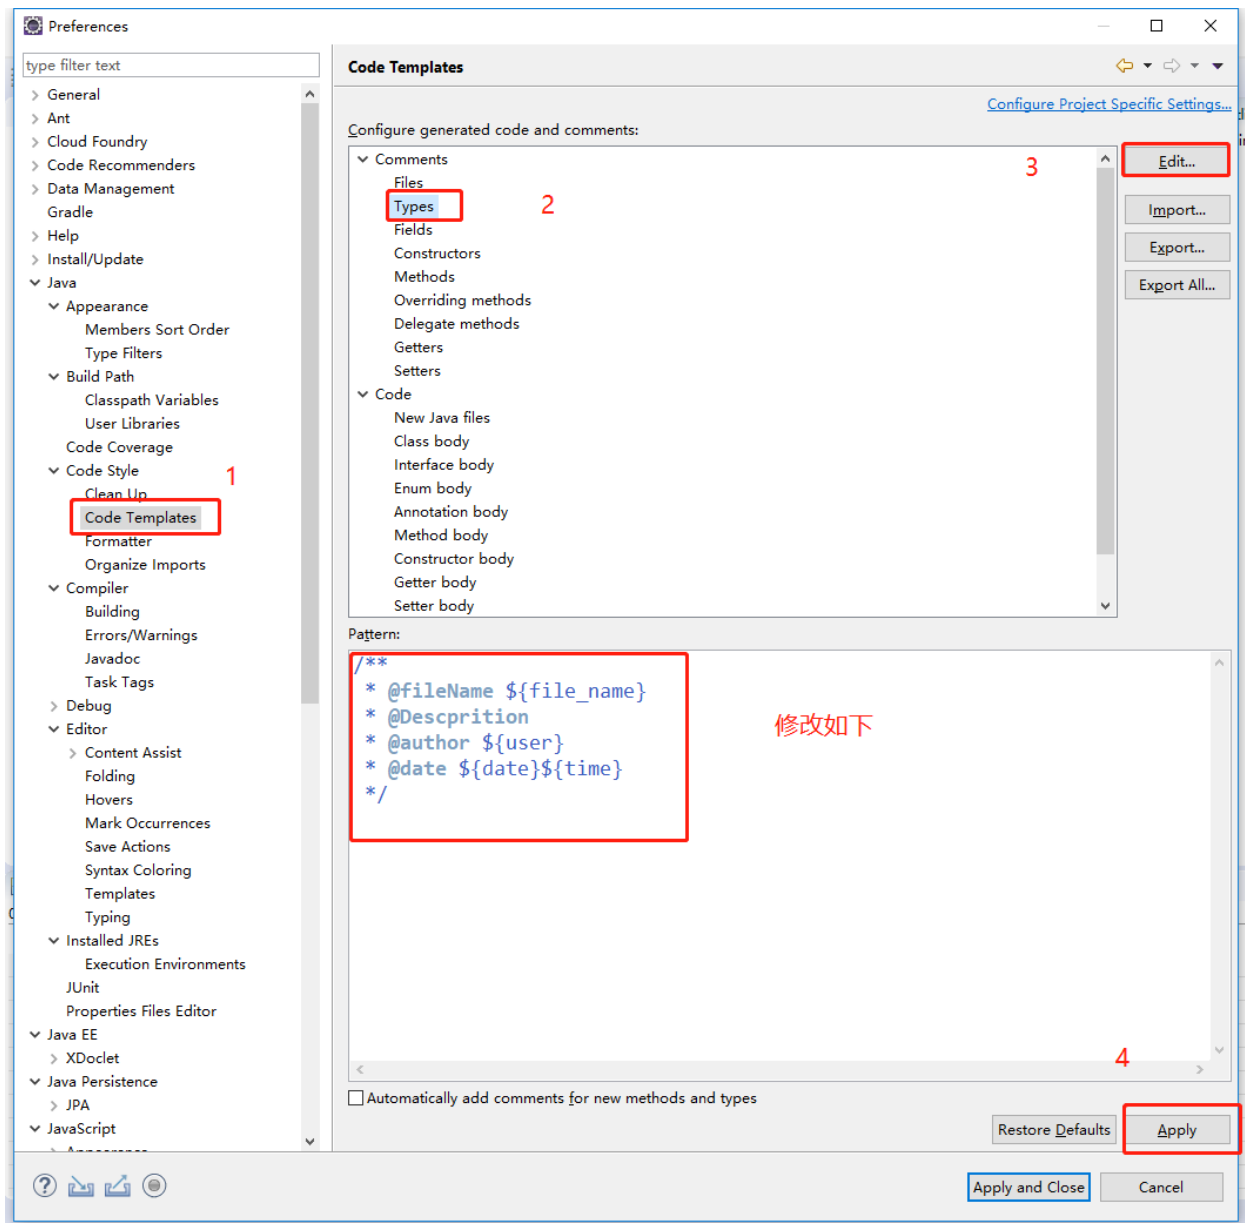

7, 配置SSH

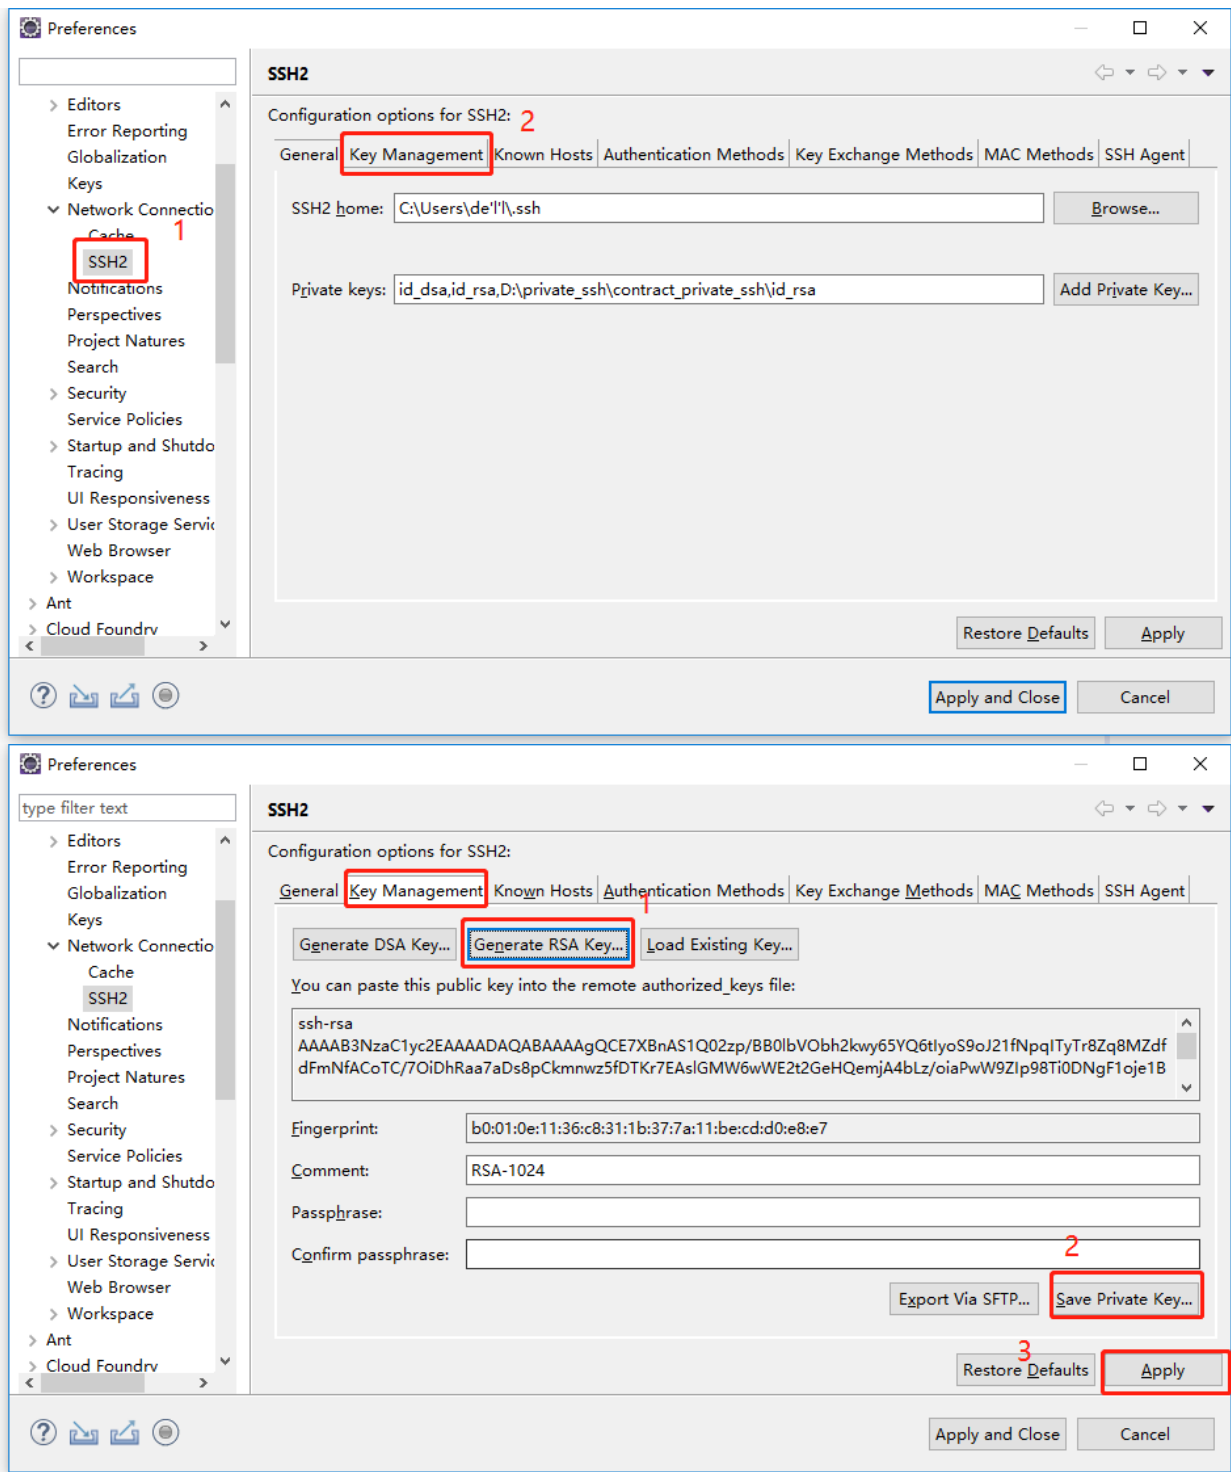

将上图中的 ssh-rsa复制到你的gitlab SSH-key中。


Add an SSH key

Before you can add an SSH key you need to generate it.

Don't paste the private part of the SSH key. Paste the public part, which is usually contained in the file '~/.ssh/id_rsa.pub' and begins with 'ssh-rsa'.

Add key

RSA-1024-contract
30:aa:86:a1:c2:1e:56:e6:a4:89:24:43:6a:f4:5a:73

 RSA-1024-warning
cd:18:81:4c:73:e1:55:51:10:8d:05:f0:a2:d7:c6:b9

RSA-1024
6f:eb:51:3e:2a:fa:95:02:60:f5:12:d9:73:6b:bb:48

created 15 minutes ago

created 2 days ago

created 17 days ago

8, 导入项目



Import




Select

Import one or more projects from a Git Repository.



Select an import wizard:

- > General
- > EJB
- ▼ Git
 -  Projects from Git
- > Gradle
- > Install
- > Java EE
- > Maven
- > Oomph
- > Plug-in Development
- > Run/Debug
- > Tasks




< Back

Next >

Finish

Cancel

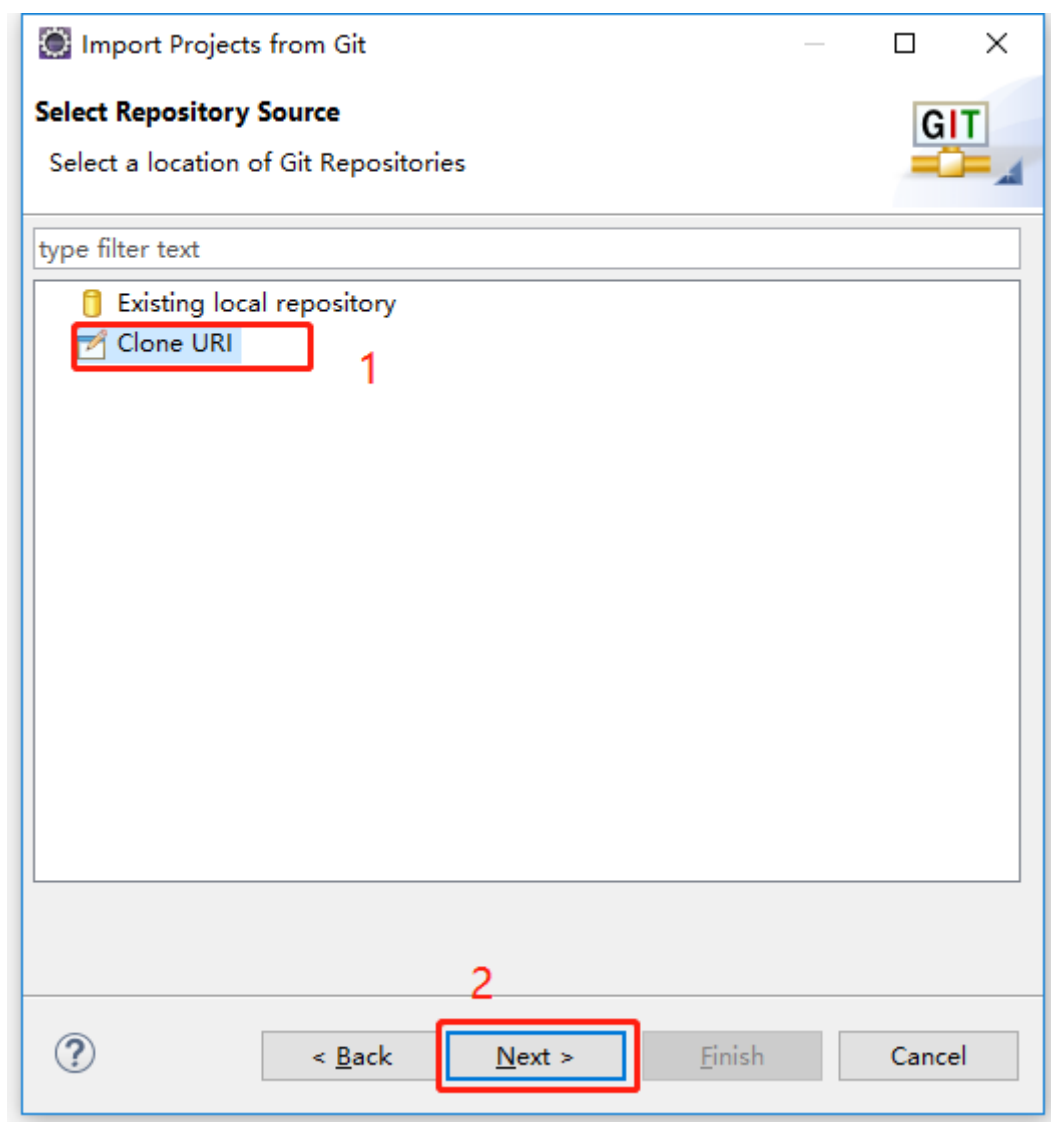

这里一定要先进行一次Https失败的操作，然后back，在选ssh。因为上面的git会根据你的user修改而变动。很是麻烦

Import Projects from Git

Source Git Repository

Enter the location of the source repository.



Location

URI:

ssh://git@

Local File...

Host:

git.igfresh.com

Repository path:

regs-tms/tms-web-api.git

Connection

Protocol:

ssh

Port:

Authentication

User:

aiker

Password:

●●●●●●●●●●●●●●●●

☐ Store in Secure Store



< Back

Next >

Finish

Cancel

Import Projects from Git

Branch Selection

Select branches to clone from remote repository. Remote tracking branches will be created to track updates for these branches in the



Branches of `ssh://git@git.igfresh.com/regs-tms/tms-web-api.git`:

- ☒  dev
- ☐ 
- ☐ 
- ☐ 
- ☐ 

Select All

Deselect All



< Back

Next >

Finish

Cancel

Import Projects from Git

Local Destination

Configure the local storage location for tms-web-api.



Destination

Directory:

C:\Users\de'l\git\tms-web-api

Browse

Initial branch:

dev

☐ Clone submodules

改成自己本地放代码的文件夹

Configuration

Remote name:

origin



< Back

Next >

Finish

Cancel


Select a wizard to use for importing projects

Depending on the wizard, you may select a directory to determine the wizard's scope



Wizard for project import

- ☐ Import existing Eclipse projects
- ☐ Import using the New Project wizard
- ☒ Import as general project

 Working Tree - D:\CompanyCodeContract\tms-web-api




< Back

Next >

Finish

Cancel

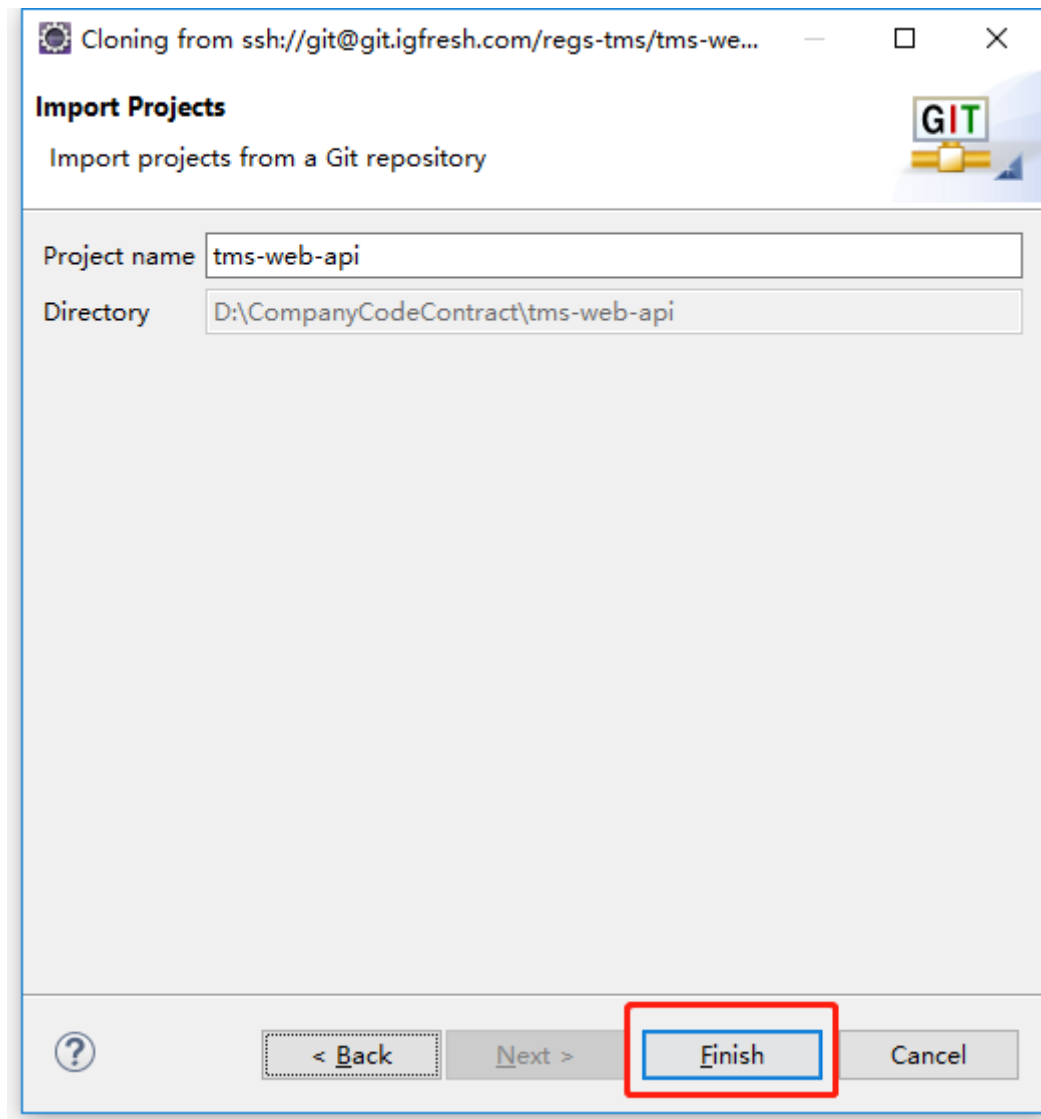


- ▼ > tms-web-api [tms-web-api dev]
 - > tms-web-api
 - > tms-web-facade
 - > tms-web-service


Select Repository Source

Select a location of Git Repositories



type filter text

 Existing local repository

 Clone URI



< Back

Next >

Finish

Cancel

Import Projects from Git

Select a Git Repository

You can also clone a repository or add local repositories to the list



type filter text

Add...

> tms-web-api [dev] - D:\CompanyCodeContract\tms-web-api\.git



< Back

Next >

Finish

Cancel

Import Projects from Git

Select a wizard to use for importing projects

Depending on the wizard, you may select a directory to determine the wizard's scope



Wizard for project import

- ☐ Import existing Eclipse projects
- ☐ Import using the New Project wizard
- ☒ Import as general project

Working Tree - D:\CompanyCodeContract\tms-web-api

> .git

[X] .project

> tms-web-api

1

> tms-web-facade

2

> tms-web-service

3

依次导入




< Back

Next >

Finish

Cancel

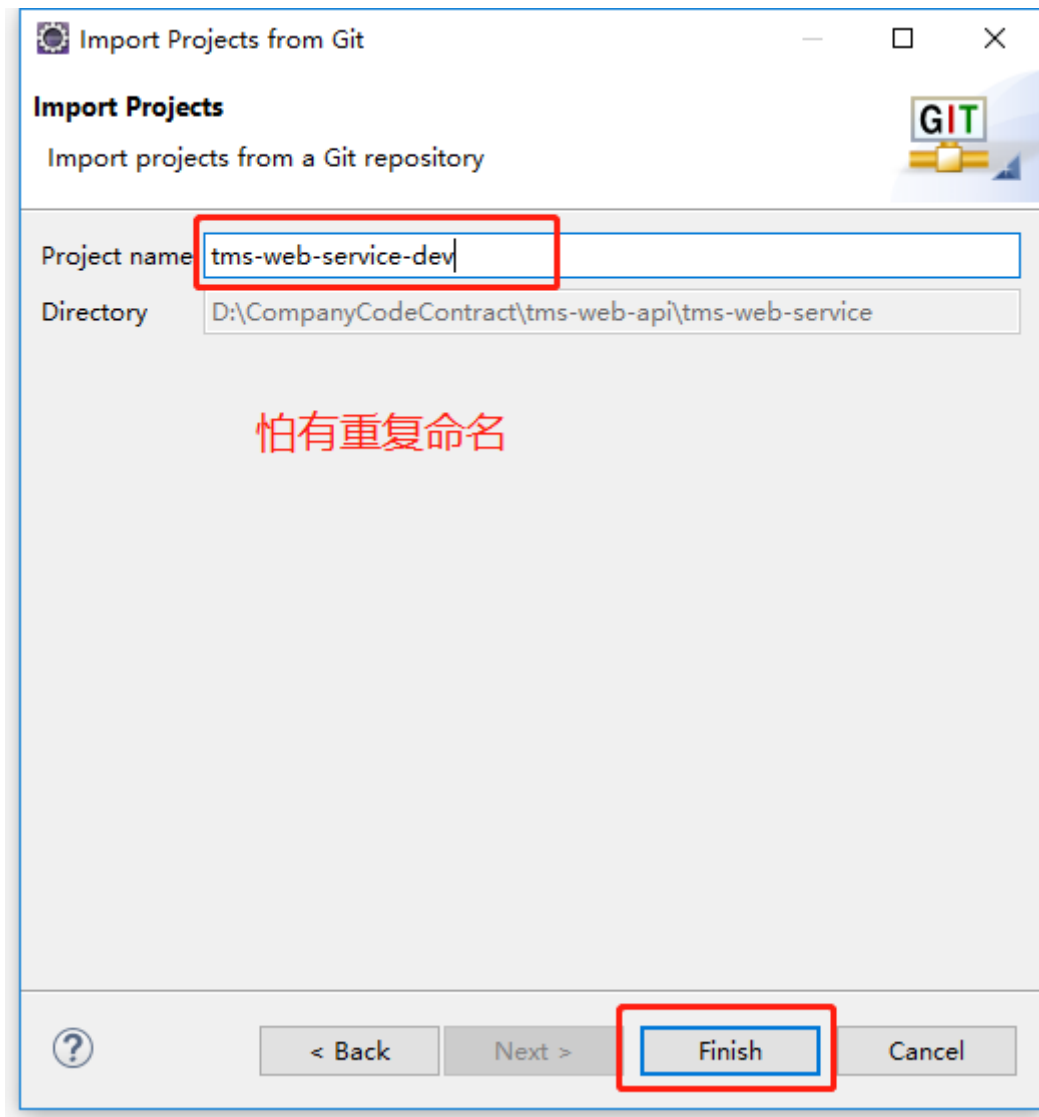

9, 依此进行 condfigure-> convet to maven project 操作,最后进行maven->update project操作

10, 运行配置

-Dspring.profiles.active=local -DlogPath=D:/workSpace/tms-safety-api/tms-safety-api/logs

