



Chapter 3: Processes Part 1

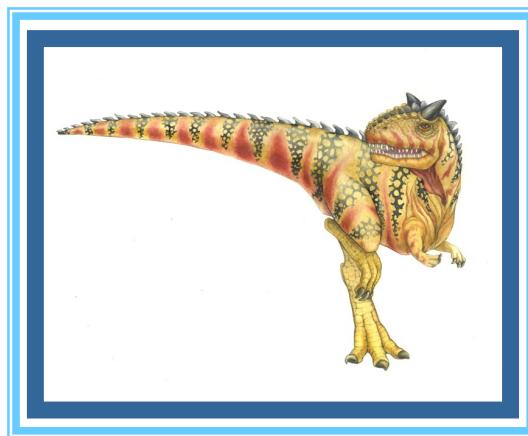



Process Concept

- An operating system executes a variety of programs:
 - Batch system – **jobs**
 - Time-shared systems – **user programs** or **tasks**
- Textbook uses the terms **job** and **process** almost interchangeably
- **Process** – a program in execution; process execution must progress in sequential fashion
- Multiple parts
 - The program code, also called **text section**
 - Current activity including **program counter**, processor registers
 - **Stack** containing temporary data
 - ▶ Function parameters, return addresses, local variables
 - **Data section** containing global variables
 - **Heap** containing memory dynamically allocated during run time






Process Concept (Cont.)


- Program is ***passive*** entity stored on disk (**executable file**), process is ***active***
 - Program becomes process when executable file loaded into memory
- Execution of program started via GUI mouse clicks, command line entry of its name, etc
- One program can be several processes
 - Consider multiple users executing the same program







Process in Memory

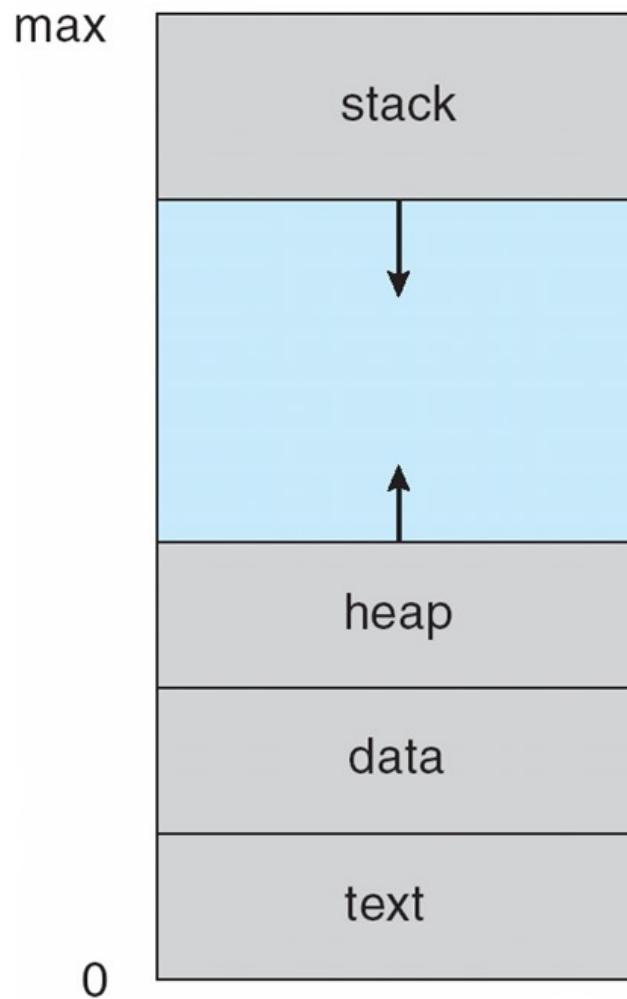



Memory Layout of a C Program


- The global data section is divided into different sections for (a) initialized data and (b) uninitialized data.
- A separate section is provided for the `argc` and `argv` parameters passed to the `main()` function.

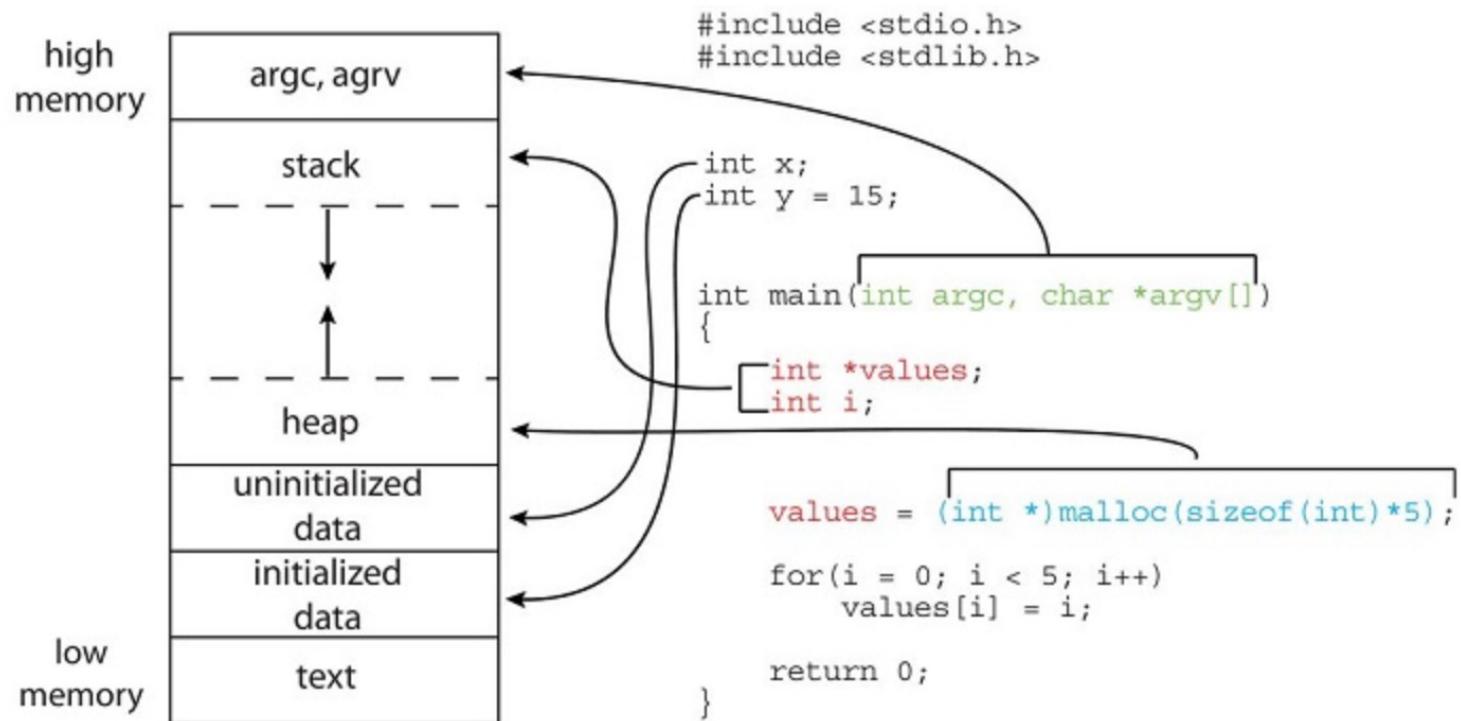



Process State

- As a process executes, it changes **state**
 - **new**: The process is being created
 - **running**: Instructions are being executed
 - **waiting**: The process is waiting for some event to occur
 - **ready**: The process is waiting to be assigned to a processor
 - **terminated**: The process has finished execution










Diagram of Process State



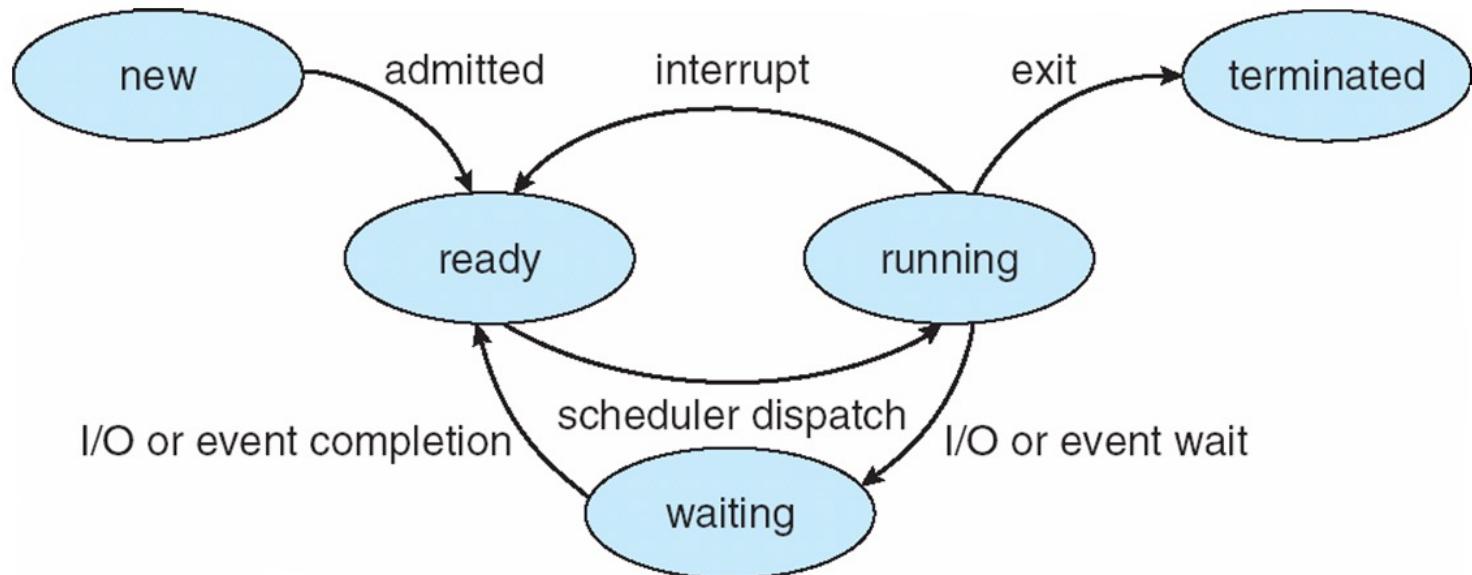

CPU Switch From Process to Process

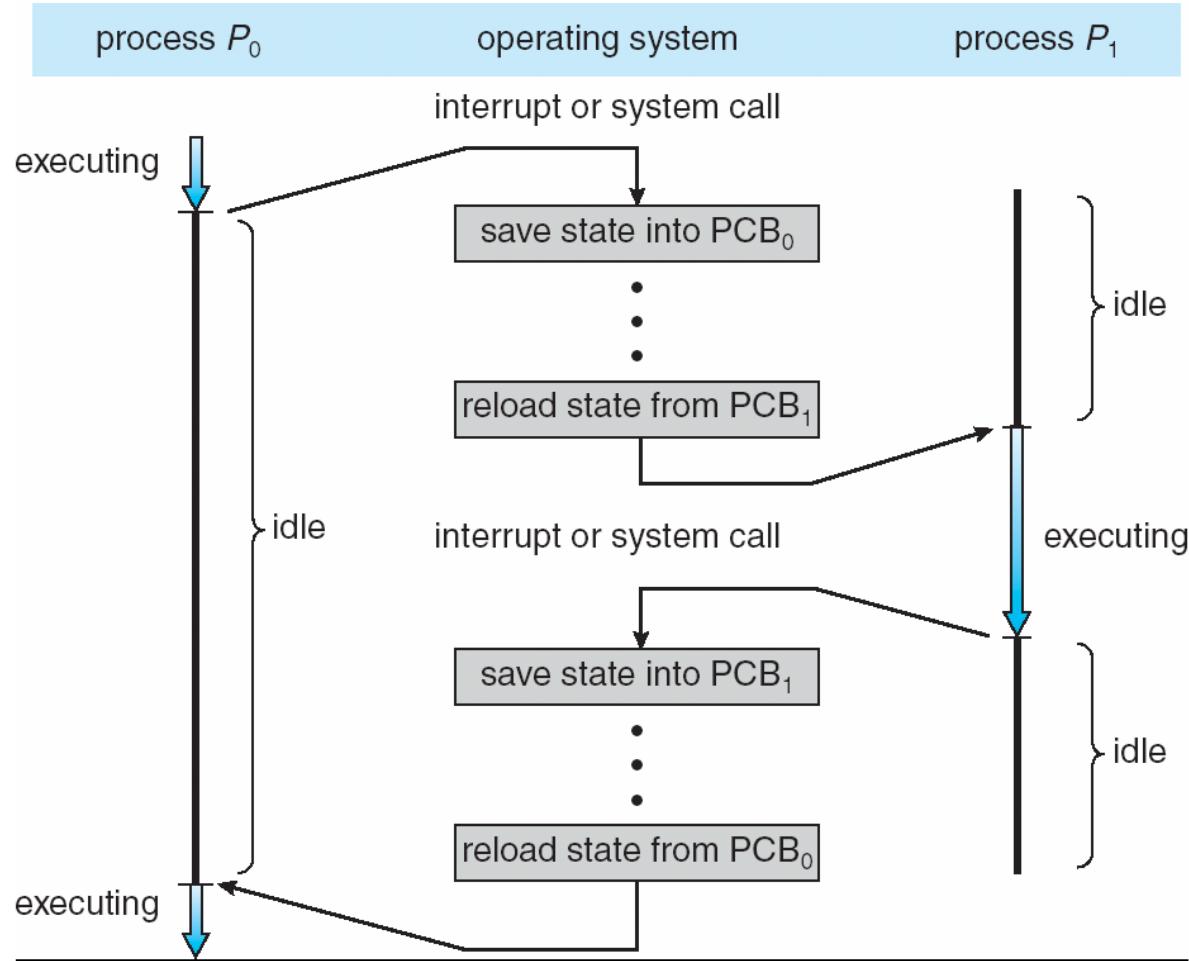




Threads

- So far, process has a single thread of execution
- Consider having multiple program counters per process
 - Multiple locations can execute at once
 - ▶ Multiple threads of control -> **threads**
- Must then have storage for thread details, multiple program counters in PCB
- See next chapter







Process Control Block (PCB)

Information associated with each process
(also called **task control block**)

- Process state – running, waiting, etc
- Program counter – location of instruction to next execute
- CPU registers – contents of all process-centric registers
- CPU scheduling information- priorities, scheduling queue pointers
- Memory-management information – memory allocated to the process
- Accounting information – CPU used, clock time elapsed since start, time limits
- I/O status information – I/O devices allocated to process, list of open files

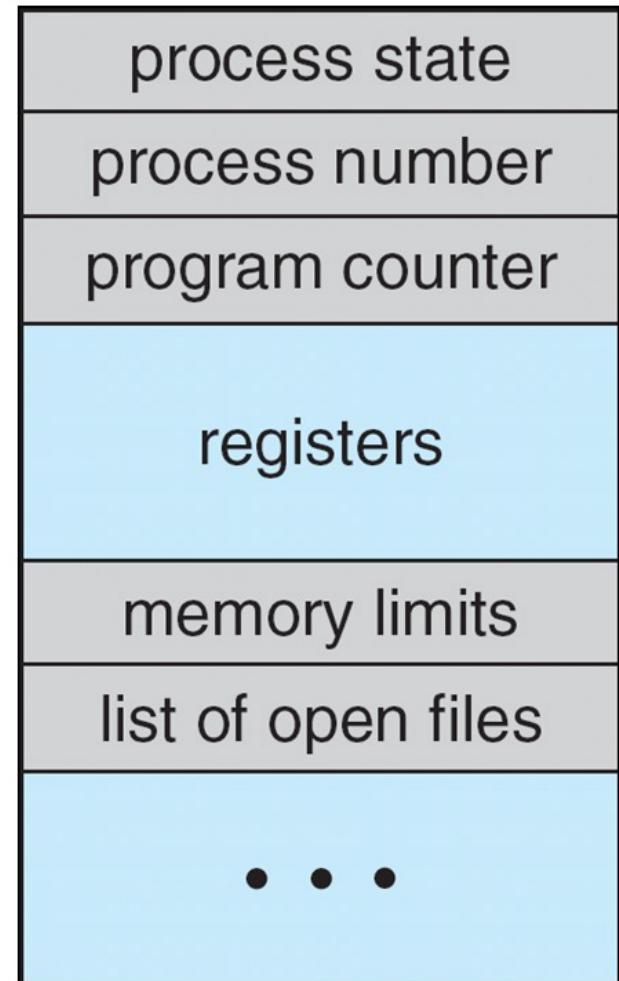



Process Representation in Linux

Represented by the C structure `task_struct`

```
pid t_pid; /* process identifier */  
long state; /* state of the process */  
unsigned int time_slice /* scheduling information */  
struct task_struct *parent; /* this process's parent */  
struct list_head children; /* this process's children */  
struct files_struct *files; /* list of open files */  
struct mm_struct *mm; /* address space of this process */
```

