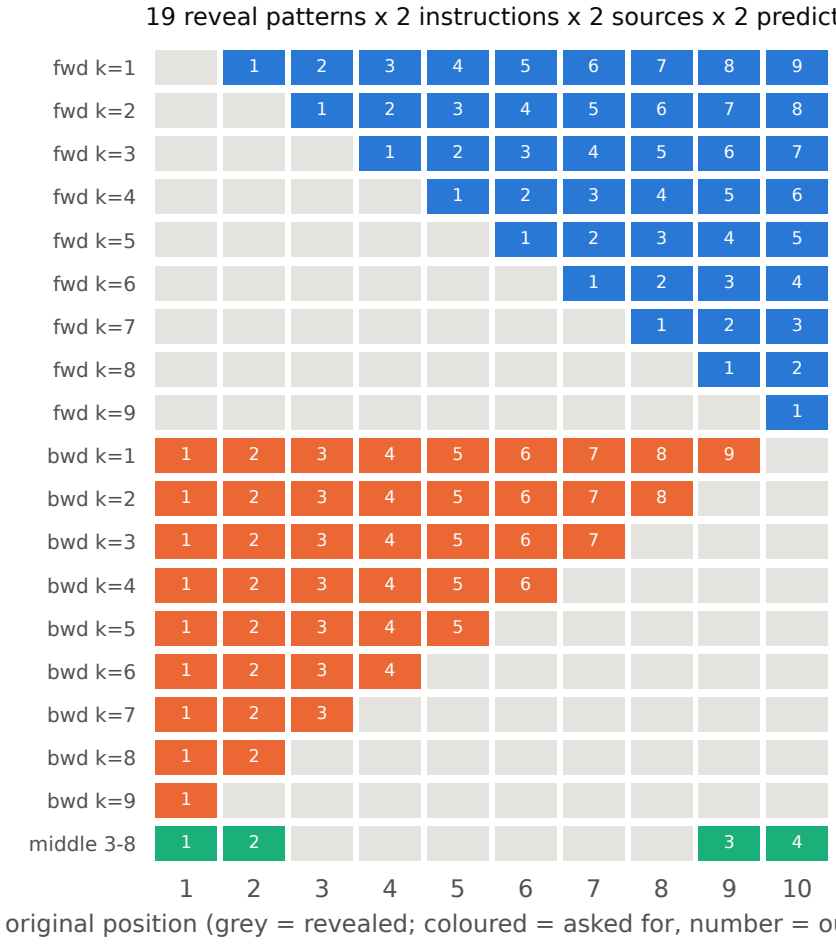

Examples (source model never named; both predictors get identical bytes)

Forward k=3 (Qwen G)

```
reveal 5 2 6 (pos 1-3)  ->  target 3 1 4 6 2 5 3 (pos 4-10)
```

Backward k=3 (Qwen G)

```
reveal 2 5 3 (pos 8-10)  ->  target 5 2 6 3 1 4 6 (pos 1-7)
```

Middle (Qwen G)

```
reveal 6 3 1 4 6 2 (pos 3-8)  ->  target 5 2 | 5 3 (pos 1, 2, 9, 10)
```

Wrapper: 'A language-model instance received the following instruction: <G or F, verbatim> ...
Its response consisted of 10 integers from 1 to 6. <REVEALED> ... Predict the missing integers ...'