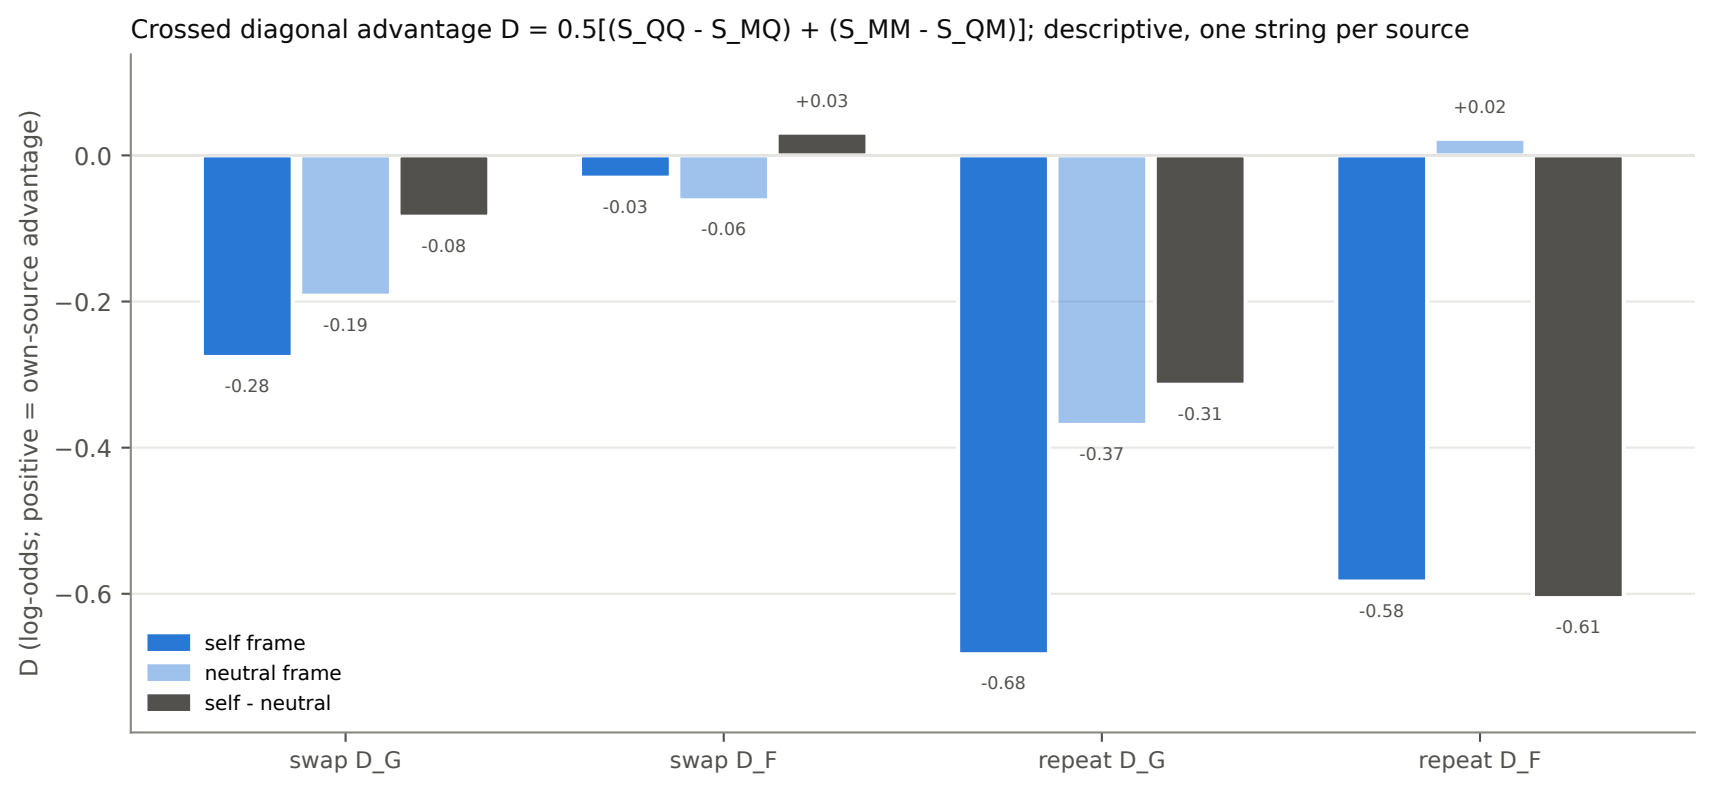
Crossed diagonal advantage D = 0.5[(S_QQ - S_MQ) + (S_MM - S_QM)]; descriptive, one string per source
D (log-odds; positive = own-source advantage)
0.0
−0.2
−0.4
−0.6
self frame
neutral frame
self - neutral
-0.28
-0.19
-0.08
-0.03
-0.06
+0.03
-0.68
-0.37
-0.31
-0.58
+0.02
-0.61
swap D_G
swap D_F
repeat D_G
repeat D_F