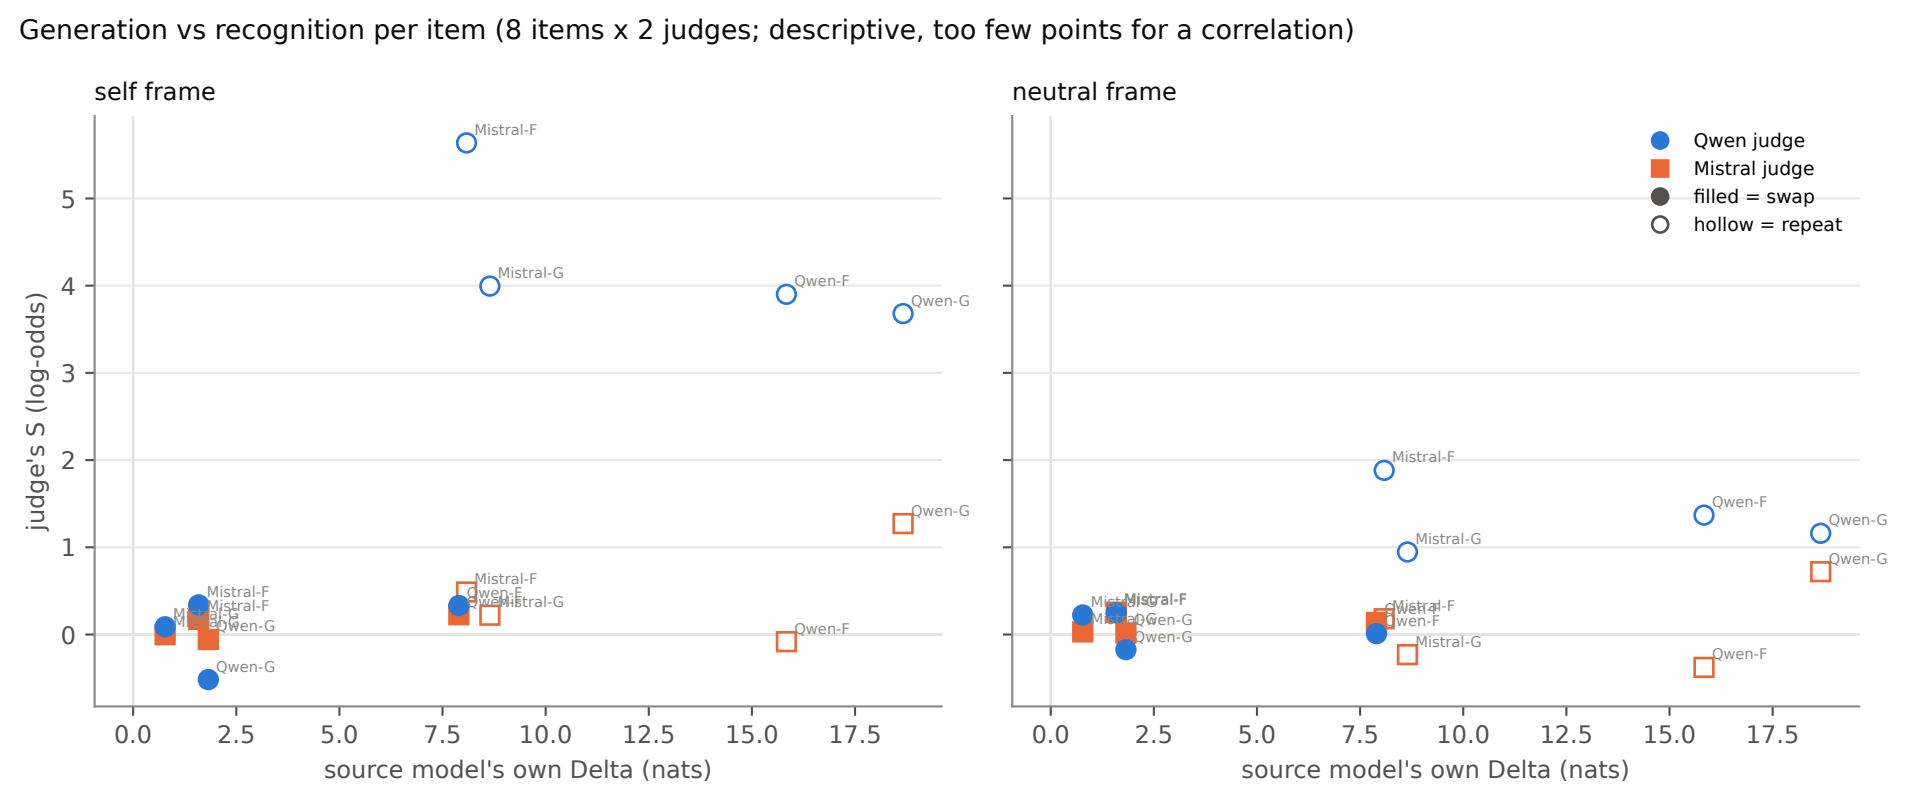
Generation vs recognition per item (8 items x 2 judges; descriptive, too few points for a correlation)
self frame
neutral frame
judge's S (log-odds)
source model's own Delta (nats)
source model's own Delta (nats)
Qwen judge
Mistral judge
filled = swap
hollow = repeat
Mistral-F
Mistral-G
Qwen-F
Qwen-G
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
0
1
2
3
4
5