

markdown to pdf typst template

2024/12/26

Contents

1. Description	1
1.1. Supported styles	4
1.2. Version of the tools	4
1.3. Contents of the template package directory	5
1.4. Default design in the template	9
1.4.1. PDF page	9
1.4.2. Fonts	10
1.4.3. Default font size	14
1.4.4. Indentation	15
1.4.5. Code highlight color theme	16
1.4.6. Style modification	16
1.5. How to use the pandoc template program	17
1.5.1. Run	20
1.6. How to use themekit	21
1.6.1. Run	22
1.6.2. Integration with Sublime Text .	23
2. front matter	25
2.1. Article parameters	25
2.2. Page layout style parameters	28
2.3. Content insertion parameters	32

3. Limitations	33
3.1. Pandoc limitations	34
3.1.1. Duplicated footnote references....	
34	
3.2. typst limitations	34
3.2.1. First line indent	34
3.2.2. Image files	35
3.2.3. Style theme file	36
3.2.4. Italic	37
3.2.5. Table row number	37
4. Tricks	38
4.1. Reduce the size of PDF files	38
4.2. typst exporting png images are not clear enough	39
4.3. Hiding Heading Numbers	40
4.4. Hiding Page Numbers	40
4.5. No Pagination	40
5. Demonstrations	41
5.1. Paragraph and line break	41
5.2. Emphasis	43
5.3. Ordered lists	44
5.4. Unordered lists	47
5.5. Task lists	48
5.6. Ignore Markdown Formatting	50
5.7. emojis	50
5.8. Links	51
5.9. Images	53
5.10. Footnotes	55
5.11. Definition lists	57
5.12. Mathematical Equation	59
5.13. Code and syntax highlighting	60

5.14. Tables	63
5.14.1. Table title table caption	67
5.14.2. simple tables	68
5.14.3. Multi-line table	69
5.14.4. grid tables	71
5.15. alerts	75
5.16. Table width and column width	78
5.17. Quotes	82
5.18. alerts	84
5.19. Horizontal Rule	87
5.20. Inline HTML	87
5.21. Title	88
5.22. Alt-H2	89
6. (only for demonstration) h1 title...	89
6.1. h2 title	89
6.1.1. h3 title	89
7. (only for demonstration) Alt-H1....	89
7.1. Alt-H2	89

1. Description

This template is used to convert markdown to pdf documents using [pandoc](#) and [typst](#). Therefore, this template is somewhat prefabricated. This template will affect the typesetting layout in the generated pdf document.

1. **This template is suitable for:** The preset styles in the template are suitable for individuals or teams to write technical documents and instruction documents for communication or sharing, reflecting personalization. It can also be used to learn how to program the typesetting and formatting in typst.
2. **This template is not suitable for:** It is not for academic and paper fields with strict formats, such as lack of special types such as [abstract](#), [citation](#), [scientific and mathematical charts](#). However, you can modify it based on this template. (You need to understand typst syntax)

Advantages

1. Used to quickly convert markdown to pdf. Required tools Pandoc and typst are two command line tools.
2. Support common styles, used to replace word or other heavyweight writing tools to write lightweight documents such as (work summaries, personal diaries, team task plans, and other common short and medium-length articles)
3. Use typst to replace latex to avoid using too many tools. typst is currently the lightest and most efficient solution for generating PDF documents
4. No need to convert markdown to html or docx first, and then use a browser or word/wps to convert it to pdf.
5. Offline use, when converting to generate PDF files..

Disadvantages

Due to the use scenario setting, it does not support professional writing requirements, and cannot generate papers, academic reports,

and book publishing that have higher requirements for typesetting and formatting. Because the template is set to be used in an offline environment, the template does not use the typst universe extension package. However, this extension can be completed by yourself.



Caution

The original intention of this template is to quickly generate a **self-righteous** pdf document after writing a markdown document in the sublime text editor for information exchange or sharing. Therefore, it does not exist as a writing tool. It only defines the typst layout and rendering layout of some commonly used document structure types, and does not cover all the markdown properties of pandoc. For the current specific supported styles, see [Supported Styles](#)

If you need more comprehensive writing support, you can use [quarto](#) (supports users in multiple fields such as Scholarly Writing, Presentations, Dashboards, Books, Manuscripts, and Publishing).

1.1. Supported styles

- Paragraphs and line breaks
- Emphasis
- Unordered lists
- Ordered lists
- Task lists
- Emojis
- Links
- Images
- Footnotes
- Definition lists
- Math equation
- Code highlight fenced code block
- Tables
- Table width and column width
- Quote quotelblocktext
- alerts
- Inline HTML
- Horizontal rule
- Title

1.2. Version of the tools

1. pandoc **3.5** Download and installation instructions, <https://pandoc.org/installing.html>
2. typst **0.12.0** Download and installation instructions, <https://github.com/typst/typst/releases/tag/v0.12.0>

First download pandoc and typst, and put them in the system environment variable `PATH` where they can be found.

- MacOS/Linux operating system:
You can use command line software tools such as brew, apt, mise, asdf, etc. to install.
- Windows operating system: You can use command line software tools such as scoop, Chocolatey, etc. to install. Or after downloading, add the directories where the pandoc and typst executable programs are located to the system variable `PATH`.

1.3. Contents of the template package directory

```
|— pandoc
|   |— example.sh
|   |— pandoc
|   |   |— some pandoc typst tempaltes
|   |   |— stanalone with difference pdf
page size
|   |   |— font color and highlighting theme
|   |   |— themes
|   |   |— tmTheme files, define
highlighting
|— themekit
|   |— 0.4.0
|       |— example.markdown.sublime-build
```



```

|           |—— example.sh
|           |—— fonts.typst
|           |—— lib.typst
|           |—— pandoc
|           |   |—— Some pandoc typst template
files
|           |   |—— font color, code highlight
theme
|           |   |—— ...
|           |—— styled
|           |   |—— typst rules file for
presetting
|           |   |—— page size, font color,
highlight color
|           |   |—— Each file is independent of
each other
|           |   |—— ...
|           |   |—— themes
|           |       |—— ayu-dark.tmTheme
|           |       |—— ...
|           |—— typst.toml
|—— pandoc.vs.themekit.pdf
|—— userguide.dark.ayu-dark.pdf
|—— userguide.light.ayu-dark.pdf
|—— pandoc.vs.themekit.pdf
|—— howto.pandoc.pdf
|—— howto.themekit.pdf

```

The template contains two distribution forms, `pandoc` and `themekit`, which are two different organizational methods, but the pdf files and png images converted by them have the same look.

- Using the template in the `pandoc` directory, you can generate a typst standalone file, which is convenient for independent debugging or modifying the typst result file. However, there are requirements for the location of the themes code highlight directory.
- `themekit` requires to be installed as a typst local package first. For installation methods, see the instructions in `howto.themekit.pdf`. The `pandoc` typst template in the `themekit` directory uses various rules definitions by referencing the typst package, which is convenient for generating target format files.

`pandoc` template directory:

1. `pandoc` directory contains independent pandoc typst templates. Each template file sets different colors and themes.
2. `.tmTheme` file in `themes` directory is the programming language highlight color theme file used by sublime text 3.1 and before. It is

in XML format. typst uses it to define the color theme of code highlighting. These theme files are referenced in pandoc typst templates.

`themekit` template directory:

1. `styled` stores the rules of typst `show` or `set` according to page size, preset color, and highlight theme. Each file is independent and is re-exported in `lib.typst` of `themekit`.
2. `pandoc` directory stores references to the rules in `styled`, which can be used in the `--template` parameter of pandoc command line. Each file corresponds to a highlight theme.

Instructions or help documents:

1. `pandoc.vs.themekit.pdf`, which introduces the differences between the two template packages.
2. `howto.pandoc.pdf` and `howto.themekit.pdf` introduces how to use the template package.

3. `userguide`, which is the user help document. Compared with `howto`, this document is more detailed.

i Tip

The template file is named `[phone.]MODE.THEMES.typst`. If it starts with `phone`, the generated pdf page is 300 pt wide, which is convenient for reading on mobile phones.

`MODE` is dark or light, corresponding to the dark or light background of the page, and `THEMES` is the code highlight color theme,

1.4. Default design in the template

1.4.1. PDF page

In this template package, there are two sizes of PDF page size, namely `A4` and `phone`. `A4` is used for normal documents, and `phone` size can be used for easy reading when sharing on mobile devices. The specific sizes are as follows:

Page	mode	size	border margin
a4	dark/ light	595.28 pt × 841.89 pt	2.5cm on top, bottom, left and right
phone	dark/ light	300 pt × 650 pt	12pt on top, left and right, 24 pt on bottom

The dark page background color value is `#10141c`, the font color value is `#bfbdb6`, the light page background color value is `#fcfcfc`, the font color value is `#5c6166`.

1.4.2. Fonts

There are two type of fonts in the document, one is the unified font used throughout the text, and the other is a monospaced font used to display code, called mono font.

- Main font: The template uses `Xiawu Wenkai GB` as the main font, which displays Chinese more elegantly.
- Monospaced font: This template package uses `Xiawu Wenkai GB` as the monospaced font, and the

Western effect is consistent with the Chinese effect. If you like programming fonts such as Fira Code, you can modify it.

Xiawu Wenkai is a multi-version series font. The font of this template version is LXGW WenKai GB, and the corresponding English name is

`LXGW WenKai GB`. Before using this template, you need to download these fonts and install them to the system. Download address of Xiawu Wenkai GB [GitHub Project Network](#), [Maoken Network](#)

[Xiawu Wenkai GB](#) The font weight is divided into light, regular, and medium. The overall style is relatively slender. And there is no built-in italic font, so the italic style cannot be displayed in the PDF generated by typst.

If the above fonts do not meet the requirements, you can modify them as needed. `pandoc` template package, the modification method is as follows:

```
// // for windows
// // fonts for emoji
// #let emmoji_fonts=("Segoe UI Emoji", "Noto Color
Emoji")
```

```

// #let mainfont = ("Segoe UI",)
// #let monofont = ("Consolas",)

// for macos
// fonts for emoji
#let emmoji_fonts=("Apple Color Emoji", "Noto Color
Emoji")
#let mainfont = ("SF Pro Text",)
#let monofont = ("SF Mono",)

// // for linux
// // fonts for emoji
// #let emmoji_fonts=("Noto Color Emoji")
// #let mainfont = ("Menlo",)
// #let monofont = ("DejaVu Sans Mono")

#let lang = "zh"
#let region = "CN"
#if lang == "zh" {
    mainfont=("PingFang SC", )
    // mainfont=("Microsoft YaHei UI", )
}

// fonts defined
#let fonts=(
    normal: (
        // typst 0.12: typst
        // normal font for whole doc
        font: (name: ("LXGW WenKai GB", ..mainfont,
"Libertinus Serif", ..emoji_fonts))
    ),
    codeblock: (
        // mono font for code snippets
        font: (name: ("LXGW WenKai Mono
GB", ..monofont, "DejaVu Sans Mono", ..emoji_
fonts)),
    ),
    math: (
        // typst built-in math font, New Computer
Modern Math
        font: (name: ("New Computer Modern Math",

```

```
"LXGW WenKai Mono GB", ..emmoji_fonts)),  
    )  
)
```

Change `mainfont`, `monofont`, `LXGW WenKai GB`, `LXGW WenKai Mono GB` to your operating system or other default fonts.

The font settings in the `themekit` template are located in the `fonts.typst` file in the package, with the same content as above.

You can also set the `mainfont` and `monofont` parameters in the front matter. For specific parameters, see [front matter](#).

i Tip

1. If the running prompt font does not exist, `unknown font family`, typst will fall back to the default system font, will not be interrupted. But not elegant.
2. The font mechanism of typst searches from the first font family of the set font group. If it cannot be found, it searches in the next font family. There may be inconsistencies when displaying emojis. For example, the symbol  uses the wireframe symbol style in `LXGW WenKai GB` instead of the emoji style in `Apple Color Emoji`. This is not a program error of typst. You can adjust the order of font families or use other fonts to solve it.

1.4.3. Default font size

- Text: 12 pt
- Title
 - Article title: 28pt
 - Heading 1: 20pt
 - Heading 2: 16pt
 - Heading 3: 14pt
 - Heading 4: 12pt
 - Heading 5: 12pt
 - Heading 6: 12pt
- Code block: 11pt
- Quote text block: 12pt

1.4.4. Indentation

1. The first line of a text paragraph is indented by **four English characters**.
2. The entire quotation (text block) is indented by **four English characters** to the right.
3. [Ordered list] and [Unordered list] are indented by **two Chinese characters** to the right in the body.
4. In alerts, quotes, and Definition lists, multiple text paragraphs, except for the first line of the first paragraph, cannot be indented*¹, the first line of other subsequent paragraphs is indented **four English characters wide**. When only ordered lists and unordered lists appear

¹These situations occur in elements such as alerts, quotes, and Definition lists that use blocks to wrap content. It is related to the implementation mechanism of typst itself. Most elements and text layout and typesetting control use blocks. The body paragraph after the block can be implemented through special means, but there is no way to do it at the beginning of the block.

alone, in order to maintain visual compactness, ordered lists and unordered lists are not indented.

Warning

typst 0.12 still does not solve the problem of marking the first paragraph of multiple consecutive paragraphs, so the first line of the first paragraph of the text segment cannot be indented.

1.4.5. Code highlight color theme

This template package currently includes modern and beautiful code highlight themes:

- ayu:
 - ayu-mirage
 - ayu-dark
 - ayu-light
- Catppuccin
 - Catppuccin Frappe
 - Catppuccin Latte
 - Catppuccin Macchiato
 - Catppuccin Mocha

In the pandoc typst template file,

```
#set raw(theme: )
```

 specifies.

1.4.6. Style modification

In front of each independent pandoc typst template file, global variables that

can be used by the entire document are defined. Most of the variable values in the template are concentrated here, such as font size, font name, color, etc.

1. Font: See the [Font] section above
2. Code highlight theme: In this template package, all color themes are listed and each corresponds to a template. You can select the corresponding template file according to your preference. If you have a custom `*.tmTheme` style file, you can modify it according to the method in Code highlight theme.

1.5. How to use the pandoc template program

This template program directory does not have an interface operation method. The template package is specified when using the pandoc command. The problems of image reference and code highlight theme reference have been described in typst limitations. If you want to be compatible with both problems, the `themes` directory in the template needs to exist in the

same main directory as the image directory and markdown file, or have the same ancestor directory above.

The required directory structure is as follows Case 1:

```
my_notes
├── images
│   ├── a.png
│   └── ...
├── themes
│   ├── some tmTheme files
│   └── ...
└── notes.md
```

Or Case 2

```
my_notes
├── content
│   ├── images
│   │   ├── a.png
│   │   └── ...
│   ├── notes.md
│   └── ...
├── themes
│   ├── some tmTheme files
│   └── ...
├── typst
│   ├── some pandoc typst template files
│   └── ...
```

Start pandoc in the directory

`my_notes` , typst can access both `images` and `themes` directories at the same time.

But usually our directories are like this (images outside of `pandoc_typst`):

```
top
├── my_notes
│   ├── images
│   │   ├── a.png
│   │   └── ...
│   └── notes.md
├── pandoc_typst
│   ├── themes
│   │   ├── some tmTheme files
│   │   └── ...
│   ├── typst
│   │   ├── some pandoc typst template files
│   │   └── ...
```

Of course, we can run `pandoc` in the top directory, but the following conditions must be met:

1. The image reference path in

`notes.md` is `my_notes/images/xxx.png`

2. `#set raw(theme: )` in the `typst` template file must be

```
#set raw(theme: "pandoc_typst/themes/xxx.tmTheme")
```

It looks weird no matter how you look at it.

You can create a symbolic link in the `my_notes` directory point to the `pandoc_typst/themes` directory. This is the simplest and most direct method. The

method is described in the following section

1.5.1. Run

Command:

```
# linux / macos
cd CONTENT/DIRECTORY
template_dir=absolute path of template file package
directory
template=$template_dir/pandoc/
pandoc.dark.catppuccin-frappe.typst
md_args="+emoji+strikeout+definition_lists+implicit_
figures+fancy_lists+yaml_metadata_block"
# How to create soft links without themes directory
[ ! -d themes ] && ln -s $template_dir/themes
cat markdownfile.md | pandoc -f gfm"$md_args" -t pdf
--pdf-engine typst \
--template=$template -o OUTPUT.pdf
# After pdf is generated, delete the link
[ -L themes ] && rm themes;
```

1. `themes` The directory is linked to the content directory, so that for typst, the images, tmTheme files and other resources that need to be referenced are all in the same directory.
2. Use `cat markdown.md | pandoc -f gfm` or `pandoc markdown.md -f gfm`, because the markdown.md file may need to be preprocessed. If you need to use multimarkdown to preprocess the markdown file, you can do `multimarkdown -tmmd markdown.md | pandoc`

1.6. How to use themekit

The pdf file generated by `themekit` has the same visual effect as the `pandoc` template package. It is referenced in the form of typst package. When using the `themekit` package, there is no `themes` highlighting theme file location, because it can exist as a component of the typst package. Just install `themekit` as a typst local package first.

The directory specification of the typst local package is: `{data-dir}/typst/packages/{namespace}/{name}/{version}`. Different operating systems have different `{data-dir}`, as follows:

- linux: `$XDG_DATA_HOME` or `~/.local/share`
- maxos: `~/Library/Application Support`
- whidowns: `%APPDATA%`

According to convention, `{namespace}` is `local`, the name of this template package is `themekit`, and `{version}` corresponds to the latest version number released by themekit.

Copy or link the themekit directory to the `{data-dir}/typst/packages/local` directory, such as:


```
mkdir -p "{data-dir}/typst/packages/local"
cp -R themekit "{data-dir}/typst/packages/local"
# or
ln -s themekit "{data-dir}/typst/packages/local/
themekit"
```

Change `{data-dir}` to the directory corresponding to your operating system.

1.6.1. Run

Command:

```
cd markdown/document directory
template="{data-dir}/typst/packages/local/themekit/
version number/pandoc/any pandoc template in the
directory.typst"

pandoc_args="markdown_mmd+emoji+strikeout+fancy_
lists+task_lists+implicit_figures+link_attributes+
inline_notes+tex_math_single_backslash+simple_
tables+grid_tables+multiline_tables+table_captions+
yaml_metadata_block-blank_before_blockquote"
cat markdown document.md |
pandoc --from $pandoc_args \
-t pdf --pdf-engine typst --template="$template" \
-o "output file name.pdf"
```

Change `{data-dir}` to the directory corresponding to your operating system. Any typst template file in the pandoc directory, distinguished by page size, dark/light background, code highlighting theme.

There are example shell scripts in the directory, see `{data-dir}/typst/`

packages/themekit/version number/

examples.sh

1.6.2. Integration with Sublime Text

By integrating the above command line into the build system of Sublime Text, you can quickly perform conversions without switching to the command line terminal.

1. **Step 1:** Create a new sublime text build system as follows: A. Menu `setting/Browse Packages...`, create a blank text file `markdown.sublime-build` under `Packages/User` B. `cmd` + `shift` + `p`, open the command panel, enter `new build system`, save the file as `markdown.sublime-build`
2. **Step 2:** In the `markdown.sublime-build` file, save the following content:

```
{
  "selector": "text.html.markdown",
  "variants": [
    {
      "name": "md to pdf (by typst)",
      "working_dir": "$file_path",
      "env": {
        // 修改为 themekit 所在目录`
        "THEMEKIT_DIR": "path/to/themekit",
        "PANDOC_MD_ARGS": "--from=markdown_
mmd+emoji+strikeout+fancy_lists+task_lists+implicit_
figures+link_attributes+inline_notes+tex_math_
single_backslash+simple_tables+grid_tables+
multiline_tables+table_captions+yaml_metadata_block-
```

```

blank_before_blockquote",
    "PANDOC_TARGET": " -t pdf --pdf-
engine typst ",
    // 修改为对应高亮主题模板
    "PANDOC_TEMPLATE": "themekit/
{version number}/pandoc/dark.catppuccin-
frappe.typst"
},
    "shell_cmd": "cat \"$file\" | pandoc \\
$PANDOC_MD_ARGS \\$PANDOC_TARGET --template=\\
$THEMEKIT_DIR/\\$PANDOC_TEMPLATE -o $file_path/
$file_base_name.pdf",
},
]
}

```

Set the `THEMEKIT_DIR` parameter to the local directory path of the template package, then edit a markdown file in sublime text at will, open the command palette with `cmd + shift + p`, enter `pdf typst`, and press `Enter`. A pdf file is generated in the same directory as the markdown file. The `PANDOC_TEMPLATE` parameter specifies which template to use, and each template has a unique preset color.

You can also use pandoc and typst to generate png images with the same pdf style.

`Themekit` contains the example file `example.markdown.sublime-build` for sublime text markdown build.

2. front matter

When pandoc interprets markdown documents, it supports interpreting the parameters in front-matter. We can use these parameters to modify the document template style.

The parameters supported by this document template are:

2.1. Article parameters

title

Article title, type is `text`.

subtitle

Article subtitle, type is `text`.

author

Article author. Type is `text`, `object`, or `text array`, `object array`. When there are multiple signatures, use `,` to separate them, and use `[]` to wrap multiple names. When using an object to describe the author, the three properties of `name`, `affiliation`, and `email` are supported. For example, Multiple author names:

```
# Single name
author: Author name
# Multiple names
author: [Author 1, Author 2]
```

Use objects to describe authors:

```
# Single name
author:
name: Author name
affiliation: nullable
email: Email, nullable

# Multiple names
author:
- name: Author name
affiliation: nullable
email: Email, nullable
- name: Author name
affiliation: nullable
email: Email, nullable
```

date

Article date, type `text`

lang

Language and region parameters, format `lang-region code`, `lang` value is [ISO 639-1/2/3 language code](#). `lang` sets the language properties in typst, affecting various parts of Typst,

- The text processing pipeline can make smarter choices
- Hyphens will use the correct pattern for the language
- [smart quotes](#) will become the correct quotes for the language
- And all other language-aware content

For example, when `lang` is `zh`, the table of contents title is Table of Contents, when `lang` is `en`, the table of contents title is Contents. `region` allows typist to make smarter choices when processing text. The value is ISO 3166-1 alpha-2 region code

abstract

Abstract, type `text`, because the abstract may have multiple lines, follow the multi-line syntax of yaml, such as

```
abstract: |  
This is the abstract.  
  
It consists of two paragraphs.
```

citations

Citations, see Citation rendering

bibliographystyle/csl

The format of bibliography, type `text`, value see bibliography style

bibliography

Bibliography or parameter document, type `text`, point to `Hayagriva.yml` or The path of the `BibLaTeX .bib` file. The relative path rules comply with the path safety regulations of typst.

2.2. Page layout style parameters

mainfont

Default font, type is `text` or `text array`, enumerate the fonts used in the text. It should be noted that the listed fields already exist in the current operating system, otherwise a warning of unavailable fonts will appear. As shown in the following example, the fonts in `Fira Code` are used first, and the Chinese font is `PingFang SC`:

```
mainfont: [Fira Code, PingFang SC]
```

monofont

Monospaced font, type is `text` or `text array`, specifies the code block font in the generated pdf document, and generally uses a programming font that is friendly to developers. The format is the same as `mainfont`.

mathfont

Mathematical formula font, type is `text` or `text array`, format is the same as `mainfont`. Used to set non-English fonts, such as Chinese in formulas.

fontsize

Font size, type typst [length](#). For example, 12pt.

papersize

Page size, the name of the predefined page size in typst, common ones are "a4", "us-letter", etc., see typst [page paper](#) for details. `papersize` will override the original page size of the document template. When setting `pagesize`, the current `papersize` page size can be overwritten.

pagesize

Page size, see typst [page width](#) and [page height](#) parameters, which can override `papersize`. The actual page size below is `400pt` wide and `800pt` high, regardless of the value of `papersize`. When `pagesize: {height:auto}`, no pagination is done, which can be used to generate long pages.

```
papersize: presentation-16-9
pagesize:
width: 400pt
height: 800pt
```

margin

Page margin, see [typst page margin](#), the default value is described in [pdf page](#).

page-numbering:

Page number format, see [typst page numbering](#). [When set to `disable` or `none`, no page numbers are displayed.](#)

section-numbering:

Heading numbering, see [typst heading numbering](#). [When `section-numbering` is set to `disable` or `none`, the heading numbering can be hidden.](#)

columns

The number of page columns, default is `1`, see [typst page columns](#).

toc

Table of contents, type is `bool`, default is `false`. When `toc: true`, the table of contents is displayed. [When `pagesize.height` is `auto`, the table of contents is not displayed.](#)

toc-depth:

Table of contents level, controls the displayable title level, type is a number, see [typst outline depth](#)

toc-title:

Table of contents title, when `toc-title: auto`, it is automatically defined according to `lang`, such as `lang: zh-CN`, the title is `Table of Contents`; when `toc-title: none`, the table of contents title is not displayed. See [typst outline title](#).

table-caption-position:

Sets the position of the table title relative to the table, which is located above the table by default, see [typst figure caption position](#).

figure-caption-position:

Set the position of the image caption relative to the image. By default, it is below the image. See [typst figure caption position](#).

figure.numbering.heading_numbers:

Set the caption number displayed of the image or table, whether it includes the chapter heading number. A4 size templates have chapter numbers by default, and

phone size templates do not have chapter numbers by default.

```
figure:  
numbering:  
heading_numbers: true
```

To include chapter numbers in the caption numbering, set the value to `true`, and to disable it, set it to `false`. For this parameter to work, `section-numbering` cannot be explicitly set to `disable`.

figure.supplement

Set the supplement of the image or table caption. If set to `false` or `none`, the supplement will not be displayed.

```
figure:  
supplement: false or none
```

2.3. Content insertion parameters

header-includes

Pandoc parameter. Text content is inserted after the directory and before the main text. Usually in the header when converting markdown to html. JavaScript, css references. See pandoc [Variables set automatically](#). You can also use the pandoc command line parameter `-`

H/-include-in-header to specify the content file.

include-before

pandoc parameter, text content is inserted before the table of contents, see pandoc Variables set automatically, you can also use the pandoc command line parameter -B/-include-before-body to specify the content.

include-after

pandoc parameter, text content is inserted after the body, at the end of the document, see pandoc Variables set automatically, you can also use the pandoc command line parameter -B/-include-after-body to specify the content.

i Tip

When using the pandoc command, you need to use the `--from gfm` or `--from markdown_mmd` or `--from markdown+yaml_metadata_block` parameters.

3. Limitations

This manual is not a markdown specification, nor a typst syntax specification. Therefore, this manual will

not include markdown and typst syntax descriptions.

3.1. Pandoc limitations

3.1.1. Duplicated footnote references

Pandoc has a 10-year-old bug [issue 1603](#) that cannot correctly parse repeated footnotes.

3.2. typst limitations

3.2.1. First line indent

`typst 0.12` does not support the recognition of the first paragraph, so it is not possible to indent the first paragraph. This is related to its internal implementation. Many elements in typst use block as the outermost container to achieve the overall layout. Even

`set par(first-line-indent: )` refers to the first line between consecutive paragraphs, that is, it does not include the first line of the first paragraph. If it is a paragraph after a block or box, special means can be used to deal with it, but there is currently no way to indent the first paragraph of text in a block or box. In [alerts](#) and [quotes](#), when the text content is long or has multiple paragraphs, you will see that the first

line of the first paragraph is not indented.

I hope that typst can solve this problem in future versions, so that some redundant code for compatibility can be removed.

3.2.2. Image files

To ensure that the typst script is safe and harmless, typst comes with a sandbox mechanism. When the `.typst` file is compiled into a pdf, the image files it references cannot use the url path, and the images can only be located in the directory or subdirectory where the `.typst` file is located. The relative path is used to specify the image file location. This is different from the unlimited path writing method in the markdown file. Special attention should be paid.

The image file must be located under the same top-level directory as the `*.typst` content file. There is no requirement for the hierarchy, as long as the relative path hierarchy in `*.typst` corresponds correctly. For example:

```
my_notes
├── images
│   └── a.png
```

```
| └─ ...  
└─ readme.typst  
└─ readme.md
```

Assuming that the image file is located in the images directory, the path of the image file relative to the `readme.typst` content file is `./themes`, that is, when specifying the image path in `readme.typst`, fill in:

```
#image("./userguide/images/a.png")
```

Because `pandoc` is used to convert markdown, the way to specify the image reference in markdown is:

```
![Image example](./userguide/images/a.png)
```

According to this relative path, `pandoc` can convert markdown to pdf correctly through `typst`.

3.2.3. Style theme file

Similar to the image file reference, the code highlight color theme file is also referenced through a relative path. Currently there is no way to embed the theme file directly into the `*.typst` file.

The style theme file must be located in the same top-level directory as `*.typst`, regardless of the hierarchy. As long as

the relative path hierarchy in `*.typst` is correct, it will be fine. For example:

```
pandoc_typst
├── themes
│   ├── some tmTheme files
│   └── ...
└── readme.typst
```

If the theme file is located in the themes directory, then the path of `.tmTheme` relative to `readme.typst` is `./themes`, that is, when specifying the theme path in `readme.typst`, fill in:

```
#set raw(theme: "themes/file name.tmTheme")
```

3.2.4. Italic

For fonts that do not have their own italic style fonts, the italic style cannot be displayed in the text.

3.2.5. Table row number

Typst's tables are very powerful and can draw tables of various forms, but there is currently a lack of a function similar to `y==table.footer.row-number`. When pandoc converts markdown's grid table, it is impossible to write typst rules to modify the style of the table footer.

4. Tricks

4.1. Reduce the size of PDF files

This template program uses typst to generate PDF documents, and does not consider the size of the PDF document after it is generated. The size of the PDF file is determined by the size of the embedded pictures, fonts, and redundant information. Before generating a PDF document, the image size should be reduced, or the image should be cropped or compressed to a size suitable for Nottingham. If high-definition pictures cannot be used without limit, after the PDF file is generated, the PDF compression tool can be used to compress the PDF. For example, macos os comes with a PDF file size reduce filter, and ghost script is used to compress PDF documents, etc.

The example pdfs in the `examples` directory of this template program release package are all compressed using ghost script. The original `4.6M` size of pdf is compressed to about `900k` as you can see, with significant compression effect. The command is as follows:

```
gs -dBATCH -dNOPAUSE -q -sDEVICE=pdfwrite -  
dCompatibilityLevel=1.7 \  
-dNOPAUSE -dQUIET -dPDFSETTINGS=/prepress -  
sOutputFile="The file name was lost" "Original pdf  
file"
```

4.2. typst exporting png images are not clear enough

Use

`typst compile original.typst result-{0p}-of-{t}.png` to convert a typst document with a multi-page layout into multiple png images. When exporting, png uses twice the size of the pdf file. If the pdf page size is set too small, the image effect is not clear enough. For example, in this template program, the pandoc typst template starting with `phone.` has a page size of $300pt \times 650pt$, and the exported image is $600pt \times 1300pt$. When the font is small, the image quality is not good. At this time, set typst to generate images with higher resolution. The example command is:

```
pandoc --from markdown... --typst --template=pandoc  
or pandoc template under themekit |  
typst compile --ppi 200 - output-{0p}-of-{t}.png
```

The key parameter is `--ppi 200`, which can be set to `--ppi 300` to meet the printing quality requirements. Because

of the `--ppi` parameter option, we don't need to use the pdf to png image tool to generate higher resolution images.

4.3. Hiding Heading Numbers

Set the markdown front matter parameter `section-numbering` to `disable` or `none` to hide the heading numbers.

```
section-numbering: disable
```

4.4. Hiding Page Numbers

Set the markdown front matter parameter `page-numbering` to `disable` or `none` to hide page numbers.

```
page-numbering: disable
```

4.5. No Pagination

No Pagination , that is keep the whole doc in one long page, set `pagesize.height` to `auto`, then the table of contents and page numbers will not be displayed, even if `toc` is `true`.

```
# toc will be ignored
toc: true

pagesize:
height: auto

# or
pagesize: { height: auto }
```

5. Demonstrations

5.1. Paragraph and line break

Note: This section makes conventions for paragraphs and line breaks.

Paragraphs, also known as "lines link", have soft and hard line breaks in markdown. Line breaks are not segmented, line breaks are automatically spliced, and two spaces are added to the end. They are very personalized. A markdown file only supports one convention.

However, in order to simplify writing, maintain the original writing habits, and reduce the memory and confusion of rules, this template recommends that you use the following rules to write markdown. You are required to write in the following form:

```
 Lorem ipsum dolor sit amet, consectetur adipisicing
 elit, sed do eiusmod
 tempor incididunt ut labore et dolore magna aliqua.
 Ut enim ad minim veniam,
 quis nostrud exercitation ullamco laboris nisi ut
 aliquip ex ea commodo
```

```
 Lorem ipsum dolor sit amet, consectetur adipisicing
 elit, sed do eiusmod
 tempor incididunt ut labore et dolore magna aliqua.
 Ut enim ad minim veniam,
```

Lorem ipsum dolor sit amet,
 This is another line, but it still belongs to the
 same line as the previous line.

 To start a new paragraph, enter a blank line first.
 This sentence still follows the previous sentence.

 This is another new paragraph.

Rendered as:

Lorem ipsum dolor sit amet,
 consectetur adipisicing elit, sed do
 eiusmod tempor incididunt ut labore et
 dolore magna aliqua. Ut enim ad minim
 veniam, quis nostrud exercitation
 ullamco laboris nisi ut aliquip ex ea
 commodo

Lorem ipsum dolor sit amet,
 consectetur adipisicing elit, sed do
 eiusmod tempor incididunt ut labore et
 dolore magna aliqua. Ut enim ad minim
 veniam,

Lorem ipsum dolor sit amet, This is
 another line, but it still belongs to the
 same line as the previous line.

To start a new paragraph, enter a
 blank line first. This sentence still
 follows the previous sentence.

This is another new paragraph.

⚠ Caution

When using this template, according to the line break conventions in this template, it is not recommended to add the `+hard_line_breaks` extension to `pandoc -f gfm` or `pandoc -f markdown`. When writing long paragraphs, a lot of line breaks will be generated, affecting the layout of the complete paragraph.

If a new paragraph is really needed, it is implemented by a blank line. It is easy to read and write. Ordinary line breaks are considered to be convenient for writing, or the return key is pressed inadvertently, which does not affect the actual effect.

5.2. Emphasis

todo 字体、斜体

Emphasis, also known as italics, uses an `*asterisk*` or `_underline_`.

Emphasis, also known as bold, uses an `**asterisk**` or `__underline__`.

Use a combination of `**asterisk` and `_underline_` for emphasis.

Strikethrough uses two tildes. `~~Strike this out.~~`

`**This is bold text**`

`__This is bold text__`

`*This is italic text*`

`_This is italic text_`

`~~Strikethrough~~`

Rendered to:

Emphasis, also known as italics, uses an asterisk or underline.

Emphasis, also known as bold, uses an **asterisk** or **underline**.

Use a combination of **asterisk and underline** for emphasis.

Strikethrough uses two tildes. Strike ~~this out~~.

This is bold text

This is bold text

This is italic text

This is italic text

~~Strikethrough~~

The italic in this example is not displayed as italic style because the Xiawuwenkai GB font family used in this template does not contain italic style glyphs, not a template problem or a program error of typst. For details, see the instructions in Fonts.

5.3. Ordered lists

1. First ordered list item
 2. Another item
- * Unordered list

1. The actual number doesn't matter, as long as it's a number

1. The numbers will reorder

4. Another item.

You can also properly indent paragraphs in list items.

5. Extra blank lines

In addition to properly indenting paragraphs, adding an extra blank line before a paragraph also forms a new indented paragraph with an indented first line.

In addition to properly indenting paragraphs, adding an extra blank line before a paragraph also forms a new indented paragraph with an indented first line.

7. One more item

1. Make changes

1. Fix bugs

2. Improve formatting

- Make headings bigger

2. Push my commit to GitHub

3. Open a pull request

* Describe my changes

* Mention all members of my team

* Ask for feedback

The ordered list above renders to:

1. First ordered list item

2. Another item

• Unordered list

1. The actual number doesn't matter, as long as it's a number

2. The numbers will reorder

3. Another item. You can also properly indent paragraphs in list items.

4. Extra blank lines

In addition to properly indenting paragraphs, adding an extra blank line before a paragraph also forms a new indented paragraph with an indented first line.

In addition to properly indenting paragraphs, adding an extra blank line before a paragraph also forms a new indented paragraph with an indented first line.

5. One more item

6. Make changes

7. Fix bugs

8. Improve formatting - Make headings bigger

9. Push my commit to GitHub

10. Open a pull request

- Describe my changes
- Mention all members of my team
 - Ask for feedback

pandoc also supports `fancy_lists`, use `#.` to replace numbers, pandoc will automatically calculate the sequence number, such as:

```
1. one
#. two
#. three
```

Renders to:

```
1. one
2. two
3. three
```

5.4. Unordered lists

```
* Unordered lists can be made with an asterisk (`*`)
- or a minus sign (`-`)
+ or a plus sign (`+`)

+ Create a list by starting a line with `+`, `-`, or `*`

+ Create a sublist by indenting 2 spaces:
  - A change in the marker character forces the
  start of a new list:
    * Ac tristique libero volutpat at
    + Facilisis in pretium nisl aliquet
    - Nulla volutpat aliquam velit

+ Very simple!

+ Unordered lists can also be
+ mixed with numbered lists
  1. Indent and create a numbered list item
  2. Another numbered item
+ Another unordered list item
```

Renders to:

-
- Unordered lists can be made with an asterisk (*)
 - or a minus sign (-)
 - or a plus sign (+)
 - Create a list by starting a line with +, -, or *
 - Create a sublist by indenting 2 spaces:
 - A change in the marker character forces the start of a new list:
 - Ac tristique libero volutpat at
 - Facilisis in pretium nisl aliquet
 - Nulla volutpat aliquam velit
 - Very simple!
 - Unordered lists can also be
 - mixed with numbered lists
 1. Indent and create a numbered list item
 2. Another numbered item
 - Another unordered list item
-

5.5. Task lists

Use GitHub-Flavored Markdown Syntax, use pandoc parameter

```
pandoc --from markdown+task_lists or pandoc -f gfm
```

to parse task lists.

```
- [x] Finish my changes
- [ ] Push my commits to GitHub
- [ ] Open a pull request
- [x] Support \@mentions, #refs, [links](),
**formatting**, and <del>tags</del>
- [x] Require list syntax (supports any unordered or
ordered list)
- [ ] This is a complete project
- [ ] This is an incomplete project
-  This line is not a task list item, but it is
also a list item
```

Renders to:

-
- ☒ Finish my changes
 - ☐ Push my commits to GitHub
 - ☐ Open a pull request
 - ☒ Support @mentions, #refs, links, **formatting**, and tags
 - ☒ Require list syntax (supports any unordered or ordered list)
 - ☐ This is a complete project
 - ☐ This is an incomplete project
 -  This line is not a task list item, but it is also a list item
-

5.6. Ignore Markdown Formatting

You can tell GitHub to ignore (or enable escapes for) Markdown formatting by using `<code>before Markdown characters</code>.`

```
Let's rename \*our-new-project\* to \*our-old-project\*.
```

Let's rename `*our-new-project*` to `*our-old-project*`.

5.7. emojis

You can use emoji fonts, or use emoji markers

```
*emoji marks*: :smile: :rage: :sweat: :point_down:
```

```
*emoji symbols*: 😄😄😄😄🐶🐱🐭🐹
```

🍏🍏🍏🍏🍏

⚽⚽⚽⚽⚽

🚗🚗🚗🚗🚗

🕒📱➡️📱💻

💖💖💖💖🔒🔒🔒🔒🔒🔒


🏳️🏳️🏳️🏳️🏳️

⚠️🔥🔥🔥👍✅

Renders to:

emoji marks: 😄😡😓👉

emoji symbols: 😊 😄 😁 😂 🐶 🐱 🐭 🐹 🍏

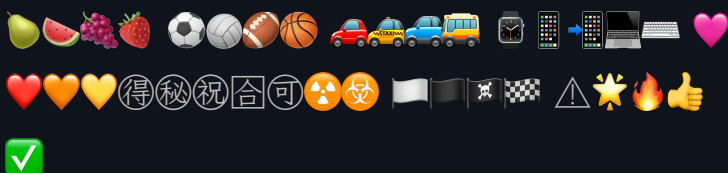

If some of the emoji fonts above are displayed as wireframe outline symbol style, it is not a problem with the typst template. It is caused by the font mechanism of typst, not a program error. For details, see the description in the [Fonts](#) section.

pandoc parameter: `pandoc --from gfm` or
`pandoc --from markdown+emoji`

5.8. Links

[I am an inline-style link](<https://www.google.com>)

[I am an inline-style link with a title](<https://www.google.com> "Google's Homepage")

[I am a reference-style link][Any case-insensitive reference text]

[I am a relative reference to a repository file](../blob/master/LICENSE)

[You can use a number for a reference-style link definition][1]

Or leave it blank and use [the link text itself].

URLs and URLs in angle brackets are automatically

converted to links. `http://www.example.com` or `<http://www.example.com>`, and sometimes `example.com` (but not on Github).

Some text indicating that the reference link can follow later.

[Any case-insensitive reference text]: `https://www.mozilla.org`

[1]: `http://slashdot.org`

[The link text itself]: `http://www.reddit.com`

Rendered to:

I am an inline-style link

I am an inline-style link with a title

I am a reference-style link

I am a relative reference to a repository file

You can use a number for a reference-style link definition

Or leave it blank and use the link text itself.

URLs and URLs in angle brackets are automatically converted to links. `http://www.example.com` or `http://www.example.com`, and sometimes `example.com` (but not on Github).

Some text indicating that the reference link can follow later.

5.9. Images

This is the logo:

Inline style:

```
![Alternative text](./userguide/images/icon48.png  
"Logo Title Text 1")
```

Quote style:

```
![Alternative text][Logo]
```

```
[Logo]: ./userguide/images/icon48.png "Logo Title  
Text 2"
```

No caption below the image, and the image is right next to the text:

```
![Minion](./userguide/images/minion.png){width=20%}  
![Stormtroopocat](./userguide/images/  
stormtroopocat.png "The Stormtroopocat"){width=20%}
```

You can also add a caption below the image, which needs to be a separate paragraph, that is, a blank line before and after:

```
![Image title, some explanation][id]
```

Define the image location in the quote later in the document:

```
[id]: ./userguide/images/dojocat.jpg "The Dojocat"
```

You can also specify the image size:

```
![Minion](./userguide/images/minion.png){width=5%} !  
[Minion](./userguide/images/minion.png){width=10%}  
![Minion](./userguide/images/minion.png){width=20%}!  
[Minion](./userguide/images/minion.png){width=30%}
```

Rendered to:

This is the logo:

Inline style: 🐾

Quote style: 🐾

No caption below the image, and the



image is right next to the text:



You can also add a caption below the image, which needs to be a separate paragraph, that is, a blank line before and after:



Figure 1: Image title, some explanation

Define the image location in the quote later in the document:

You can also specify the image size:



1. To add annotations below the image, use pandoc parameters:

```
pandoc --from gfm+implicit_figures or  
pandoc --from markdown
```

2. To control the image size, use pandoc parameters:

```
pandoc --from gfm+attributes or  
pandoc --from markdown+link_attributes
```

When the image is a separate paragraph, the image is centered and the image size is set according to the page size. When the page width is less than 480 points, the image is flat without stretching. When it is an A4 page, the maximum width of the image does not exceed 11 cm. Inline images do not control the width.

5.10. Footnotes

The previous [Indentation](#) section used footnotes, which occupied the footnote number. Therefore, in the following markdown example, the

numbering will continue from **2**, even if the example uses **Footnote 1 Link [¹]** The corresponding footnote number automatically continues from **2**, please pay attention to this detail.

```
Footnote 1 link [1].  
Footnote 2 link [2].  
  
~Inline footnote ^[text of inline footnote]  
definition.  
  
Repeated footnote reference [2].  
  
[1]: Footnotes can have tags and multiple  
paragraphs.  
  
[2]: Footnote text.
```

Renders to:

Footnote 1 link².
Footnote 2 link³.

Inline footnote⁴ definition.
Repeated footnote reference⁵.

²Footnotes **can have tags** and multiple paragraphs.

³Footnote text.

⁴text of inline footnote

⁵Footnote text.

⚠ Warning

pandoc has a 10-year-old bug [issue 1603](#) that cannot correctly parse repeated footnotes.

To correctly parse footnote syntax with [inline references](#) using pandoc, you need to use the following parameters.

```
pandoc --from markdown
# or
pandoc --from markdown_mmd+inline_notes
```

Footnotes in the form of inline references are only supported by pandoc's `--from markdown`, or `markdown_mmd` with the `inline_notes` option enabled.

5.11. Definition lists

Term

: The term name is on a separate line, and the second line starts with a colon (``:``), followed by a description of the term definition

Another term

: It starts with a colon (``:``), followed by a description of the term definition. ***Definition lists*** are often used in documents to unify the definitions of professional terms, business terms, and nouns.

Term entry line break

: It is related to the line break interpretation of markdown. If it is ``hard_linkbreak``, a line needs to be left blank between entries.

This is not a definition term

: The definition term is not separated from the previous entry by a blank line and cannot become a new entry.

Term definition paragraph

: The term content is indented to the right as a whole paragraph.

Renders to:

Term

The term name is on a separate line, and the second line starts with a colon (:), followed by a description of the term definition

Another term

It starts with a colon (:), followed by a description of the term definition. Definition lists are often used in documents to unify the definitions of professional terms, business terms, and nouns.

Term entry line break

It is related to the line break interpretation of markdown. If it is `hard_linkbreak`, a line needs to be left blank between entries. This is not a definition term

The definition term is not separated from the previous entry by a blank line and cannot become a new entry.

Term definition paragraph

The term content is indented to the right as a whole paragraph.

You need to use the pandoc parameter `--from markdown` or `--from gfm+definition_lists` to parse the definition list.

5.12. Mathematical Equation

When writing mathematical equation in pandoc markdown, use symbols such as `$$`, `\( \)`, or `\[ \]` to wrap the formula. There is also a GitHub flavored Markdown format.

Display on a single line

: `$$`

`e=mc^2`

`$$`

Inline

: This is a bunny, followed by a formula, `$e=mc^2$`.

There can be text after it.

Use pandoc parameter `pandoc --from gfm` or `pandoc --from markdown+tex_math_dollars` to render:

Display on a single line

$$e = mc^2$$

Inline

This is a bunny, followed by a formula, $e = mc^2$. There can be text after it.

If you want to use `pandoc --from gfm`, you can also support,

```
gfm-specific:
```

```
$`e=mc^2`$
```

```
``` math
```

```
e=mc^2
```

```
```
```

You can also use

`pandoc --from markdown+tex_math_single_backslash` to parse the following format:

```
gfm cannot interpret:
```

```
\( e=mc^2 \)
```

```
\[ e=mc^2 \]
```

5.13. Code and syntax highlighting

For code highlighting color themes, see [Code highlight color themes]. Each theme is set in the corresponding pandoc `template` file.

Inline ``code`` has ``backticks`` around it.

Inline `code` has `backticks` around it.

Code blocks use a pair of triple
backticks `````

css sample:

```
```css
@font-face {
 font-family: Chunkfive; src: url('Chunkfive.otf');
}

body, .usertext {
 color: #F0F0F0; background: #600;
 font-family: Chunkfive, sans;
}

@import url(print.css);
@media print {
 a[href^=http]::after {
 content: attr(href)
 }
}
```
```

css highlighting effect:

```
@font-face {
  font-family: Chunkfive; src: url('Chunkfive.otf');
}

body, .usertext {
  color: #F0F0F0; background: #600;
  font-family: Chunkfive, sans;
}

@import url(print.css);
@media print {
  a[href^=http]::after {
    content: attr(href)
  }
}
```


javascript sample:

```
```javascript
function $initHighlight(block, cls) {
 try {
 if (cls.search(/\bno\-highlight\b/) != -1)
 return process(block, true, 0x0F) +
 ` class="${cls}"`;
 } catch (e) {
 /* handle exception */
 }
 for (var i = 0 / 2; i < classes.length; i++) {
 if (checkCondition(classes[i]) === undefined)
 console.log('undefined');
 }
}

export $initHighlight;
```
```

javascript highlighting effect:

```
function $initHighlight(block, cls) {
  try {
    if (cls.search(/\bno\-highlight\b/) != -1)
      return process(block, true, 0x0F) +
        ` class="${cls}"`;
  } catch (e) {
    /* handle exception */
  }
  for (var i = 0 / 2; i < classes.length; i++) {
    if (checkCondition(classes[i]) === undefined)
      console.log('undefined');
  }
}

export $initHighlight;
```

⚠ Warning

The typst `#highlight()` function does not control the line height as well as `#box()`, so `typst ·#box()`` is used in the template to implement inline code. If the inline code format is used, when the line needs to be broken beyond the end of the line, it cannot be split, which may cause too much white space in the previous line, or more than one line. At this time, you can adjust the description of the statement, or shorten the `` statement. No better implementation method has been found yet.

5.14. Tables

`*Colons*` can be used to align columns.

| | | |
|---------------|---------------|--------|
| Table | is very | Cool |
| ----- | :-----: | -----: |
| Column 3 is | Right-aligned | \$1600 |
| Column 2 is | Centered | \$12 |
| Zebra Stripes | Neat | \$1 |

There must be at least 3 dashes (``-``) between each header cell.

The outer pipes (``|``) are optional and you don't need them to make the raw Markdown line up nicely. You can also use inline Markdown.

Table example, outer pipe characters (``|``) can be omitted:

| | | |
|----------------------|------------------------|----------------------------|
| Markdown | Less | Pretty |
| --- | --- | --- |
| <code>*Still*</code> | <code>`Renders`</code> | <code>**Very well**</code> |
| 1 | 2 | 3 |

| | |
|---------------|----------------|
| First heading | Second heading |
| ----- | ----- |
| Content cell | Content cell |
| Content cell | Content cell |

Table example, cell content can be marked up:

| Command | Description |
|------------|---|
| --- | --- |
| git status | List all new or modified files |
| git diff | Show differences in files that have not yet been staged |

| Command | Description |
|---------------------------|---|
| --- | --- |
| <code>`git status`</code> | List all <i>*new or modified*</i> files |
| <code>`git diff`</code> | Show differences in files that have not yet been staged |

Table example, columns can be freely aligned:

| Left alignment | Center alignment | Right alignment |
|----------------|------------------|-----------------|
| :--- | :---: | ---: |
| git status | git status | git status |
| git diff | git diff | git diff |

Table example, special symbols in cells:

| Name | Character |
|----------|-----------|
| --- | --- |
| Backtick | ` |
| Pipe | |

Renders to:

Colons can be used to align columns.

| Table | is very | Cool |
|---------------|---------------|--------|
| Column 3 is | Right-aligned | \$1600 |
| Column 2 is | Centered | \$12 |
| Zebra Stripes | Neat | \$1 |

There must be at least 3 dashes (—) between each header cell.

The outer pipes (|) are optional and you don't need them to make the raw Markdown line up nicely. You can also use inline Markdown.

Table example, outer pipe characters (|) can be omitted:

| Markdown | Less | Pretty |
|--------------|--------------------|-----------|
| <u>Still</u> | <div>Renders</div> | Very well |
| 1 | 2 | 3 |

| First heading | Second heading |
|---------------|----------------|
| Content cell | Content cell |
| Content cell | Content cell |

Table example, cell content can be marked up:

| Command | Description |
|------------|---|
| git status | List all new or modified files |
| git diff | Show differences in files that have not yet been staged |

| Command | Description |
|-------------------------|---|
| <code>git status</code> | List all <u>new or modified</u> files |
| <code>git diff</code> | Show differences in files that have not yet been staged |

Table example, columns can be freely aligned:

| Left alignment | Center alignment | Right alignment |
|----------------|------------------|-----------------|
| git status | git status | git status |
| git diff | git diff | git diff |

Table example, special symbols in cells:

| Name | Character |
|----------|-----------|
| Backtick | ` |
| Pipe | |

The table syntax above is called `pipe tables`. pandoc markdown also supports `simple_tables` and `grid_tables` styles, as well as [multi-line cells](#) and [table captions](#). Use

```
pandoc --from
markdown+simple_tables+grid_tables+multiline_tables+table_c
```

to enable the extension.

5.14.1. Table title [table caption](#)

`table_captions` can be used to add captions to tables:

```
Column 1	Column 2
first    | Second

: Define the caption after the table

table: Define the table caption before the table

Column 1	Column 2
first    | Second
```

Start with `Table:`, `table:` or `:`, either before or after the table, remember to leave a blank line between the table and the caption. The table above is rendered as:

Table 1: Define the caption after the table

| Column 1 | Column 2 |
|----------|----------|
| first | Second |

Table 2: Define the table caption before the table

| Column 1 | Column 2 |
|----------|----------|
| first | Second |

5.14.2. simple tables

`simple_tables`, looks simple, but is actually more difficult to edit than pipe tables. It has strict format requirements

| Right | Left | Center | Default |
|-------|------|--------|---------|
| 12 | 12 | 12 | 12 |
| 123 | 123 | 123 | 123 |
| 1 | 1 | 1 | 1 |

Table: Show simple table syntax.

Use `-----` to separate the title and the cell. The relative position of the title and the `-----` line is used to set the cell content to the left, center, or right. To be close to the actual layout, `-----`, title, and cell content are best aligned as needed. The table above is rendered as:

Table 1: Show simple table syntax.

| Right | Left | Center | Default |
|-------|------|--------|---------|
| 12 | 12 | 12 | 12 |
| 123 | 123 | 123 | 123 |
| 1 | 1 | 1 | 1 |

5.14.3. Multi-line table

The syntax of `multiline_tables` is similar to `simple_tables`.

```
-----
-----
Center  Default      Right Left
Title   Aligned      Aligned Aligned
-----
-----
First   row          12.0 Example of a row
that                                         spans multiple
lines.                                     rows.
Second  row          5.0 Here's another
one. Note                                         the blank line
between                                         rows.
-----
-----

Table: Here's the caption. It, too, may span
multiple lines.
```

Format requirements for `multiline_tables`:

1. There is a `-----` line above and below the table, and there must be a blank line after the table
2. The alignment of the title and the `-----` separator line is the same as `simple_tables`
3. Use a blank line to separate each row of content

The above cross-row table is rendered as:

Table 1: Here's the caption. It, too, may span multiple lines.

| Center Aligned Title | Default Aligned | Right Aligned | Left Aligned |
|----------------------|-----------------|---------------|---|
| First | row | 12.0 | Example of a row that spans multiple lines. |
| Second | row | 5.0 | Here's another one. Note the blank line between rows. |

5.14.4. grid tables

`grid_tables` is the most complex, but also the most functional table:

```
: grid table example

+-----+-----+-----+
-+
| Fruit          | Price          | Advantages
|
+=====+=====+
=====+
| Bananas        | $1.34          | - built-in wrapper
|
|                |                | - bright color
|
+-----+-----+-----+
-+
| Oranges         | $2.10          | - cures scurvy
|
|                |                | - tasty
|
+-----+-----+-----+
-+
```

Cells can span multiple rows or columns:

```
+-----+-----+
| Property          | Earth          |
+=====+=====+
|                | min            | -89.2 °C |
| Temperature +-----+-----+
| 1961-1990        | mean           | 14 °C     |
|                +-----+-----+
|                | max            | 56.7 °C   |
+-----+-----+-----+
```

Table with multiple lines of headers:

```
+-----+-----+
| Location          | Temperature 1961-1990 |
|                  | in degree Celsius      |
```

```
|
|                                     +-----+-----+-----+
|                                     | min   | mean   | max   |
+=====+=====+=====+=====+
| Antarctica                         | -89.2 | N/A    | 19.8   |
+-----+-----+-----+-----+
| Earth                             | -89.2 | 14     | 56.7   |
+-----+-----+-----+-----+
```

Similar alignment syntax to **pipe tables**, use ``:`` to set the title separator:

```
+-----+-----+-----+
-+
| Right          | Left          | Centered
|
+=====+:=====+
:=====+:+
| Bananas        | $1.34         | built-in wrapper
|
+-----+-----+-----+
-+
```

You can also use ``=====`` to set the table footer:

```
+-----+-----+
| Fruit          | Price         |
+=====+=====+
| Bananas        | $1.34         |
+-----+-----+
| Oranges        | $2.10         |
+=====+=====+
| Sum            | $3.44         |
+=====+=====+
```

Renders to:

Table 1: grid table example

| Fruit | Price | Advantages |
|---------|--------|--|
| Bananas | \$1.34 | <ul style="list-style-type: none"> • built-in wrapper • bright color |
| Oranges | \$2.10 | <ul style="list-style-type: none"> • cures scurvy • tasty |

Cells can span multiple rows or columns:

| Property | | Earth |
|--------------------------|------|-------------|
| Temperature
1961-1990 | min | -89.2
°C |
| | mean | 14
°C |
| | max | 56.7
°C |

Table with multiple lines of headers:

| Location | Temperature
1961-1990
in degree
Celsius | | |
|------------|--|------|------|
| | min | mean | max |
| Antarctica | -89.2 | N/A | 19.8 |
| Earth | -89.2 | 14 | 56.7 |

Similar alignment syntax to [pipe tables](#), use `:` to set the title separator:

| Right | Left | Centered |
|---------|--------|---------------------|
| Bananas | \$1.34 | built-in
wrapper |

You can also use `=====` to set the table footer:

| Fruit | Price |
|---------|--------|
| Bananas | \$1.34 |
| Oranges | \$2.10 |
| Sum | \$3.44 |

`typst 0.12` Currently there is no way to get the last row of a table, so when the table footer is used, it is not

possible to add styles to the table footer by typst rules.

5.15. alerts

alerts is a special style in GitHub-Flavored markdown. This template has been processed for compatibility. In addition to the note, tip, important, caution, and warning specified by gfm itself, it also supports idea, error, success, goal, and notification. Both uppercase and lowercase are acceptable.

```
> [!NOTE]
> This is a note

> [!TIP]
> This is a tip

> [!IMPORTANT]
> This is important

> [!CAUTION]
> Be careful with the problem described here

> [!WARNING]
> Warning
>

>[!Idea]
> This is an idea
>
>

> [!Error]
> This is an error
>

> [!Success]
> When successful
```

```
> [!Goal]
> This is the goal
>

> [!Notification]
> There is a notification here
>
```

Renders to:



Note

This is a note

i Tip

This is a tip

! Important

This is important



Caution

Be careful with the problem described here



Warning

Warning



Idea

This is an idea

Error

This is an error

Success

When successful

Goal

This is the goal

Notification

There is a notification here

If the alerts style is too much, you can use a quoted text block instead:

```
> Note:  
> Block quotes can be used to highlight important  
ideas.
```

Renders to:

Note: Block quotes can be used to highlight important ideas.

When the text content in alerts exceeds one line or multiple paragraphs, you cannot see the indentation of the

first line of the first paragraph.

Currently, `typst` does not support this. See the instructions in [Indentation](#) for details.

5.16. Table width and column width

`pandoc`'s `markdown+grid_tables` or `markdown+multiline_tables` supports specifying the table width and column width. When the table content is small and the page layout is unnatural, you can use grid tables or multiline tables to adjust it.

The table width and column width can be intervened respectively.

There are two factors affecting the table width:

1. `pandoc` `--columns` parameter value, the default is `72`
2. When defining a grid table, the number of characters between the `+` sign in the upper left corner of the top frame and the `+` sign in the upper right corner, that is, the total number of characters in the top frame, is the relative width of the table. Relative to the width of the text, its $relativewidth \approx totallength \div 72$, when $relativewidth > 1$, it is

equal to 1. $actualwidth \approx relativelength \times textwidth$.

The table column width is also relative. The number of characters in the list title separator `====` or

`----` (including trailing space) is the ratio of the relative width of the entire table, which is the relative width of the column.

Take `grid_tables` as an example:

```
: 2 columns 72 characters
```

```
+-----+-----+
| Fruit          Price          | Advantages
|
+=====+
| Oranges        $2.10          | - cures scurvy
|
|                               | - tasty
|
+-----+-----+
-----+
```

```
: 3 columns 72 characters
```

```
+-----+-----+-----+
| Fruit          | Price          | Advantages
|
+=====+=====+
| Oranges        | $2.10          | - cures scurvy
|
|                |                | - tasty
|
+-----+-----+-----+
-----+
```

: 2 columns 37 characters

| | |
|---------------|--------|
| +-----+-----+ | |
| Fruit | Price |
| +=====+ | |
| Oranges | \$2.10 |
| | |
| +-----+-----+ | |

Renders to:

Table 1: 2 columns 72 characters

| Fruit Price | Advantages |
|----------------|--|
| Oranges \$2.10 | <ul style="list-style-type: none">• cures scurvy• tasty |

Table 2: 3 columns 72 characters

| Fruit | Price | Advantages |
|---------|--------|--|
| Oranges | \$2.10 | <ul style="list-style-type: none">• cures scurvy• tasty |

Table 3: 2 columns 37 characters

| Fruit | Price |
|---------|--------|
| Oranges | \$2.10 |

Take `multiline_tables` as an example:

: 4 columns, 72 characters

| Centered
Header | Default
Aligned | Right
Aligned | Left
Aligned |
|--------------------|--------------------|------------------|--|
| First
that | row | 12.0 | Example of a row
spans multiple
lines. |

: 3 columns, 34 characters

| Centered
Header | Default
Aligned | Right
Aligned |
|--------------------|--------------------|------------------|
| First | row | 12.0 |

: 2 columns 72 characters

| Centered
Header | Default
Aligned | Right
Aligned | Left
Aligned |
|--------------------|--------------------|------------------|--|
| First
that | row | 12.0 | Example of a row
spans multiple
lines. |

Rendered to:

Table 4: 4 columns, 72 characters

| Centered
Header | Default
Aligned | Right
Aligned | Left
Aligned |
|--------------------|--------------------|------------------|---|
| First | row | 12.0 | Example of a row
that spans
multiple lines. |

Table 5: 3 columns, 34 characters

| Centered
Header | Default
Aligned | Right
Aligned |
|--------------------|--------------------|------------------|
| First | row | 12.0 |

Table 6: 2 columns 72 characters

| | |
|------------------------------|---|
| Centered
Right
Aligned | Default
Header
Aligned |
| First row | 12.0
Example of a row
that spans
multiple lines. |

5.17. Quotes

```
> Blockquotes are really handy in emails to simulate
reply text.
This line is part of the same quote.

Quote separator.

> This is a really long line that will still quote
correctly when it wraps. Oh, let's keep writing it
to make sure it's long enough to actually wrap for
each person. Oh, and you can *put* **Markdown** into
a blockquote.

> Blockquotes can also be nested...
>> ...by using additional greater-than signs right
next to each other...
> > > ...or with spaces between the arrows.
```

Renders to:

Blockquotes are really handy in emails to simulate reply text. This line is part of the same quote.

Quote separator.

This is a really long line that will still quote correctly when it wraps. Oh, let's keep writing it to make sure it's long enough to actually wrap for each person. Oh, and you can put **Markdown** into a blockquote.

Blockquotes can also be nested...

...by using additional greater-than signs right next to each other...

...or with spaces between the arrows.

When the text in the quote exceeds one line or has multiple paragraphs, you cannot see the first line indent of the first paragraph. Currently `tyspt` does not support this. See [Indentation](#) for details.

5.18. alerts

alerts is a special style in GitHub-Flavored markdown. This template has been processed for compatibility. In addition to the note, tip, important, caution, and warning specified by gfm itself, it also supports idea, error, success, goal, and notification. Both uppercase and lowercase are acceptable.

```
> [!NOTE]
> This is a note

> [!TIP]
> This is a tip

> [!IMPORTANT]
> This is important

> [!CAUTION]
> Be careful with the problem described here

> [!WARNING]
> Warning
>

>[!Idea]
> This is an idea
>
>

> [!Error]
> This is an error
>

> [!Success]
> When successful

> [!Goal]
> This is the goal
>
```

```
> [!Notification]
> There is a notification here
>
```

Renders to:



Note

This is a note

i Tip

This is a tip



Important

This is important



Caution

Be careful with the problem described here



Warning

Warning



Idea

This is an idea



Error

This is an error

✓ Success

When successful

🏁 Goal

This is the goal

🔊 Notification

There is a notification here

If the alerts style is too much, you can use a quoted text block instead:

```
> Note:
```

```
> Block quotes can be used to highlight important ideas.
```

Renders to:

Note: Block quotes can be used to highlight important ideas.

When the text content in alerts exceeds one line or multiple paragraphs, you cannot see the indentation of the first line of the first paragraph. Currently, tyspt does not support this.

See the instructions in [Indentation](#) for details.

5.19. Horizontal Rule

Three symbols or more

Three hyphens `---``

Three asterisks `***``

Three underscores `___``

Three symbols or more

Three hyphens `---`

Three asterisks `***`

Three underscores `___`

5.20. Inline HTML

```
<dl>
```

```
<dt>Definition Lists</dt>
```

```
<dd>People sometimes use this. </dd>
```

```
<dt>Markdown in HTML</dt>
```

```
<dd>Doesn't work very well. Use the HTML <em>tag</em>. </dd>
```

```
</dl>
```

Caution

The text content of **inline html** can only be displayed when using `pandoc -f markdown`, which can convert the markdown file to `typst` or convert it to `pdf` format document through `--pdf-engine typst` parameter, and falls back to displaying only text.

5.21. Title

The title presentation will affect the pdf directory structure and is placed at the end of the document.

```
Alt-H2
```

```
-----
```

```
# (only for demonstration) h1 title
```

```
## h2 title
```

```
### h3 title
```

```
#### h4 title
```

```
##### h5 title
```

```
##### h6 title
```

Or, for H1 and H2, use the underline style:

```
(only for demonstration) Alt-H1
```

```
=====
```

```
Alt-H2
```

```
-----
```

Renders to:

5.22. Alt-H2

6. (only for demonstration)

h1 title

6.1. h2 title

6.1.1. h3 title

6.1.1.1. h4 title

6.1.1.1.1. h5 title

6.1.1.1.1.1. h6 title

Or, for H1 and H2, use the
underline style:

7. (only for demonstration)

Alt-H1

7.1. Alt-H2
