Signed generalization gaps: each split and backbone

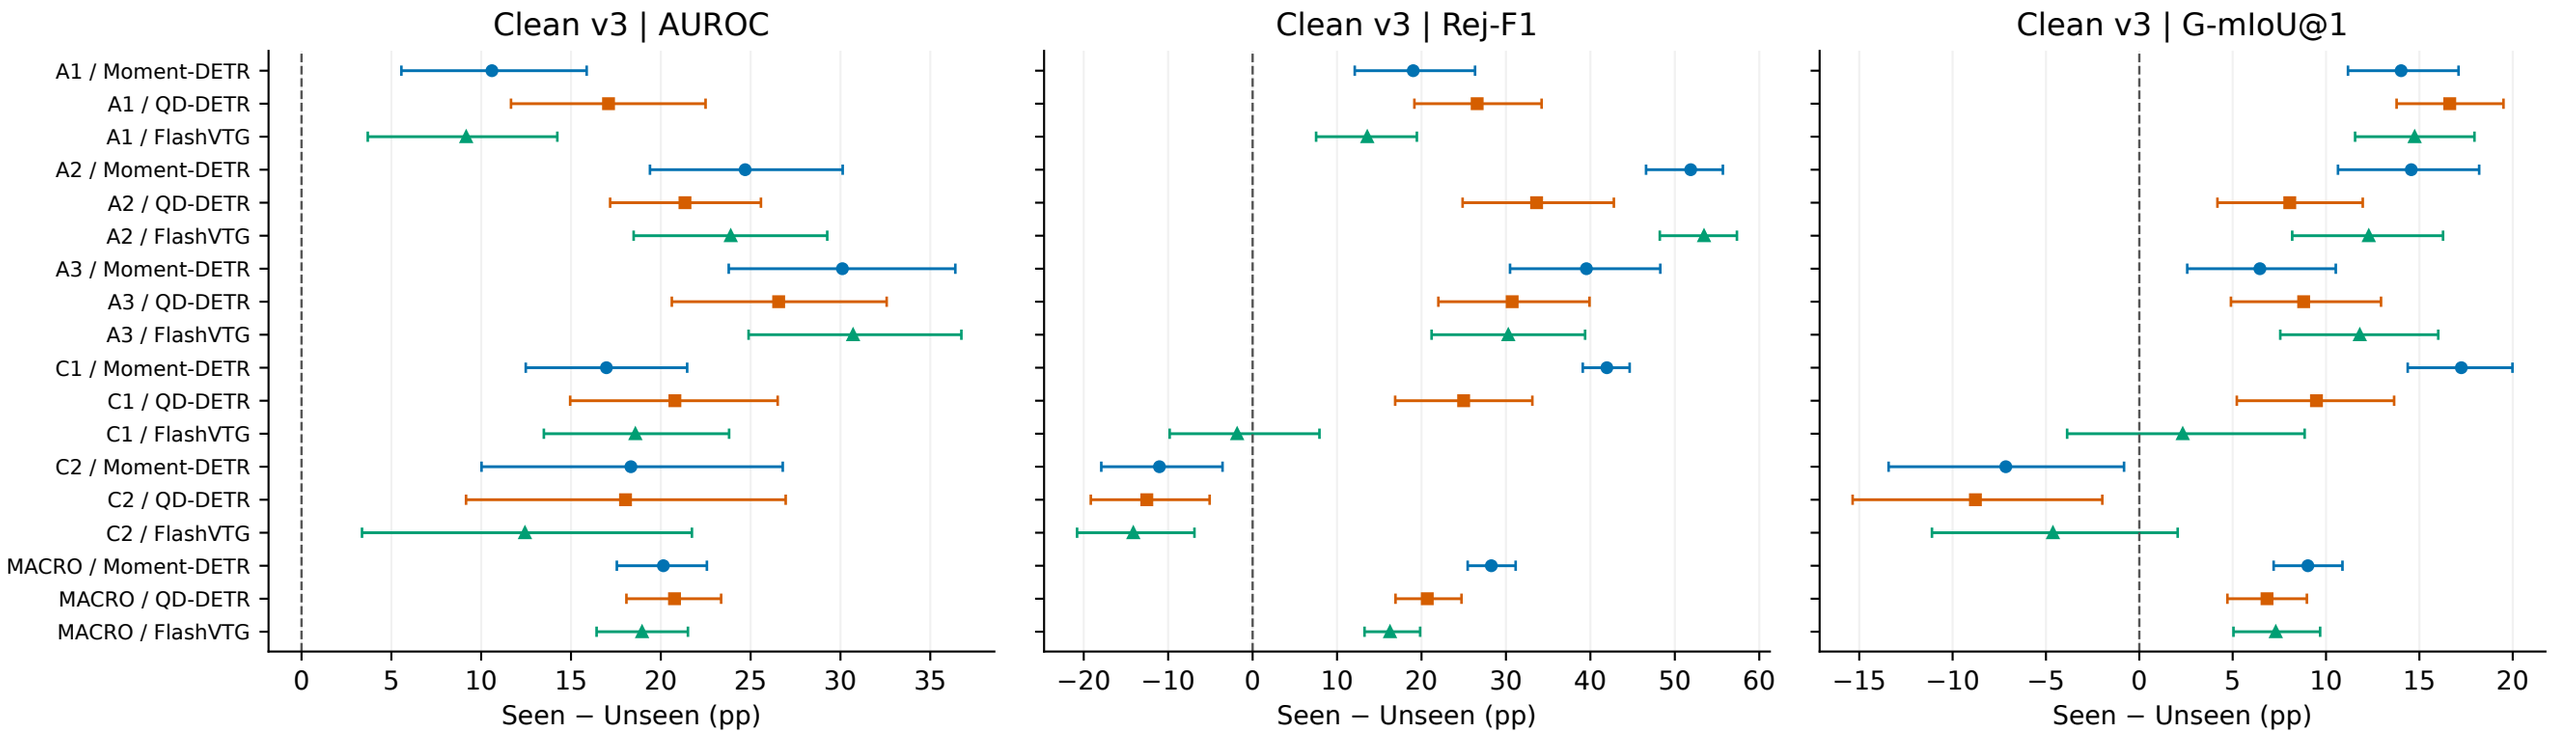

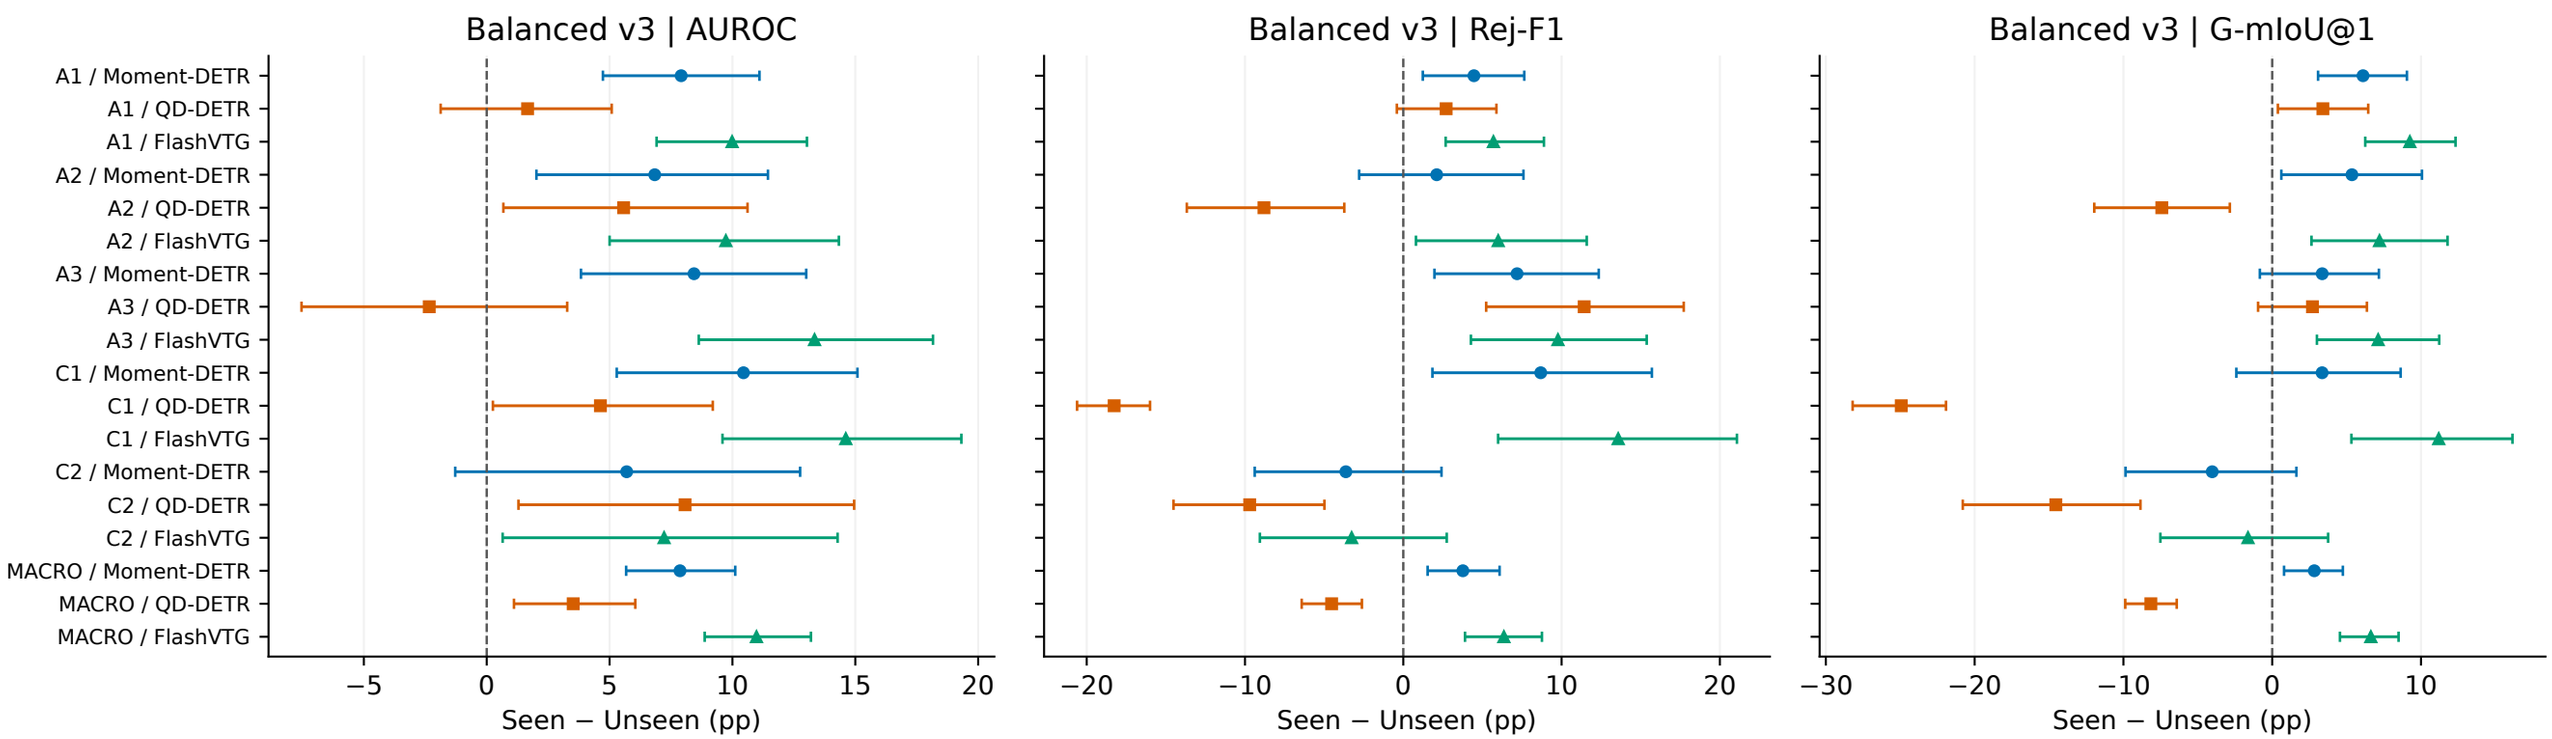

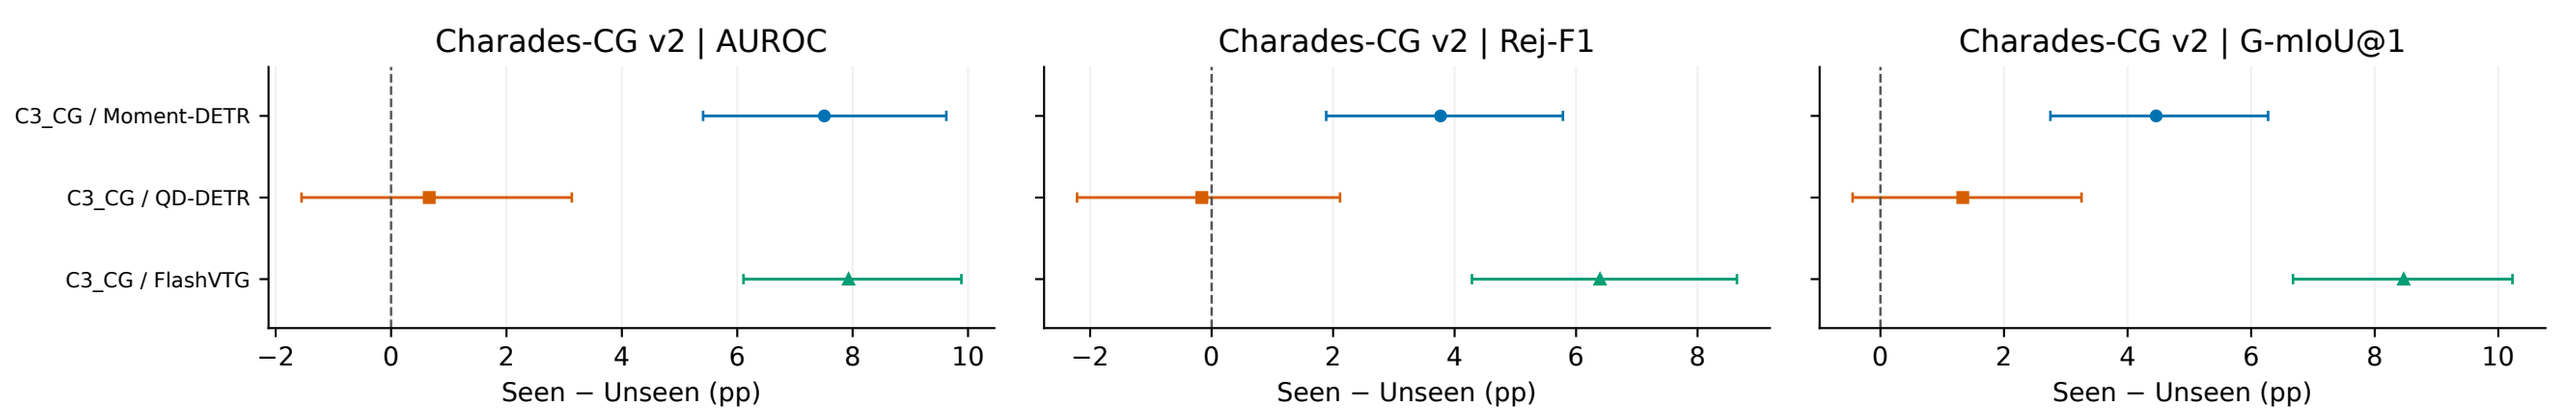

95% joint video-cluster bootstrap CI; 2,000 draws; frozen checkpoints and thresholds. Negative gaps are retained. Rej-F1 and G-mIoU depend on class proportions.