Standard Test | 1,036 queries

G-mIoU@1 at each method's independently Val-selected existence gate

86% Val positive-retention target (≥220/255) | selected 9/11 exploratory subset

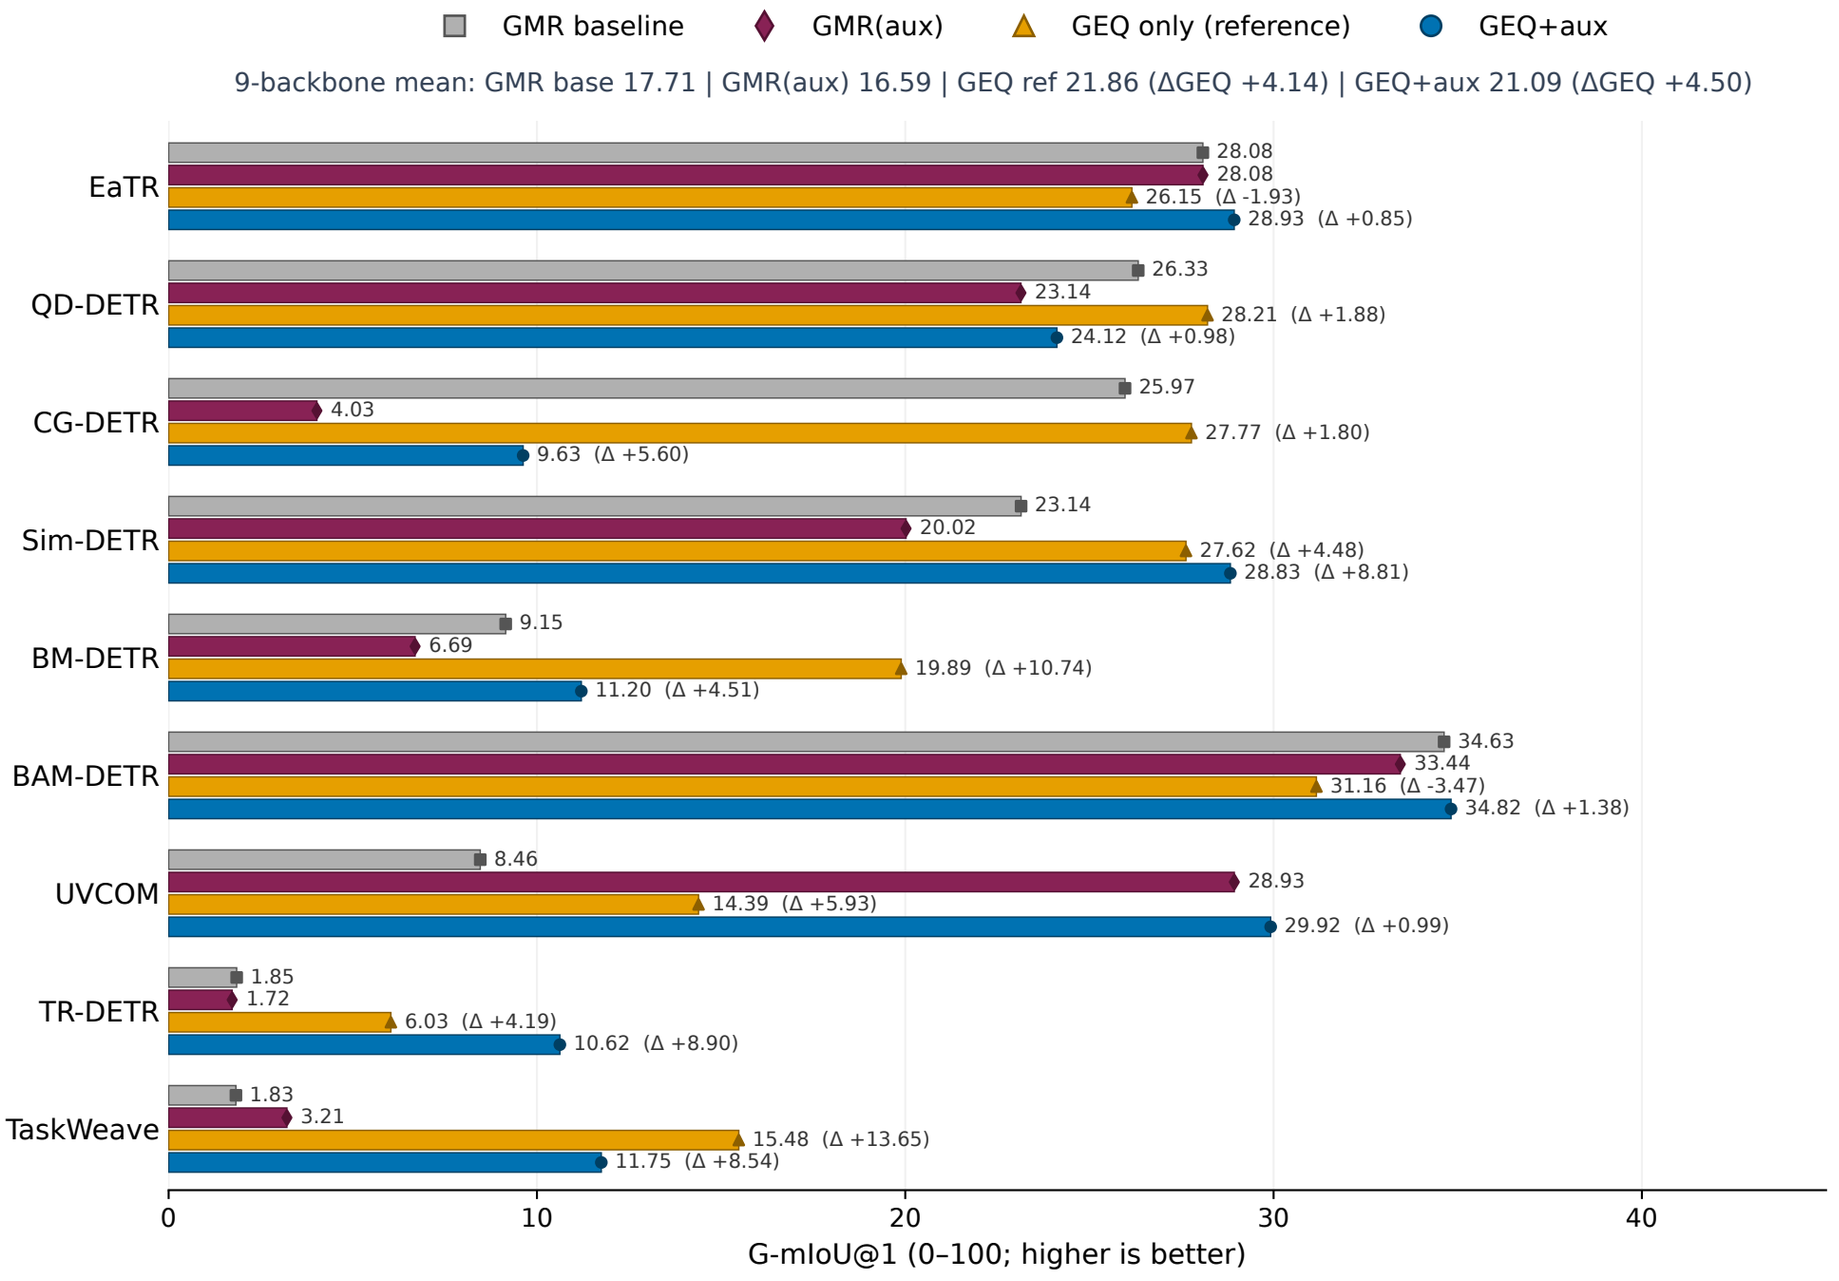

Each backbone/method selects its own largest 0.01-grid threshold on Standard Val; the same threshold is used on both Tests.
Subset is fixed by prior exploratory gains; Moment-DETR and LD-DETR are omitted from display.
Paired comparisons: GMR baseline → GEQ only (ΔGEQ no-aux), GMR(aux) → GEQ+aux (ΔGEQ aux). ΔAux is descriptive reference across different parent/protocol baselines.

Full-Decodable Test | 2,970 / 2,986 queries

G-mIoU@1 at each method's independently Val-selected existence gate

86% Val positive-retention target (≥220/255) | selected 9/11 exploratory subset

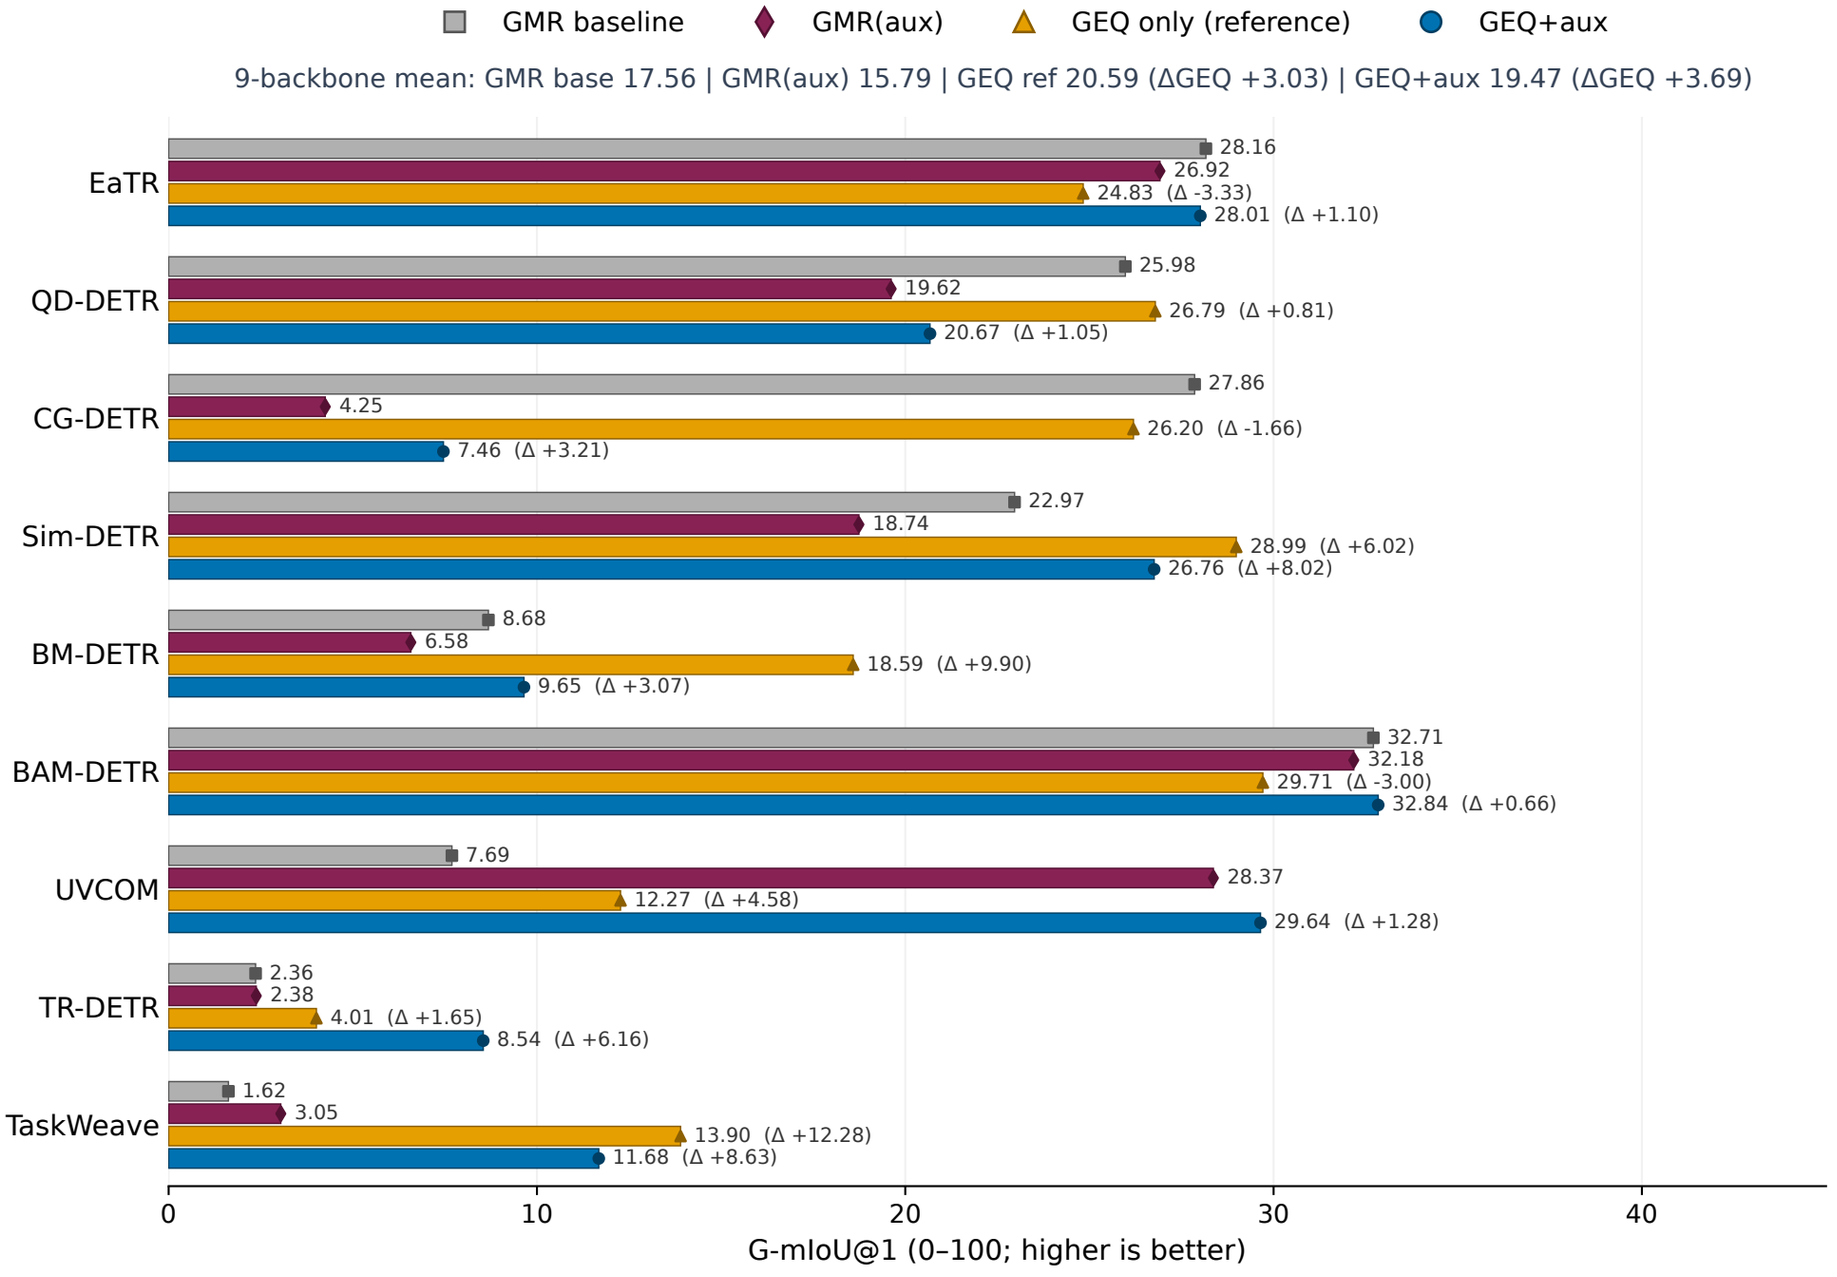

Each backbone/method selects its own largest 0.01-grid threshold on Standard Val; the same threshold is used on both Tests.
Subset is fixed by prior exploratory gains; Moment-DETR and LD-DETR are omitted from display.
Paired comparisons: GMR baseline → GEQ only (ΔGEQ no-aux), GMR(aux) → GEQ+aux (ΔGEQ aux). ΔAux is descriptive reference across different parent/protocol baselines.